

An Explicit Primitive Conservative Solver for the Euler Equations with Arbitrary Equation of State

Giuseppe Sirianni^{1,*}, Alberto Guardone¹, Barbara Re¹, and Rémi Abgrall²

¹Department of Aerospace Science and Technology, Politecnico di Milano, Via La Masa 34, 20156 Milano, Italy

²Institute of Mathematics, Universität Zürich, Winterthurerstrasse 190, 8057 Zürich, Switzerland

*Corresponding author: giuseppe.sirianni@polimi.it

Abstract

This work presents a procedure to solve the Euler equations by explicitly updating, in a conservative manner, a generic thermodynamic variable such as temperature, pressure or entropy instead of the total energy. The presented procedure is valid for any equation of state and spatial discretization. When using complex equations of state such as Span-Wagner, choosing the temperature as the generic thermodynamic variable yields great reductions in the computational costs associated to thermodynamic evaluations. Results computed with a state of the art thermodynamic model are presented, and computational times are analyzed. Particular attention is dedicated to the conservation of total energy, the propagation speed of shock waves and jump conditions. The procedure is thoroughly tested using the Span-Wagner equation of state through the CoolProp thermodynamic library and the Van der Waals equation of state, both in the ideal and non-ideal compressible fluid-dynamics regimes, by comparing it to the standard total energy update and analytical solutions where available.

Keywords

non-ideal compressible fluid dynamics, NICFD, primitive variables, conservation, Euler equations, Arbitrary EoS

1 Introduction

The numerical simulation of fluid-dynamics problems is still an extremely active field of research despite thousands of researchers working on the subject for the past century. This is due to a large number of applications, each characterized by its different needs regarding physical modeling, numerical accuracy, and computational costs. The broader subject of fluid-dynamics can be divided into many sub-fields, for example, relativistic [1] and magneto-hydrodynamics (MHD) [2], incompressible [3] or compressible [4] fluid dynamics, and more. We will concentrate on compressible fluid-dynamics, also named gas-dynamics, which in turn can be subdivided into two further categories, namely ideal and non-ideal [5–7] compressible fluid-dynamics (NICFD). Ideal compressible fluid dynamics has been the main interest of the broader CFD research and industry landscape, and it is devoted to the study of flow fields that follow the ideal gas equation of state (EoS) [8, 9]. Starting from the theoretical work of Bethe [10], Zel’dovich [11], and finally Thompson [12], a new sub-category of compressible fluid dynamics was born, interested in the study of non-ideal fluids [5–7]. Under particular flow conditions, these fluids can exhibit non-classical behaviors such as expansion shocks and compression fans [10, 11, 13, 14]. These waves will not occur if the gas is being described through the ideal gas EoS, therefore more accurate EoS such as the Van der Waals (VdW) EoS [15], are necessary to describe the thermodynamic behavior of real fluids. Since the first appearance of the VdW EoS, more accurate EoSs have been developed [16–18]. The current state-of-the-art equation of state is the so-called Span-Wagner type EoS [19], expressed in terms of the Helmholtz free energy. This EoS is at the basis of the thermodynamic library CoolProp [20], which we will use in this work. The method proposed in this paper will be purposefully developed in an EoS-agnostic manner, that is the proposed strategy is valid for any equation of state. For a comprehensive recap of the latest advancements in the theoretical and numerical modeling of non-ideal compressible fluid dynamics see [21, 22].

Non-ideal compressible fluid dynamics is described by the same Euler equations as the ones that describe ideal compressible fluid dynamics. In their conservation form, these are expressed as conservation equations for mass density ρ , momentum $\rho\mathbf{u}$, and total energy $E^t = E + \rho\mathbf{u}^2/2$, with E being the internal energy per unit volume. In NICFD simulations, the most accurate EoS in use is the Span-Wagner type EoS [19], which is expressed as a function of density and temperature $f(\rho, T)$. To evaluate this EoS using two different variables such as density and internal energy $f(\rho, E)$, two different approaches are currently used: look-up tables [23–26], or root searching algorithms [27–30]. A similar need also arises in relativistic hydrodynamics where a root-finding algorithm [31], or more recently, a machine learning model [32], is often employed to retrieve primitive variables from the conservative ones. An alternative and interesting approach that completely replaces the EoS was presented by Saurel et al. [33] and is based on mechanical relaxation.

In a finite volume CFD code using MUSCL for second-order spatial convergence, one must obtain the thermodynamic state twice for each face separating two control volumes in the mesh. Since in 3D the number of faces scales faster than the number of control volumes, the EoS evaluation costs can add up. In addition to the aforementioned complications introduced by the need to evaluate a more complex EoS, the Riemann solvers used to compute numerical fluxes have also been re-worked to allow for generic EoS [34, 35].

Analogously to ideal compressible fluid dynamics, conservation [36] is a pivotal ingredient in the construction of a robust numerical tool for NICFD problems. Many industrial codes use the finite volume method to discretize the Euler equations due to the conservation properties it naturally embeds. In the compressible regime, the Euler equations are almost universally solved in their conservative form. There exist many different primitive formulations that have been employed in different contexts. For example, Van der Heul et al. [37] proposed a method that conservatively solves the Euler equations in primitive form with good performance across a large range of Mach numbers. This is done thanks to a particular choice of the pressure scaling and an implicit pressure-correction formula that is only valid for the ideal gas EoS. Toro [38, 39] described a set of schemes to solve hyperbolic PDEs in non-conservative form and applied them to the Euler equations. Unfortunately, these methods are not conservative by design, and as found by the authors themselves, they tend to compute the wrong shock position. Hughes recapped his works on stabilized methods for compressible fluid-dynamics in [40], which also focused on the development of methods using either primitive or entropy variables [41–43], mostly aimed at the creation of a unified scheme for all-speed flows. As before, these schemes are not conservative by nature. One additional way of dealing with non-conservative formulations is the concept of path-conservation [44, 45], although its capability of converging to the exact solution has been questioned [46]. Extended Euler systems for multi-phase and multi-component flows have sometimes been presented in primitive form [47–50] as they

can be better suited to avoid spurious oscillations across multi-material interfaces [51]. A common issue of all primitive formulations is how to preserve conservation. Although they are well-behaved on smooth problems, when discontinuities such as shocks arise in the flow, the loss of conservation can lead to errors in captured shock positions and jump conditions.

Over the years, different approaches have been explored to robustly solve the Euler equations when not using the conservation form. Space-time coupled approaches such as [52, 53] look promising but have not been widely adopted. Also, their implementation could require large reworks in well-established CFD codes. Zhang et al. [54] presented a primitive update of the conservative Euler equations that leverages an implicit dual-time formulation to retrieve exact conservation that was lost by using an approximate linearization of the time derivative to change variables. This approach works well, but it can only recover conservation up to the tolerance on the dual-time integration, which can become expensive for unsteady simulations. Also, Dumbser and Casulli [55] presented a semi-implicit conservative solver for generic EoS that updates pressure instead of total energy. This is done by using a Newton-type technique [56] to solve a system for the unknown pressure on a staggered grid, which could be complicated to implement in already established 2D and 3D unstructured CFD solvers. More recently, Abgrall and Ivanova [57] described a residual correction for the explicit and arbitrarily high-order solution of the primitive Euler equations. This correction works well for any set of variables $[\rho, \mathbf{u}, \varphi]$, as long as we have a constant derivative of the internal energy with respect to the primitive variable φ , that is $E_{\varphi,\rho} = (\partial E / \partial \varphi)_\rho = \text{const.}$

In this paper, we will present an update procedure that is explicit in time and allows us to solve the conservative form of the Euler equations by updating $[\rho, \rho \mathbf{u}, \varphi]$ instead of $[\rho, \rho \mathbf{u}, E^t]$ in a conservative manner without worrying about the spatial discretization. Indeed, we can therefore replace the total energy by any independent generic thermodynamic variable φ . This procedure does not require the derivation of an evolution equation for φ and does not affect any of the properties of its standard total energy update counterpart. The effective choice of φ is entirely dependent on the problem at hand. Some applications could require the imposition of boundary conditions on a particular variable such as the pressure ($\varphi = P$), while some others could use a particular EoS where using the enthalpy ($\varphi = h$) is beneficial. We are primarily interested in non-ideal compressible fluid dynamics, so we will showcase results obtained mostly using the temperature ($\varphi = T$) since we can drastically reduce the computational time spent evaluating thermodynamics when using a Span-Wagner type EoS.

The paper is structured as follows: firstly, in section 2.1, we will shortly describe the employed spatial discretization. In section 2.2.1, we will derive an approximate formula to explicitly update the generic thermodynamic variable φ by using the spatial residuals of the total energy equation. Then, in section 2.2.2, we will describe a simple procedure to fix the approximate formula described in the previous section, in order to obtain the exact total energy conservation. To aid the implementation of the presented method, we report a simplified recap in section 2.2.3. Various results are then presented using both the VdW EoS and Span-Wagner type EoS by using the thermodynamic library CoolProp [20]. We start with a carbon-dioxide shock tube close to saturation using the Span-Wagner EoS [19] in section 3.1 to showcase the method’s robustness (section 3.1.1) and the computational costs associated to EoS evaluations (section 3.1.2). We then show a dilute nitrogen shock tube with the VdW EoS in section 3.2 to demonstrate how wave speeds and jump conditions are satisfied when using the presented procedure when compared to a simplified approximation. The spatial convergence order is evaluated using the VdW EoS and the Method of Manufactured Solutions (MMS) [58] in section 3.3. The proposed approach is then tested on multiple dilute gas tests in section 3.4 and dense gas tests in section 3.5 with the VdW EoS, and conclusions are drawn in section 4.

2 Numerical Scheme

The goal of this work is to describe an update procedure that is explicit in time, capable of solving the conservative Euler equations by updating a generic thermodynamic variable $\varphi(x, t)$ instead of the total energy $E^t(x, t)$, in a conservative manner. We will test the method by using $\varphi(x, t) = [T, P, e, h, s]$, namely temperature, pressure, internal energy, enthalpy, and entropy per unit mass. In short, we will store and update φ instead of E^t , while still solving the conservative Euler equations. The procedure is structured as follows:

1. We compute the spatial discretization of the conservative Euler equations, as described in section 2.1
2. Instead of updating the total energy E^t , we use an approximate explicit update formula for φ , obtained through a linearization which does not conserve total energy, described in section 2.2.1

3. We use a secant root searching algorithm to compute the linearization coefficients present in the aforementioned approximate update formula for φ , such that total energy is conserved exactly, described in section 2.2.2

As mentioned, the first step to perform this procedure is to compute the spatial residuals of the conservative Euler equations, Eq. (1), which we can already compute since we are integrating explicitly in time.

$$\begin{cases} \frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \underline{u}) = 0 \\ \frac{\partial \rho \underline{u}}{\partial t} + \nabla \cdot (\rho \underline{u} \otimes \underline{u} + P) = \underline{0} \\ \frac{\partial E^t}{\partial t} + \nabla \cdot ((E^t + P) \underline{u}) = 0 \end{cases} \quad (1)$$

We will briefly describe the finite volume spatial discretization of the Euler equations we employ in section 2.1. We then describe the explicit time update strategy in section 2.2. To simplify the implementation, we recap the procedure in section 2.2.3, forgoing the mathematical details regarding the derivation.

2.1 Spatial Discretization

We will be working in a collocated finite volume solver, with MUSCL reconstruction for second-order spatial convergence (See Fig 1). We denote with C_j a control volume neighboring control volume C_i and with $A_{i,j}$ their shared area. We also denote with $\sum_{C_j \in \partial C_i}$ the sum over all control volumes C_j neighbouring C_i .

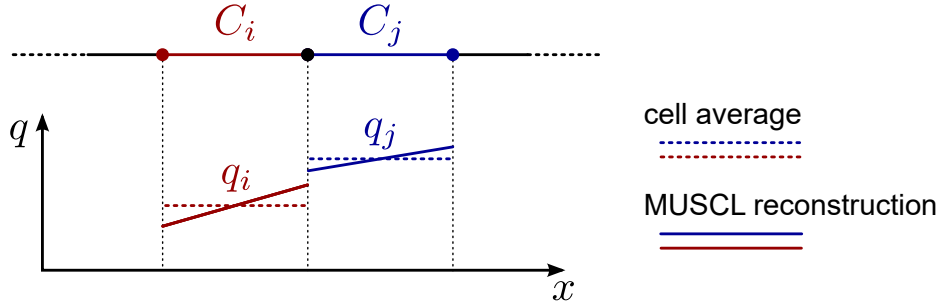


Figure 1: Variable arrangement and MUSCL reconstruction sketch for a generic variable q on two neighbouring control volumes C_i and C_j .

As mentioned, we will be updating and storing, in each control volume, a generic thermodynamic variable $\varphi(x, t)$ instead of the total energy $E^t(x, t)$. Therefore, the only difference to a standard scheme updating the total energy will be in which variables are stored and reconstructed at each side of the face, namely $\underline{q}_i = [\rho_i, \rho \underline{u}_i, \varphi_i]$ and $\underline{q}_j = [\rho_j, \rho \underline{u}_j, \varphi_j]$. This means that the numerical fluxes can be computed using any exact or approximate Riemann solver [34, 35, 59–61], or also any central difference based schemes [62]. In this work, we will use an HLLC solver, with the Vinokur & Montagne [34] Roe average state for arbitrary EoS. We made this choice because we want to be able to use any equation of state, and also intend to apply the presented scheme to non-ideal compressible fluid dynamics. We name $F^q(\underline{q}_i, \underline{q}_j)$ the numerical flux associated with the conservation equation for an arbitrary variable q from Eq. (1), on the boundary between two control volume C_i and C_j . Using this, we define the spatial residuals Φ_i^q arising from the discretization of the surface integral of the conservative fluxes for an arbitrary variable q of Eq. (1) on the boundary of a control volume C_i as:

$$\begin{aligned} \Phi_i^\rho &= \sum_{C_j \in \partial C_i} A_{i,j} F^\rho(\underline{q}_i, \underline{q}_j) \\ \underline{\Phi}_i^{\rho \underline{u}} &= \sum_{C_j \in \partial C_i} A_{i,j} \underline{F}^{\rho \underline{u}}(\underline{q}_i, \underline{q}_j) \\ \Phi_i^{E^t} &= \sum_{C_j \in \partial C_i} A_{i,j} F^{E^t}(\underline{q}_i, \underline{q}_j) \end{aligned} \quad (2)$$

Note that we compute the residual of $\Phi_i^{E^t}$ since we are still interested in solving the total energy conservation equation, although we will update and store φ . Any high-order spatial reconstruction such as ENO [63] or WENO [64] could be used to reconstruct the left and right states. We will use MUSCL to obtain up to second-order spatial convergence and to avoid spurious oscillations, we employ the slope limiter by Barth and Jespersen [65].

2.2 Time Discretization

In this section, we will describe the conservative time update procedure for φ . First, we will derive an approximate update formula for φ in section 2.2.1, obtained through a linearization of the total energy conservation. In section 2.2.2 we will then describe a secant root search strategy designed to find the linearization coefficients that recover exact total energy conservation.

As explained in section 2.2.1, density ρ^{n+1} and momentum $\rho \underline{u}^{n+1}$ at the next time step are needed in the approximate update formula for φ . Since the mass and momentum equations are already in conservative form, we can update them using a forward Euler scheme, that is:

$$\begin{aligned}\rho_i^{n+1} &= \rho_i^n - \frac{\Delta t}{C_i} \Phi_i^\rho \\ \rho \underline{u}_i^{n+1} &= \rho \underline{u}_i^n - \frac{\Delta t}{C_i} \Phi_i^{\rho \underline{u}}\end{aligned}\tag{3}$$

2.2.1 Approximate update formula for a generic thermodynamic variable φ

In this section, we will build a formula, similar to what is done in [54], that will be used to compute the value of the thermodynamic variable φ_i at the next time step, φ_i^{n+1} , from a given total energy residual $\Phi_i^{E^t}$. This formula does not conserve total energy because it amounts to a linearization of the explicit update [54]. We will correct this inconsistency through the iterative procedure described in section 2.2.2, while still using an explicit and relatively inexpensive approach.

Noting the internal energy per unit volume as E , and assuming that the equation of state can be expressed in the form $E = E(\rho, \varphi)$, the definition of the total energy reads:

$$E^t = E(\rho, \varphi) + \frac{1}{2} \rho \underline{u}^2 = \rho e + \frac{1}{2} \rho \underline{u}^2\tag{4}$$

where e is the internal energy per unit mass. We can write the derivative of E^t in time as:

$$\frac{\partial E^t}{\partial t} = E_{\varphi, \rho} \frac{\partial \varphi}{\partial t} + E_{\rho, \varphi} \frac{\partial \rho}{\partial t} + \frac{1}{2} \frac{\partial \rho \underline{u}^2}{\partial t}\tag{5}$$

where $E_{x,y}$ denotes the partial derivative $(\frac{\partial E}{\partial x})_y$. If we integrate Eq. (5) in time, between two time steps t^n and t^{n+1} we have:

$$\begin{aligned}\int_{t^n}^{t^{n+1}} \frac{\partial E^t}{\partial t} dt &= \int_{t^n}^{t^{n+1}} \left[E_{\varphi, \rho} \frac{\partial \varphi}{\partial t} + E_{\rho, \varphi} \frac{\partial \rho}{\partial t} + \frac{1}{2} \frac{\partial \rho \underline{u}^2}{\partial t} \right] dt \\ \int_{t^n}^{t^{n+1}} \frac{\partial E^t}{\partial t} dt &\simeq \overline{E_{\varphi, \rho}} \int_{t^n}^{t^{n+1}} \frac{\partial \varphi}{\partial t} dt + \overline{E_{\rho, \varphi}} \int_{t^n}^{t^{n+1}} \frac{\partial \rho}{\partial t} dt + \frac{1}{2} \int_{t^n}^{t^{n+1}} \frac{\partial \rho \underline{u}^2}{\partial t} dt.\end{aligned}\tag{6}$$

In doing this, we made a non-trivial approximation because in principle $E_{\varphi, \rho} = E_{\varphi, \rho}(\rho(t), \varphi(t))$ and $E_{\rho, \varphi} = E_{\rho, \varphi}(\rho(t), \varphi(t))$ are functions of time, whereas we considered them constant and equal to $\overline{E_{\varphi, \rho}}$ and $\overline{E_{\rho, \varphi}}$, respectively. This linearization is the reason the update formula described in this section is not exactly conservative. In section 2.2.2 we will outline a way of selecting their values to reconcile the approximate and exact jumps of internal energy.

Introducing the notation $\Delta x = x^{n+1} - x^n$ for time jump of a variable x , we can write Eq. (6) in a compact way as:

$$\Delta E^t \simeq \overline{E_{\varphi, \rho}} \Delta \varphi + \overline{E_{\rho, \varphi}} \Delta \rho + \frac{1}{2} \Delta \rho \underline{u}^2\tag{7}$$

Let us notice that in Eq. (7) there are two distinct contributions to the jump of total energy, namely the approximation of the internal energy jump ΔE^{approx} and the exact kinetic energy jump $\Delta \rho \underline{u}^2/2$ that we already know because we have already updated the density and momentum through Eq. (3):

$$\Delta E^t \simeq \underbrace{\overline{E_{\varphi,\rho}} \Delta \varphi + \overline{E_{\rho,\varphi}} \Delta \rho}_{\Delta E^{\text{approx}}} + \underbrace{\frac{1}{2} \Delta \rho \underline{u}^2}_{\text{exact and known}}. \quad (8)$$

We can now use the approximate jump of total energy from Eq. (7) to write an approximation of the conservation of discrete total energy for control volume C_i :

$$\begin{aligned} \int_{C_i} \Delta E^t_i dV + \Delta t \Phi_i^{E^t} &= 0 \\ \int_{C_i} \left(\overline{E_{\varphi,\rho,i}} \Delta \varphi_i + \overline{E_{\rho,\varphi,i}} \Delta \rho_i + \frac{1}{2} \Delta \rho \underline{u}_i^2 \right) dV + \Delta t \Phi_i^{E^t} &= 0. \end{aligned} \quad (9)$$

For the sake of readability, we will drop subscript $(\cdot)_i$ denoting the control volume since we are only looking at a single control volume C_i . Let us split the approximate total energy conservation from Eq. (9) into two parts, and rename B the one containing $\Delta \varphi$:

$$\underbrace{\int_C \overline{E_{\varphi,\rho}} \Delta \varphi dV}_B + \int_C \left(\overline{E_{\rho,\varphi}} \Delta \rho + \frac{1}{2} \Delta \rho \underline{u}^2 \right) dV + \Delta t \Phi_i^{E^t} = 0. \quad (10)$$

We will use the same forward Euler time update scheme for the generic thermodynamic variable φ as the one used for density and momentum in Eq. (3). We therefore define a pseudo-spatial residual Φ^φ in control volume C that satisfies exactly the approximate total energy conservation, Eq. (10):

$$\varphi^{n+1} = \varphi^n - \frac{\Delta t}{C} \Phi^\varphi \quad (11)$$

which we can easily invert to obtain:

$$\Delta \varphi = -\frac{\Delta t}{C} \Phi^\varphi. \quad (12)$$

Substituting Eq. (12) into B from Eq. (10), and introducing $\bar{\omega}$, we obtain

$$\begin{aligned} B &= -\Delta t \Phi^\varphi \frac{1}{C} \int_C \overline{E_{\varphi,\rho}} dV \\ &= -\Delta t \Phi^\varphi \bar{\omega}. \end{aligned} \quad (13)$$

Let us now substitute this expression for B back into the approximate total energy conservation Eq. (10):

$$-\Delta t \Phi^\varphi \bar{\omega} + \int_C \left(\overline{E_{\rho,\varphi}} \Delta \rho + \frac{1}{2} \Delta \rho \underline{u}^2 \right) dV + \Delta t \Phi^{E^t} = 0. \quad (14)$$

from which we can explicitly express the pseudo-spatial residual Φ^φ for the generic thermodynamic variable φ :

$$\Phi^\varphi = \frac{1}{\bar{\omega} \Delta t} \left[\int_C \left(\overline{E_{\rho,\varphi}} \Delta \rho + \frac{1}{2} \Delta \rho \underline{u}^2 \right) dV + \Delta t \Phi^{E^t} \right]. \quad (15)$$

Therefore the final form of the explicit update formula for a generic thermodynamic variable φ reads

$$\begin{cases} \Phi^\varphi = \frac{1}{\bar{\omega} \Delta t} \left[\int_C \left(\overline{E_{\rho,\varphi}} \Delta \rho + \frac{1}{2} \Delta \rho \underline{u}^2 \right) dV + \Delta t \Phi^{E^t} \right] \\ \varphi^{n+1} = \varphi^n - \frac{\Delta t}{C} \Phi^\varphi \end{cases} \quad (16)$$

The presence of $\Delta \rho = \rho^{n+1} - \rho^n$ and $\Delta \rho \underline{u}^2 = (\rho \underline{u}^2)^{n+1} - (\rho \underline{u}^2)^n$ in Eq. (16) highlights the need to perform the update of ρ and $\rho \underline{u}$ before updating φ . Notice that in Eq. (16) the pseudo-spatial residual Φ^φ

is a function of unknowns $\overline{E_{\varphi,\rho}}$ and $\overline{E_{\rho,\varphi}}$. As a consequence, also the updated value of the thermodynamic variable φ^{n+1} will be a function of these unknowns

$$\begin{cases} \Phi^\varphi = \Phi^\varphi(\overline{E_{\varphi,\rho}}, \overline{E_{\rho,\varphi}}) \\ \varphi^{n+1}(\overline{E_{\varphi,\rho}}, \overline{E_{\rho,\varphi}}) = \varphi^n - \frac{\Delta t}{C} \Phi^\varphi(\overline{E_{\varphi,\rho}}, \overline{E_{\rho,\varphi}}) \end{cases} \quad (17)$$

Furthermore, also ΔE^{approx} , as defined in Eq. (8), depends on $\overline{E_{\varphi,\rho}}$ and $\overline{E_{\rho,\varphi}}$.

2.2.2 How to retrieve total energy conservation - $\bar{\varphi}$ search

In section 2.2.1 we derived a formula that allows us to update a generic thermodynamic variable φ instead of the total energy. The derived formula in Eq. (16) is not exactly conservative due to the approximation made in Eq (7), where we introduced the constant approximate values $\overline{E_{\varphi,\rho}}$ and $\overline{E_{\rho,\varphi}}$. The goal of this section is to show a simple procedure that can be used to select the values of $\overline{E_{\varphi,\rho}}$ and $\overline{E_{\rho,\varphi}}$, such that they enforce exact total energy conservation. Let us first recall the formula for the approximate internal energy jump ΔE^{approx} from Eq. (8) that has been used to derive the φ update formula Eq. (16). We can notice that it is a function of the constant approximate values $\overline{E_{\varphi,\rho}}$ and $\overline{E_{\rho,\varphi}}$, which are unknown:

$$\Delta E^{\text{approx}}(\overline{E_{\varphi,\rho}}, \overline{E_{\rho,\varphi}}) = \overline{E_{\varphi,\rho}} \Delta\varphi + \overline{E_{\rho,\varphi}} \Delta\rho. \quad (18)$$

We begin by imposing thermodynamic consistency at an unknown approximate thermodynamic state $(\bar{\rho}, \bar{\varphi})$:

$$\begin{cases} \overline{E_{\varphi,\rho}} &= E_{\varphi,\rho}(\bar{\rho}, \bar{\varphi}) \\ \overline{E_{\rho,\varphi}} &= E_{\rho,\varphi}(\bar{\rho}, \bar{\varphi}). \end{cases} \quad (19)$$

In doing this, we have changed the unknowns of our problem from $\overline{E_{\varphi,\rho}}$ and $\overline{E_{\rho,\varphi}}$ to $\bar{\rho}$ and $\bar{\varphi}$. Given the fact that we already know the exact updated density and that its change between two time steps is linear in Δt , we assume that we can choose the value of $\bar{\rho}$ as

$$\bar{\rho} = \frac{1}{2} (\rho^{n+1} + \rho^n). \quad (20)$$

Since now $\bar{\rho}$ is fixed, the problem is reduced to a single unknown $\bar{\varphi}$. Recalling Eq. (17), we can see that by using the φ update formula Eq. (16), the updated thermodynamic variable φ^{n+1} at the next time step is now also a function of the unknown $\bar{\varphi}$:

$$\varphi^{n+1}(\bar{\varphi}) \quad \rightarrow \quad \Delta\varphi(\bar{\varphi}) = \varphi^{n+1}(\bar{\varphi}) - \varphi^n. \quad (21)$$

If we now use $\varphi^{n+1}(\bar{\varphi})$ to write both the approximate internal energy jump ΔE^{approx} from Eq. (8) and its thermodynamically exact counterpart ΔE^{tmd} through the EoS we obtain

$$\begin{cases} \Delta E^{\text{approx}}(\bar{\varphi}) &= \overline{E_{\varphi,\rho}}(\bar{\rho}, \bar{\varphi}) \Delta\varphi(\bar{\varphi}) + \overline{E_{\rho,\varphi}}(\bar{\rho}, \bar{\varphi}) \Delta\rho \\ \Delta E^{\text{tmd}}(\bar{\varphi}) &= E(\rho^{n+1}, \varphi^{n+1}(\bar{\varphi})) - E(\rho^n, \varphi^n). \end{cases} \quad (22)$$

Ideally, we would want these two internal energy jumps to coincide. We therefore want to find $\bar{\varphi}$ such that $\Delta E^{\text{tmd}}(\bar{\varphi}) = \Delta E^{\text{approx}}(\bar{\varphi})$. This would entail exact total energy conservation, since the jump in kinetic energy $\Delta\rho \mathbf{u}^2/2$ is already known exactly. We can construct a scalar function $F(\bar{\varphi})$ such that its root corresponds to the value of $\bar{\varphi}$ we are looking for:

$$F(\bar{\varphi}) = \frac{\Delta E^{\text{tmd}}(\bar{\varphi}) - \Delta E^{\text{approx}}(\bar{\varphi})}{E(\rho^n, \varphi^n)} \quad (23)$$

where the division by $E(\rho^n, \varphi^n) > 0$ is performed to scale $F(\bar{\varphi})$. The problem is now to find a root of $F(\bar{\varphi})$ for which we will use the secant root search method, where we iterate on $\bar{\varphi}_{(k)}$ until:

$$|F(\bar{\varphi}_{(k)})| < \text{tol} = 10^{-14}. \quad (24)$$

There is no clear choice for the bounds of the secant search. Given the fact that the size of the time-step is already bound by the CFL condition, in this work we use $[\varphi^n, \varphi^{n+1}]$. Since, of course, φ^{n+1} is unknown,

we use a first guess for the updated generic thermodynamic variable $\tilde{\varphi}^{n+1}$ computed evaluating Eq. 16 with $\bar{\rho} = (\rho^{n+1} + \rho^n)/2$ and $\bar{\varphi} = \varphi^n$.

We have to point out some possible theoretical shortcomings in the proposed approach. To the best of our knowledge, there is no clear way to prove that such a root exists for a generic EoS and that if it does, it is the only root. In our practical experience, $F(\bar{\varphi})$ is always linear with respect to $\bar{\varphi}$ for any choice of $\varphi = [T, P, e, h, s, \dots]$, see Fig. 2, therefore the secant search algorithm always converges in at most seven iterations, but usually one or the initial guess are enough. When the change in the internal energy is close to zero, there can be a situation where there is no root but with

$$|F(\bar{\varphi})| \sim \epsilon^{machine} \quad \forall \varphi \in [\varphi^n, \tilde{\varphi}^{n+1}] . \quad (25)$$

In this situation, we can consider conservation as satisfactorily met by the initial guess, since it is close to machine precision. We were unable to find test cases where this causes any appreciable loss in total energy conservation.

2.2.3 Operational Recap of the Method

In this section, we quickly recap the conservative update procedure for φ , to simplify its implementation. First, for the sake of clarity, let us rewrite Eq. (16) by explicitly stating the thermodynamic dependencies on $\bar{\rho}$ and $\bar{\varphi}$:


$$\begin{cases} \Phi^\varphi = \frac{1}{\bar{\omega}(E_{\varphi,\rho}(\bar{\rho}, \bar{\varphi}))\Delta t} \left[\int_C \left(E_{\rho,\varphi}(\bar{\rho}, \bar{\varphi})\Delta\rho + \frac{1}{2}\Delta\rho\mathbf{u}^2 \right) dV + \Delta t \Phi^{E^t} \right] \\ \varphi^{n+1} = \varphi^n - \frac{\Delta t}{C} \Phi^\varphi \end{cases} \quad (26)$$

We also recall the secant formula:


$$\bar{\varphi}_{(k+1)} = \bar{\varphi}_{(k)} - F_{(k)}^- \frac{\bar{\varphi}_{(k)}^+ - \bar{\varphi}_{(k)}^-}{F_{(k)}^+ - F_{(k)}^-} \quad (27)$$

The main steps of the conservative update procedure for φ are the following.


1. Using the solution $[\rho^n, \rho\mathbf{u}^n, \varphi^n]$ at the previous time step t^n , compute the spatial residuals of the conservative Euler equations Eq. (1), namely $[\Phi^\rho, \Phi^{\rho\mathbf{u}}, \Phi^{E^t}]$ as defined in Eq. (2), using the preferred choice of numerical fluxes or central difference scheme.
2. Update the density and momentum to compute ρ^{n+1} and $\rho\mathbf{u}^{n+1}$ at the next time step using Eq. (3), as the mass and momentum equations are already in conservative form.
3. Compute an initial guess $\tilde{\varphi}^{n+1}$ for φ^{n+1} at the next time step t^{n+1} . In this work we use Eq. (26), with $\bar{\rho} = (\rho^{n+1} + \rho^n)/2$ and $\bar{\varphi} = \varphi^n$.
4. According to the definition of $F(\bar{\varphi})$ from Eq. (23), compute the initial bounds for the secant search $F_{(0)}^+ = \max[F(\varphi^n), F(\tilde{\varphi}^{n+1})]$ and $F_{(0)}^- = \min[F(\varphi^n), F(\tilde{\varphi}^{n+1})]$, and also save the maximum and minimum bounds $\bar{\varphi}_{(0)}^+$ and $\bar{\varphi}_{(0)}^-$ accordingly. Other choices for the initial guess $\tilde{\varphi}^{n+1}$ are possible.
5. Begin an iterative loop, with a user-defined tolerance and maximum number of iterations.
 - (a) Compute $\bar{\varphi}_{(k+1)}$ at iteration $k+1$ using the secant formula, see Eq. (27).
 - (b) Using $\bar{\varphi}_{(k+1)}$ and Eq. (26) compute the next guess value for $\varphi_{(k+1)}^{n+1}$.
 - (c) Using $\bar{\varphi}_{(k+1)}$ and $\varphi_{(k+1)}^{n+1}$, compute $F(\bar{\varphi}_{(k+1)})$ and check for convergence, namely $|F(\bar{\varphi}_{(k+1)})| < tol$.
 - (d) If convergence has not been reached, save the new values for the secant search $F_{(k+1)}^+, F_{(k+1)}^-$, $\bar{\varphi}_{(k+1)}^+$ and $\bar{\varphi}_{(k+1)}^-$ and perform another iteration.
6. Save $\varphi_{(k+1)}^{n+1}$ as the next time step value of φ .

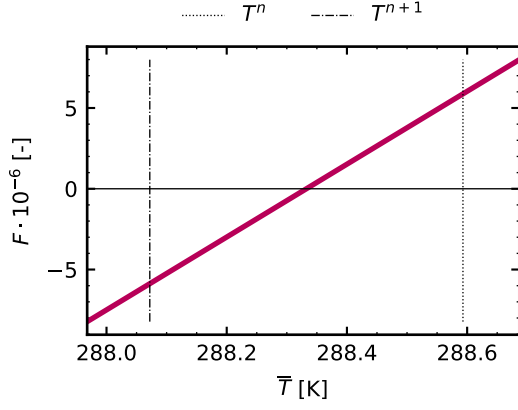


(a) Temperature, $\varphi = T$

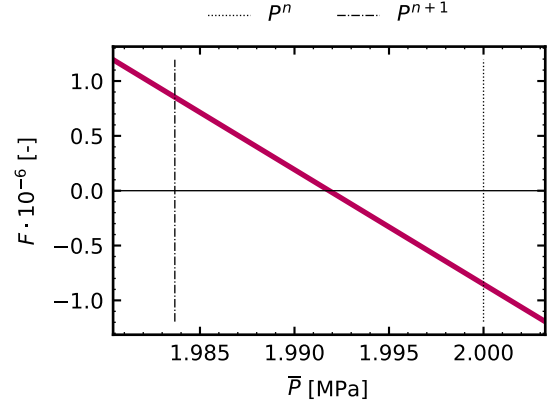


(b) Pressure, $\varphi = P$

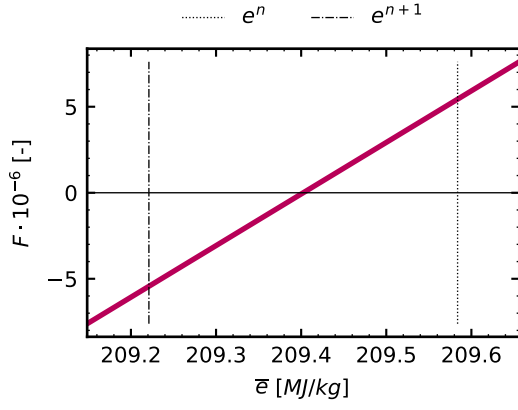

(c) Specific energy, $\varphi = e$

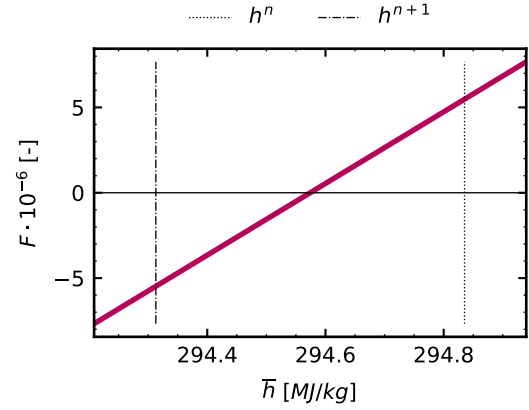

(d) Specific enthalpy, $\varphi = h$

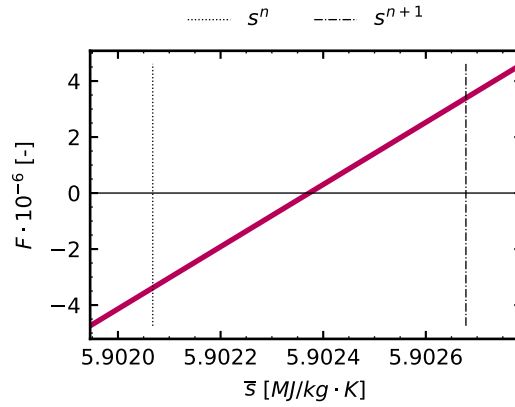

(e) Specific entropy, $\varphi = s$

Figure 2: Example plots of $F(\bar{\varphi})$ for various φ choices at the initial time step discontinuity of a Nitrogen shock tube using the Span-Wagner EoS [66].

3 Results

In this section, we will showcase a variety of test cases. First, we use the Span-Wagner EoS [19] through the thermodynamic library CoolProp [20] in a carbon-dioxide shock tube test close to saturation in section 3.1. Here, we compare solution quality (section 3.1.1) and EoS computational costs (section 3.1.2) for various choices of the generic thermodynamic variable $\varphi = [T, P, e, h, s]$. We then use the VdW EoS in a dilute nitrogen shock tube in section 3.2 to show how the proposed procedure is necessary to retrieve exact total energy conservation, and how failing to do so affects captured shock speeds and the fulfillment of jump conditions. In section 3.3 we perform order testing using the VdW EoS and the method of manufactured solutions (MMS) [67]. Following this, we show a series of tests using the VdW EoS in the ideal regime in section 3.4 and finally in the NICFD regime in section 3.5.

The VdW EoS has been chosen because it is capable of describing non-ideal behavior. See appendix A for more details on the VdW EoS. We compare results to exact solutions of the Riemann problems computed following the approach described in Quartapelle et al. [68]. For reproducibility reasons, we need to define here the constants $\delta = \gamma - 1$ where γ is the ratio of specific heats, a which describes the magnitude of the attractive forces between molecules, b which is the co-volume and R which is the gas constant.

Since one of the main goals of this work is assessing conservativity, we will often show plots of the dimensionless imbalance of total energy, named I^{E^t} , which we define as

$$I^{E^t}(t) = \frac{1}{C_\Omega \cdot \int_\Omega E^t(0)dV} \left\{ \left[\int_\Omega E^t(\tau)dV \right]_{\tau=t} - \left[\int_\Omega E^t(\tau)dV \right]_{\tau=0} + \int_{\tau=0}^{\tau=t} \left[\oint_{\partial\Omega} \underline{\mathbf{F}}^{E^t}(\tau) \cdot \hat{\mathbf{n}} dA \right] d\tau \right\} \quad (28)$$

The $(\cdot)^t$ superscript in E^t does not refer to time t . I^{E^t} is both normalized in terms of the domain's volume C_Ω and of the integral of the initial total energy $\int_\Omega E^t(0)dV$, and is therefore dimensionless. Also, it is a time-varying quantity as it measures the amount of total energy generated or destroyed by the method in the domain since $t = 0$.

We also compare the results of the proposed scheme against numerical simulations from a standard finite volume solver for the Euler equations that is identical to the previous one (same numerical fluxes, limiting, compiler) except that, instead of updating the thermodynamic variable φ using the method presented in this paper, we update the total energy E^t explicitly as

$$E_i^{t^{n+1}} = E_i^{t^n} - \frac{\Delta t}{C_i} \Phi_i^{E^t} \quad (29)$$

We use " φ Update" to denote the results obtained with the update of the thermodynamic variable φ presented in this work. In contrast, we use " E^t Update" to denote the standard finite volume solver. For the latter, we also compare results obtained using both the analytical EoS (" E^t Update") or the computationally efficient look-up tables (LUT) as implemented in CoolProp (" $E^{t,(LUT)}$ Update").

Presenting the thermodynamic results, we will also refer to the fundamental derivative of gas-dynamics Γ [12] and the compressibility factor Z , which are defined as:

$$\Gamma(s, v) = \frac{v^3}{2c^2} \frac{\partial^2 P(s, v)}{\partial v^2}, \quad Z = \frac{P}{\rho RT}. \quad (30)$$

3.1 Carbon-Dioxide Shock Tube (Span-Wagner)

In this section we show the results for a carbon-dioxide shock tube, see table 1 for the data and Fig. 3b for the thermodynamic path on the (P, ρ) plane. In particular, we show the difference between different possible choices for φ using the Span-Wagner EoS [19] through the thermodynamic library CoolProp [20]. We devised this test to stay close to the saturation curve (see Fig. 3b) to show that the proposed method works for any variable, even when far from the dilute gas regime (see the compressibility factor in Fig. 3a). See appendix B for an analogous analysis for a dilute nitrogen shock tube test also using CoolProp.

	EoS	<i>Span-Wagner [19] (CoolProp [20])</i>	
Numerical	<i>CFL</i>	0.1	
	<i>domain</i>	$x \in [0, 1]$ m	$x_{shock} = 0.5$ m
	t_{final}	0.001 s	
Initial conditions	<i>Left</i>		<i>Right</i>
	ρ	350 kg/m ³	100 kg/m ³
	u	0 m/s	0 m/s
	P	12 MPa	4 MPa

Table 1: Carbon-dioxide shock tube test initial conditions, thermodynamic, domain and numerical data.

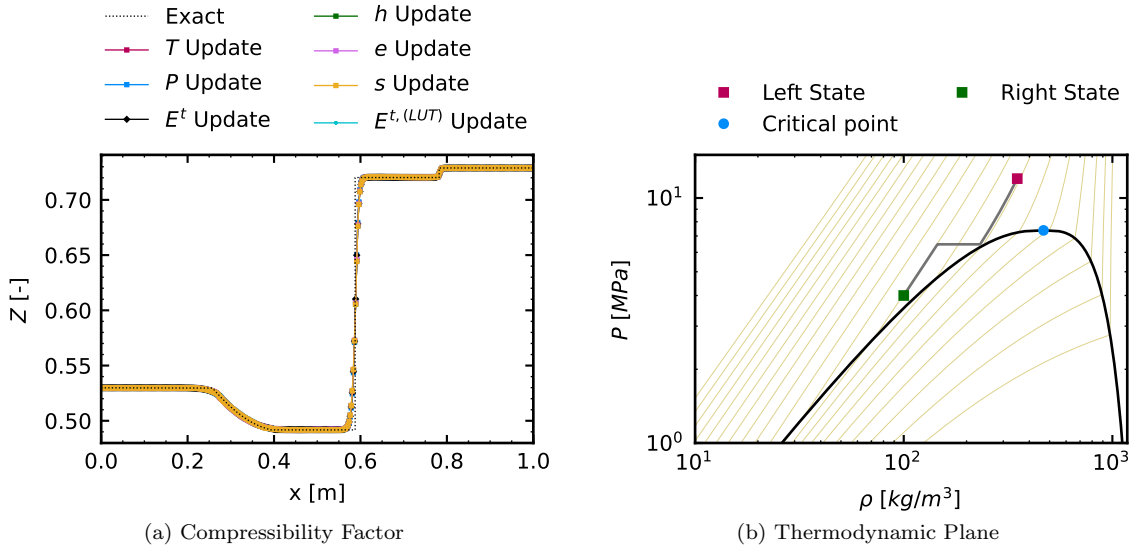


Figure 3: Carbon-dioxide shock tube test with $\Delta x = 0.025$ m using the Span-Wagner EoS [19] through the CoolProp thermodynamic library [20]. Compressibility factor profile and numerical solution on the pressure-density thermodynamic plane at $t = 0.001$ s, with isentropes in yellow and the vapour saturation curve in black.

3.1.1 Comparison of φ choices

In Fig. 4 we show profiles of density, pressure, and velocity compared to the exact solution. There are negligible variations in the results between all choices of φ , with the only exception being the specific entropy s in yellow, showing a small kink on the rightmost part of the rarefaction wave. This is probably due to the MUSCL reconstruction of s near the saturation vapor curve: if we look at first-order results without MUSCL reconstruction in Fig. 5, we can qualitatively see that all φ choices perfectly overlap. To confirm this quantitatively, we report the dimensionless difference of density and pressure profiles with respect to the results of the standard E^t update in Fig. 5d and 5c. Here we can also appreciate how the proposed approach yields results that are much closer to the standard E^t update than using look-up tables. All other results with MUSCL in Fig. 4 are in great agreement with the solution obtained using the standard E^t update. More importantly, if we focus on the total energy imbalance I^{E^t} in Fig. 4d we see how all conserve total energy close to machine precision. A closer look reveals slight differences in the total energy imbalances of different choices of φ . Namely, the specific internal energy e behaves identically to the standard E^t update (both using the EoS directly and using look-up-tables). Temperature T , specific enthalpy h , and specific entropy s show some similarities, while pressure P showcases some sporadic steps that may at first glance appear large. If we assume a loss of conservation per element close to machine precision (for our setup $\epsilon^{machine} \simeq 2 \cdot 10^{-16}$), on a 400 element mesh the total loss per time step would be approximately $400 \cdot (2 \cdot 10^{-16}) \simeq 8 \cdot 10^{-14}$. The simulation ran for 2920 iterations, therefore we can estimate an approximate loss of conservation due to truncation errors

accumulating for the total simulation as $2920 \cdot 8 \cdot 10^{-14} \simeq 2.4 \cdot 10^{-10}$, which is very comparable to the final total energy imbalance for the P update of $\sim 2 \cdot 10^{-11}$. This estimate is a worst-case scenario, as errors could cancel out in the domain instead of accumulating.

In table 2 we report how many secant iterations per mesh element were needed to reach convergence in the $\bar{\varphi}$ search described in section 2.2.2. On average, the initial guess is already good enough to get close to machine precision, particularly in homogeneous portions of the domain like the post-shock plateau. Even in more demanding cases, such as the initial discontinuity, no more than eight iterations are needed for the P update.

	Average	Max
T	1.00473	5
P	1.00451	8
e	1.00376	4
h	1.00263	2
s	1.00279	5

Table 2: Average and max (across all elements and time steps) number of secant iterations per element required to reach $|F(\varphi)| \leq 10^{-14}$

3.1.2 Computational costs

We now focus on analyzing the computational costs associated with the EoS evaluation. To do so we will categorize each EoS call performed during the simulation into three distinct types:

1. **Riemann solver - HLLC**: computation of the pressure P , internal energy per unit mass e , speed of sound c and the thermodynamic derivatives $\kappa = \left(\frac{\partial P}{\partial e}\right)_\rho$, $\chi = \left(\frac{\partial P}{\partial \rho}\right)_e$ at left and right of each face after MUSCL reconstruction.
2. **Auxiliary**: computation of P at left and right of each face after MUSCL reconstruction to check for unphysical reconstruction. Computation of c on each element to compute the CFL compliant time-step. Computation of P on each element to check for unphysical solution updates.
3. **Secant**: Computation of all thermodynamic quantities ($E_{\varphi,\rho}$, $E_{\rho,\varphi}$, E) per element when performing the secant $\bar{\varphi}$ search. This cost does not exist by definition in the standard E^t update.

We then measure the computational time spent evaluating the EoS, and lump them in the aforementioned categories. To maintain the variability as low as possible we run these simulations serially on a single core at a locked frequency. Since some variability will inevitably appear, in Fig. 6 we present the average over 30 runs and their respective ranges. All of the plots are scaled with respect to the standard E^t results. In Fig. 6a we see the breakdown of the EoS evaluation times. The T and P update show significantly lower EoS evaluation times with speed-ups of up to $\sim 650\%$ for the T update (see Fig. 6d), despite the additional $\sim 100\%$ EoS calls introduced by the secant search (see red bars in Fig. 6c). This is because, as visible in blue in Fig. 6c, each EoS call when using pressure or temperature is significantly faster than using the internal energy as done by the standard E^t update. See appendix B for the same analysis in the dilute regime, where the speed-up for the T update of around 700% is comparable to the one measured here.

3.2 Nitrogen Shock Tube (VdW) - Shock speed and jump conditions

In this section, we show the results for a nitrogen shock tube using the VdW EoS, see table 3 for the data. In appendix B we report the difference for different possible choices of φ using the state-of-the-art thermodynamic library CoolProp [20], which for nitrogen uses the Span-Wagner EoS [66]. Here we use the VdW EoS and the temperature $\varphi = T$ update to evaluate the shock speed and jump conditions in an over-refined simulation (20000 cells) and compare it to a simplified approximation and the exact analytical solution.

We compare the $\bar{\varphi}$ search procedure presented in section 2.2.2 to the approximate φ update formula Eq 16 with $\bar{\rho} = \rho^n$ and $\bar{\varphi} = \varphi^n$. In Fig. 7 we see density, pressure, and velocity profiles compared to the exact solution, which at first glance appear identical. If we zoom on the right shock and on the

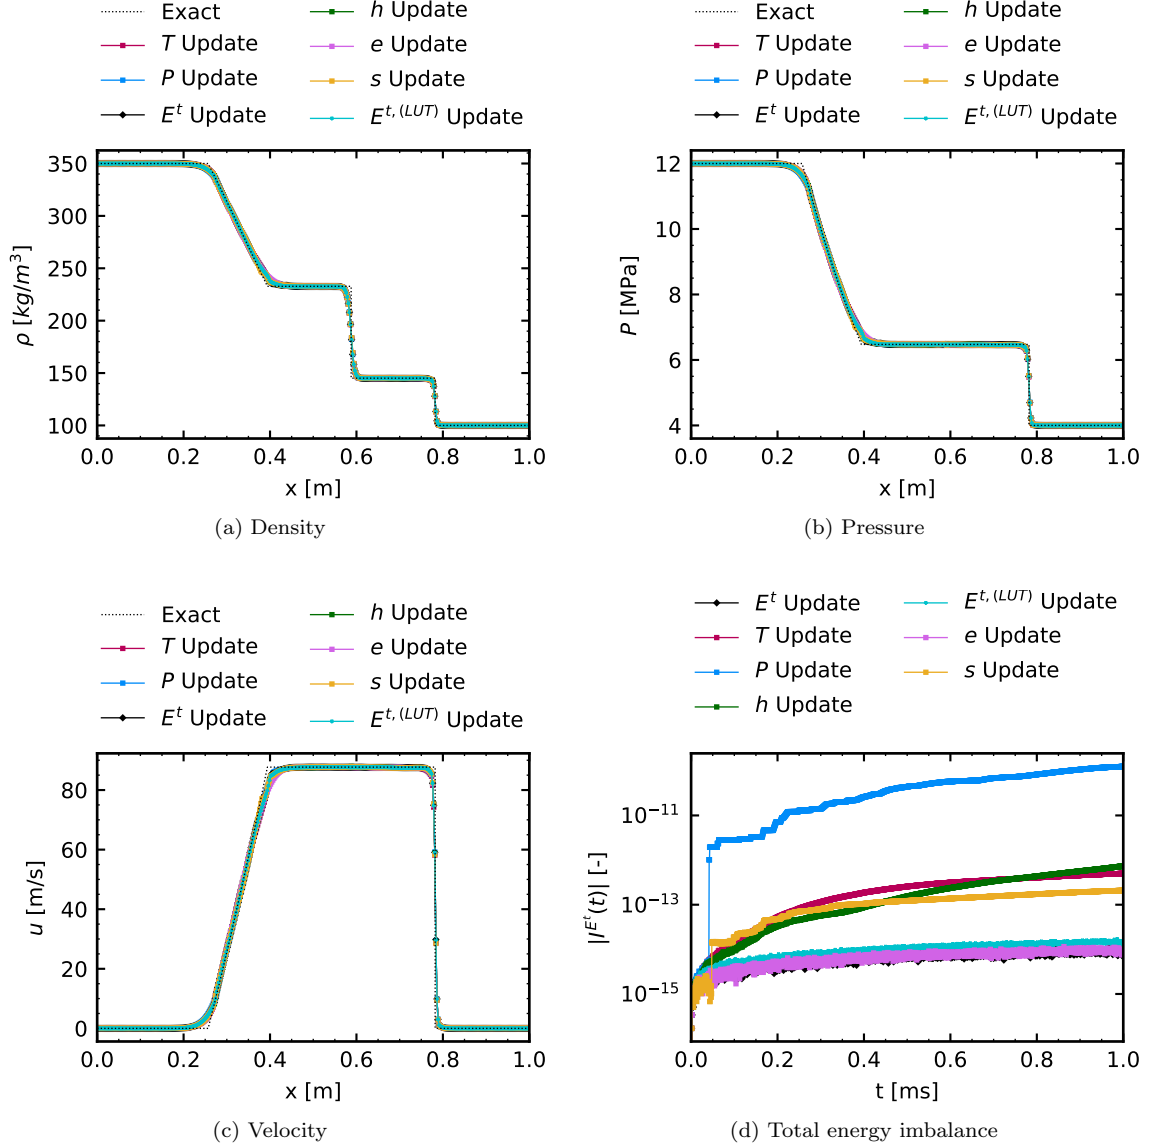


Figure 4: Carbon-dioxide shock tube test results using MUSCL with $\Delta x = 0.025\text{m}$ using the Span-Wagner EoS [19] through the CoolProp thermodynamic library [20]. Density, pressure, and velocity profiles at $t = 0.001\text{s}$ and absolute value of the total energy imbalance in time. Comparison between the φ update scheme for temperature, pressure, specific energy, specific enthalpy, specific entropy, and the standard total energy update (both using the analytical EoS and a look-up table).

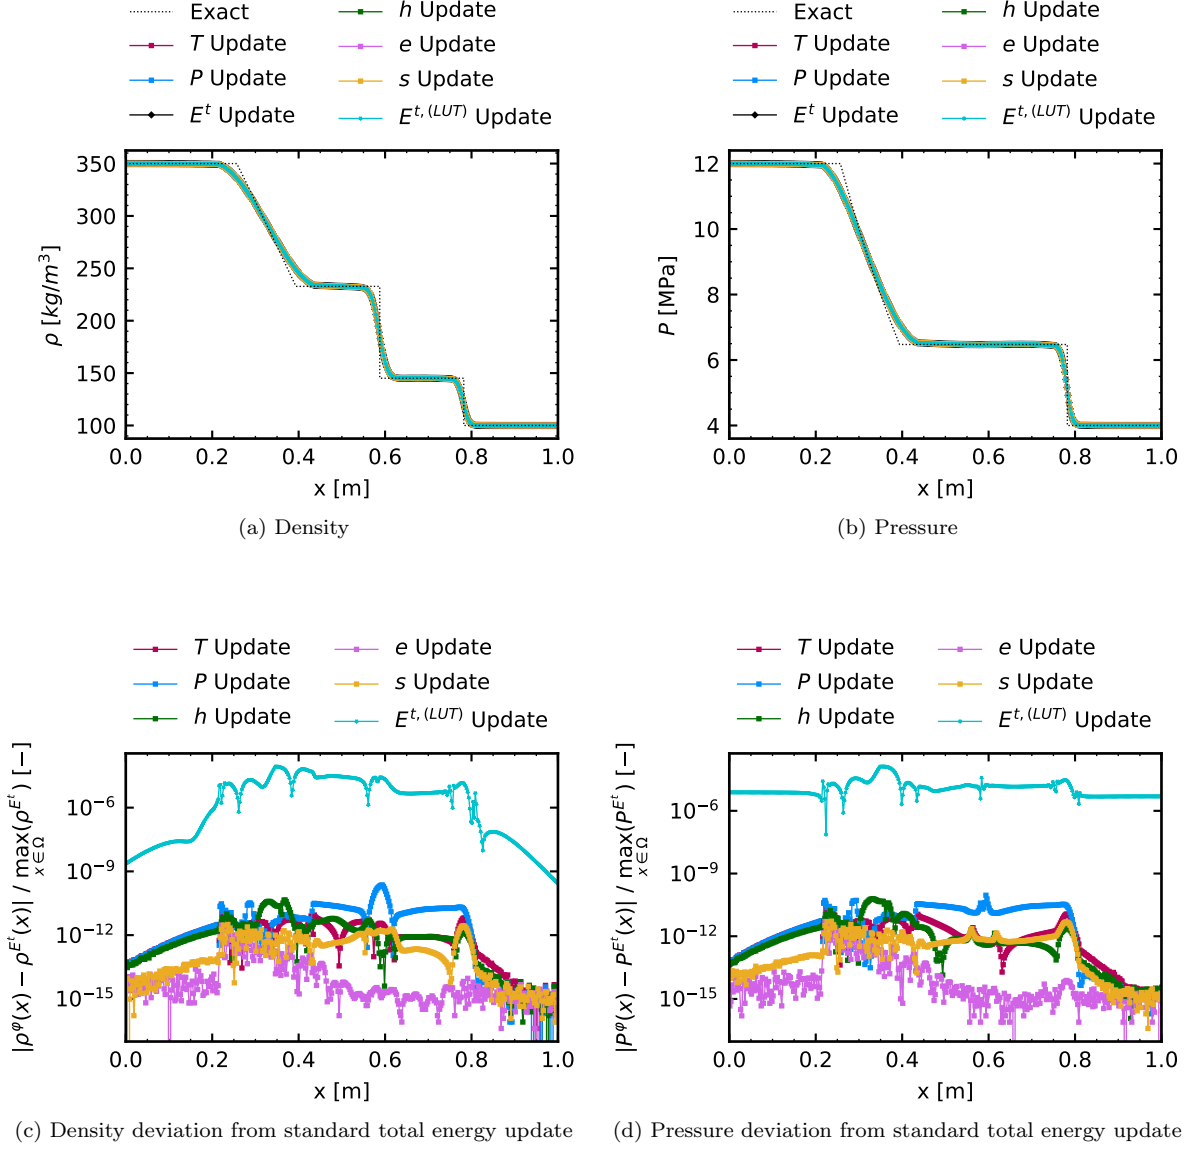


Figure 5: Carbon-dioxide shock tube test 1st order results without using MUSCL with $\Delta x = 0.025\text{m}$ using the Span-Wagner EoS [19] through the CoolProp thermodynamic library [20]. Density and pressure profiles (first row) and their dimensionless variations with respect to the standard total energy update (second row) at $t = 0.001\text{s}$. Comparison between the φ update scheme for temperature, pressure, specific energy, specific enthalpy, specific entropy, and the standard total energy update (both using the analytical EoS and a look-up table).

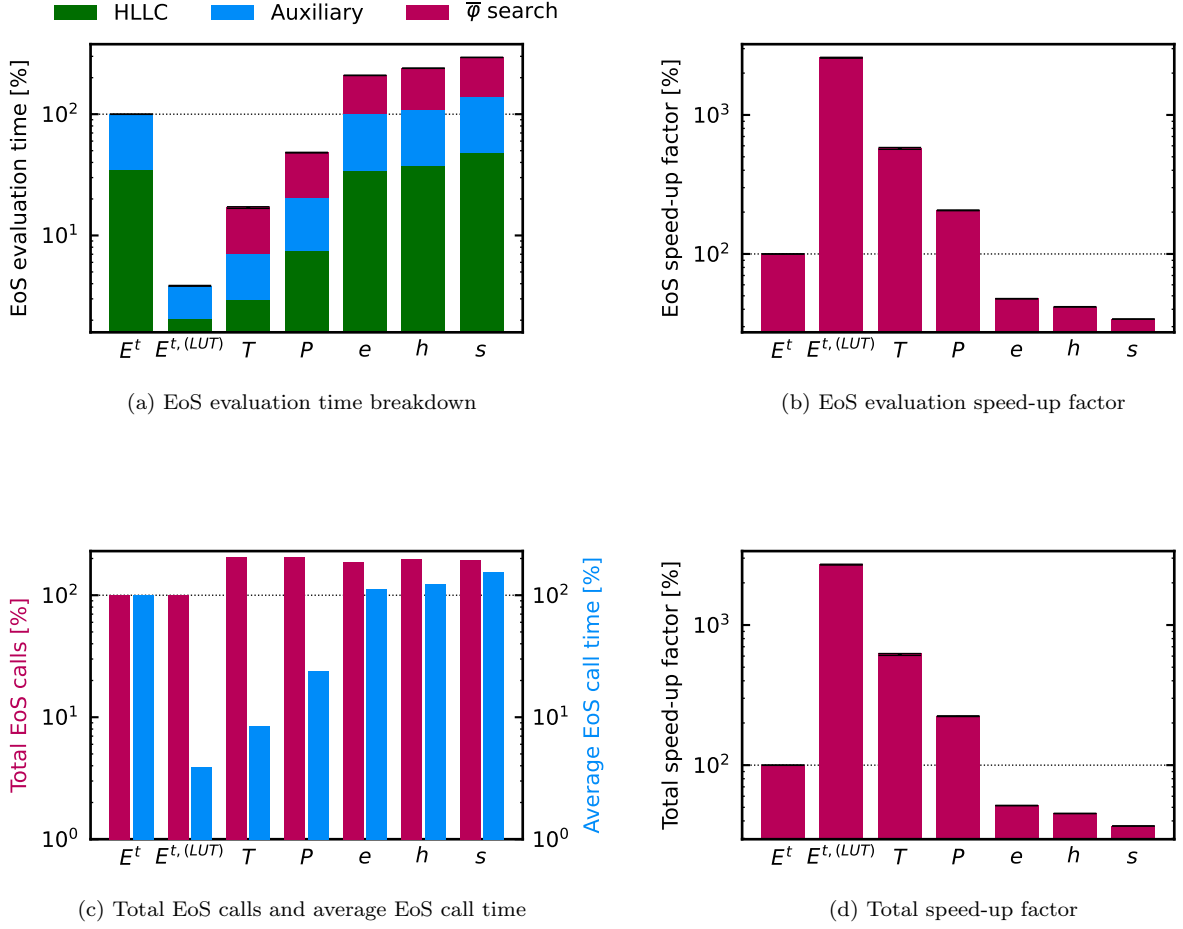


Figure 6: Carbon-dioxide shock tube test using MUSCL. EoS computational cost breakdown and comparison using the Span-Wagner EoS [19] through the CoolProp thermodynamic library [20]. All values are scaled with respect to the standard total energy update scheme, which is always 100%. The y axis is in logarithmic scale. Comparison between the φ update scheme for temperature, pressure, specific energy, specific enthalpy, specific entropy. We also show the computational costs obtained using CoolProp’s tabular interpolation and the standard total energy update (both using the analytical EoS and a look-up table).

EoS	<i>VdW</i>	
δ	0.4	
R	296.8 kJ/kg · K	
a	173.943088 s ² /m ²	
b	1.37851912 · 10 ⁻³ kg/m ³	
Numerical	<i>CFL</i>	0.1
<i>domain</i>	$x \in [-5, 5]$ m	$x_{shock} = 0$ m
<i>t_{final}</i>	0.01 s	
Initial conditions	<i>Left</i>	<i>Right</i>
ρ	23.46 kg/m ³	11.73 kg/m ³
u	0 m/s	0 m/s
P	2 MPa	1 MPa

Table 3: Nitrogen shock tube test initial conditions, thermodynamic, domain and numerical data.

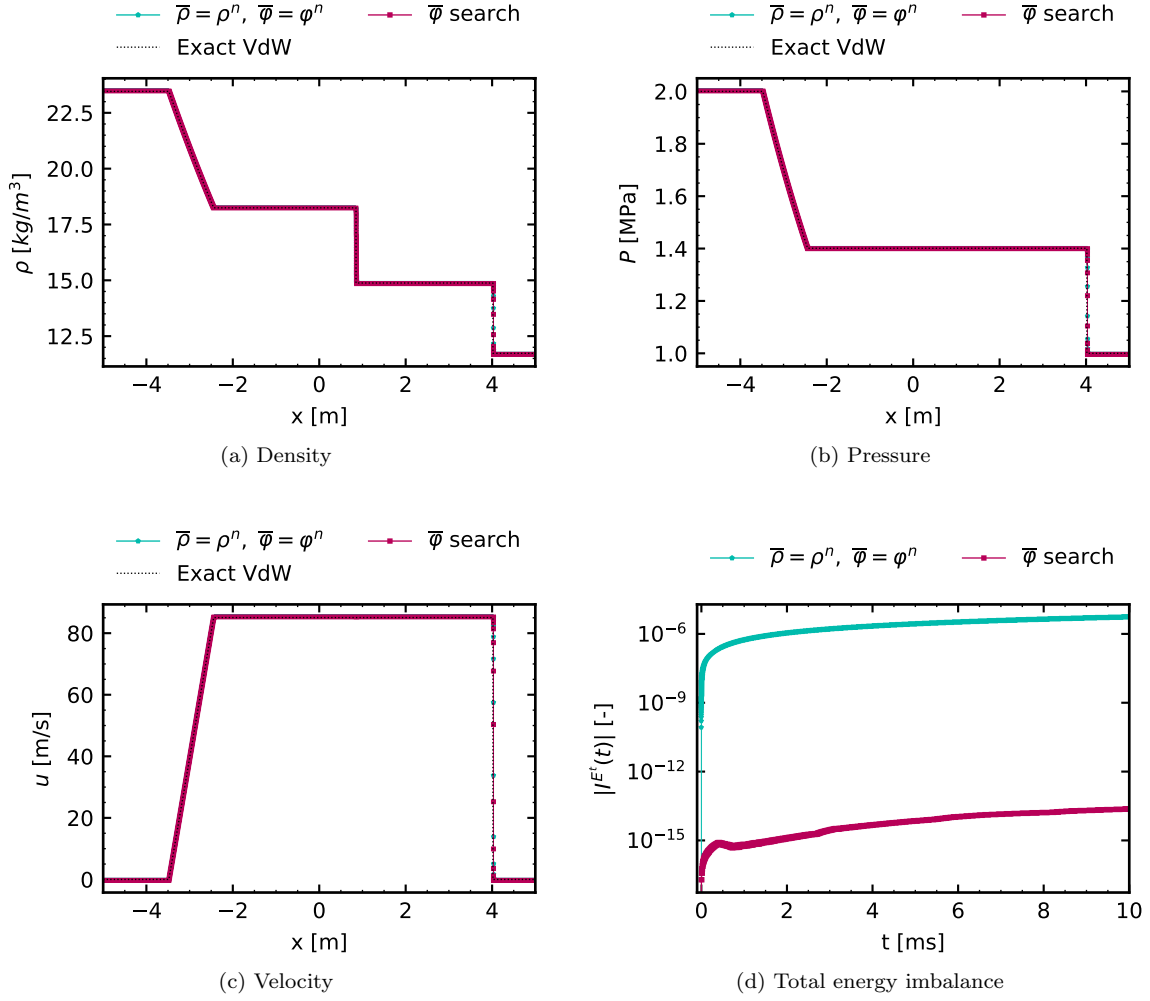


Figure 7: Nitrogen shock tube test results using MUSCL with $\Delta x = 0.0002$ m using the VdW EoS and the $\varphi = T$ update for temperature. Density, pressure, and velocity profiles at $t = 0.01$ s and absolute value of the total energy imbalance in time. Comparison between using $\bar{\rho} = (\rho^n + \rho^{n+1})/2$ with the secant search for $\bar{\varphi} = \bar{T}$ and using a simplified approximation $\bar{\rho} = \rho^n$ and $\bar{\varphi} = \varphi^n = T^n$ in the approximate φ update formula.

velocity-pressure plateau in Fig. 8 we understand why conservation is important. The results obtained using the approximate formula give wrong post-shock results (see Fig. 8c 8d) therefore jump conditions are not satisfied. Furthermore, the shock position is slightly to the right of the analytical solution (see Fig. 8a 8b). The spike we see in Fig. 8c 8d corresponds to the contact discontinuity, and is a feature of all Riemann solvers and is not caused by the time discretization. It is exaggerated by the tight zoom of Fig. 8c 8d. Looking at the absolute values of the total energy imbalance in time in Fig. 7d it is clear how the approximate formula alone is not enough to conserve total energy, with a final value of roughly 10^9 times greater than using the method proposed in this work.

3.3 Order Testing (VdW) - Method of Manufactured Solutions

We employ the method of manufactured solutions (MMS) to assess the spatial order of convergence. See Roache [67] for an in-depth discussion on MMS. Using periodic boundary conditions in the $\Omega = [0, 1]$ domain, we assume an exact periodic solution defined as

$$\begin{cases} \rho_{\text{MMS}}(x, t) &= \rho_0 + A_\rho \cos(\omega_{\rho,x}x + \omega_{\rho,t}t) \\ u_{\text{MMS}}(x, t) &= u_0 + A_u \sin(\omega_{u,x}x + \omega_{u,t}t) \\ T_{\text{MMS}}(x, t) &= T_0 + A_T \sin(\omega_{T,x}x + \omega_{T,t}t) . \end{cases} \quad (31)$$

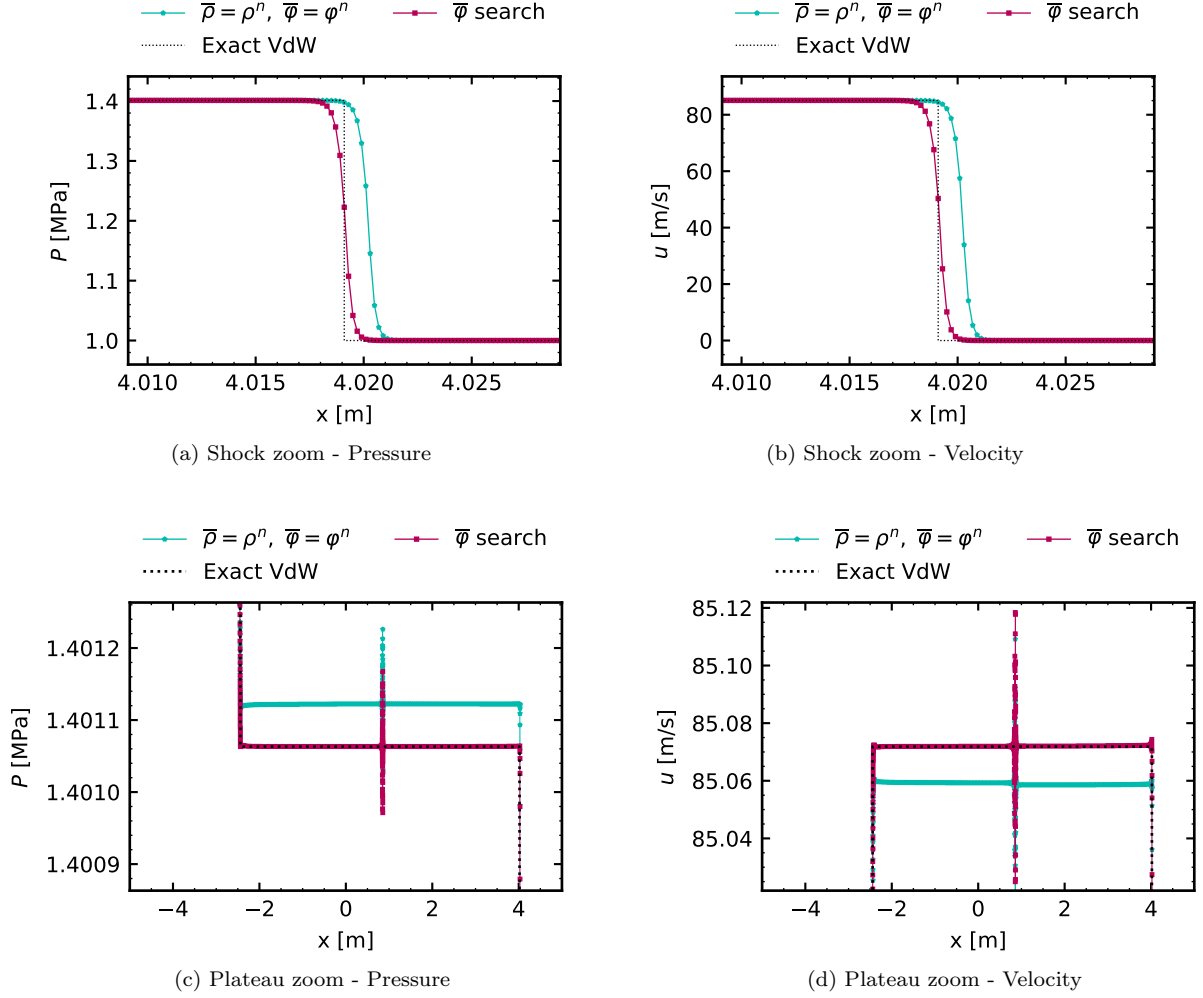


Figure 8: Nitrogen shock tube test results using MUSCL with $\Delta x = 0.0002$ m using the VdW EoS and the $\varphi = T$ update for temperature. Density, pressure, and velocity profiles at $t = 0.01$ s and absolute value of the total energy imbalance in time. Zoom on the right shock and on the plateaus for velocity and pressure. Comparison between using $\bar{\rho} = (\rho^n + \rho^{n+1})/2$ with the secant search for $\bar{\varphi} = \bar{T}$ and using a simplified approximation $\bar{\rho} = \rho^n$ and $\bar{\varphi} = \varphi^n = T^n$ in the approximate φ update formula.

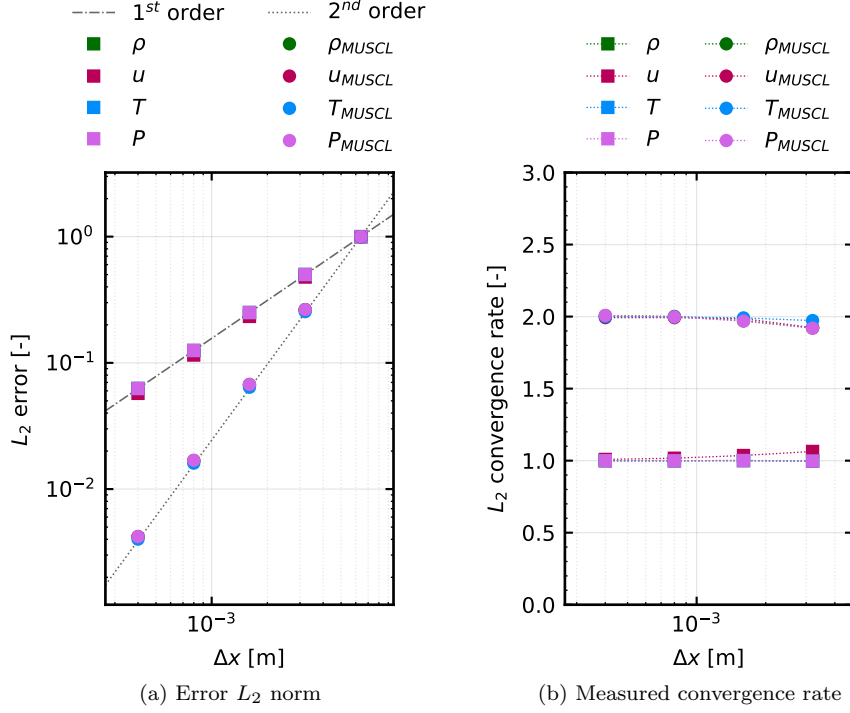


Figure 9: MMS spatial convergence order test. Dimensionless L_2 norm of the errors and measured convergence rates at $t = 0.0001s$.

We substitute the manufactured solution Eq. (31) into the Euler conservation equations Eq. (1) to compute the source terms Θ :

$$\begin{cases} \frac{\partial \rho_{\text{MMS}}(x, t)}{\partial t} + \nabla \cdot [\rho \underline{u}_{\text{MMS}}(x, t)] = \Theta^\rho(x, t) \\ \frac{\partial \rho \underline{u}_{\text{MMS}}(x, t)}{\partial t} + \nabla \cdot [\rho \underline{u}_{\text{MMS}}(x, t) \otimes \underline{u}_{\text{MMS}}(x, t) + P_{\text{MMS}}(x, t)] = \underline{\Theta}^{\rho \underline{u}}(x, t) \\ \frac{\partial E^t_{\text{MMS}}(x, t)}{\partial t} + \nabla \cdot [(E^t_{\text{MMS}}(x, t) + P_{\text{MMS}}(x, t)) \underline{u}_{\text{MMS}}(x, t)] = \Theta^{E^t}(x, t) \end{cases} \quad (32)$$

using the following constants:

$$\begin{array}{llll} \rho_0 = 2 & A_\rho = 0.025 & \omega_{\rho, x} = 2\pi & \omega_{\rho, t} = 256\pi \\ u_0 = 2 & A_u = 0.025 & \omega_{u, x} = 2\pi & \omega_{u, t} = 256\pi \\ T_0 = 300 & A_T = 0.1 & \omega_{T, x} = 2\pi & \omega_{T, t} = 256\pi. \end{array} \quad (33)$$

We plot the dimensionless L_2 errors and the measured convergence rates of density, velocity, and temperature in Fig. 9, both with and without using MUSCL. We also measure the error on the pressure. To adimensionalize we use the error of the coarsest mesh. As expected, first- and second-order convergence rates are measured, therefore the method proposed in this work preserves the expected characteristics of the underlying spatial discretization.

3.4 Dilute Gas Regime Tests (VdW)

In this section we show three tests in the dilute gas-dynamic regime using the VdW EoS; a 123 test (see table 4), two colliding shocks from Dumbser and Casulli [55] (see table 5), and a Lax shock (see table 6). We will use the T update and compare it to the standard E^t update and the exact VdW solution.

We report the density, pressure, and velocity profiles for the 123 test (see Fig. 10), colliding shocks (see Fig. 11) and Lax shock (see Fig. 12). Results compare well with the exact VdW solution everywhere, except for a kink in the density visible in Fig. 10a, corresponding to the initial discontinuity in the 123 test. The T update and the standard E^t update show different behaviors here due to the fact that

EoS	<i>VdW</i>	
δ	0.4	
R	0.4 kJ/kg · K	
a	0.5 s ² /m ²	
b	0.5 · 10 ⁻³ kg/m ³	
Numerical	<i>CFL</i>	0.1
	<i>domain</i>	$x \in [0, 1]$ m $x_{shock} = 0.5$ m
	t_{final}	0.2 s
Initial conditions	<i>Left</i>	<i>Right</i>
	ρ	1 kg/m ³ 1 kg/m ³
	u	-1 m/s +1 m/s
	P	0.4 Pa 0.4 Pa

Table 4: 123 test initial conditions, thermodynamic, domain and numerical data.

EoS	<i>VdW</i>	
δ	0.4	
R	0.4 kJ/kg · K	
a	0.5 s ² /m ²	
b	0.5 · 10 ⁻³ kg/m ³	
Numerical	<i>CFL</i>	0.1
	<i>domain</i>	$x \in [0, 1]$ m $x_{shock} = 0.5$ m
	t_{final}	0.1 s
Initial conditions	<i>Left</i>	<i>Right</i>
	ρ	1 kg/m ³ 1 kg/m ³
	u	+1 m/s -1 m/s
	P	2 Pa 1 Pa

Table 5: Colliding shocks test [55] initial conditions, thermodynamic, domain and numerical data.

MUSCL is reconstructing and limiting two different variables. A similar behavior can be seen in the Lax shock on the pressure and velocity in Figs. 12b 12c across the contact discontinuity at $x \simeq 0.65m$. The total energy imbalances in Figs. 10d 11d 12d are almost overimposed for both the T update and the standard E^t update in all three test cases.

3.5 Dense Gas Regime Tests (VdW)

Here we show two dense gas tests named DG1 (see table 7) and DG2 (see table 8) from Guardone & Vigeveno [35]. The first test DG1 is characterized by a wave structure sketched in Fig. 13, composed of a composite wave (rarefaction fan and non-classical rarefaction shock), a contact discontinuity, and a classical compression shock. The left and right states are in the convex region of the VdW EoS ($\Gamma > 0$) but the fluid crosses the $\Gamma = 0$ boundary during the evolution of the Riemann problem. The second test DG2 is characterized by a wave structure sketched in Fig. 15, composed by a non-classical rarefaction shock, a contact discontinuity, and a non-classical compression fan. For this test, the fluid always resides in the non-convex region of the VdW EoS ($\Gamma < 0$)

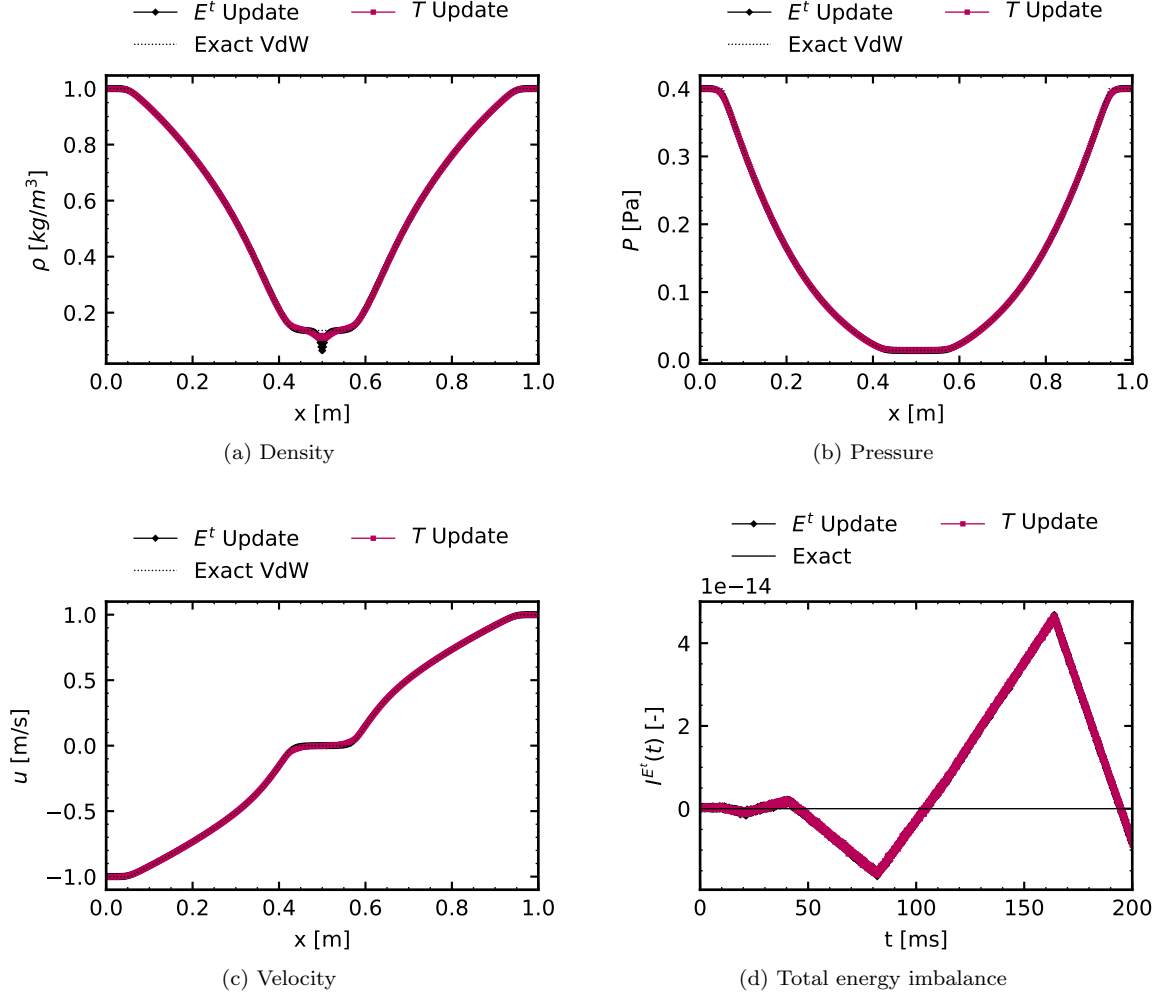


Figure 10: 123 test results using MUSCL with $\Delta x = 0.002\text{m}$ using the VdW EoS. Density, pressure, and velocity profiles at $t = 0.2\text{s}$ and total energy imbalance in time. Comparison between the φ update scheme for temperature and the standard total energy update.

EoS	<i>VdW</i>	
δ	0.4	
R	0.4 kJ/kg · K	
a	0.5 s ² /m ²	
b	0.5 · 10 ⁻³ kg/m ³	
Numerical	<i>CFL</i>	0.1
<i>domain</i>	$x \in [0, 1]$ m	$x_{shock} = 0.5$ m
t_{final}	0.1 s	
Initial conditions	<i>Left</i>	<i>Right</i>
ρ	0.445 kg/m ³	0.5 kg/m ³
u	0.698 m/s	0 m/s
P	3.528 Pa	0.571 Pa

Table 6: Lax shock test initial conditions, thermodynamic, domain and numerical data.

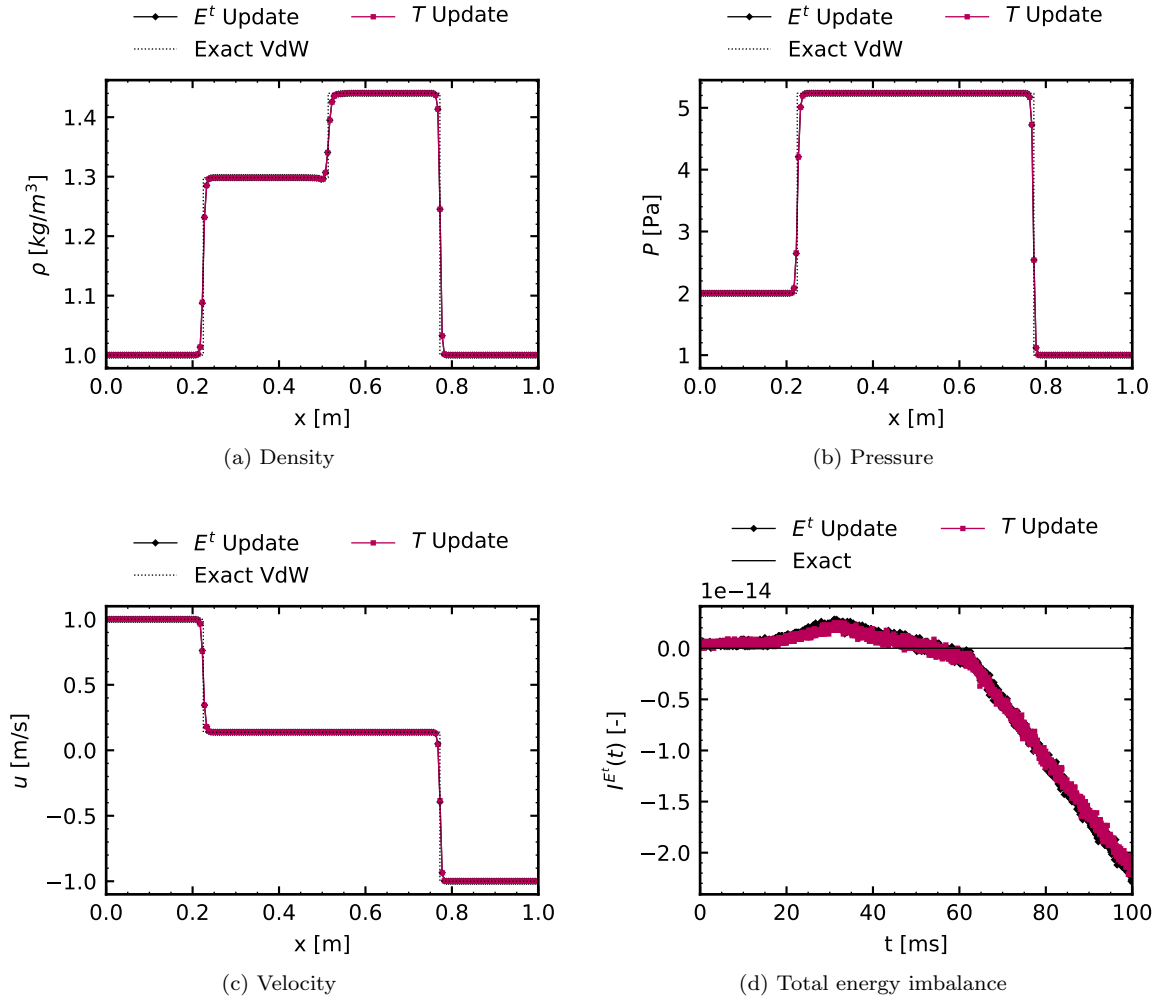


Figure 11: Colliding shocks test [55] results using MUSCL with $\Delta x = 0.005\text{m}$ using the VdW EoS. Density, pressure, and velocity profiles at $t = 0.1\text{s}$ and total energy imbalance in time. Comparison between the φ update scheme for temperature and the standard total energy update.

EoS	<i>VdW</i>	
δ	0.0125	
R	8/3 kJ/kg · K	
ρ_c	1 kg/m ³	
P_c	1 Pa	
T_c	1 K	
Numerical	<i>CFL</i>	0.1
<i>domain</i>	$x \in [0, 1]$ m	$x_{shock} = 0.5$ m
<i>t_{final}</i>	0.15 s	
Initial conditions	<i>Left</i>	<i>Right</i>
ρ	1.818 kg/m ³	0.275 kg/m ³
u	0 m/s	0 m/s
P	3 Pa	0.575 Pa

Table 7: DG1 dense gas test from [35] initial conditions, thermodynamic, domain and numerical data.

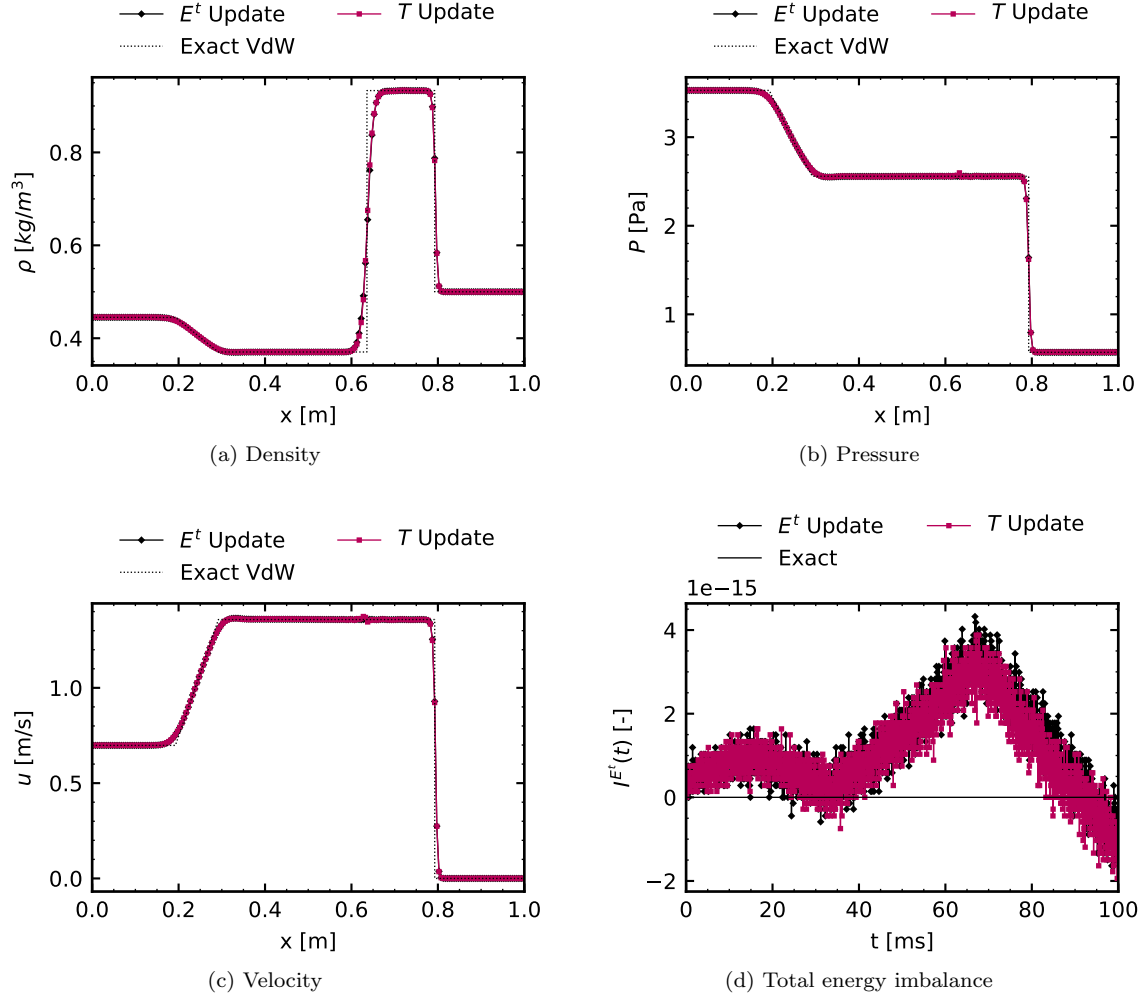


Figure 12: Lax shock test results using MUSCL with $\Delta x = 0.005\text{m}$ using the VdW EoS. Density, pressure and velocity profiles at $t = 0.1\text{s}$ and total energy imbalance in time. Comparison between the φ update scheme for temperature and the standard total energy update.

EoS	<i>VdW</i>	
δ	0.0125	
R	8/3 kJ/kg · K	
ρ_c	1 kg/m ³	
P_c	1 Pa	
T_c	1 K	
Numerical	<i>CFL</i>	0.1
<i>domain</i>	$x \in [0, 1]$ m	$x_{shock} = 0.5$ m
<i>t_{final}</i>	0.45 s	
Initial conditions	<i>Left</i>	<i>Right</i>
ρ	0.879 kg/m ³	0.562 kg/m ³
u	0 m/s	0 m/s
P	1.09 Pa	0.885 Pa

Table 8: DG2 dense gas test from [35] initial conditions, thermodynamic, domain and numerical data.

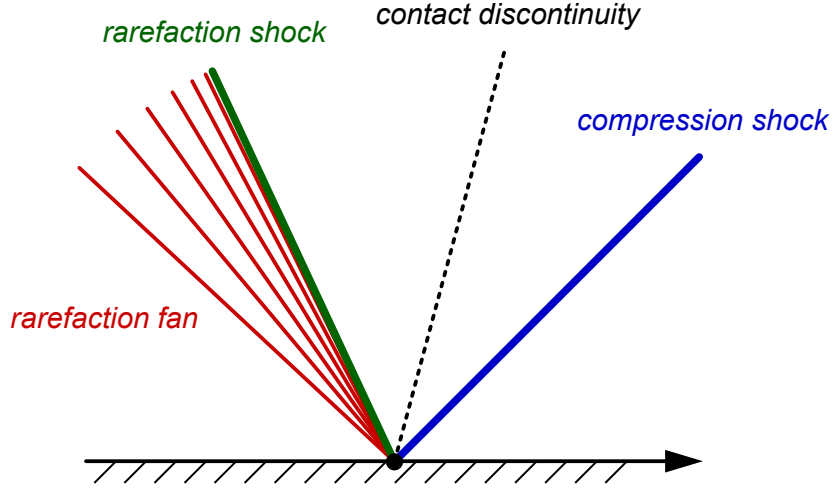


Figure 13: DG1 dense gas test from [35] solution wave structure sketch.

For both tests, we use the same 400 element mesh as Guardone and Vigevano [35] and report the density, pressure, and fundamental derivative of gas-dynamics profiles for DG1 in Fig. 14 and DG2 in Fig. 16. For the first test DG1, in Fig. 14 we see that results are almost identical between the T update, the standard E^t update, and the results taken from Guardone and Vigevano [35] obtained using the method of Davis [69]. The rarefaction shock at $x \simeq 0.53m$ is well caught with no spurious oscillations. For the second test DG2 in Fig. 16, both the rarefaction shock at $x \simeq 0.25m$ and the compression fan at $x \simeq 0.85m$ are well caught with no spurious oscillations. The results are in good agreement between the T update, the standard E^t update and the results taken from Guardone & Vigevano [35] obtained using the method of Davis [69], except for a slight difference in the Davis results in the rightmost part of the compression fan at $x \simeq 0.88m$. The total energy imbalance for both DG1 and DG2 tests are almost overimposed between the T update and the standard E^t update as seen in Figs. 14d 16d. The fundamental derivative of gas-dynamics for test DG2 in Fig. 16c is negative everywhere, while for test DG1 in Fig. 14c it only crosses the $\Gamma = 0$ boundary during the simulation, remaining positive everywhere else.

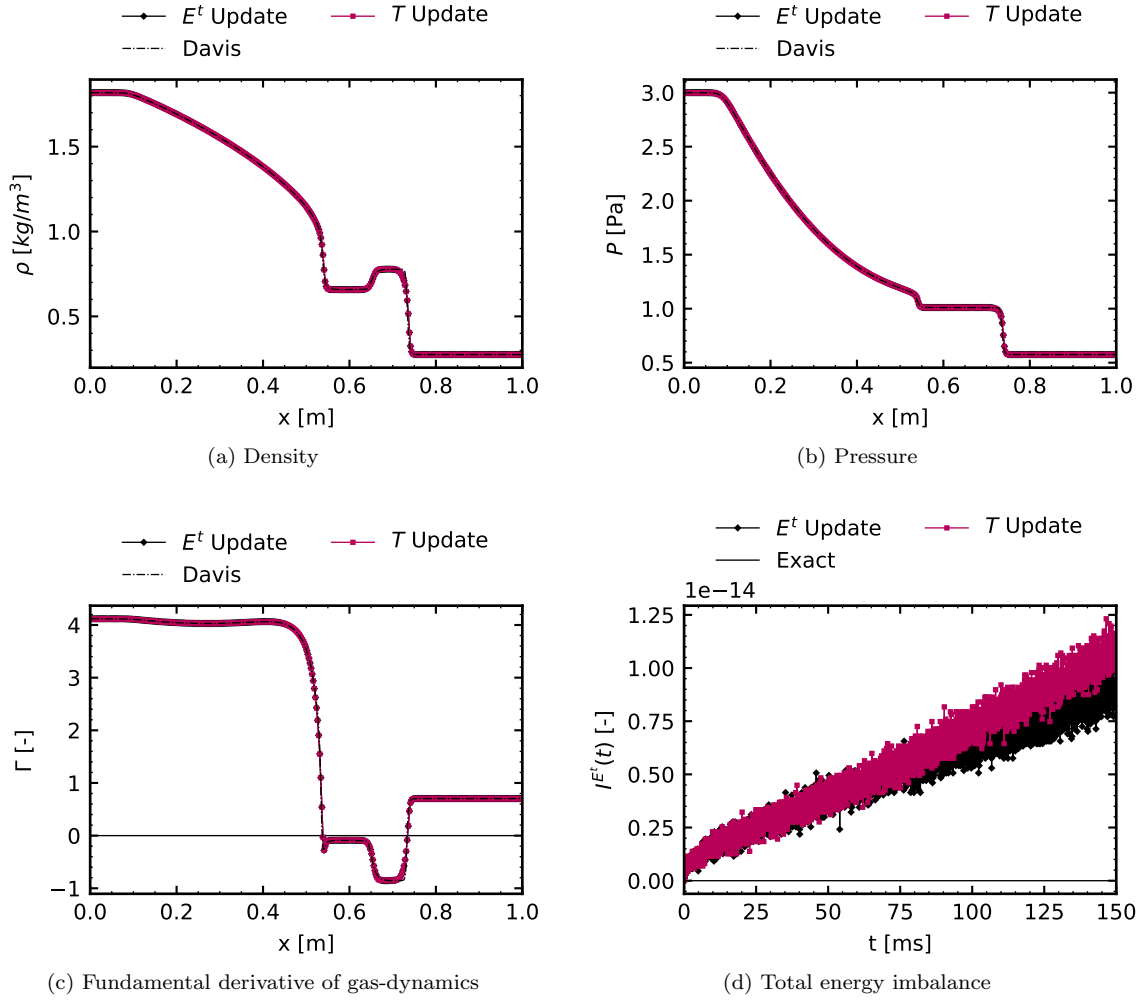


Figure 14: DG1 dense gas [35] results using MUSCL with $\Delta x = 0.0025\text{m}$ using the VdW EoS. Density, pressure and fundamental derivative of gas-dynamics profiles at $t = 0.15\text{s}$ and total energy imbalance in time. Comparison between the φ update scheme for temperature and the standard total energy update. Results with Davis [69] method taken from Guardone & Vigevano [35].

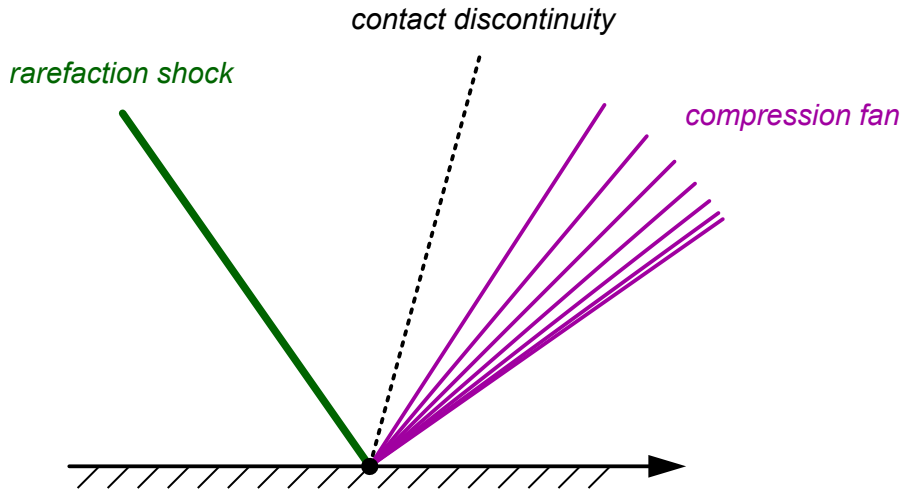


Figure 15: DG2 dense gas test from [35] solution wave structure.

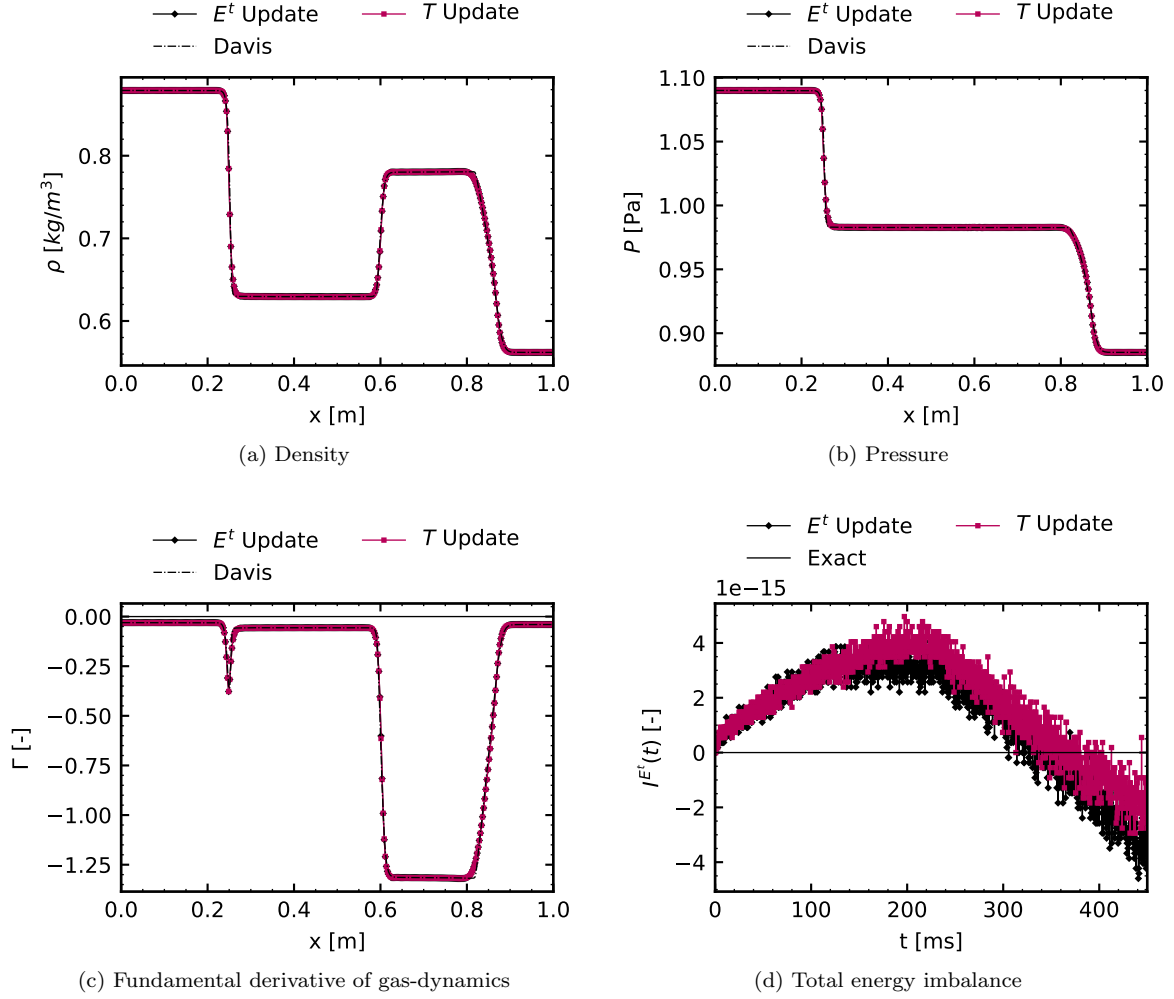


Figure 16: DG2 non-ideal [35] results using MUSCL with $\Delta x = 0.0025\text{m}$ using the VdW EoS. Density, pressure and fundamental derivative of gas-dynamics profiles at $t = 0.45\text{s}$ and total energy imbalance in time. Comparison between the φ update scheme for temperature and the standard total energy update. Results with Davis [69] method taken from Guardone & Vigevano [35].

4 Conclusions

We presented a procedure to solve the Euler equations by updating any thermodynamic variable instead of the total energy in a conservative manner. The procedure is agnostic to the chosen equation of state and spatial discretization. We measured an increase in the number of total thermodynamic evaluations of 70 – 100% when compared to the standard total energy update. The computational cost of this increase can be completely offset if using the temperature as the new thermodynamic variable because each thermodynamic evaluation is significantly faster when using the analytical Span-Wagner EoS. We measured an average speed-up of 650 – 700% if compared to the standard total energy update. Results obtained by updating temperature, pressure, specific energy, specific enthalpy, or specific entropy instead of the total energy are all within the margin of error, with all of them conserving total energy close to machine precision and to the standard total energy update. We showed that using a limited MUSCL slope reconstruction the measured order of spatial convergence remains Δx^2 as expected. Although we only presented 1D results, the procedure is applicable to 2D or 3D since the increase in dimensions would not affect the time update in any way as it only looks at one element. The thermodynamic evaluation speed-up should be even larger in 3D as the main number of thermodynamic evaluations happens at the faces, the number of which scales faster than the number of control volumes. Adding viscous or turbulent diffusion effects to the spatial residuals does not change the derivation and application of the method.

Acknowledgements

B. Re acknowledges the financial support received by the European Union’s Horizon Europe programme under the MSCA-2021-PF grant agreement Id 101066019 (project NI2PhORC). G. Sirianni acknowledges the financial support of the European Union under the NextGenerationEU action.

References

- [1] Luciano Rezzolla and Olindo Zanotti. Relativistic Hydrodynamics. Oxford University Press Oxford, September 2013.
- [2] F. Krause and K.-H. Radler. Mean-field magnetohydrodynamics and dynamo theory. Pergamon, 1980.
- [3] Peter Alan Davidson. Incompressible Fluid Dynamics. Oxford University Press, 2021.
- [4] P Balachandran. Fundamentals of compressible fluid dynamics. PHI Learning Pvt. Ltd., 2006.
- [5] Alberto Guardone, Piero Colonna, Emiliano Casati, and Enrico Rinaldi. Non-classical gas dynamics of vapour mixtures. Journal of Fluid Mechanics, 741:681–701, February 2014.
- [6] A. Kluwick. Non-ideal compressible fluid dynamics: A challenge for theory. Journal of Physics: Conference Series, 821:012001, March 2017.
- [7] Andrea Spinelli, Giorgia Cammi, Simone Gallarini, Marta Zocca, Fabio Cozzi, Paolo Gaetani, Vincenzo Dossena, and Alberto Guardone. Experimental evidence of non-ideal compressible effects in expanding flow of a high molecular complexity vapor. Experiments in Fluids, 59(8), July 2018.
- [8] C. J. Adkins. Equilibrium Thermodynamics. Cambridge University Press, July 1983.
- [9] Yunus A Çengel, Michael A Boles, and Mehmet Kanoğlu. Thermodynamics: An engineering approach. McGraw-Hill, 2024.
- [10] H. A. Bethe. On the theory of shock waves for an arbitrary equation of state. In Classic Papers in Shock Compression Science, pages 421–495. Springer New York, 1942.
- [11] Yakov Borisovich Zeldovich. 14. on the possibility of rarefaction shock waves. In Selected Works of Yakov Borisovich Zeldovich, Volume I, pages 152–154. Princeton University Press, December 1946.
- [12] Philip A. Thompson. A fundamental derivative in gasdynamics. Physics of Fluids, 14(9):1843, 1971.
- [13] Ralph Menikoff and Bradley J. Plohr. The riemann problem for fluid flow of real materials. Reviews of Modern Physics, 61(1):75–130, January 1989.

- [14] Davide Vimercati, Giulio Gori, and Alberto Guardone. Non-ideal oblique shock waves. Journal of Fluid Mechanics, 847:266–285, May 2018.
- [15] Johannes Diderik van der Waals. The Equation of State for Gases and Liquids. In Nobel Lecture. NobelPrize.org, 1910.
- [16] Ding-Yu Peng and Donald B. Robinson. A new two-constant equation of state. Industrial Engineering Chemistry Fundamentals, 15(1):59–64, February 1976.
- [17] Otto. Redlich and J. N. S. Kwong. On the thermodynamics of solutions. v. an equation of state. fugacities of gaseous solutions. Chemical Reviews, 44(1):233–244, February 1949.
- [18] Giorgio Soave. Equilibrium constants from a modified redlich-kwong equation of state. Chemical Engineering Science, 27(6):1197–1203, June 1972.
- [19] Roland Span and Wolfgang Wagner. A new equation of state for carbon dioxide covering the fluid region from the triple-point temperature to 1100 k at pressures up to 800 MPa. Journal of Physical and Chemical Reference Data, 25(6):1509–1596, November 1996.
- [20] Ian H. Bell, Jorrit Wronski, Sylvain Quoilin, and Vincent Lemort. Pure and pseudo-pure fluid thermophysical property evaluation and the open-source thermophysical property library coolprop. Industrial & Engineering Chemistry Research, 53(6):2498–2508, 2014.
- [21] Alberto Guardone, Piero Colonna, Matteo Pini, and Andrea Spinelli. Nonideal compressible fluid dynamics of dense vapors and supercritical fluids. Annual Review of Fluid Mechanics, 56(1):241–269, 2024.
- [22] Giulio Gori, Olivier Le Maître, and Pietro M. Congedo. A review of some recent advancements in non-ideal compressible fluid dynamics. In Advances in Uncertainty Quantification and Optimization Under Uncertainty with Aerospace Applications, pages 407–419. Springer International Publishing, 2021.
- [23] Christopher Laughman, Yiming Zhao, and Daniel Nikovski. Fast refrigerant property calculations using interpolation-based methods. In International Refrigeration and Air Conditioning Conference, 2012.
- [24] M. Pini, A. Spinelli, G. Persico, and S. Rebay. Consistent look-up table interpolation method for real-gas flow simulations. Computers and Fluids, 107:178–188, January 2015.
- [25] A. Rubino, M. Pini, M. Kosec, S. Vitale, and P. Colonna. A look-up table method based on unstructured grids and its application to non-ideal compressible fluid dynamic simulations. Journal of Computational Science, 28:70–77, September 2018.
- [26] Lixiang Li, Jesse Gohl, John Batteh, Christopher Greiner, and Kai Wang. Fast calculation of refrigerant properties in vapor compression cycles using spline-based table look-up method (SBTL). In Linköping Electronic Conference Proceedings. Linköping University Electronic Press, February 2019.
- [27] R. Gosset, G. Heyen, and B. Kalitventzeff. An efficient algorithm to solve cubic equations of state. Fluid Phase Equilibria, 25(1):51–64, January 1986.
- [28] Jean-Pierre Hickey, Peter C. Ma, Matthias Ihme, and Siddharth S. Thakur. Large eddy simulation of shear coaxial rocket injector: Real fluid effects. In 49th AIAA/ASME/SAE/ASEE Joint Propulsion Conference. American Institute of Aeronautics and Astronautics, July 2013.
- [29] J. Matheis, N.A. Adams, and S. Hickel. Numerical Simulation of Fuel Injection and Turbulent Mixing Under High-Pressure Conditions. Universitätsbibliothek der TU München, 2018.
- [30] T. Trummler, M. Glatzle, A. Doehring, N. Urban, and M. Klein. Thermodynamic modeling for numerical simulations based on the generalized cubic equation of state. Physics of Fluids, 34(11):116126, November 2022.
- [31] Mani Chandra, Francois Foucart, and Charles F. Gammie. grim: A flexible, conservative scheme for relativistic fluid theories. The Astrophysical Journal, 837(1):92, March 2017.

- [32] Tobias Dieselhorst, William Cook, Sebastiano Bernuzzi, and David Radice. Machine learning for conservative-to-primitive in relativistic hydrodynamics. Symmetry, 13(11):2157, November 2021.
- [33] Richard Saurel, Erwin Franquet, Eric Daniel, and Olivier Le Metayer. A relaxation-projection method for compressible flows. part i: The numerical equation of state for the euler equations. Journal of Computational Physics, 223(2):822–845, May 2007.
- [34] Marcel Vinokur and Jean-Louis Montagné. Generalized flux-vector splitting and roe average for an equilibrium real gas. Journal of Computational Physics, 89(2):276–300, aug 1990.
- [35] A. Guardone and L. Vigevano. Roe linearization for the van der waals gas. Journal of Computational Physics, 175(1):50–78, jan 2002.
- [36] Randall J. LeVeque. Numerical Methods for Conservation Laws. Birkhäuser Basel, 1992.
- [37] D.R. van der Heul, C. Vuik, and P. Wesseling. A conservative pressure-correction method for flow at all speeds. Computers & Fluids, 32(8):1113–1132, 2003.
- [38] E. F. Toro, R. C. Millington, and L. A. M. Nejad. Primitive upwind numerical methods for hyperbolic partial differential equations. In Charles-Henri Bruneau, editor, Sixteenth International Conference on Numerical Methods in Fluid Dynamics, pages 421–426, Berlin, Heidelberg, 1998. Springer Berlin Heidelberg.
- [39] E. F. Toro and A. Siviglia. PRICE: primitive centred schemes for hyperbolic systems. International Journal for Numerical Methods in Fluids, 42(12):1263–1291, 2003.
- [40] Thomas J. R. Hughes, Guglielmo Scovazzi, and Tayfun E. Tezduyar. Stabilized Methods for Compressible Flows. Journal of Scientific Computing, 43(3):343–368, 2010.
- [41] G. Hauke and T.J.R. Hughes. A unified approach to compressible and incompressible flows. Computer Methods in Applied Mechanics and Engineering, 113(3-4):389–395, 1994.
- [42] Guillermo Hauke and Thomas J.R. Hughes. A comparative study of different sets of variables for solving compressible and incompressible flows. Computer Methods in Applied Mechanics and Engineering, 153(1-2):1–44, 1998.
- [43] Guillermo Hauke. Simple stabilizing matrices for the computation of compressible Flows in primitive variables. Comput. Methods Appl. Mech. Engrg., 2001.
- [44] Carlos Parés. Numerical methods for nonconservative hyperbolic systems: a theoretical framework. SIAM Journal on Numerical Analysis, 44(1):300–321, January 2006.
- [45] Manuel J. Castro, Philippe G. LeFloch, María Luz Muñoz-Ruiz, and Carlos Parés. Why many theories of shock waves are necessary: Convergence error in formally path-consistent schemes. Journal of Computational Physics, 227(17):8107–8129, September 2008.
- [46] Rémi Abgrall and Smadar Karni. A comment on the computation of non-conservative products. Journal of Computational Physics, 229(8):2759–2763, April 2010.
- [47] Smadar Karni. Multicomponent flow calculations by a consistent primitive algorithm. Journal of Computational Physics, 112(1):31–43, May 1994.
- [48] Y. Ogata and T. Yabe. Shock capturing with improved numerical viscosity in primitive euler representation. Computer Physics Communications, 119(2-3):179–193, June 1999.
- [49] Barbara Re and Rémi Abgrall. A pressure-based method for weakly compressible two-phase flows under a baer–nunziato type model with generic equations of state and pressure and velocity disequilibrium. International Journal for Numerical Methods in Fluids, 94(8):1183–1232, May 2022.
- [50] Giuseppe Sirianni, Barbara Re, Remi Abgrall, and Alberto Guardone. Momentum weighted interpolation for unsteady weakly compressible two-phase flows on unstructured meshes. Journal of Computational and Applied Mathematics, 428:115209, 2023.
- [51] Rémi Abgrall. How to prevent pressure oscillations in multicomponent flow calculations: A quasi conservative approach. Journal of Computational Physics, 125(1):150–160, April 1996.

- [52] K. S. Surana, S. Allu, P. W. Tenpas, and J. N. Reddy. k-version of finite element method in gas dynamics: higher-order global differentiability numerical solutions. International Journal for Numerical Methods in Engineering, 69(6):1109–1157, 2007.
- [53] L. Pesch and J.J.W. van der Vegt. A discontinuous galerkin finite element discretization of the euler equations for compressible and incompressible fluids. Journal of Computational Physics, 227(11):5426–5446, May 2008.
- [54] Huaibao Zhang, Alexandre Martin, and Guangxue Wang. Numerical analysis of time accuracy of a primitive variable-based formulation of the conservative form of the governing equations for compressible flows. International Journal of Computational Fluid Dynamics, 33(1-2):1–9, dec 2018.
- [55] Michael Dumbser and Vincenzo Casulli. A conservative, weakly nonlinear semi-implicit finite volume scheme for the compressible navier-stokes equations with general equation of state. Applied Mathematics and Computation, 272:479–497, jan 2016.
- [56] Vincenzo Casulli. A semi-implicit numerical method for the free-surface navier-stokes equations. International Journal for Numerical Methods in Fluids, 74(8):605–622, November 2013.
- [57] Rémi Abgrall and Ksenya Ivanova. Staggered residual distribution scheme for compressible flow, 2022.
- [58] KAMBIZ SALARI and PATRICK KNUPP. Code verification by the method of manufactured solutions. Technical report, Sandia National Laboratories, June 2000.
- [59] P.L Roe. Approximate riemann solvers, parameter vectors, and difference schemes. Journal of Computational Physics, 43(2):357–372, October 1981.
- [60] E. F. Toro, M. Spruce, and W. Speares. Restoration of the contact surface in the HLL-riemann solver. Shock Waves, 4(1):25–34, July 1994.
- [61] Eleuterio F Toro. Riemann solvers and numerical methods for fluid dynamics. Springer, Berlin, Germany, 3 edition, April 2009.
- [62] A. JAMESON, WOLFGANG SCHMIDT, and ELI TURKEL. Numerical solution of the euler equations by finite volume methods using runge kutta time stepping schemes. In 14th Fluid and Plasma Dynamics Conference. American Institute of Aeronautics and Astronautics, June 1981.
- [63] Ami Harten, Bjorn Engquist, Stanley Osher, and Sukumar R Chakravarthy. Uniformly high order accurate essentially non-oscillatory schemes, III. Journal of Computational Physics, 71(2):231–303, August 1987.
- [64] Xu-Dong Liu, Stanley Osher, and Tony Chan. Weighted essentially non-oscillatory schemes. Journal of Computational Physics, 115(1):200–212, November 1994.
- [65] Timothy Barth and Dennis Jespersen. The design and application of upwind schemes on unstructured meshes. In 27th Aerospace Sciences Meeting. American Institute of Aeronautics and Astronautics, jan 1989.
- [66] Roland Span, Eric W. Lemmon, Richard T Jacobsen, Wolfgang Wagner, and Akimichi Yokozeki. A reference equation of state for the thermodynamic properties of nitrogen for temperatures from 63.151 to 1000 k and pressures to 2200 MPa. Journal of Physical and Chemical Reference Data, 29(6):1361–1433, nov 2000.
- [67] P.J. Roache. Verification and Validation in Computational Science and Engineering. Hermosa Publishers, 1998.
- [68] L. Quartapelle, L. Castelletti, A. Guardone, and G. Quaranta. Solution of the riemann problem of classical gasdynamics. Journal of Computational Physics, 190(1):118–140, September 2003.
- [69] Stephen F. Davis. A simplified TVD finite difference scheme via artificial viscosity. SIAM Journal on Scientific and Statistical Computing, 8(1):1–18, January 1987.
- [70] Giuseppe Sirianni, Alberto Guardone, Remi Abgrall, and Re Barbara. Dataset todo, June 2023.

A Polytropic Van der Waals Equation of State

We report here useful formulas and thermodynamic derivatives of the polytropic VdW EoS for the T update. Pressure, internal energy, and the fundamental derivative of gas dynamics are:

$$\begin{aligned}
P(\rho, T) &= \frac{\rho RT}{1 - b\rho} - a\rho^2 \\
E(\rho, T) &= \frac{\rho RT}{\delta} - a\rho^2 \\
\Gamma(\rho, P) &= \frac{(\delta + 1)(\delta + 2) \frac{P + a\rho^2}{(1 - \rho b)^2} \rho^2 - 6a\rho^4}{2(\delta + 1) \frac{P + a\rho^2}{(1 - \rho b)} \rho^2 - 4a\rho^4}
\end{aligned} \tag{34}$$

Other miscellaneous quantities are:

$$\begin{aligned}
a &= \frac{27}{64} \frac{(RT_c)^2}{P_c} & b &= \frac{1}{8} \frac{RT_c}{P_c} \\
\kappa &= \frac{\delta}{1 - b\rho} & \chi &= \delta \frac{b(E - a\rho^2) + 2a\rho}{(1 - b\rho)^2} - 2a\rho
\end{aligned} \tag{35}$$

The internal energy derivatives needed for the φ update scheme for temperature T :

$$\begin{aligned}
E_{\varphi, \rho} &= \left(\frac{\partial E}{\partial T} \right)_{\rho} = \frac{\rho R}{\delta} \\
E_{\rho, \varphi} &= \left(\frac{\partial E}{\partial \rho} \right)_T = \frac{RT}{\delta} - 2a\rho
\end{aligned} \tag{36}$$

B Nitrogen Shock Tube with Span-Wagner EoS

Results obtained using the CoolProp thermodynamic library, leveraging the Span-Wagner EoS [66]. In Fig. 17 we show profiles of density, pressure, and velocity, compared to the exact solution for nitrogen computed using the VdW EoS. There is virtually no difference in the results between all φ choices, and they all overlap perfectly with the solution obtained using the standard E^t update. If we focus on the total energy imbalance in Fig. 17d we see how some choices of φ behave slightly differently from others. Namely, the specific internal energy e behaves exactly identically to the standard E^t update, while temperature T and specific enthalpy h show some similarity. Pressure P and specific entropy s showcase some sporadic steps that may at first glance appear large, but are still of the order of 10^{-13} .

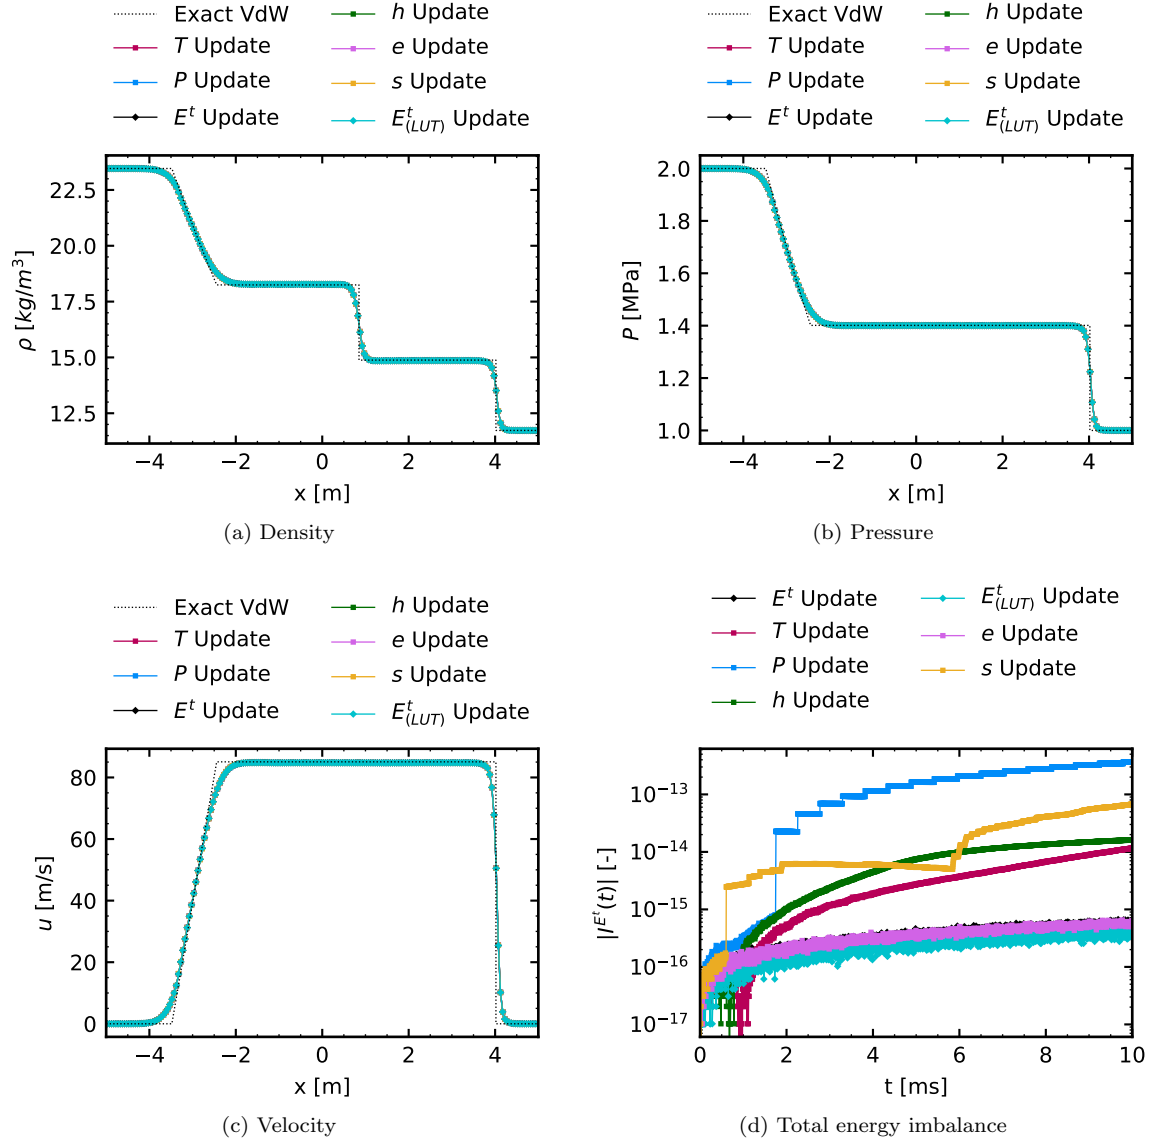


Figure 17: Nitrogen shock tube test results with $\Delta x = 0.05\text{m}$ using the Span-Wagner EoS [66] through the CoolProp thermodynamic library [20]. Density, pressure and velocity profiles at $t = 0.01\text{s}$ and absolute value of the total energy imbalance in time. Comparison between the φ update scheme for temperature, pressure, specific energy, specific enthalpy, specific entropy and the standard total energy update.

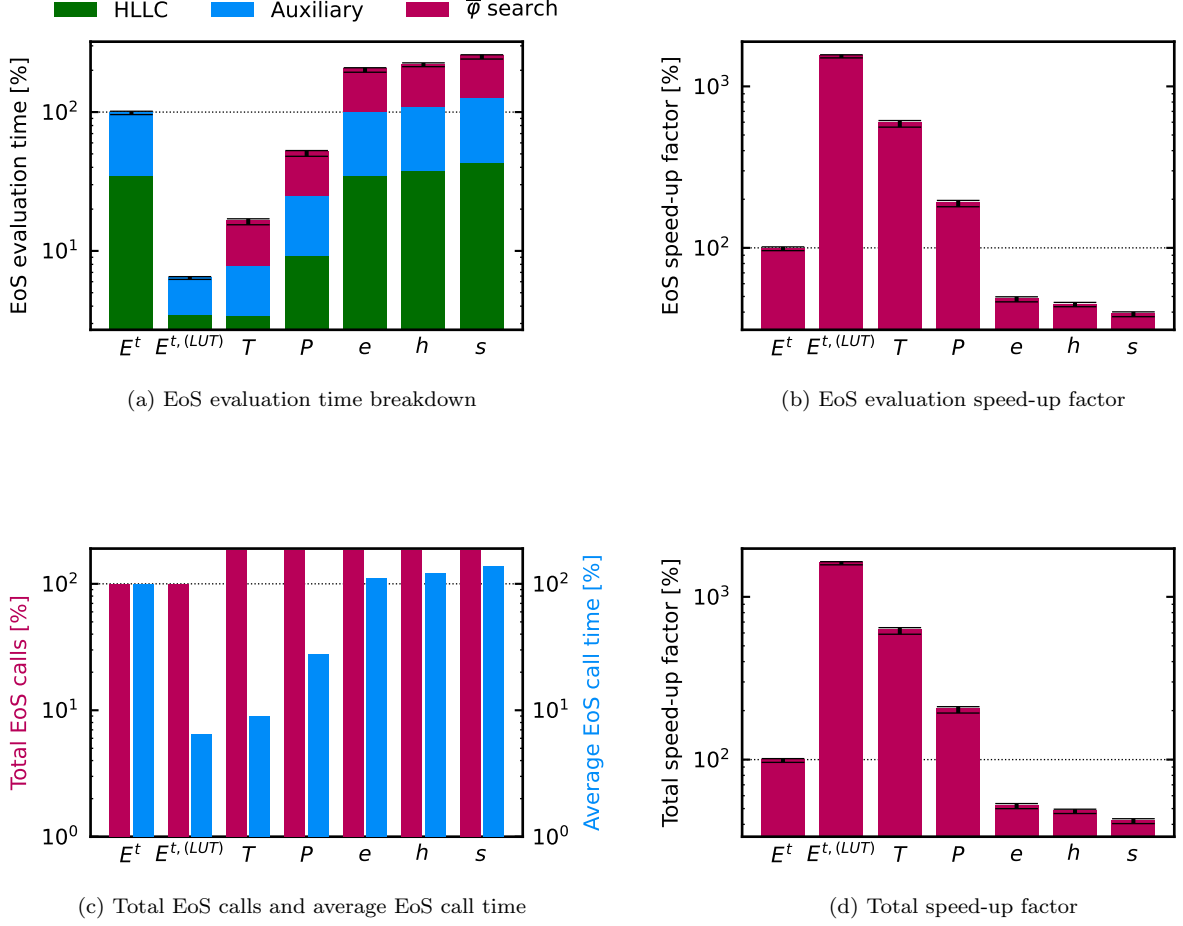


Figure 18: Nitrogen shock tube test. EoS computational cost breakdown and comparison using the Span-Wagner EoS [66] through the CoolProp thermodynamic library [20]. All values are scaled with respect to the standard total energy update scheme, which is always 100%. The y axis is in logarithmic scale. Comparison between the φ update scheme for temperature, pressure, specific energy, specific enthalpy, and specific entropy. We also show the computational costs obtained using CoolProp’s tabular interpolation and the standard total energy update.