

Vulnerability and Protection of Critical Infrastructures

Vito Latora¹ and Massimo Marchiori^{2,3}

¹ *Dipartimento di Fisica e Astronomia, Università di Catania,
and INFN, Via S. Sofia 64, 95123 Catania, Italy*

² *W3C and Lab. for Computer Science, Massachusetts Institute of Technology,
545 Technology Square, Cambridge, MA 02139, USA and*

³ *Dipartimento di Informatica, Università di Venezia, Italy*

(Dated: March 22, 2022)

Critical infrastructure networks are a key ingredient of modern society. We discuss a general method to spot the critical components of a critical infrastructure network, i.e. the nodes and the links fundamental to the perfect functioning of the network. Such nodes, and not the most connected ones, are the targets to protect from terrorist attacks. The method, used as an improvement analysis, can also help to better shape a planned expansion of the network.

PACS numbers: 89.75.Hc, 89.75.Fb, 89.20.Hh, 89.40.-a

The attacks of September 11 2001 have raised in all its urgency the problem of protecting critical infrastructures from terrorist attacks. The US President's Commission on Critical Infrastructures Protection [1] has defined five different categories of critical infrastructures: 1) information-communication, 2) banking and finance, 3) energy (e.g. electric, oil, gas), 4) physical distribution (including transportation), 5) vital human services (including water supply). In this paper we propose a general method to find the *critical components* of a critical infrastructure network [2]. By critical components we mean the nodes and the edges crucial to the best functioning of the network, and therefore the strategic points of the network to improve or to protect from terrorist attacks. Recently, attacks on artificially generated random and scale-free topologies and on real-world networks have been studied intensively. In the literature appeared so far the attacks were simulated as the deliberate removal either of nodes [3, 4, 5, 6, 7] or of links [4, 8, 9] of the network. The rationale of our method is different from the previous ones: instead of sorting and removing the nodes in descending order of degree [3, 4, 5, 6] or betweenness [4, 6, 7], and the edges in descending order of betweenness [4, 8] or range [9], we measure the importance of an element of the network by the drop in the network's performance caused by the deactivation of that element. In practice we check for the redundancy of an element by calculating the performance of the perturbed network and comparing it with the original one. The element can be a single node or edge, or a group of nodes and edges if we want to simulate multiple attacks. In this way we define the vulnerability of the network under a given class of attacks and we produce a list of the points of the network that should be the first concern of any policy of protection from terrorist attacks. Analogously, we measure the importance of an improvement by the increase in the network's performance caused by such improvement. The paper is organized as follows: we first present the

general framework to define critical damages, critical improvements, structural vulnerability and improvability of a critical infrastructure. We then show how the method works in practice on some examples of communication and transportation critical infrastructures.

We assume that a generic critical infrastructure S is characterized by a single variable $\Phi[S] > 0$, the *performance* of S [10]. The definition and quantitative analysis of the *critical components* of S , we propose in this paper, uses, as reference observable, variations in the performance $\Delta\Phi$. We consider separately the study of damages and of improvements.

Attacks analysis. Let us indicate by D a set of possible damages on the infrastructure S , and with $DAMAGE(S, d)$ a map that gives the infrastructure resulting from S after the damage $d \in D$. We measure the importance of the damage d by the relative drop in performance $\Delta\Phi^-/\Phi$, with $\Delta\Phi^- = \Phi[S] - \Phi[DAMAGE(S, d)] \geq 0$, caused by d . In particular, the *critical damage* $d^* \in D$ is the damage of D that minimizes $\Phi[DAMAGE(S, d)]$. The *vulnerability* V of S under the class of damages D can be defined as:

$$V[S, D] = \frac{\Phi[S] - W[S, D]}{\Phi[S]} \quad (1)$$

where $W[S, D] = \Phi[DAMAGE(S, d^*)]$ is the worst performance of S under the class of damages D . The vulnerability $V[S, D]$ is defined in the range $[0, 1]$.

Improvements analysis. We now turn our attention into how to improve an existing infrastructure [11]. Various improvements can be added to S , so given a set of improvements I we define, for any improvement $i \in I$, the map $IMPROVE(S, i)$ that gives the resulting infrastructure obtained after the improvement i . We measure the importance of i as the relative increase in the performance $\Delta\Phi^+/\Phi$, with $\Delta\Phi^+ = \Phi[IMPROVE(S, i)] - \Phi[S]$, caused by i . In particular

we define the *critical improvement* i^* as the best possible improvement in I , i.e. the improvement of I that maximizes $\Phi[IMPROVE(S, i)]$. Then, the *improvability* IM of S under the class of improvements I can be defined as:

$$IM[S, I] = \frac{B[S, I] - \Phi[S]}{\Phi[S]} \quad (2)$$

where $B[S, I] = \Phi[IMPROVE(S, i^*)]$ is the best performance of S under the class of improvements I .

As a practical application of the method we consider communication-information (as the Internet [12]) and transportation infrastructure networks. We represent the infrastructure network S as a valued [13] undirected [14] graph with N nodes (for instance the routers in the Internet, or the stations in a railway transportation system) and K links (the cables connecting two routers, or the lines connecting couples of stations). S is described by the $N \times N$ adjacency matrix $\{l_{ij}\}$. If there is a link between node i and node j , the entry l_{ij} is a positive number measuring the *link latency*, otherwise $l_{ij} = +\infty$. For instance, in the Internet (in the railway system) the larger l_{ij} is, the longer it takes for a unitary packet of information (a train) to go along the link from i to j . We have now different ways to measure the performance of S . In this paper we identify the performance of S with the *efficiency* of the network i.e. we assume: $\Phi[S] = E[S] \equiv \frac{1}{N(N-1)} \sum_{i \neq j \in S} \frac{1}{d_{ij}}$, where d_{ij} is the smallest sum of the links latency throughout all the possible paths in the graph from a node i to a node j (in the particular case of unvalued graphs d_{ij} reduces to the minimum number of links traversed to get from i to j). The *efficiency* is a quantity recently introduced in refs.[15] to measure how efficiently the nodes of the network communicate if they exchange information in parallel. A second possibility is to assume the performance $\Phi[S]$ to be equal to the inverse of the characteristic path length $L \equiv \frac{1}{N(N-1)} \sum_{i \neq j \in S} d_{ij}$ [15, 16]. An alternative possibility to avoid the shortest path assumption on which both E and L rely, is to identify $\Phi[S]$ with the mean flow-rate of information over S [17].

Ca*net3 We show how the method works in practice by considering the Ca*net3 IS-IS routing network [18] represented in fig.1, a simple example of an Internet backbone, consisting of two main routes, OC-12 and OC-48, $N = 13$ routers and $K = 14$ links. As the backbone has diverse routes of different bandwidths, the preferred path between any two routers is the path which presents the least amount of latency under normal router load conditions. We consider three different classes (sets) of damages D : the damage of a single cable connection, of a single Internet router, and of a couple of routers. $DAMAGE(S, d)$ is the network we obtain from S after the deactivation of the damaged component (respectively the damaged link, node or couple of nodes). The damage of single links allows to investigate the finer effects on the network, since the damage of a node implies the damage of a number of links equal to the node's degree.

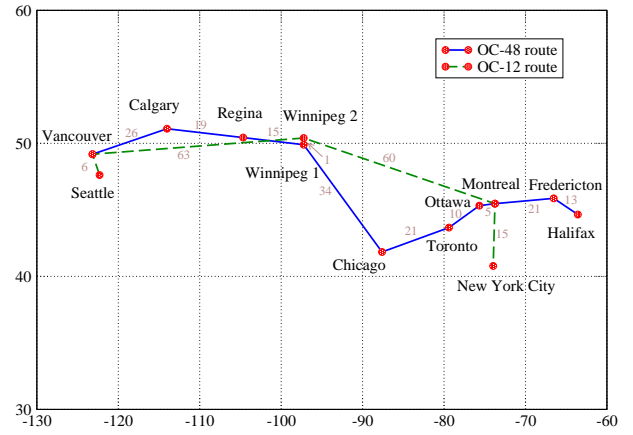


FIG. 1: Ca*net3 IS-IS routing network. The numbers reported are a measure of the latency associated to each link [18].

The entity of the damage d is given by the relative drop in the efficiency $\Delta\Phi^-/\Phi[S]$ caused by d .

As class of improvements I we consider the effect of adding a new link (the addition of groups of links will be considered in [19]). $IMPROVE(S, i)$ is the network we obtain from S after the addition of the new link. The results shown in table I indicate that the connection Winnipeg2-Winnipeg1 is by far the most important one since it is crucial for the correct interplay of the OC-12 and OC-48 routes. The routers Winnipeg1 and Winnipeg2 are respectively the first and the second in the list of the most important nodes. Conversely when two nodes are removed at once, the couple Winnipeg1 + Montreal produces a larger effect than the couple Winnipeg1 + Winnipeg2 which is only the tenth in the list (not in table) with $\Delta\Phi^-/\Phi = 0.570$. Concerning the improvement analysis, the best links to add are long cables bridging two different parts of the network, as for instance Toronto-NYC or Winnipeg1-Toronto.

Infonet As a second example we study the Internet backbone of Infonet[20], as of September 2001. The network of Infonet has $N = 94$ nodes and $K = 96$ cable connections and carries about the 10% of the traffic over US and Europe. It consists of two main parts, the US and the European backbone respectively with $N_1 = 66$ and $N_2 = 28$ nodes, connected by three overseas cables. In table II we consider the same classes of damages and improvements as in the previous example. The vulnerability of Infonet under single link damages is $V = 0.379$, with NYC-New Jersey being the critical link damage. Such a link plays in the network a role similar to red bonds in percolation [21]. In fact the removal of such a link will result in a break up of the network into two disconnected parts of about the same size, with a decrease of the 38% in the performance of the network. Notice that the second highest link damage produces only a drop of 23% in the performance. Other important links are those connecting New-Jersey with Chicago, with San Jose and with Dal-

TABLE I: Attacks and improvement analysis of Ca*net3. For each class of damage/improvement considered (see text) we report the cases having the highest effects on the performance of the network. Rank and name of the damaged link (node, or couple of nodes, respectively) and of the added link are listed in the first two columns. The relative drop or increase of the efficiency is in the third column.

	<i>Damaged link</i>	$\Delta\Phi^-/\Phi$
1	Winnipeg2 - Winnipeg1	0.358
2	Ottawa - Montreal	0.146
3	Montreal - Fredericton	0.123
4	Seattle - Vancouver	0.098
	<i>Damaged node</i>	$\Delta\Phi^-/\Phi$
1	Winnipeg1	0.466
2	Winnipeg2	0.408
3	Montreal	0.317
4	Ottawa	0.220
	<i>Damaged couple of nodes</i>	$\Delta\Phi^-/\Phi$
1	Winnipeg1 + Montreal	0.792
2	Winnipeg1 + Ottawa	0.723
3	Winnipeg2 + Montreal	0.702
4	Winnipeg2 + Ottawa	0.700
5	Winnipeg2 + Toronto	0.633
	<i>Added Link</i>	$\Delta\Phi^+/\Phi$
1	Toronto - NYC	0.01237
2	Ottawa - NYC	0.00770
3	Winnipeg1 - Toronto	0.00587
4	Fredericton - NYC	0.00546
5	Winnipeg2 - Toronto	0.00514
6	Seattle - Calgary	0.00508

las, and some links in the east coast as NYC-Washington and Washington-Atlanta. The links in table, ordered according to $\Delta\Phi^-/\Phi$, have also a decreasing betweenness b , another measure of link centrality [13] defined as the number of times the link is in the shortest paths connecting couples of nodes [8]. Nevertheless, the correlation between $\Delta\Phi^-/\Phi$ and b is not perfect: for instance the link NYC-Amsterdam, with the second highest betweenness, ranks only 14th according to $\Delta\Phi^-/\Phi$. The vulnerability under damages of single nodes (couples of nodes) is $V = 0.573$ ($V = 0.723$). New Jersey and NYC are by far the two most important nodes: the damage of either one would disconnect the US from the European backbone, reducing by more than 50% the performance of the network. The damage of both nodes at once reduces by more than 70% the network performance. The damage analysis of other networks [22] shows that the link NYC-New Jersey and the nodes NYC and New Jersey play an important role also in other Internet backbone maps. Such result might explain the significant drop in performance, marked by increased packet loss and difficult in reaching some Web Sites (in particular in the connection from US to Europe), experienced by the Internet in the aftermath of the 11 September terrorist attacks. In fact the stress the US Internet infrastructure was subjected to was the greatest encountered over its 32-year history and was probably related to the damages of Internet routers

TABLE II: Attacks and improvement analysis of Infonet 2001 [20], as of September 2001. Same as in table I. In the last column we report the betweenness b of the removed edge, the degree k of the removed node, and the sums of the degrees of the two removed nodes.

	<i>Damaged link</i>	$\Delta\Phi^-/\Phi$	b
1	NYC-New Jersey	0.379	2205
2	New Jersey-Chicago	0.229	1185
3	NYC-Washington	0.197	1185
4	Washington-Atlanta	0.183	1120
5	New Jersey-San Jose	0.179	984
6	New Jersey-Dallas	0.122	609
	<i>Damaged node</i>	$\Delta\Phi^-/\Phi$	k
1	New Jersey	0.573	9
2	NYC	0.530	9
3	Chicago	0.280	15
4	Amsterdam	0.241	9
5	Atlanta	0.227	14
6	Washington	0.203	2
	<i>Damaged couple of nodes</i>	$\Delta\Phi^-/\Phi$	$k_1 + k_2$
1	NYC + New Jersey	0.723	17
2	New Jersey + Amsterdam	0.710	18
3	New Jersey + Atlanta	0.707	23
4	New Jersey + Frankfurt	0.689	20
5	NYC + Chicago	0.685	24
6	New Jersey + Washington	0.673	11
	<i>Added Link</i>	$\Delta\Phi^+/\Phi$	
1	New Jersey-Atlanta	0.0522	
2	Chicago-Atlanta	0.0481	
3	NYC-Atlanta	0.0437	
4	San Jose-Atlanta	0.0395	
5	Dallas-Atlanta	0.0341	
6	Chicago-Amsterdam	0.0339	
7	New Jersey-Amsterdam	0.0329	
8	NYC-Chicago	0.0326	
9	Atlanta-Amsterdam	0.0318	
10	Chicago-Frankfurt	0.0316	
11	Atlanta-Frankfurt	0.0296	

and cables in the south of NYC [23].

The comparison of our measure with the node degree k [13] i.e. with the number of links incident with the node, (see tab.II) shows that the damage of the most connected nodes, the hubs [3], is not always the worst damage. In fact, the damage of Chicago, the node with the highest k , produces only a drop of 28% in the performance of the network, while the damage of Chicago and Atlanta, the couple with the highest number of links (29) gives $\Delta\Phi^-/\Phi = 0.476$ (the 187th damage in the list). This has deep consequences on the best strategy to adopt in a protection policy. In fact, a node with a large degree is immediately recognized as a major channel of communication, being very visible since in direct contact to many other nodes [13]. On the other hand, Infonet is a typical example in which the crucial components, i.e. the nodes to protect from the attacks, are not the hubs, but less visible and apparently minor nodes.

Our results imply either an intense policy of protection of the critical links/nodes from attacks, or a strategic expansion of the network with the addition of new links [2].

TABLE III: Attacks and Improvement analysis of the MBTA. Same as in table I. The letters in parenthesis indicate the line/lines the stations belong to: R=red, G=green, G_B =green B, G_C =green C, O=orange, B=blue.

	<i>Damaged link</i>	$\Delta\Phi^-/\Phi$
1	Park Street(RG)- Boylstone(G)	0.275
2	Boylstone(G) - Arlington(G)	0.270
3	Arlington(G) - Copley(G)	0.270
4	Copley(G) - Hynes(G)	0.256
5	Hynes(G) - Kenmore(G)	0.255
6	Kenmore(G) - Blandford(G)	0.185
	<i>Damaged node</i>	$\Delta\Phi^-/\Phi$
1	Kenmore(G)	0.343
2	Copley(G)	0.333
3	Park Street(RG)	0.331
4	Boylstone(G)	0.285
5	Arlington(G)	0.281
6	Hynes(G)	0.266
	<i>Damaged couple of nodes</i>	$\Delta\Phi^-/\Phi$
1	Down. Cross.(RO) + Kenmore(G)	0.508
2	Park Street(RG) + Kenmore(G)	0.495
3	Down. Cross.(RO) + Copley(G)	0.465
4	Boylstone(G) + Kenmore(G)	0.444
	<i>Added Link</i>	$\Delta\Phi^+/\Phi$
1	Mount Hood(G_B)- Dean (G_C)	0.0390
2	Mount Hood(G_B)- Tappan(G_C)	0.0370
3	Washington(G_B)- Tappan(G_C)	0.0369
4	Washington(G_B)- Dean (G_C)	0.0368
5	Sutherland(G_B)- Englewood(G_C)	0.0360
6	Mount Hood(G_B)- Englewood(G_C)	0.0357
7	Sutherland(G_B)- Dean (G_C)	0.0355

We now investigate the best strategies to increase the performance of the network by the addition of a new link. The improvability of S under such a class of improve-

ments is $I = 0.052$. In the highest positions we find two different classes of links: links connecting two IP presences in the US, and links connecting US and Europe as Chicago-Amsterdam, NJersey-Amsterdam, Atlanta-Amsterdam, Chicago-Frankfurt and Atlanta-Frankfurt. A new link between Us and European, namely the link Washington-Geneva, was in fact planned in the expansion of Infonet 2001. Our method predicts that the inclusion of such a link increases by 2.5% the network performance.

MBTA As a final example we consider a transportation system, the Boston subway, consisting of four lines, $N = 124$ stations and $K = 125$ tunnels [24]. Here the links latency has been taken to be proportional to the time it takes to go from a station to the next one. The results of the analysis are in table III. The vulnerability V is equal to 0.275, 0.343, 0.508, respectively for damages of single links, single nodes or couples of nodes. The critical link is Park Street - Boylstone. I is equal to 0.0390 with best links to be added those connecting stations on the green line B with stations on the green line C.

Summing up, in this paper we have proposed a new general method to spot the critical components of a critical infrastructure system. With this method we are able to identify the points of a network that are crucial to the functioning of the infrastructure network, i.e. those nodes and connections whose protection from terrorist attacks must be assumed as the first concern of any national policy. The method, used as an improvement analysis, can also help to better shape an expansion of the network. Other classes of critical infrastructure systems are currently under study and will be presented in a future work [19].

-
- [1] <http://www.info-sec.com/pccip/pccip2/index.html>
 - [2] S. Bologna, C. Balducci, G. Dipoppa and G. Vicoli, Lecture Notes in Comp. Sci. **2788**, 342 (2003).
 - [3] R. Albert, H. Jeong, and A.-L. Barabási, *Nature* **406**, 378 (2000); *Nature* **409**, 542 (2001).
 - [4] P. Holme, B. J. Kim, C. N. Yoon and S. K. Han, *Phys. Rev. E* **65**, 056109 (2002).
 - [5] Crucitti, P., V. Latora, M. Marchiori, and A. Rapisarda. *Physica A* **320**, 622 (2003).
 - [6] R. Albert, I. Albert and G.L. Nakarado, *Phys. Rev. E* **69**, 025103(R) (2004).
 - [7] P. Crucitti, V. Latora and M. Marchiori, *Phys. Rev. E* **69**, 045104(R) (2004).
 - [8] M. Girvan, and M. E. J. Newman. *Proc. Natl. Acad. Sci. USA* **99**, 8271 (2002).
 - [9] A. E. Motter, T. Nishikawa, Y. Lai, *Phys. Rev. E* **66**, 065103 (2002).
 - [10] The method can be extended to the case in which the performance is a combination of two or more variables.
 - [11] There are two main improvement strategies: we can better shape the expansion of a given infrastructure in order to increase its performance, or in order to decrease its vulnerability. The most general strategy is an appropriate combination of the above two strategies, to get a good mixture of performance and low vulnerability. In this paper we adopt the first of the two strategies.
 - [12] V. Rosato, F. Tiriticco, *Europhys. Lett.* **66**, 471 (2004).
 - [13] S. Wasserman and K. Faust, *Social Networks Analysis* (Cambridge University Press, Cambridge, 1994).
 - [14] The formalism presented in this paper can be easily extended also to *directed* graphs.
 - [15] V. Latora and M. Marchiori, *Phys. Rev. Lett.* **87**, 198701 (2001); *Eur. Phys. J. B* **32**, 249-263 (2003).
 - [16] D.J. Watts and S.H. Strogatz, *Nature* **393**, 440 (1998).
 - [17] L.R. Ford and D.R. Fulkerson, *Flows in networks* (Princeton University Press, Princeton, 1962).
 - [18] <http://205.189.33.72/optical/pdf/canet3routing.pdf>
 - [19] P. Crucitti, V. Latora and M. Marchiori, in preparation.
 - [20] <http://www.infonet.com>
 - [21] H.E. Stanley, *J. Phys. A* **10**, 1211 (1977).
 - [22] <http://navigators.com/isp.html>
 - [23] <http://www.cnn.com/2001/TECH/industry/09/12/telecom.operation>
 - [24] <http://www.mbtta.com/>