Direct observation of Josephson capacitance

M.A. Sillanpaa¹, T. Lehtinen¹, A. Paila¹, Yu. Makhlin¹;², L. Roschier¹, and P. J. Hakonen¹ Low Temperature Laboratory, Helsinki University of Technology, FIN-02015 HUT, Finland
²Landau Institute for Theoretical Physics, 119334 Moscow, Russia

The e ective capacitance has been measured in the split Cooperpairbox (CPB) over its phase-gate bias plane. Our low-frequency reactive measurement scheme allows to probe purely the capacitive susceptibility due to the CPB band structure. The data are quantitatively explained using parameters determined independently by spectroscopic means. In addition, we show in practice that the method of ers and elient way to do non-demolition readout of the CPB quantum state.

PACS num bers: 67.57 Fg, 47.32.-y

Energy can be stored into Josephson junctions (JJ) according to E = $E_{\rm J}\cos(\prime)$, where \prime is the phase difference across the junction, and the Josephson energy $E_{\rm J}$ is related to the junction critical current $I_{\rm C}$ through $I_{\rm C}$ = 2eE $_{\rm J}$ =~. By using the Josephson equations, this energy storing property translates into the well-known fact that a single classical JJ behaves as a parametric inductance $L_{\rm J}$ = ~=(2eI $_{\rm C}$) for small values of \prime .

Since the early 80's, it has become understood that 'itself can behave as a quantum -m echanical degree of freedom [1]. In mesoscopic JJs, this is typically associated with the competition between the Josephson and Coulombe ects at a very low temperature. These fundam entalphenomena take place if charge on the junction is localized by a large resistance $R > R_Q = h = (4e^2)$ [2], as well as in the Cooper-pair box (CPB), or the single-Cooper-pair transistor (SCPT), whose quantum coherence is often considered macroscopic [3].

In the rst theoretical landm ark papers [4,5] on quantum properties of 'it was already noticed that due to localization of charge Q, the energy of a the JJ system is similar to that of a non-linear capacitance. In spite of the importance of the phenom enon especially in CPB or SCPT in the promising eld of superconducting qubits [6,7], direct experimental verication of the Josephson capacitance has been lacking, likely due to challenges posed by measuring small reactances, or by the extreme sensitivity to noise.

In this Letter, we present the st such direct experiment [8], where we determ ine the Josephson capacitance in the Cooper pair box. Related experiments have recently been performed by Wallra et al. [9], but in their case the key role is played by the transitions between levels of a coupled system where the band gap between the ground state and state of the CPB, $E_1 = E_0 = E$, is nearly at resonance with an oscillator of angular frequency $ext{!}_0$. Thus, detuning fully dominates over the Josephson capacitance which can be clearly observed in our experiments where we study directly the reactive response of the lowest band $ext{E}_0 = E$. We determ ine the experimental parameters independently using spectroscopy, and demonstrate

a simple way to perform a non-destructive measurement of the CPB state using purely the CPB Josephson capacitance.

An SCPT (Fig. 1) consists of a mesoscopic island (total capacitance C = $C_1 + C_2 + C_g$), two JJs, and of a nearby gate electrode used to polarize the island with the (reduced) gate charge $n_g = C_g V_g = e$. The island has the charging energy $E_C = e^2 = (2C)$, and the junctions have the generally unequal Josephson energies E_J (1 d), where the asymmetry is given by d. The SCPT Ham iltonian is then E_C (fi n_g)² $2E_J$ \cos ('=2) \cos (')+ $2dE_J$ \sin ('=2) \sin (') $C_g V_g^2 = 2$. Here, the number fi of extra electron charges on the island is conjugate to 2 , where 2 is the superconducting phase on the island [10]. The SCPT is thus equivalent to a CPB (single JJ and a capacitance in series with a gate voltage source) but with a Josephson energy tunable by ' = 2 = $_0$, where $_0$ = h=(2e) is the quantum of magnetic ux.

If d = 0 and E $_J$ =E $_C$ 1 the ground and excited state energies are $(n_g=0::2): E_{0;1}=E_C$ $(n_g^2-2n_g+2)=(E_J\cos('=2))^2+(2E_C(1-n_g))^2$ $C_gV_g^2$ =2, with a large gap to higher levels. For a general E_J = E_C , we compute the bands numerically in the charge state basis.

The e ective "Josephson" capacitance of the CPB can be related to the curvature of band k, sim ilar to the effective m ass of an electron in a crystal:

$$C_{e}^{k} = \frac{e^{2}E_{k}(';n_{g})}{eV_{g}^{2}} = \frac{C_{g}^{2}}{e^{2}}\frac{e^{2}E_{k}(';n_{g})}{en_{g}^{2}}:$$
 (1)

U sually, the system e ective capacitance is obtained from a Lagrangian or Ham iltonian as $\ell^2 L = \ell V_g^2 = (\ell^2 H = \ell Q^2)^{-1}$, without the m inus sign. In Eq. (1), however, E $_k$'s are, more precisely, the eigenvalues of the Routhian H = $-\ell_L$ L [1], which serves as a Ham iltonian for the n; degree of freedom but as m inus Lagrangian for the phase $-\ell_L$ V $_g$ dt and V $_g$ /, thus leading to Eq. (1).

Using the analytic formulas for Eo;1 in the limit




FIG. 1: Schem atic view of the experim ent. The resonant frequency of the LC circuit (m ade using lum ped elements) is tuned by the elective capacitance C $_{\rm e}$ of the Cooperpair box shown in the SEM image. For details, see text.

 $E_J = E_C$ 1 we get

$$C_{e}^{(0;1)} = C_{g} \frac{2C_{g}^{2}E_{c}}{e^{2}}$$

$$1 \frac{E_{c}E_{J}^{2}(1+\infty s')}{4E_{c}^{2}(n_{g}-1)^{2}+\frac{1}{2}E_{J}^{2}(1+\infty s')}^{!} (2)$$

which reduces to the classical geometric capacitance $(1=C_g+1=(C_1+C_2))^{-1}$ in the lim it of vanishingly small E $_J$, except where C coper-pair tunneling is degenerate [12]. Numerically evaluated graphs of C $_{\rm e}^{(0;1)}$ for a general E $_J$ =E $_C$ can be found in Ref. [13].

Our experimental scheme is illustrated in Fig. 1. We perform low-dissipation microwave rejection measurements [14,15] on a series LC resonator in which the boxe ective capacitance, Eq. (1), is a part of the total capacitance $C_S + C_e^k$. The resonator is formed by a surface mount inductor of L = 160 nH .W ith a stray capacitance of $C_S = 250$ ff due to the fairly big lumped resonator, the resonant frequency is $f_0 = 800$ MHz and the quality factor Q '16 is limited by the external $Z_0 = 50$. When C_e^k varies, the phase of the rejected signal $V_{out} = V_{in}$ changes, which is measured by the rejection coefficient $= (Z_0) = (Z + Z_0) = 0$. Here, Z is the resonator impedance seen at the point labelled "in" in Fig. 1. In all the measurements, the probing signal V_{in} was continuously applied.

Since we are rather far from m atching conditions, the re ection magnitude $_0$ remains always close to one. The variation in due to modulation in C $_{\rm e}^{\rm k}$ is up to 40 in our measurements, corresponding to a shift of resonance frequency f $_0$ ′ 6 M Hz. In addition to band pass litering, we used two circulators at 20 m K .

As seen in Eq. (2), the modulation depth of C_e^k is sensitive to C_g . Therefore, in order to faithfully demonstrate the Josephson capacitance in spite of the stray

capacitance, we used a large $C_g > 0.5$ ff. It was made using an A l-A lO $_x$ -A loverlay structure (see the image in Fig. 1), with a prolonged oxidization in 0.1 bar of O_2 for 15 m in. 0 therwise, our CPB circuits have been prepared using rather standard e-beam lithography. The tunnel junctions having both an area of 60 nm $\,$ 30 nm correspond to an average capacitance of $\,$ 0.17 ff each. The overlay gate has C_g ' 0:7 ff for an area of 180 nm $\,$ 120 nm $\,$.

The main bene tofour method comes from the fact that we work at a resonator (angular) frequency ! o much lower than the CPB level spacing E. In Ref. [9] it is shown that $!_0$ depends on the resonator - CPB (qubit) interaction because of two contributions. The frequency change is $!_0 = g^2 =$, where the detuning ~! o, and the coupling coe cient g contains the curvature of energy bands. In general, both the curvature depend on the (ng;') point. Now, in our case everywhere E \sim ! 0, ' E, and hence $!_0 = g^2 = E = C_e !_0 = (2C_s)$ has a contribution by only the second derivative, not by the detuning. Therefore, we can resolve the reactive response due to purely the bands of CPB, which has not been possible in previous experim ents.

When doing microwave spectroscopy, we have to consider also the other side of the coin: E increases due to interaction with the resonator by [16] " = $\sim 2N~g^2$ = E + g 2 = E , where N is the number of quanta in the resonator. When driven by a gate amplitude V_g , the resonator energy is $E_R=V_g^2C_s$ =2. At a high excitation amplitude n_g ' 1=2 we would have V_g 'e=(2C_g) and hence N = E_R =(\sim !0) = e^2 C=(8C_g^2 \sim !0) 4 10 which would yield " E. The data shown in this paper are, however, measured at a very low excitation of n_g 0:05 which corresponds to N 40 and " 200 MHz which is an insignicant contribution to E.

Fig. 2 (a) displays the measured phase shift—as a function of the two external control knobs (in the following, $n_{\rm g}$ should be understood as being due to the control gate, $n_{\rm g}=C_{\rm g0}V_{\rm g0}=e)$. The results show full 2e periodicity as a function of $n_{\rm g}$, checked by increasing temperature above the 2e $\,$ e crossover at $\,$ 300 mK, and a $_{\rm 0}$ period with respect to . The data was measured without any microwave excitation, and hence we expect to see e ects due to the ground band $C_{\rm e}^{\,0}$. The corresponding theoretical picture, obtained using Eq. (1) and straightforward circuit formulas for , is given in Fig. 2 (b).

As a vital step to get convinced of the measured capacitance modulation versus the calculation, we carried out a detailed determination of the sample parameters independently of the capacitance modulation by using microwave spectroscopy (Fig. 3). To the weakly coupled control gate C_{g0} of the SCPT, we applied continuous—wave microwaves while slowly sweeping the CPB band gap E with 'and n_g . Whenever the microwave energy

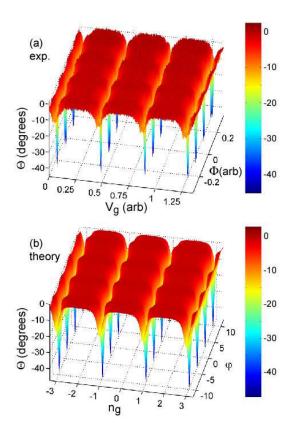


FIG.2: (color online) (a) Phase shift measured at a probing frequency 803 MHz f₀, and (b) calculated using Eq. (1) with the ground band E₀ ('; n_g) evaluated numerically with parameters of Table I.

m atches the band gap, that is, $\sim !_{RF} = E$, the CPB becom es resonantly excited. Since typically the Josephson corrections to the geom etric capacitance are opposite in sign for the bands 0 and 1 (see Eq. (2)), band 1 would contribute an opposite phase shift signal. At resonance, we would then expect to see mixture of $C_e^{\,0}$ and $C_e^{\,1}$, weighted by the state occupancies which depend on the m icrow ave am plitude. We calculate that a high enough am plitude su cient to saturate the populations into a 50 % mixture, would yield a 3 resonance absorption peak in the measured . The expectation is con med in Fig. 3 (b), where the resonance peaks are displayed at a few values of ' (when ' = 0, m icrow ave energy does not exceed the band gap, and for ' = peak height is lower due to a smaller matrix element).

W hile slow ly sweeping ' and n_g , the resonance conditions correspond to contours (see Fig. 3 (a)), which appear as annular ridges in the experimental data of graphs 3 (c)-(e) around the minimum E at ($n_g=1;'=$). Since the band gap is sensitive to E_J as well as to the E_J=E_C ratio, the resonance contours allow for an accurate determination of these parameters (Table I). For example, at ($n_g=1;'=0$), the band gap is 2E_J=12.5 GHz, whereas at ($n_g=1;'=$) E has the absolute minimum 2dE_J' 3 GHz which was barely exceeded by

the microwave energy in Fig. 3 (c).

Based on the surface area $\,$ 0:022 (m 2 of the overlay gate, we estim ate C $_g$ $\,$ 0:5 $\,$ 1 ff . The exact value was obtained by tting to the modulation depth of C $_e^0$ (see Eq. (2)), yielding C $_g$ = 0:65 ff , corresponding to a speci c capacitance very reasonable to a thick oxide $\,$ 30 ff / m 2 .

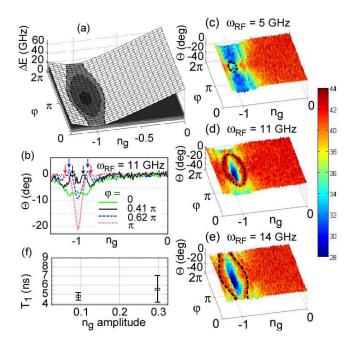


FIG. 3: (color online) (a) Illustration of the m icrow ave spectroscopy used to map the SCPT band gap $E=E_1$ E_0 . The three horizontal planes which intersect the band gap correspond, from bottom to top, to the microw ave energy \sim ! RF used in (c)...(e), respectively. Whenever $E=\sim$! RF (dashed lines), the system experiences resonant absorption; (b) peaks of resonant absorption (arrows) in the measured phase shift at !RF = 11 GHz; (c) - (e) spectroscopy data represented as surfaces in the ', ng plane. The resonance conditions shown in (a) are plotted on top of the data; (f) T_1 as a function of measurement strength at ' = 0, n_g 1.

Е _Ј (К)	$E_{C} = \frac{e^{2}}{2C} (K)$	E _J =E _C	R _T (k)	C (虾)	d	C g (虾)
0.30	0.83	0.36	55	1.1	0.22	0.65

TABLE I:Sample parameters determined by microwave spectroscopy. $R_{\rm T}$ is the series resistance of the two SCPT tunnel junctions (other parameters are dened in text and in Fig. 1).

Fig. 4 illustrates the bare gate and ux modulations without microwave excitation in more detail, and shows the corresponding numerical calculations using the ground band. As expected, C_e reduces to the geometric capacitance when Cooper-pair tunneling is blocked either by tuning the Josephson energy excitively to zero when is an odd multiple of , or by gate voltage. At the Coulomb resonance $n_g = 1$, however, the Josephson capacitance is signicant. In the special point $n_g = 1$,

' = , the most pronounced e ect is observed, now due to strong Cooper-pair uctuations. The agreement between theory and experiment is good in Fig. 4 except around $n_g=1$ which we assign to intermittent poisoning by energetic quasiparticles [17]. An estimate using Ce from Eq. (2), = 2Ce $^{\rm p}_{\rm L}=({\rm C_S^{3=2}\,Z_0})$, falls to within 15% of the numerical results except around integer n_g .

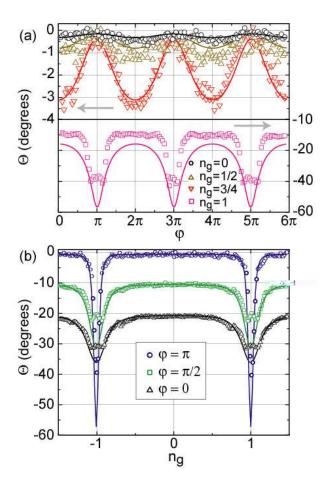


FIG. 4: (color online) M easured m icrowave phase shift , (a) vs. phase ' (note di erent scales in the two panels) and (b) vs. gate charge $n_{\rm g}$ (curves for ' = 0 and =2 have been shifted vertically for clarity by 20 $\,$ and 10 , respectively). Solid lines are num erical calculations using Eq. (1) and sample param eters in Table I.

Reactive measurements, either inductive or capacitive, can be employed for non-demolition readout for qubits [18] which means that 0 \$ 1 relaxation caused by the measurement is insignicant. An important advantage of our scheme is that since the probing gate swing has a frequency f_0 $E=\sim$, its contribution to spectral density at the qubit level spacing frequency is negligible. We measured the relaxation time T_1 using the technique of pulsed microwave excitation with variable repetition time $T_R=1$ 200 ns, while keeping the measurement signal always on, as in Ref. [19]. The T_1

tim es were lim ited to about 7 ns by parasitic reactances in the somewhat uncontrolled high-frequency environment, causing noise from Z_0 to couple strongly due to a large coupling $= C^{\alpha} = C$ 1. The result for T_1 , however, did not depend on the measurement strength (Fig. 3 (f)), which supports the non-demolition character of this scheme. By fabricating the resonator on-chip it is straightforward to gain a full control of environment. Then, the impedance seen from the qubit gate $\text{Re}(\mathbb{Z}_q \ (! = \mathbb{E} = \sim)) \ ' \ 0:1 \, \text{m}$, and a worst-case estimate $\sim R_K = [4 \quad ^2Re(Z_q(E=\sim)) E] \quad 1 \text{ s. For a}$ yields T₁ dephasing $tim e T_2$ averaged over n_q , we measured ns using Landau-Zener interferom etry [20, 21]. This T2 time is on the same order as the spectroscopy line widths in Fig. 3.

In conclusion, using the phase of strongly re ected m icrowave signals, we have experimentally veried the Josephson capacitance in a mesoscopic Josephson junction, i.e., the quantity dual to the Josephson Inductance. Good agreement is achieved with the theory on the Josephson capacitance. Implications for non-destructive readout of quantum state of Cooper-pair box using the capacitive susceptibility are investigated.

We thank T.Heikkila, F.Hekking, G.Johansson, M. Paalanen, and R.Schoelkopf for comments and useful criticism. This work was supported by the Academy of Finland and by the Vaisala Foundation of the Finnish Academy of Science and Letters.

- [1] M. Tinkham, Introduction to Superconductivity (M cG raw-H ill, New York, 1996).
- [2] See, e.g., G. Schon and A.D. Zaikin, Phys. Rep. 198, 237 (1990); J.S. Penttila et al., Phys. Rev. Lett. 82, 1004 (1999).
- [3] Y. Nakamura, Y. A. Pashkin, and J.S.Tsai, Nature 398, 786 (1999).
- [4] A.W idom et al., J. Low Temp. Phys. 57, 651 (1984).
- [5] D. V. Averin, A. B. Zorin, and K. Likharev, Sov. Phys. JETP 61, 407 (1985); K. Likharev and A. Zorin, J. Low. Temp. Phys. 59, 347 (1985).
- [6] D. V. A verin and C. Bruder, Phys. Rev. Lett. 91, 057003 (2003).
- [7] See, e.g., Yu. Makhlin, G. Schon, A. Shniman, Rev. Mod. Phys. 73, 357 (2001).
- [8] Capacitance of a non-equilibrium Cooper pair box has been investigated in a recent preprint; T.Duty et al., cond-m at/0503531.
- [9] A.W allra et al., Nature 431, 162 (2004).
- [10] The last term in the H am iltonian typically does not in uence the SCPT's dynam ics and is typically om itted; it is important to keep it here since V_g becomes a dynam ical variable.
- [11] L.D.Landau and E.M.Lifshitz, M echanics (Pergam on Press, Oxford, 1976).
- [12] For single electron case, see M. Buttiker and C. A. Sta ord, Phys. Rev. Lett. 76, 495 (1996).

- [13] M A. Sillanpaa, Ph.D. thesis, Helsinki University of Technology (2005); http://lib.tkk./Diss/2005/isbn9512275686/.
- [14] M. Sillanpaa, L. Roschier, and P. Hakonen, Phys. Rev. Lett. 93, 066805 (2004).
- [15] L.Roschier, M. Sillanpaa, and P.Hakonen, Phys.Rev. B 71,024530 (2005).
- [16] D.I.Schuster et al., Phys. Rev. Lett. 94, 123602 (2005).
- [17] J. Aum entado, M. W. Keller, J. M. Martinis, and M. H.
- Devoret, Phys. Rev. Lett. 92, 066802 (2004).
- [18] A.Blais et al., Phys. Rev. A 69, 062320 (2004).
- [19] T.Duty, D.Gunnarsson, K.Bladh, and P.Delsing Phys. Rev.B 69, 140503 (2004).
- [20] A.V.Shytov, D.A.Ivanov, and M.V.Feigel'm an, Eur. Phys.J.B 36, 263 (2003).
- [21] M . A . Sillanpaa et al., cond-m at/0510559.