# Generating functional analysis of CDMA detection dynamics

### Kazushi Mimura

Faculty of Information Sciences, Hiroshima City University, Hiroshima 731-3194, Japan

### M asato O kada

Graduate School of Frontier Sciences,

University of Tokyo, Chiba 277-5861, Japan

Brain Science Institute, RIKEN, Saitam a 351-0198, Japan

PRESTO, Japan Sciencs and Technology Agency, Chiba 277-8561, Japan

(Dated: April 14, 2024)

## A bstract

We investigate the detection dynamics of the parallel interference canceller (PIC) for codedivision multiple-access (CDMA) multiuser detection, applied to a randomly spread, fully syncronous base-band uncoded CDMA channel model with additive white Gaussian noise (AWGN) under perfect power control in the large-system limit. It is known that the predictions of the density evolution (DE) can fairly explain the detection dynamics only in the case where the detection dynamics converge. At transients, though, the predictions of DE system atically deviate from computer simulation results. Furthermore, when the detection dynamics fail to convergence, the deviation of the predictions of DE from the results of numerical experiments becomes large. As an alternative, generating functional analysis (GFA) can take into account the elect of the Onsager reaction term exactly and does not need the Gaussian assumption of the local eld. We present GFA to evaluate the detection dynamics of PIC for CDMA multiuser detection. The predictions of GFA exhibits good consistency with the computer simulation result for any condition, even if the dynamics fail to converge.

E lectronic address: m im ura@ cs.hiroshim a-cu.ac.p

#### I. INTRODUCTION

M obile com munication systems, such as cellular phone systems, are now used every day by millions of people worldwide. Code-division multiple-access (CDMA) is a digital modulation system that employs spreading codes to enable access to a mobile communication system by multiple users [1]. In the multipoint-to-point communication framework, CDMA allows several users to share a single communication channel to a base station. Each user is modulates one's own information sequence using the spreading code assigned to the user, and then the modulated sequence is transmitted to the base station. The base station receives a mixture of the transmitted signals and additional channel noise. Using the users' spreading codes, a demodulator at the base station extracts the original information sequence from the received noise-degraded mixture signal. This process is called a detection.

Tanaka has evaluated the detection problem by the replica method [2, 3, 4]. However, the detection process cannot be treated by the replica m ethod. The detection process of CDMA has drawn much attention from theoretical as well as practical viewpoints [5, 6]. Tanaka and 0 kada have applied a dynam ical theory of Hop eld model [7] to the detection process [6]. Their method is equivalent to the density evolution (DE) framework in the eld of information theory [8]. In the DE framework, a local eld, which is a matched liter output that the estimated parallel interference is subtracted from, is separated into a signal part for the detection and a remaining noise part. Furtherm ore, it is assumed that the noise part follows a Gaussian distribution with mean zero. The predictions of DE can fairly explain the detection dynamics only in the case where the detection dynamics converge [6]. However, at transients the predictions of DE system atically deviate from computer simulation results. The Gaussian assumption of the local eld has a more serious in uence, when the detection dynamics fail to converge. In such a case, the deviation of the predictions of DE from the results of num erical experim ents becom es large [6]. On the other hand, generating functional analysis (GFA) [9, 10, 11, 12] does not need the Gaussian assumption. In this paper, we present GFA to evaluate the detection dynamics for CDMA multiuser detection, applied to a random ly spread, fully synchronous base-band uncoded CDMA channelm odelwith additive white Gaussian noise (AWGN) under perfect power control. In order to con m the validity of our analysis, we have performed computer simulations for some typical system load and channel noise conditions.

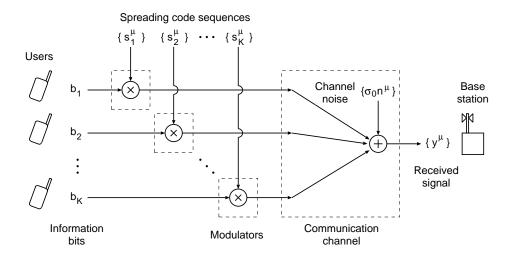


FIG. 1: CDMA communication model.

#### II. SYSTEM MODEL

We will focus on the basic fully syncronous K-user baseband binary phase-shift-keying (BPSK) CDMA channelmodelwith perfect power control as

$$y = \frac{1}{N} \sum_{k=1}^{X^{K}} s_{k} b_{k} + {}_{0}n ;$$
 (1)

where y is the recieved signal at chip interval 2 f1; ;N g, and where bf 1;1g and  $s_k$  2 f 1;1g are the BPSK-m odulated inform ation bit and the spreading code of user k 2 f1; ;K g at chip interval , respectively. Figure 1 shows this CDMA communication model. The Gaussian random variable  ${}_0^2n$ , where n N (0;1), represents channel noise whose variance is  ${}_0^2$ . The spreading codes are independently generated from the identical unbiased distribution P ( $s_k$  = 1) = P ( $s_k$  = 1) = 1=2. The factor 1= n is introduced in order to normalize the power per symbol to 1. U sing these normalisations, the signal to noise ratio is de ned as Eb=N  $_0$  = 1=(2  $_0^2$ ). The ratio K=N is called system load.

The goal of multiuser detection is to simultaneously infer the information bits  $b_l$ ;  $_{K}$ ;  $_{K}$  ;  $b_{k}$  after recieving the base-band signals  $y_1$ ;  $_{N}$ . The updating rule for the tentative decision  $\hat{b}_{k}$  (t) 2 f 1;1g of bit signal  $b_{k}$  at stage t is

$$\hat{b}_{k}$$
 (t) = sgn  $h_{k}$   $W_{kk^{0}}\hat{b}_{k^{0}}$  (t 1); (2)

where  $h_k$  is the output of the matched lter for user k:

$$h_k = \frac{1}{N} \sum_{k=1}^{N} s_k y ; \qquad (3)$$

and  $W_{kk^0}$  is the  $kk^0$ -elem ent of the sample correlation matrix W of the spreading code:

$$W_{kk^0} = \frac{1}{N} \sum_{k=1}^{N} s_k s_{k^0}$$
 (4)

The function sgn(x) denotes the sign function taking 1 for x=0 and -1 for x<0. This iterative detection algorithm is called the parallel interference canceller (PIC) [1]. As for initialization, we assume the matched liter stage, i.e.,  $\hat{b}_k(0) = sgn(h_k)$ . This initialization is easily treated by form ally assuming

$$\hat{\mathbf{b}}_{\mathbf{k}} \left( \quad 1 \right) = 0; \tag{5}$$

for all k. The widely used measure of the perform ance of a demodulator is the bit error rate (BER)  $P_b(t)$ , which is given by  $P_b(t) = [1 \quad m(t)] = 2$ , where  $m(t) = \frac{1}{K} \sum_{k=1}^{P} b_k \hat{b}_k(t)$  is the overlap between the information bits vector  $b(t) = \sum_{k=1}^{q} b_k \hat{b}_k(t)$  and the tentative decision vector  $\hat{b} = \sum_{k=1}^{q} b_k \hat{b}_k(t)$ . The operator denotes the transpose. Without loss of generality, we assume that the true information bits are all 1, i.e.,  $b_k = 1$  for all k, because the spreading codes are unbiased.

## III. GENERATING FUNCTIONAL ANALYSIS

## A. Generating functional

We analyse the detection dynamics in the large system  $\lim_{x\to\infty} \frac{1}{x} \le 1$ , while the system load is kept nite. For generating functional analysis, we introduce inverse temperature. The stochastic updating rule for the tentative decision  $\hat{b}_k$  (t) 2 f 1;1g of bit signal  $b_k$  at stage t is given by

$$P[\hat{b}_{k}(t+1) = \hat{b}_{k}(t)] = \frac{1}{2} 1 \quad \tanh \hat{b}_{k}(t+1)u_{k}(t);$$
 (6)

w here

$$u_k$$
 (t)  $h_k = \sum_{k^0 = 1 \neq k}^{X^K} W_{kk^0} \hat{b}_{k^0}$  (t)  $+ k^0 = 1 \neq k$  (7)

which is called a local eld. In the lim it where ! 1, this updating rule is equivalent to (2). The term  $_k$  (t) is a time-dependent external eld which is introduced in order to de ne a response function. The inverse temperature and the external eld are set ! 1 and  $_k$  (t) = 0 in the end of analysis.

To analyse the dection dynam ics of the system we de ne a generating functional Z [ ]:

$$Z[] = \sum_{\hat{b}(1); \hat{b}(t)}^{X} p[\hat{b}(1); \hat{b}(t)] \neq \sum_{s=1}^{p-1} \hat{b}(s) \quad (s)$$
(8)

where  $\hat{b}(s) = {}^{y}(\hat{b}_{1}(s); \hat{b}_{K}(s))$ ,  $(s) = {}^{y}(_{1}(s); _{K}(s))$ . In familiar way [9, 10, 11, 12], one can obtain from Z [ ] all averages of interest by dierentiation, e.g.,

$$m_{k}(s) = \langle \hat{b}_{k}(s) \rangle = i \lim_{s \to 0} \frac{e^{2s} [s]}{e^{2s} (s)};$$
 (9)

$$C_{kk^{0}}(s;s^{0}) = \langle \hat{b}_{k}(s)\hat{b}_{k^{0}}(s^{0}) \rangle = \lim_{\substack{i \in \mathbb{N} \\ i \in \mathbb{N}}} \frac{\text{@Z []}}{\text{@}_{k}(s)\text{@}_{k^{0}}(s^{0})};$$
(10)

$$G_{kk^{0}}(s;s^{0}) = \frac{0 < \hat{D}_{k}(s) >}{0 + (s^{0})} = i \lim_{s \to 0} \frac{0 \times [s]}{0 + (s^{0})} :$$
(11)

The dynam ics (6) is a M arkov chain, so the path probability  $p(\hat{b}(1); \hat{b}(t))$ ; are simply given by products of the individual transiton probabilities  $[\hat{b}(s+1)\hat{f}(s)]$  of the chain:

$$p[\hat{b}(1); \hat{b}(t)] = p[\hat{b}(1)] | \hat{b}(s+1) | \hat{b}(s) |;$$
 (12)

where these transition probabilities are given by

$$[\hat{b}(s+1)\hat{f}(s)] = \sum_{k=1}^{K} \frac{e^{\hat{b}_k(s+1)u_k(s)}}{2\cosh u_k(s)};$$
(13)

Since the initial state is given by (5), the initial state probability becomes  $p[\hat{b}(1) = 0] = 0$  = 0

where u  $= \begin{pmatrix} Q_{t,1} & Q_{K} & \frac{du_{k}(s)}{2} \\ s = 1 & k = 1 \end{pmatrix}$  and  $\hat{u}$   $= \begin{pmatrix} Q_{t,1} & Q_{K} & \frac{d\hat{u}_{k}(s)}{2} \\ s = 1 & k = 1 \end{pmatrix}$ . We can express (8) as Z  $= \begin{pmatrix} Z & Z \\ \hat{p}(t) & \hat{p}(t) \end{pmatrix}$ 

$$\stackrel{P}{\stackrel{t}{=}} \stackrel{P}{\stackrel{K}{=}} \stackrel{P}{\stackrel{K}{=}} \stackrel{R}{\stackrel{k}{=}} \stackrel{R}{\stackrel{k}{=}}$$

In order to average the generating functional with respect to the disorder  $fs_k g$  and  $fn \ g$ we isolate the spreading codes by introducing the variables v (s); w (s):

$$1 = v v = e^{iv (s) [v (s) \frac{1}{k}]} P_{k=1}^{K} s_{k} \hat{\alpha}_{k} (s)];$$
(16)

 $Q_{N} = 1$   $Q_{t 1} = 1$   $Q_{t 2} = 1$   $Q_{t 3} = 1$   $Q_$ 

denotes averaging over the disorder fand in g. We separate the relevant where one-stage and two-stage order parameters by inserting:

$$1 = \frac{K}{2} \operatorname{dm} \operatorname{dm}^{2} e^{iK} \int_{s=1}^{P_{t-1}} \operatorname{rm}^{2}(s) \left[ \operatorname{m}^{2}(s) \right] \frac{1}{K} \int_{k=1}^{P_{k}} \hat{f}_{k}(s) \right];$$

$$1 = \frac{K}{2} \operatorname{dk} \operatorname{dk}^{2} e^{iK} \int_{s=1}^{P_{t-1}} \hat{k}(s) \left[ \operatorname{k}^{2}(s) \right] \frac{1}{K} \int_{k=1}^{P_{k}} \hat{f}_{k}(s) \right];$$

$$(19)$$

$$1 = \frac{K}{2} \operatorname{dkd\hat{k}} e^{iK} \int_{s=1}^{P_{t-1}} \hat{k}(s) k(s) \frac{1}{K} \int_{k=1}^{P_{k}} \hat{u}_{k}(s) ;$$
 (20)

$$1 = \frac{K}{2} \frac{(t+1)^2 Z}{dqd\hat{q}e^{iK}} \int_{s=1}^{P_{t-1}} \int_{s^{0}=1}^{P_{t-1}} \hat{q}(s;s^0) \left[q(s;s^0) + \frac{1}{K} \int_{k=1}^{R} \hat{b}_k(s)\hat{b}_k(s^0)\right];$$
 (21)

$$1 = \frac{K}{2} \operatorname{dQ} \operatorname{d\hat{Q}} e^{iK} \int_{s=1}^{P_{t-1}} \int_{s^{0}=1}^{P_{t-1}} \widehat{Q}(s;s^{0}) \widehat{Q}(s;s^{0}) \frac{1}{K} \int_{k=1}^{R} \widehat{q}_{k}(s) \widehat{q}_{k}(s^{0}) \widehat{q}_{$$

$$1 = \frac{K}{2} \int_{(t+1)^{2}}^{(t+1)^{2}} dL d\hat{L} e^{iK} \int_{s=1}^{P_{t-1}} \int_{s^{0}=1}^{P_{t-1}} \hat{L}(s;s^{0}) \left[ L(s;s^{0}) + \frac{1}{K} \int_{k=1}^{R} \hat{b}_{k}(s) \hat{u}_{k}(s^{0}) \right]}$$
(23)

Since the initial state probability is factorisable, the disorder-averaged generating functional factorises into single-site contributions. The disorder-averaged generating functional is for K ! 1 dom inated by a saddle-point. We can thus simplify the saddle-point problem to

$$Z = \lim_{K \to \infty} \lim_{K \to \infty}$$

in which the functions; are given by

where u  $\int_{s=0}^{Q} \frac{du(s)}{p}$  and û  $\int_{s=0}^{Q} \frac{dt(s)}{p}$ . We have arrived at a single-site saddle-point problem. Using normalization condition and Z [0] = 1, we obtain eld derivatives of the generating functional as follows:

$$\frac{}{\langle \hat{\mathbf{b}}_{k} (\mathbf{s}) \rangle} = \langle \hat{\mathbf{b}} (\mathbf{s}) \rangle ; \tag{28}$$

$$\frac{}{\langle \hat{b}_{k} (s) \hat{b}_{k^{0}} (s^{0}) \rangle} = k_{jk^{0}} \langle \hat{b}(s) \hat{b}(s^{0}) \rangle + (1 \quad k_{jk^{0}}) \langle \hat{b}(s) \rangle \langle \hat{b}(s) \rangle ;$$
(29)

$$\frac{0}{0_{k^0}(s^0)} < \hat{b}_k(s) > = i_{k;k^0} < \hat{b}(s) \hat{a}(s^0) > ;$$
(30)

where  $k_{i,k}$  is K ronecker's delta taking 1 if  $k = k^0$  and 0 otherwise and < > denotes

$$< f(\hat{\text{fb}}; u; \hat{\text{dg}}) > \frac{ \frac{P}{\hat{\text{b}}(1); \hat{\text{b}}(t)} \frac{R}{u \hat{\text{dM}} (\hat{\text{fb}}; u; \hat{\text{dg}}) f(\hat{\text{fb}}; u; \hat{\text{dg}})}{P};$$

$$= \frac{P}{\hat{\text{b}}(1); \hat{\text{b}}(t)} \frac{R}{u \hat{\text{dM}} (\hat{\text{fb}}; u; \hat{\text{dg}})};$$
(31)

with

M (fb;u;ûg) 
$$pb(1)e^{\int_{t}^{t} fb(s)u(s 1) \ln 2 \cos h u(s 1)g}$$

The evaluation figaddle denotes an evaluation of a function f at the dominating saddle point. Therefore we see the order parameters are essentially single-site ones.

## B. saddle-point equations

In the limit K! 1, the integral (24) will be dominated by the saddle point of the extensive exponent + + . We rst calculate the remaining Gaussian integral in:

$$= \frac{1}{2} \frac{Z}{(2)^{(t+1)=2}} \frac{d\hat{w}}{(2)^{(t+1)=2}} e^{i\hat{y}\hat{w}} (^{-1}1)\hat{v}^{\frac{1}{2}\hat{y}}\hat{v}Q \hat{v}^{\frac{1}{2}\hat{y}}\hat{v}^{y}B \hat{w}^{\frac{1}{2}\hat{y}}\hat{w} B \hat{v}^{\frac{1}{2}\hat{y}}\hat{w} \hat{D} \hat{w}$$

$$= \frac{1}{2} \frac{Z}{(2)^{t=2}} e^{\frac{1}{2}\hat{y}}\hat{v}^{y}Q \hat{v}^{\frac{1}{2}\hat{y}}\hat{D} \hat{j}^{1=2} e^{\frac{1}{2}\hat{y}}\hat{v}^{y}(^{-1}1B)\hat{D}^{-1}(^{-1}1B)\hat{v}$$

$$= \frac{1}{2} \ln \hat{D} \hat{j} + \ln \hat{D} + \hat{y}(^{-1}1B)\hat{D}^{-1}(^{-1}1B)\hat{j}; \qquad (33)$$

where B, D and Q are matrices having matrix elements

B 
$$(s;s^0)$$
 ik  $(s)$  G  $(s;s)$ ; (34)

B 
$$(s;s^0)$$
 ik  $(s)$  G  $(s;s^0)$ ; (34)  
 $(s;s^0)$   $\frac{2}{0} + 1$  m  $(s)$  m  $(s)$  + C  $(s;s^0)$ ; (35)

and Q (s; s<sup>0</sup>), respectively. The saddle-point equations are derived by di erentiation with respect to integration variables fm;  $\hat{k}$ ;  $\hat{k}$ ;  $\hat{q}$ ;  $\hat{q}$ ;  $\hat{Q}$ ;  $\hat{L}$ ;  $\hat{L}$   $\hat{g}$ . These equations will involve the average single-site correlation C (s;s $^{0}$ ) and the average single-site response function G (s;s $^{0}$ ):

$$C (s;s^{0}) = \lim_{K ! 1} \frac{1}{K} \frac{x^{K}}{K} \frac{1}{K} \frac{x^{K}}{(s)\hat{b}_{k^{0}}(s^{0})} = (\hat{b}(s)\hat{b}(s^{0})) ;$$
 (36)

G (s;s<sup>0</sup>) = 
$$\lim_{K! \to 1} \frac{1}{K} \frac{x^{K}}{K} = \frac{0}{0} \frac{1}{0} \frac{x^{K}}{0} = i < \hat{b}(s) \hat{a}(s^{0}) > i$$
 (37)

Straightforward di erentiation by usage of causality, leads us to the following saddle-point equations:

$$\hat{m}(s) = k(s) = \hat{q}(s; s^0) = Q(s; s^0) = 0;$$
 (38)

$$\hat{\mathbf{k}}(\mathbf{s}) = \mathbf{j}_{\mathbf{s}} \mathbf{\dot{\mathbf{j}}} \tag{39}$$

$$m(s) = \langle \hat{b}(s) \rangle ;$$
 (40)

$$q(s;s^0) = \langle \hat{b}(s)\hat{b}(s^0) \rangle = C(s;s^0);$$
 (41)

$$q(s;s^{0}) = \langle \hat{b}(s)\hat{b}(s^{0}) \rangle = C (s;s^{0});$$

$$\geq i \langle \hat{b}(s)\hat{u}(s^{0}) \rangle ; \text{ for } s \rangle s^{0}$$

$$L (s;s^{0}) = iG (s;s^{0}) = \vdots 0; \text{ for } s \rangle s;$$

$$(41)$$

$$\hat{Q} = \frac{1}{2} (1 + G)^{1} D (1 + {}^{y}G)^{1}; \qquad (43)$$

$$\hat{L} = (1 \quad {}^{Y}G)^{1}; \qquad (44)$$

where  $\hat{Q}$ ,  $\hat{L}$ , D and s are matrices having matrix elements  $\hat{Q}$  (s;s<sup>0</sup>),  $\hat{L}$  (s;s<sup>0</sup>),

D 
$$(s;s^0)$$
 D  $(s;s^0) = {}^2 + [1 m (s) m (s) + C (s;s^0)];$  (45)

and

respectively. Substituting (38)-(44) into (31) and introducing a simple rescaling of local elds and conjugate local elds, the term  $<\hat{b}(s)\hat{u}>$  becomes

$$<\hat{b}(s)\hat{u}> = \begin{bmatrix} Z & X & \hat{b}(s)\hat{u}e^{\frac{P_{t-1}}{s=1}f\hat{b}(s+1)u(s)\ln 2\cosh u(s)g} \\ & \hat{b}(1); & \hat{b}(t) \end{bmatrix}$$

$$= i \begin{bmatrix} \frac{1}{2}y\hat{u}R\hat{u} + i\hat{u}(u\hat{k}) & \hat{b}(s)R \end{bmatrix} \begin{bmatrix} X & \hat{b}(s)R \end{bmatrix} \begin{bmatrix} Y^{\frac{1}{2}} & \frac{1}{2}I + \hat{b}(s+1)sgnu(s)J \end{bmatrix}; (47)$$

in the lim it ! 1 , where  $\hat{\mathbf{u}}$   $\hat{\mathbf{u}}$  ( $\hat{\mathbf{u}}$  (1);  $\hat{\mathbf{u}}$  ( $\hat{\mathbf{u}}$  (1)), R  $\hat{\mathbf{u}}$   $\hat{\mathbf{u}}$   $\hat{\mathbf{u}}$  1)), R  $\hat{\mathbf{u}}$   $\hat{\mathbf{u}}$  1 D (1 + G)  $\hat{\mathbf{u}}$  and  $(1 + G)^1$  G. The term  $s < \hat{b}(s) > and < \hat{b}(s)\hat{b}(s^0) > can also be calculated in a$ sim ilar way.

Let us sum marize our calculation. Some macroscopic integration variables are found to vanish in the relevant physical saddle-point:  $m(s) = k(s) = q(s;s^0) = Q(s;s^0) = 0$ . The remaining ones can all be expressed in terms of three macroscopic observables, namely the overlaps m (s), the single-site correlation functions C (s;s<sup>0</sup>) and the single-site response functions G (s;  $s^0$ ). Finally, setting ! 1 and (s) = 0, we then arrive at the following saddle-point equations in the therm odynam ic limit, i.e., K! 1:

$$m(s) = \hat{b}(s)$$
; (48)

$$C(s;s^0) = \hat{b}(s)\hat{b}(s^0) ;$$
 (49)

$$C (s;s^{0}) = \begin{cases} \hat{b}(s)\hat{b}(s^{0}) ; \\ 8 \end{cases}$$

$$G (s;s^{0}) = \begin{cases} \hat{b}(s)(R^{-1}v)(s^{0}) ; \text{ for } s > s^{0} \end{cases}$$

$$(49)$$

$$G (s;s^{0}) = \begin{cases} \hat{b}(s)(R^{-1}v)(s^{0}) ; \text{ for } s > s^{0} \end{cases}$$

$$(50)$$

The bit error rate is obtained by

$$P_b(s) = \frac{1 - m(s)}{2}$$
: (51)

The average over the e ective path measure is given by

g(b;v) Dv Trg(b;v) 
$$\sum_{s=1}^{Z} \frac{1}{2} [1 + b(s+1) \operatorname{sgn} u(s)];$$
 (52)

$$Dv \qquad \frac{dve^{\frac{1}{2}v R^{-1}v}}{? R j}; \qquad (53)$$

 $\hat{b}(1)2f0g;\hat{b}(0);\hat{b}(t)2f1;1g$ 

$$u(s) = \hat{k}(s) + v(s) + (\hat{b})(s);$$
 (55)

$$R = (1 + {}^{y}G)^{1}D (1 + G)^{1}; (56)$$

$$= (1 + G)^{1} G;$$
 (57)

$$\hat{\mathbf{k}}(\mathbf{s}) = \mathbf{j}_{\mathbf{s}} \mathbf{\dot{y}} \tag{58}$$

D 
$$(s;s^0)$$
  ${}_{g^0}^2 + [1 m (s) m (s^0) + C (s;s^0)];$  (59)

$$D (s;s^{0}) = \begin{cases} 2 + [1 & m (s) & m (\$) + C (s;s^{0})]; \\ 8 & s^{0};s^{0} + G (s^{0};s^{0}); \text{ for } s^{0} \in s \end{cases}$$

$$(59)$$

$$(59)$$

$$(60)$$

$$(60)$$

The terms  $(R^{-1}v)(s)$  and (-)(s) denote the sth element of the vector  $R^{-1}v$  and respectively. Equations (48)-(60) entirely describe the dynam ics of the system. In the lim it where t! 1, the term ( )(s) in (55) can be regarded as a self-interaction and corresponds to the Onsager reaction term in equilibrium statistical mechanics. Therefore, in this paper, we call this term the Onsager reaction term.

## IV. RESULTS AND DISCUSSION

In order to validate the results obtained above, we perform ed num erical experim ents in an N = 8000 system. Figure 2 shows the 11st few stages of the detection dynamics obtained from 100 experim ents for the cases  $E_b = N_0 = 7.0$ , 9.0 [dB], predicted by generating functional analysis (GFA) and density evolution (DE) [6], where  $E_b=N_0$  [dB] denotes  $10 \log_{10} E_b=N_0$  (see Appendix A). The system load is = 0.5 < c, where c is the critical system load de ned as the minimum system load at which the dynamics fail to convergence. Figure 3 shows the 1st few stages of the detection dynamics obtained from 100 experiments for the cases  $E_b=N_0=5.5$ , 7.5 [dB], predicted by GFA and DE with the system load = 0.7 >  $_{\rm c}$ . O scillation of the detection dynam ics was observed, when >  $_{\rm c}$ . In such a case, both GFA and DE predicted the failure of convergence of the dynam ics. However, the DE results has residual deviations in gures 2 and 3 due to the lack of the Onsager reaction term and the assumption that the local eld follows a Gaussian distribution. In particular, the deviation of the DE predictions from the simulation results become slarge when >  $_{\rm c}$ . In contrast, GFA exhibits good consistency with the simulation results for any system load.

The di erence between DE and GFA appears also in a signal term with respect to the information bit of the local eld. The signal term s of DE and GFA at stage t represent B<sub>t</sub> and  $\hat{k}$  (t), respectively (see Appendix A). The signal term  $\hat{k}$  (t) derived by GFA contains all response functions G (s; s<sup>0</sup>) with s; s<sup>0</sup> t. On the other hand, the signal term B<sub>t</sub> derived by DE contains only the response functions of adjacent stages. This di erence appears from stage t = 1. The signal term  $\hat{k}$  (1) of GFA is,

$$\hat{k}(1) = 0 \qquad 1 \qquad G(1; 1)$$

$$\hat{k}(1) = 0 \qquad 1 \qquad G(1; 0)$$

$$1 \qquad 1 \qquad 1$$

$$= 1 \qquad G(1; 0) + {}^{2}G(1; 0)G(0; 1) \qquad G(1; 1); \qquad (61)$$

while the signal term  $B_1$  of DE is

$$B_1 = 1 U_1 + {}^2U_1U_0: (62)$$

As you can easily see, the  $B_1$  contains only  $U_1$  and  $U_0$ , which correspond to G(1;0) and G(0; 1) of GFA respectively, while the  $\hat{k}(1)$  has the response function between stage 1 and stage -1 as G(1; 1).

#### V. CONCLUSIONS

We presented the generating functional analysis to describe the detection dynamics of PIC for CDMA multiuser detection. The predictions of DE can qualitatively explain the detection dynamics only when the detection dynamics converge. Furthermore, the deviation of the predictions of DE from the results of numerical experiments becomes large when the detection dynamics fail to convergence. In contrast, the predictions of GFA are in good

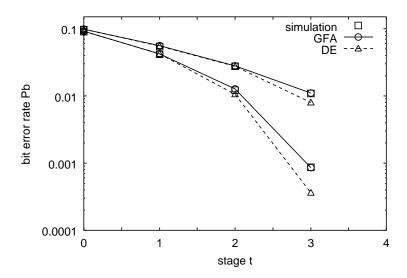


FIG. 2: The rst few stages of the detection dynam ics predicted by generating functional analysis (solid line) and density evolution (dashed line). Computer simulations (square) are evaluated with N=8000 from 100 experiments for the cases  $E_b=N_0=7.0$  [dB] (upper), 9.0 [dB] (lower). The system load is =0.5 < 0.5 for both cases.

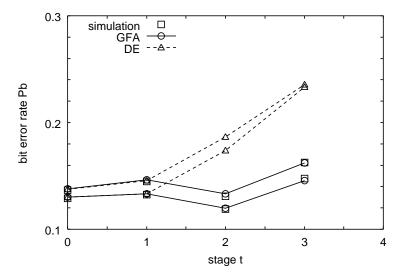


FIG. 3: The rst few stages of the detection dynam ics predicted by generating functional analysis (solid line) and density evolution (dashed line). Computer simulations (square) are evaluated with N = 8000 from 100 experiments for the cases  $E_b = N_0 = 5.5$  [dB] (upper), 7.5 [dB] (lower). The system load is = 0.7 > 0.2 for both cases.

agreem ent with computer simulation result of PIC for any system load and channel noise level, even if the dynam ics fail to converge.

## A cknow ledgem ent

This work was partially supported by a Grant-in-Aid for Scientic Research on Priority A reas No. 14084212, and for Scientic Research (C) No. 16500093 from the Ministry of Education, Culture, Sports, Science and Technology of Japan.

### APPENDIX A:DENSITY EVOLUTION OF CDM A DETECTION DYNAM ICS

Density evolution is a useful tool to analyze nonlinear dynamics [7, 8]. By means of density evolution, the bit error rate  $P_b$  (t) of hard decisions  $\hat{b}_k$  (t) = sgn  $[u_k$  (t 1)] at the tth stage is given by

$$P_{b}(t) = \frac{1 - M_{t}}{2};$$
 (A 1)

where M  $_{\rm t}$  are to be evaluated by the following recursive formulas for B  $_{\rm t}$  , C  $_{\rm t}$  , M  $_{\rm t}$  , U  $_{\rm t}$  and q:;:

$$B_t = 1 \quad U_t B_{t1};$$
 (A2)

$$C_{t}$$
; =  $V_{t}$ ; +  ${}^{2}U_{t}U_{t}$   $C_{t1}$ ; 1

$$C_{t;} = V_{t;} + {}^{2}U_{t}U C_{t 1; 1}$$

$$+ V; (U) + V; (U); (A3)$$

$$= 1 = +1 = +1$$

$$V_{t;} = {}^{2}U_{t} + (1 M_{t} M + Q_{t}; ); (A4)$$

$$= 0 \times 2 \times 10^{-1} (A + 2 \times 10^{-1}) \times 10^{-1} (A + 2 \times 10$$

$$V_{t;} = {0 \atop 0} + (1 \quad M_t \quad M + q_t; );$$
 (A 4)

$$M_{t+1} = Dz sgn (B_t + z^T C_{t,t});$$
 (A 5)

$$U_{t+1} = \frac{1}{q - \frac{1}{C_{t,t}}} Dzzsgn(B_t + z - \frac{q}{C_{t,t}});$$

$$Q_{t+1;+1} = DzDuDvsgn(B_t + z - \frac{q}{C_{t,t}} - \frac{q}{C_{t,t}} - \frac{q}{C_{t,t}})$$
(A 6)

(2)  $^{1=2}$  e  $^{z^2=2}$ dz. The initializations are V  $_{1;t}$  =  $V_{t;1}$  =  $^2_0$ + (1  $M_t$ ), B  $_1$  = 1,  $M_{1} = 0$ ,  $C_{1;1} = {0 \atop 0} +$ ,  $C_{1;t} = C_{t;1} = V_{1;t}$   $U_{t}V_{1;t}$ , and  $q_{1;t} = q_{t;1} = 0$ . The physical meaning of the parameters  $B_t$ ,  $C_t$ ,  $M_t$ ,  $U_t$  and  $q_t$ , is

$$B_{+} = E[u_{k}(t)]; \tag{A8}$$

$$C_{t}$$
 =  $C \text{ ov } [u_k (t); u_k ()];$  (A 9)

$$M_{t+1} = \frac{1}{K} \sum_{k=1}^{K} sgn [u_k (t)];$$
 (A 10)

$$U_{t+1} = \frac{1}{K} \int_{k=1}^{K} sgn^{0}[u_{k}(t)];$$
 (A 11)

$$q_{k+1;+1} = \frac{1}{K} \sum_{k=1}^{K} sgn [u_k (t)] sgn [u_k ()];$$
 (A 12)

The detailed derivation is available in the appendix of the paper [6]. In the derivation by means of density evolution, it is assumed that the local eld  $u_k$  (t) follows the Gaussian distribution with mean  $B_t$  and covariance  $C_t$ ; . Furthermore, the Onsager reaction term is ignored. The signal term  $B_t$  contains only the response functions of adjacent stages.

<sup>[1]</sup> VaranasiM K and Aazhang 1990 IEEE Trans. Commun. 38 4 509.

<sup>[2]</sup> Tanaka T 2001 Europhys. Lett. 54 4 540.

<sup>[3]</sup> Tanaka T 2002 IEEE Trans. Inf. Theory 48 11 2888.

<sup>[4]</sup> Nishim ori H 2002 Europhys. Lett. 57 2 302.

<sup>[5]</sup> Kabashim a Y 2003 J. Phys. A: Math. Gen. 36 43 11111.

<sup>[6]</sup> Tanaka T and Okada M 2005 IEEE Trans. Inf. Theory 51 2 700.

<sup>[7]</sup> Okada M 1995 Neural Netw. 8 6 833.

<sup>[8]</sup> Richardson T J and Urbanke R L 2001 IEEE Trans. Inf. Theory 47 2 599.

<sup>[9]</sup> Coolen A C C 2000 Preprint cont-m at/0006011.

<sup>[10]</sup> During A, Coolen A C C and Sherrington D 1998 J. Phys. A: Math. Gen. 31 8609.

<sup>[11]</sup> Kawamura Mand Okada M2002 J. Phys. A: Math. Gen., 35 2 253.

<sup>[12]</sup> M im ura K, Kawam ura M and Okada M 2004 J. Phys. A: Math. Gen. 37 25 6437.