

Theoretical analysis of the implementation of a quantum phase gate with neutral atoms on atom chips

E. Charron,¹ M. A. Cirone,² A. Negretti,^{2,3,*} J. Schmiedmayer,⁴ and T. Calarco^{2,5}

¹*Laboratoire de Photophysique Moléculaire du CNRS,*

Bâtiment 210 - Université Paris-Sud, 91405 Orsay Cedex - France

²*ECT*, Strada delle Tabarelle 286, I-38050 Villazzano, Trento, Italy, and*

Dipartimento di Fisica, Università di Trento, and BEC-CNR-INFM, I-38050 Povo, Italy

³*Institut für Physik, Universität Potsdam, Am Neuen Palais 10, 14469 Potsdam, Germany*

⁴*Physikalisches Institut, Universität Heidelberg, 69120 Heidelberg, Germany*

⁵*ITAMP, Harvard Smithsonian Center for Astrophysics,*

and Department of Physics, Harvard University, Cambridge, MA 02138, USA

(Dated: April 1, 2022)

We present a detailed, realistic analysis of the implementation of a proposal for a quantum phase gate based on atomic vibrational states, specializing it to neutral rubidium atoms on atom chips. We show how to create a double-well potential with static currents on the atom chips, using for all relevant parameters values that are achieved with present technology. The potential barrier between the two wells can be modified by varying the currents in order to realize a quantum phase gate for qubit states encoded in the atomic external degree of freedom. The gate performance is analyzed through numerical simulations; the operation time is ~ 10 ms with a performance fidelity above 99.9%. For storage of the state between the operations the qubit state can be transferred efficiently via Raman transitions to two hyperfine states, where its decoherence is strongly inhibited. In addition we discuss the limits imposed by the proximity of the surface to the gate fidelity.

I. INTRODUCTION

The idea of encoding information in quantum two-level systems (qubits) instead of in classical bits promises a revolution in the way we process and communicate information [1]. Quantum computers, i.e., processing units manipulating qubits instead of classical bits, would lead to an intrinsic speed-up of calculation that is not possible with a classical computer [2, 3]. For this purpose, a set of controlled operations is necessary, that substitute the network of electronic logic gates of present microelectronics. Analog to classical bits, also for qubits a limited set of universal gates exists that allows to implement networks for the execution of any quantum algorithm [4]. Such universal gates operate on single qubits and on pairs of qubits. Whereas the design of single-qubit operations is conceptually simple and experimental implementations are within the reach of current technology in many cases, two-qubit operations are more demanding in terms of both theoretical and experimental investigations.

Several schemes for the realization of two-qubit gates with atoms or ions have been proposed in the last years [5, 6, 7, 8, 9, 10] and a considerable amount of progress has been recently realized for the future implementation of quantum information with cold atoms in optical lattices [11, 12]. Many of these schemes have been elaborated for ideal systems (harmonic oscillators, two-level systems, etc.) or under simplifying approxima-

tions for the sake of simplicity, in order to illustrate the idea on which the gate is based. The realization of such schemes in an experimental setup, where the characteristics of the real physical system are inevitably to be taken into account, is often a formidable task. The inclusion of realistic features and values requires a reexamination and modification of the schemes presented in the literature, in order to exploit all properties of the real physical system. For instance, the collisional gate with switching potentials proposed in [7] exploits the complete revivals of wave packets in harmonic traps, which are difficult to achieve for neutral atoms, and deviations from harmonicity pose limiting restrictions to the performance of the gate [13]. More realistic proposals for quantum gates are thus required.

With the spirit just outlined, we reconsider the two-qubit gate initially proposed in Ref. [10]. Two atoms are trapped in a double well potential. The ground ($|g\rangle$) and first excited ($|e\rangle$) vibrational states of each well are used as qubit logic states and the phase gate operation occurs via selective interaction between the atoms in the classically forbidden region under the potential barrier that separates the two atoms. In this paper we investigate the feasibility of such a scheme with neutral atoms on atom chips. Instead of assuming ideal trapping potentials for the atoms to facilitate numerical analysis, we derive here the exact potential created by appropriate stationary and time-dependent currents and bias magnetic fields on atom chips. The finite size of the current-carrying wires is also taken into account and realistic values for all physical parameters are used. In addition we consider also effects of the proximity of the surface, like spin flips and decoherence. Moreover, we specialize our discussion to neutral ^{87}Rb atoms. In this way our investigations

*Present address: Department of Physics and Astronomy, University of Aarhus, Ny Munkegade, Building 1520, DK-8000 Aarhus C, Denmark

are much closer to the experimental conditions and our results show how the implementation of such a scheme is indeed feasible.

In spite of the improved realism of our investigations, some features of the real system are neglected in our analysis. Nonetheless, we expect that their role is marginal and/or can be minimized. Van der Waals and Casimir forces between the atoms and the chip surface are not taken into account, since these effects become negligible when the atoms are kept sufficiently distant from the chip surface. Similarly, fabrication defects, such as roughness of the chip surface and imperfections in the atom chip are not taken into account, since they were shown to be sufficiently small, and the potentials sufficiently smooth [14] when using the appropriate fabrication techniques [15]. Thermal fluctuations of currents in the metal layers of the atom chip are another important issue [16, 17, 18] They may lead to loss of the atoms, and to decoherence of quantum states. However, we shall show that one can transfer the qubit state from the external degree of freedom to the internal one, using two clock states whose decoherence is strongly reduced [19, 20] and the important aspect to consider is the atom loss. Therefore, in spite of these approximations, our analysis is a significant step towards the first implementation of a phase gate with neutral atoms on atom chips.

The outline of the paper is as follows: in Sec. II we discuss the properties of ^{87}Rb atoms that are relevant for our analysis and describe the architecture of wires and bias magnetic fields on atom chips that create a double-well potential for the two atoms with strong confinement in one dimension. We also give the values of currents, bias fields, and wire sizes that realize this trap. In Sec. III we give the results of our numerical investigations on the performance of the phase gate. We show that high fidelity ($\geq 99.9\%$) can be achieved with short operation times (~ 10 ms). In Sec. IV we show how to transfer the qubit state from the external degree of freedom to two hyperfine (magnetic tappable clock) states with Raman transitions. The relative phase of the two hyperfine states is insensitive, to first order, to fluctuations of the magnetic fields, thus, preserving the purity of the qubit state for long time. Finally in Sec. V we relate the achievable gate operation times to the expected atomic life times and coherence time, to estimate a realistic fidelity. Whereas the decoherence can be avoided by storing the qubits in the clock states, the loss of qubits due to thermally induced spin flips remains, and limits the fidelity of operations. The Appendix contains details concerning the magnetic field created by the currents on the atom chip.

II. DOUBLE-WELL POTENTIALS WITH MAGNETIC FIELDS ON ATOM CHIPS

Atom chips are versatile integrated microstructures for the manipulation of samples of atoms in the ultracold

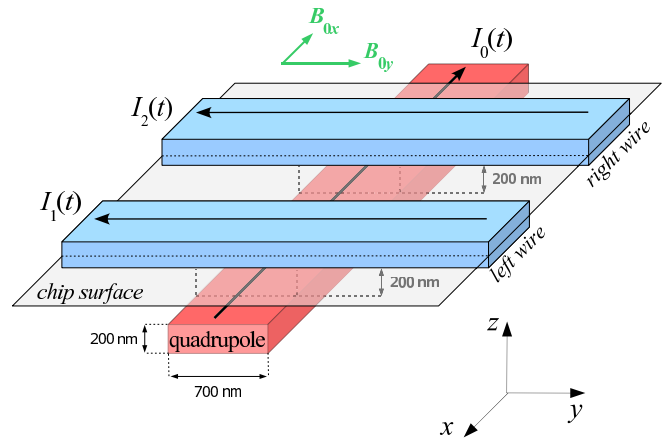


FIG. 1: (Color online) Schematic view of the atom chip configuration. The two wires along the y -axis lie on the chip surface and are separated from the quadrupole wire by 200 nm.

and quantum degenerate regime (see Ref. [21] and references therein). Trapping potentials for neutral atoms can be created near the chip surface. We shall consider the simple case of homogeneous bias magnetic fields and magnetic fields created by dc (but time-dependent) currents. The spin of slow, cold atoms remains adiabatically aligned with the magnetic field. The trapping magnetic potential, in the weak field approximation, is expressed by

$$V(\mathbf{r}) = -g_F \mu_B m_F B(\mathbf{r}) \quad (1)$$

where μ_B is the Bohr magneton, g_F is the Landé factor, m_F is the azimuthal quantum number, and $B(\mathbf{r})$ is the magnetic field. In section III, a higher order accurate formula – derived from the Breit-Rabi approach [22] – will be used in the numerical simulations, but we limit our discussion to the first order term given in Eq. (1) for the sake of simplicity.

The most simple configuration of wires and bias magnetic fields that creates a double-well potential is shown in Fig. 1 [23]. A longitudinal wire along x (hereafter, quadrupole wire) carrying a dc current I_0 and a uniform bias magnetic field B_{0y} perpendicular to the wire create a quadrupole potential, with a zero magnetic field along a line parallel to the quadrupole wire. Clearly, along this line the magnetic field is minimum, but Majorana spin flips occur at zero magnetic field, which result in atom losses. Therefore the minimum is shifted to a non-zero value with the addition of a second uniform bias magnetic field B_{0x} , orthogonal to the first one and parallel to the chip surface. Two more wires (hereafter, left and right wire, respectively), perpendicular to the quadrupole wire, carry a dc current $I_{1,2} = \alpha I_0$, whose magnetic fields give rise to a modulation of the trapping potential.

In consideration of the small extension of the system (a few microns), the assumption of infinitely thin wires is too crude an approximation. Therefore in the potential (1) we shall use the expression of the magnetic field

created by currents flowing through wires with finite rectangular sections (a typical shape of wires on atom chips). Details of the calculation are given in the Appendix.

A trapping potential with two well-separated minima, as shown in Figure 2(a), is created with the values $I_0 = 40.89$ mA, $\alpha = 70.25 \times 10^{-3}$, $B_{0x} = -9.90$ G, and $B_{0y} = 50.0$ G. The three wires have an identical rectangular section, of width $W = 700$ nm and height $H = 200$ nm, and the centers of the left and right wires are $1.60 \mu\text{m}$ apart. The center of the quadrupole wire is at a distance $z_Q = 400$ nm under the chip surface, whereas the left and right wires lie on the chip. We stress that the values for the required transversal confinement has been approached even in the first experiments with nano fabricated atom chips [21, 24] and the currents, bias fields, size and distances of the wires are within current laboratory conditions [25].

The two potential minima are at a distance of $1.19 \mu\text{m}$ from the surface, and the line joining them is slightly tilted by an angle $\beta \simeq 14.8^\circ$ from the x axis. This angle defines the new axis x' along which the dynamics will take place (see [26] for details). We also define a new axis y' parallel to the chip surface and perpendicular to x' . The z axis remains unchanged. Since the trapping frequencies at the two minima verify the condition $\nu_{x'} \ll \nu_{y'} \simeq \nu_z$ [27], transverse vibrations do not get excited during the gate operation (provided that the energy of the atoms is less than the quanta of transverse vibrations), and the trapped atoms will experience a quasi one-dimensional (1D) dynamics.

The value of the magnetic field at the two minima is $B_m \simeq 3.23$ G. This value minimizes the decoherence induced by fluctuations of the dc currents for the hyperfine states $|F = 2, m_F = 1\rangle$ and $|F = 1, m_F = -1\rangle$ of the ground state $5S_{1/2}$ of ^{87}Rb [20]. These clock states will be used to store the qubit information at the end of the gate operation, as described in Sec. IV.

III. GATE OPERATION

Compared to previous static proposals [26], we implement here a time-dependent phase gate in a spirit similar to the one of Ref. [10].

As it can be noticed in Figure 2(a), when the barrier is high the translational wavefunctions of the atoms do not overlap in the inter-well region. In this type of environment, the atoms do not interact. On the other hand, when the barrier is lowered, as in Figure 2(b), tunneling takes place and the probability of finding the atoms in the classically forbidden region is not negligible any more. As a consequence, the energy splitting between the symmetric and anti-symmetric state combinations increases quickly when the barrier height ξ is lowered. This effect is clearly state-selective in the sense that it affects differently the ground and excited translational states. It therefore constitutes an interesting candidate for the implementation of a conditional logical gate.

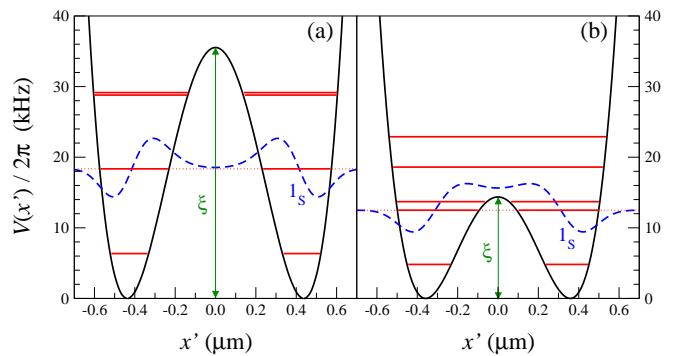


FIG. 2: (Color online) Double well potentials created by the atom chip configuration shown in Figure 1. The energies of the first six eigenstates are shown as red horizontal lines. The blue dashed line represents the wavefunction of the third eigenstate labeled as 1_s because it originates from the symmetric combination of the $v = 1$ trapped levels, also labeled as $|e\rangle$ in the text. (a) Highest barrier $\xi/2\pi = 35.4$ kHz obtained with $I_0 = 40.89$ mA and $\alpha = 70.25 \times 10^{-3}$. (b) Lowest barrier $\xi/2\pi = 14.4$ kHz obtained with $I_0 = 42.01$ mA and $\alpha = 69.70 \times 10^{-3}$. In both cases the bias magnetic fields are equal to $B_{0x} = -9.90$ G, and $B_{0y} = 50.0$ G.

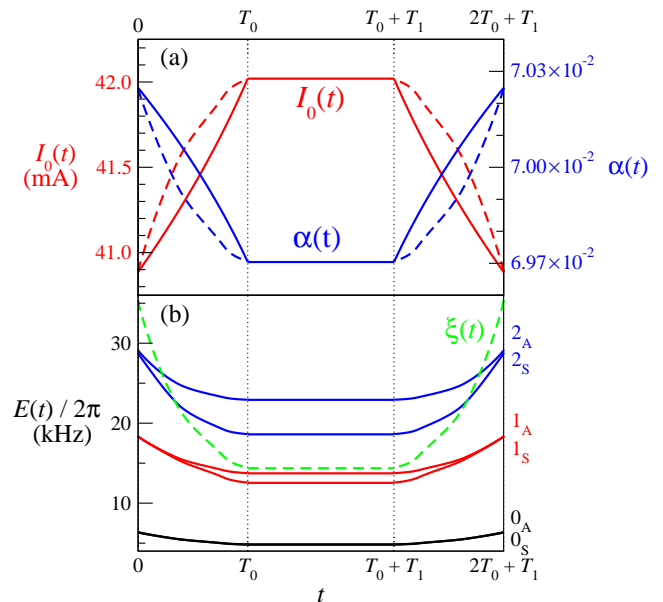


FIG. 3: (Color online) (a) Variation of the dc current $I_0(t)$ (red lines) in the quadrupole wire and of $\alpha(t) = I_1(t)/I_0(t) = I_2(t)/I_0(t)$ (blue lines) during the gate operation. The solid lines correspond to a simple linear gate and the dashed lines represent an optimized gate (see text for details). (b) Variation of the barrier height $\xi(t)$ (green dashed line) and of the energies of the first six instantaneous eigenstates of the double well potential (solid lines) in the case of the optimized gate. The times T_0 , $(T_0 + T_1)$ and $(2T_0 + T_1)$ delimit the three steps which constitute the conditional π phase gate.

In the present scheme, the barrier height $\xi(t)$ is controlled by varying simultaneously the intensities $I_0(t)$ and

$I_1(t) = I_2(t) = \alpha(t) \times I_0(t)$ in the quadrupole and in the perpendicular wires. In a first and simple implementation of the phase gate, we impose a linear variation of the barrier height ξ with time. The phase gate is decomposed in three steps:

- When $0 \leq t \leq T_0$ the barrier is lowered and the double-well potential changes from the one of Figure 2(a) to the one of Figure 2(b).
- When $T_0 \leq t \leq T_0 + T_1$ the inter-well barrier is fixed at its lowest value, such that a large inter-atomic interaction takes place.
- Finally, when $T_0 + T_1 \leq t \leq 2T_0 + T_1$ the inter-well barrier is raised again until the initial condition is recovered.

The linear variation of $\xi(t)$ is obtained by changing $I_0(t)$ and $\alpha(t)$ only, as depicted by the solid lines shown in Figure 3(a). We have verified that this simultaneous variation of the dc currents does not modify the direction x' along which the dynamics is taking place. In addition, the value of the magnetic field at the potential minima remains equal to 3.23 G during the whole gate operation. The dynamics is therefore quasi-adiabatic if $T_0 \gg 1/\nu_{x'} \simeq 77 \mu\text{s}$ (hereafter we write x, y instead of x', y').

The gate operation is followed by solving the time-dependent Schrödinger equation along the double-well direction x for the wave packet $\Psi(x_1, x_2, t)$ describing the motion of the two atoms

$$i\hbar \frac{\partial}{\partial t} \Psi(x_1, x_2, t) = \mathcal{H}(x_1, x_2, t) \Psi(x_1, x_2, t). \quad (2)$$

The two-dimensional time-dependent Hamiltonian is written as

$$\mathcal{H}(x_1, x_2, t) = \hat{T}_{x_1} + \hat{T}_{x_2} + V_{2D}(x_1, x_2, t), \quad (3)$$

where \hat{T}_q denotes the kinetic energy operator along the q -coordinate. The two-dimensional potential is given by the following sum

$$V_{2D}(x_1, x_2, t) = V(x_1, t) + V(x_2, t) + V_{\text{int}}(|x_2 - x_1|, t), \quad (4)$$

where $V(x, t)$ is the trapping potential (1) created by the atom chip and $V_{\text{int}}(|x_2 - x_1|, t)$ represents the averaged interaction potential between the two atoms at time t

$$V_{\text{int}}(|x_2 - x_1|, t) = 2\hbar a_0 (\omega_y \omega_z)^{1/2} \delta(|x_2 - x_1|). \quad (5)$$

This last expression is obtained by averaging the three-dimensional delta function interaction potential over the lowest trap states along the y and z directions [7]. One can note that the atom-atom interaction strength is proportional to the s-wave scattering length a_0 . Since the orthogonal trapping frequencies ω_y and ω_z vary slightly during the gate operation [27], the averaged interaction strength is also slightly time-dependent.

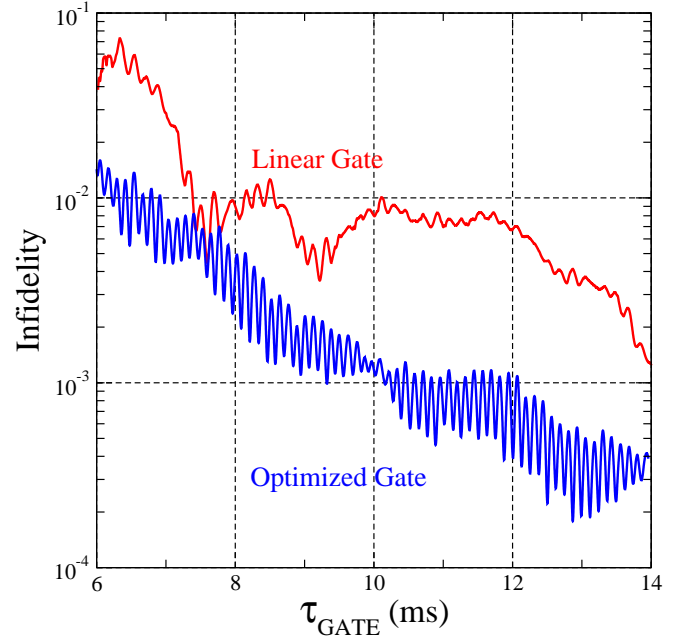


FIG. 4: (Color online) Infidelity of the conditional phase gate as a function of the gate duration. The red and blue lines correspond to the infidelities calculated for the linear and optimized gates respectively (see Figure 3 and text for details).

We solve the time-dependent Schrödinger equation (2) in a basis set approach by propagating the initial state of the two-atom system in time. We start with the atoms initially in one of the first four eigenstates $|gg\rangle$, $|ge\rangle$, $|eg\rangle$, or $|ee\rangle$ of the double-well potential (4). The wavefunction $\Psi(x_1, x_2, t)$ is then expanded as

$$\Psi(x_1, x_2, t) = \sum_i c_i(t) \times \varphi_i(x_1, x_2, t) \quad (6)$$

where $\varphi_i(x_1, x_2, t)$ represent the wavefunctions associated to the instantaneous eigenstates of the two-dimensional potential $V_{2D}(x_1, x_2, t)$ of Eq. (4). Inserting this expansion into the time-dependent Schrödinger equation (2) yields the following set of first order coupled ordinary differential equations for the complex coefficients $c_i(t)$

$$i\hbar \frac{d}{dt} c_i(t) = \varepsilon_i c_i(t) - i\hbar \sum_j c_j(t) V_{ij}(t), \quad (7)$$

where ε_i denotes the energy of the eigenstate φ_i and $V_{ij}(t)$ is a time-dependent non-adiabatic coupling arising from the time variation of the barrier height $\xi(t)$

$$V_{ij}(t) = \langle \varphi_i | \frac{\partial}{\partial t} | \varphi_j \rangle = \frac{d\xi}{dt} \langle \varphi_i | \frac{\partial}{\partial \xi} | \varphi_j \rangle. \quad (8)$$

This set of equations is solved using an accurate Shampine-Gordon algorithm [28]. For each value of the duration T_0 we adapt T_1 in order to obtain an accurate conditional phase gate, with $\phi = \pi \pm 10^{-6}$.

At the end of the propagation ($t = t_f$) the coefficients $c_i(t_f)$ are analyzed to calculate the infidelity of the gate

$$I = \sum_{i=|gg\rangle\cdots|ee\rangle} (1 - |c_i(t_f)|^2). \quad (9)$$

where the sum runs over all possible initial qubit states. The infidelity is therefore a measure of the deviation from adiabaticity which arises from the non-adiabatic couplings $V_{ij}(t)$. This quantity is plotted in Figure 4 (red line for the linear gate) as a function of the gate duration. It shows an oscillatory behavior partially similar to the one observed with atoms trapped in an optical lattice [10]. The succession of maxima and minima is a signature of constructive and destructive interferences between two distinct pathways of excitation of the initial qubit state. Indeed the initial state may be excited in the time intervals $0 \leq t \leq T_0$ and $T_0 + T_1 \leq t \leq 2T_0 + T_1$, when the barrier is lowered and raised. The nature of this interference depends on the phases which develop during the gate operation [10]. The periodicity of the oscillation is simply related to the Bohr frequencies associated with the energy splitting of the two-atom eigenstates. The linear gate configuration proposed here can achieve a relatively high fidelity of about 99.6% in just 7.6 ms.

One should also realize that in the general case the couplings between the initial qubit states and the other accessible two-atom eigenstates vary with time. These couplings effectively increase when the inter-well barrier approaches the energy of the initial state. The linear gate proposed until now is therefore far from being optimal for the maximization of the gate fidelity.

We have thus implemented an optimized gate which tends to minimize these couplings during the whole gate duration. For this purpose, we impose a fast variation of the barrier height $\xi(t)$ at early times $t \ll T_0$, whereas this variation is much slower when $t \simeq T_0$. This is done by choosing

$$\hbar \frac{d\xi}{dt} = \gamma \text{Min}_i \left| \frac{\varepsilon_i - \varepsilon_{|ee\rangle}}{\langle \varphi_i | \frac{\partial}{\partial \xi} | \varphi_{|ee\rangle} \rangle} \right|. \quad (10)$$

In this expression, γ is a dimensionless proportionality factor, which can be decreased to achieve larger gate durations. The first derivative with respect to time of the barrier height $\xi(t)$ is therefore chosen such that the maximum effective first-order coupling between the highest energy qubit state $|ee\rangle$ and all other states remains constant during the whole gate duration. With this approach, higher fidelities are expected when compared to a linear gate of the same duration.

The variations of $I_0(t)$ and $\alpha(t)$ for this optimized gate are shown as dashed lines in Figure 3(a). Figure 4 shows that the optimized gate infidelity (blue line) is, on average, improved by a factor 6 when compared to the linear gate. As a consequence, this optimized gate can achieve fidelities of 99% in 6.3 ms and of 99.9% in 10.3 ms.

IV. USING BOTH DEGREES OF FREEDOM AS QUBIT STATES

When neutral atoms are used, it is possible to employ either the vibrational or the internal states as qubit states. Section III has shown that vibrational states are very promising in terms of gate performance. However, the readout of the qubit after the gate operation seems to be a difficult task in comparison to the readout of internal states, for which observation of fluorescence emitted from selected transitions is a well established technique. Moreover, a closer examination of the hyperfine structure of the ground state of ^{87}Rb provides further motivation for the use of internal states.

The hyperfine structure of the $5S_{1/2}$ ground state of ^{87}Rb is shown in Figure 5: eight sublevels have to be considered, three with $F = 1$ and five with $F = 2$. Only three of these eight sublevels (the states $|F = 1, m_F = -1\rangle$, $|F = 2, m_F = 1\rangle$, and $|F = 2, m_F = 2\rangle$) are low-field seeking states which can be trapped by static magnetic potentials [21]. In addition, the two hyperfine levels $|F = 1, m_F = -1\rangle$ and $|F = 2, m_F = 1\rangle$ have opposite Landé factors. As a consequence, they experience identical magnetic potentials. A more precise estimation that goes beyond the linear approximation given in Eq. (1) shows that the difference of the Zeeman shifts experienced by these two states is minimum at $B \simeq 3.23$ G [19]. At this field the states $|0\rangle \equiv |F = 2, m_F = 1\rangle$ and $|1\rangle \equiv |F = 1, m_F = -1\rangle$ are insensitive to field fluctuations at first order. The decoherence of an arbitrary superposition of the two states $|0\rangle$ and $|1\rangle$ due to fluctuations in the current intensities (which entail fluctuations in the magnetic field and thus in the potential (1)) is thus strongly inhibited. Indeed, coherent oscillations between the states $|0\rangle$ and $|1\rangle$ have recently been observed and the decoherence time has been estimated to be $\tau_c = 2.8 \text{ s} \pm 1.6 \text{ s}$ [20]. The inhibition of decoherence is a fundamental issue in quantum computation, since the coherence of the quantum state is an essential ingredient. It would thus be desirable to use the clock states $|F = 1, m_F = -1\rangle$ and $|F = 2, m_F = 1\rangle$ for the storage of quantum information.

In fact, we can use both degrees of freedom as qubits: when information must be processed, it will be encoded in the external degree of freedom and the gate operation will be done as described in the previous Section. At the end of the gate operation, the qubit state can be transferred to the internal degree of freedom and stored there until new operations are performed or until the final readout. In order to realize this transfer from one degree of freedom to the other, we need to swap the states associated with these two degrees of freedom, according to

$$|g1\rangle \leftrightarrow |e0\rangle \quad (11)$$

In this way, an arbitrary qubit state encoded in the vibrational states as

$$(a|gg\rangle + b|ge\rangle + c|eg\rangle + d|ee\rangle) \otimes |00\rangle \quad (12)$$

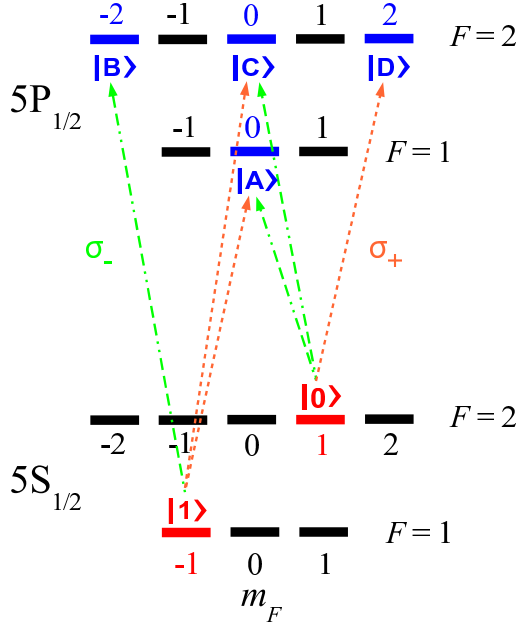


FIG. 5: (Color online) Schematic representation of the hyperfine structure of the $5S_{1/2}$ and $5P_{1/2}$ states of ^{87}Rb . The two qubits $|0\rangle \equiv |F=2, m_F=1\rangle$ and $|1\rangle \equiv |F=1, m_F=-1\rangle$ of the $5S_{1/2}$ ground state are shown in red. The intermediate sublevels $|A\rangle$, $|B\rangle$, $|C\rangle$, and $|D\rangle$ of the $5P_{1/2}$ excited state are shown in blue. The σ_+ and σ_- transitions connecting them are shown with dotted (orange) and dash-dotted (green) arrows respectively.

is transformed into

$$|gg\rangle \otimes (a|00\rangle + b|01\rangle + c|10\rangle + d|11\rangle) \quad (13)$$

and vice versa. Eq. (12) assumes that the internal degree of freedom of the two atoms has been initialized to the state $|0\rangle$. The map given in Eq. (11) is a selective switch from the internal state $|0\rangle$ (respectively $|1\rangle$) to the state $|1\rangle$ (respectively $|0\rangle$) under the control of the vibrational state. In order to realize it, we propose the use of two-photon Raman transitions.

The realization of such a two-photon Raman transition via intermediate $5P$ states requires a careful analysis [29]. The $5S_{1/2}$ and $5P_{1/2}$ levels have eight hyperfine states with $F=1$ or 2 , whereas the $5P_{3/2}$ level comprise sixteen states with $F=0, 1, 2$ or 3 . The Raman transition requires two lasers, one with σ^+ polarization (frequency ω_+ and wave vector \mathbf{k}_+), the other with σ^- polarization (frequency ω_- and wave vector \mathbf{k}_-). When the laser frequencies ω_+ and ω_- are kept below the $5S_{1/2} \rightarrow 5P_{1/2}$ transition, the states in $5P_{3/2}$ can be neglected, being detuned by about 7 THz. From now on we therefore restrict our analysis to the states $|0\rangle$ and $|1\rangle$, and to the following $5P_{1/2}$ states

$$\begin{aligned} |A\rangle &\equiv |F=1, m_F=0\rangle & |C\rangle &\equiv |F=2, m_F=0\rangle \\ |B\rangle &\equiv |F=2, m_F=-2\rangle & |D\rangle &\equiv |F=2, m_F=2\rangle \end{aligned}$$

Taking into account all possible transitions according to the selection rules imposed by the polarizations, the

Hamiltonian in the usual rotating-wave approximation is

$$\mathcal{H} = \mathcal{H}_0 + \mathcal{H}_1 + \mathcal{H}_2 \quad (14)$$

with

$$\begin{aligned} \mathcal{H}_0 &= \hbar \sum_{k=0,1} \omega_k |k\rangle \langle k| + \hbar \sum_{j=A}^D \omega_j |j\rangle \langle j| \\ \mathcal{H}_1 &= \frac{\hbar \Omega_+}{2\sqrt{3}} e^{i\eta_+} (|A\rangle \langle 1| + |C\rangle \langle 1| - \sqrt{2} |D\rangle \langle 0|) + \text{h.c.} \\ \mathcal{H}_2 &= \frac{\hbar \Omega_-}{2} e^{i\eta_-} (\sqrt{2} |B\rangle \langle 1| + |C\rangle \langle 0| - |A\rangle \langle 0|) + \text{h.c.} \end{aligned}$$

where we have defined the phases

$$\begin{cases} \eta_+ = \mathbf{k}_+ \cdot \mathbf{r} - \omega_+ t \\ \eta_- = \mathbf{k}_- \cdot \mathbf{r} - \omega_- t \end{cases}$$

and where Ω_+ and Ω_- are the Rabi frequencies associated with the interaction between the electric dipole of the atom and the electric field of the lasers. \mathbf{r} is the atomic position operator, and h.c. denotes the Hermitian conjugate.

From the Hamiltonian (14) one can derive the Heisenberg equations of motion for the operators $\sigma_{ij} \equiv |i\rangle \langle j|$, with $i, j = 0, 1, A, \dots, D$. For instance, for the operator σ_{A1} we get

$$\begin{aligned} i \hbar \dot{\sigma}_{A1} &= [\sigma_{A1}, \mathcal{H}] \\ &= [\sigma_{A1}, \mathcal{H}_0] + [\sigma_{A1}, \mathcal{H}_1] + [\sigma_{A1}, \mathcal{H}_2] \end{aligned} \quad (15)$$

where

$$\begin{aligned} [\sigma_{A1}, \mathcal{H}_0] &= \hbar (\omega_1 - \omega_A) \sigma_{A1} \\ [\sigma_{A1}, \mathcal{H}_1] &= \frac{\hbar \Omega_+}{2\sqrt{3}} e^{-i\eta_+} (\sigma_{AA} - \sigma_{11} + \sigma_{AC}) \\ [\sigma_{A1}, \mathcal{H}_2] &= \frac{\hbar \Omega_-}{2} e^{-i\eta_-} (\sigma_{01} + \sqrt{2} \sigma_{AB}). \end{aligned}$$

With the introduction of the “slow” variables

$$\begin{aligned} \tilde{\sigma}_{A1} &\equiv \sigma_{A1} e^{-i\omega_+ t} \\ \tilde{\sigma}_{01} &\equiv \sigma_{01} e^{-i(\omega_+ - \omega_-) t}, \end{aligned}$$

equation (15) becomes

$$\begin{aligned} i \dot{\tilde{\sigma}}_{A1} &= (\omega_+ - \omega_A + \omega_1) \tilde{\sigma}_{A1} \\ &+ \frac{\Omega_+}{2\sqrt{3}} e^{-i\mathbf{k}_+ \cdot \mathbf{r}} (\sigma_{AA} - \sigma_{11} + \sigma_{AC}) \\ &+ \frac{\Omega_-}{2} e^{-i\mathbf{k}_- \cdot \mathbf{r}} (\tilde{\sigma}_{01} + \sqrt{2} e^{i(\omega_- - \omega_+) t} \sigma_{AB}) \end{aligned}$$

When the lasers are strongly detuned from the atomic transition frequencies, one can obtain an effective Hamiltonian by imposing the adiabaticity condition $\dot{\tilde{\sigma}}_{A1} \simeq 0$ [30, 31]. In this case, we get

$$\begin{aligned} \sigma_{A1} &= \frac{\Omega_+}{2\sqrt{3}} \frac{e^{-i\eta_+}}{\Delta_{A1}} (\sigma_{AA} - \sigma_{11} + \sigma_{AC}) \\ &+ \frac{\Omega_-}{2} \frac{e^{-i\eta_-}}{\Delta_{A1}} (\sigma_{01} + \sqrt{2} \sigma_{AB}), \end{aligned}$$

where we have defined the detuning

$$\Delta_{A1} \equiv \omega_A - \omega_1 - \omega_+. \quad (16)$$

Performing similar calculations for the operators σ_{B1} , σ_{C1} , σ_{A0} , σ_{C0} and σ_{D0} after substituting them into \mathcal{H}_1 and \mathcal{H}_2 and including the diagonal terms into \mathcal{H}_0 , we get the effective interaction Hamiltonians

$$\begin{aligned} \tilde{\mathcal{H}}_1 = \frac{\hbar\Omega_+}{2\sqrt{6}} & \left[\Omega_- e^{i\eta} \left(\frac{\sigma_{AB}}{\Delta_{A1}} \right) + \frac{\Omega_+}{\sqrt{6}} \left(\frac{\sigma_{AC}}{\Delta_{A1}} + \frac{\sigma_{AC}}{\Delta_{C1}} \right) \right. \\ & + \Omega_- e^{-i\eta} \left(\frac{\sigma_{AD}}{\Delta_{D0}} + \frac{\sigma_{BC}}{\Delta_{C1}} - \frac{\sigma_{CD}}{\Delta_{D0}} \right) \\ & \left. + \frac{\Omega_-}{\sqrt{2}} e^{i\eta} \left(\frac{\sigma_{01}}{\Delta_{A1}} - \frac{\sigma_{01}}{\Delta_{C1}} \right) \right] + \text{h.c.} \end{aligned} \quad (17)$$

and

$$\begin{aligned} \tilde{\mathcal{H}}_2 = \frac{\hbar\Omega_-}{2\sqrt{2}} & \left[\frac{\Omega_+}{\sqrt{3}} e^{i\eta} \left(\frac{\sigma_{AB}}{\Delta_{B1}} \right) - \frac{\Omega_-}{\sqrt{2}} \left(\frac{\sigma_{AC}}{\Delta_{A0}} + \frac{\sigma_{AC}}{\Delta_{C0}} \right) \right. \\ & + \frac{\Omega_+}{\sqrt{3}} e^{-i\eta} \left(\frac{\sigma_{AD}}{\Delta_{A0}} + \frac{\sigma_{BC}}{\Delta_{B1}} - \frac{\sigma_{CD}}{\Delta_{C0}} \right) \\ & \left. + \frac{\Omega_+}{\sqrt{6}} e^{i\eta} \left(\frac{\sigma_{01}}{\Delta_{A0}} - \frac{\sigma_{01}}{\Delta_{C0}} \right) \right] + \text{h.c.} \end{aligned} \quad (18)$$

where the phase η is simply given by the difference

$$\eta = \eta_+ - \eta_- \quad (19)$$

and the detunings are defined just as (16) by

$$\begin{aligned} \Delta_{A0} &\equiv \omega_A - \omega_0 - \omega_- & \Delta_{A1} &\equiv \omega_A - \omega_1 - \omega_+ \\ \Delta_{C0} &\equiv \omega_C - \omega_0 - \omega_- & \Delta_{C1} &\equiv \omega_C - \omega_1 - \omega_+ \\ \Delta_{D0} &\equiv \omega_D - \omega_0 - \omega_- & \Delta_{B1} &\equiv \omega_B - \omega_1 - \omega_- \end{aligned}$$

When the initial atomic state is a superposition of $|0\rangle$ and $|1\rangle$, as in our case, we can retain the terms containing σ_{01} and σ_{10} only, such that the effective interaction Hamiltonian reduces to

$$\tilde{\mathcal{H}}^{\text{int}} = \tilde{\mathcal{H}}'_1 + \tilde{\mathcal{H}}'_2 \quad (20)$$

where

$$\tilde{\mathcal{H}}'_1 = \frac{\hbar\Omega_+\Omega_-}{4\sqrt{3}} e^{i\eta} \left(\frac{\sigma_{01}}{\Delta_{A1}} - \frac{\sigma_{01}}{\Delta_{C1}} \right) + \text{h.c.} \quad (21a)$$

$$\tilde{\mathcal{H}}'_2 = \frac{\hbar\Omega_+\Omega_-}{4\sqrt{3}} e^{i\eta} \left(\frac{\sigma_{01}}{\Delta_{A0}} - \frac{\sigma_{01}}{\Delta_{C0}} \right) + \text{h.c.} \quad (21b)$$

The presence of two $5P_{1/2}$ states with $m_F = 0$ (the $|A\rangle$ and $|C\rangle$ states) could seem problematic. When the lasers are very far detuned from resonance, the detunings from these two levels are almost equal: $\Delta_{A0} \simeq \Delta_{C0}$ and $\Delta_{A1} \simeq \Delta_{C1}$. A destructive interference between these two quantum paths suppresses the Raman transition between the states $|0\rangle$ and $|1\rangle$ (see Eqs. (21)). In order to stimulate this Raman transition, the detunings from levels $|A\rangle$ and $|C\rangle$ must be significantly different. This condition can be realized in ^{87}Rb , where the states $|A\rangle \equiv |F=1, m_F=0\rangle$ and $|C\rangle \equiv |F=2, m_F=0\rangle$

are separated by $\omega_C - \omega_A \simeq 2\pi \cdot 800$ MHz and the natural line width of the level $5P_{1/2}$ is about $2\pi \cdot 5.75$ MHz. Finally, we comment the realization of the sideband excitation required by the transformation (11). It requires a laser linewidth much smaller than the vibrational angular frequency, i.e., much smaller than 10 KHz, a condition that can be reached experimentally with standard techniques [26]. It is also possible to produce pulses with specific shapes that optimize the transition probability and stimulate the transition in very short periods, so that the gate operation time is not significantly altered.

V. LOSS AND DECOHERENCE

An important mechanism we have to consider in a realistic evaluation of the performance of quantum gates, is the possibility of loss and decoherence of the qubits during the operation. Especially in atom chips this is an important issue, since the cold atoms are perturbed by thermal electromagnetic fields generated by the nearby, hot solid substrate. This leads to heating, trap loss and decoherence [16, 17, 18]. Since the thermal induced couplings lead to similar timescales for all these undesired processes we consider the loss, which was studied in largest detail theoretical and experimentally [32]. In addition, as we have seen in the previous section, the decoherence can be dramatically reduced by transferring the qubits to clock states during idle periods.

Following the treatment of [16] one can estimate the atomic lifetimes for a setup like shown in Fig. 1. Assuming gold wires we find a typical lifetime of 0.8 s due to thermally induced spin flips and consequent loss of the qubit state. The left and right wires, which are closest to the atoms and carry small currents, give the largest contribution to the loss. In this configuration the best fidelity of $\sim 98.7\%$ is obtained for a gate operation time of ~ 9 ms.

Small changes in the trapping geometry can improve the fidelity: Since a big part of the loss comes from the left and right wires, one can fabricate them much thinner. Reducing the thickness of the double well wires to 50 nm would increase the lifetime to over 2 sec and increase the fidelity to $\sim 99.5\%$ at a gate operation time of ~ 10 ms. This can be even more improved by a little bit different wire geometry for the quadrupole wire. A wider but thinner quadrupole wire ($\sim 3\mu\text{m} \times 50\text{nm}$), and smaller left and right wires ($\sim 0.3\mu\text{m} \times 50\text{nm}$) will lead to lifetimes in excess of 3 s and consequently a better gate fidelity in the order of $\sim 99.7\%$ at a gate operation time of ~ 11 ms.

Further improvements can be expected when optimizing the wire geometries. Two aspects have to be taken into account.

- The best achievable lifetime increases with the *square* of the magnetic field gradient dB/dZ [33]. The present trap has a transverse gradient of 300

kG/cm. For 100 kG/cm and optimized wire cross section one can achieve lifetimes of up to 100 s [33].

- A second consideration is using different materials, and cooling the chip surface, as investigated theoretically by [34]. This should lead to even further improvements.
- Directly fabricating the wires into semiconductor chips will give even better thermal coupling and allow the use of high resistivity materials for the wires, which should improve even further the gate performance.

Overall we conclude that for optimized geometries fidelities better than 99.9% should be possible in realistic settings with present day atom chip technology.

VI. SUMMARY AND CONCLUSIONS

We have presented a detailed analysis of the implementation of a quantum phase gate with neutral rubidium atoms on atom chips. Our analysis is quite close to the experimental conditions and is within the reach of current technology. We have shown how to create a double well potential near the surface of an atom chip and studied the performance of a phase gate, using as qubit states the vibrational states of two rubidium atoms, each sitting in one of the two wells. The gate operation is realized through an adiabatic modification of the potential barrier that separates the two wells. This implementation allows selective interaction between the vibrational states of the two atoms. We have found that, neglecting losses due to spin flips, a fidelity of 99.9% can be achieved in just 10.3 ms. We have also shown that the motional qubit state can be transferred to two hyperfine states with reduced decoherence. The estimation of loss due to thermally induced spin flips reduces slightly the gate fidelity, and improvements to reduce these effects have been discussed.

The results presented here are a significative improvement when compared to an implementation using a static trap [26]. For a fidelity above 99% the operation time is diminished from about 16.2 ms to 6.3 ms. The operation time could be further reduced using non-adiabatic changes of the barrier, as recent studies employing optimal control theory indicate [35], but the excitation of the perpendicular degrees of freedom might then become an issue.

VII. ACKNOWLEDGMENTS

M. A. Cirone, A. Negretti, T. Calarco and J. Schmiedmayer acknowledge financial support from the European Union, contract number IST-2001-38863 (ACQP). T. Calarco also acknowledges financial support from the European Union through the FP6-FET Integrated Project

CT-015714 (SCALA) and a EU Marie Curie Outgoing International Fellowship, and from the National Science Foundation through a grant for the Institute for Theoretical Atomic, Molecular and Optical Physics at Harvard University and Smithsonian Astrophysical Observatory. The IDRIS-CNRS supercomputer center supported this study by providing computational time under project number 08/051848. This work has been done with the financial support of the LRC of the CEA, under contract number DSM 05-33. Laboratoire de Photophysique Moléculaire is associated to Université Paris-Sud. We wish to thank P. Krüger, J. Reichel and P. Treutlein for useful discussions about experimental details.

VIII. APPENDIX

The magnetic field created by an infinitely thin and infinitely long straight wire is

$$B = \frac{k_0 I}{r} \quad (22)$$

where I is the dc current flowing through the wire, r is the distance to the wire and $k_0 = \mu_0/2\pi$ (μ_0 is the magnetic permeability of the vacuum). In the case of a wire of finite rectangular section, we average the magnetic fields created by many infinitely thin wires lying inside the finite section. For instance, for a dc current I flowing in the positive x direction through a wire with section $(-W/2 < y < W/2, -H/2 < z < H/2)$, the magnetic field components are

$$B_y(y, z) = \frac{k_0 I}{HW} \int_{-W/2}^{W/2} dy' \int_{-H/2}^{H/2} dz' \frac{z' - z}{(y - y')^2 + (z - z')^2} \quad (23)$$

and

$$B_z(y, z) = \frac{k_0 I}{HW} \int_{-W/2}^{W/2} dy' \int_{-H/2}^{H/2} dz' \frac{y - y'}{(y - y')^2 + (z - z')^2} \quad (24)$$

In Eq. (23) the integration over y' gives the y -component

$$B_y(y, z) = \frac{k_0 I}{HW} \int_{-H/2}^{H/2} dz' \left[\arctan \frac{y_-}{z - z'} - \arctan \frac{y_+}{z - z'} \right] \quad (25)$$

where $y_{\pm} \equiv y \pm W/2$. A final integration over z' gives

$$\begin{aligned} B_y(y, z) = & -\frac{k_0 I}{HW} \left[z_- \left(\arctan \frac{z_-}{y_+} - \arctan \frac{z_-}{y_-} \right) \right. \\ & + z_+ \left(\arctan \frac{z_+}{y_-} - \arctan \frac{z_+}{y_+} \right) \\ & \left. + \frac{y_-}{2} \log \frac{y_-^2 + z_-^2}{y_-^2 + z_+^2} - \frac{y_+}{2} \log \frac{y_+^2 + z_-^2}{y_+^2 + z_+^2} \right] \quad (26) \end{aligned}$$

After defining $z_{\pm} \equiv z \pm H/2$, analogous calculations for the component $B_z(y, z)$ give

$$B_z(y, z) = \frac{k_0 I}{HW} \left[y_- \left(\arctan \frac{y_-}{z_+} - \arctan \frac{y_-}{z_-} \right) + y_+ \left(\arctan \frac{y_+}{z_-} - \arctan \frac{y_+}{z_+} \right) + \frac{z_-}{2} \log \frac{z_-^2 + y_-^2}{z_-^2 + y_+^2} - \frac{z_+}{2} \log \frac{z_+^2 + y_-^2}{z_+^2 + y_+^2} \right] \quad (27)$$

-
- [1] M. A. Nielsen and I. L. Chuang, *Quantum Computation and Quantum Information*, Cambridge University Press, Cambridge (2000).
- [2] P. W. Shor, *Proc. 35th Annual Symposium on Foundations of Computer Science* (Shafi Goldwasser, ed.), IEEE Computer Society Press (1994).
- [3] L. K. Grover, Phys. Rev. Lett. **79**, 325 (1997).
- [4] A. Barenco, C. H. Bennett, R. Cleve, D. P. DiVincenzo, N. Margolus, P. Shor, T. Sleator, J. A. Smolin, and H. Weinfurter Phys. Rev. A **52**, 3457 (1995).
- [5] J. I. Cirac and P. Zoller, Phys. Rev. Lett. **74**, 4091 (1995).
- [6] Q. A. Turchette, C. S. Wood, B. E. King, C. J. Myatt, D. Leibfried, W. M. Itano, C. Monroe, and D. J. Wineland Phys. Rev. Lett. **81**, 3631 (1998).
- [7] T. Calarco, E. A. Hinds, D. Jaksch, J. Schmiedmayer, J. I. Cirac, and P. Zoller Phys. Rev. A **61**, 022304 (2000).
- [8] D. Jaksch, J. I. Cirac, P. Zoller, S. L. Rolston, R. Côté, and M. D. Lukin, Phys. Rev. Lett. **85**, 2208 (2000).
- [9] G. K. Brennen, C. M. Caves, P. S. Jensen, and I. H. Deutsch, Phys. Rev. Lett. **82**, 1060 (1999).
- [10] E. Charron, E. Tiesinga, F. Mies, and C. Williams, Phys. Rev. Lett. **88**, 077901 (2002).
- [11] O. Mandel, M. Greiner, A. Widera, T. Rom, T. W. Hänsch and I. Bloch, Nature **425**, 937 (2003).
- [12] J. V. Porto, S. Rolston, B. Laburthe Tolra, C. J. Williams and W. D. Phillips, Phil. Trans. R. Soc. Lond. A **361**, 1417 (2003).
- [13] A. Negretti, T. Calarco, M. A. Cirone, and A. Recati, Eur. Phys. J. D **32**, 119 (2005).
- [14] P. Krüger, L.M. Andersson, S. Wildermuth, S. Hofferberth, E. Haller, S. Aigner, S. Groth, I. Bar-Joseph and J. Schmiedmayer, cond-mat/0504686.
- [15] S. Groth, P. Krüger, S. Wildermuth, R. Folman, T. Fernholz, D. Mahalu, I. Bar-Joseph, and J. Schmiedmayer, Appl. Phys. Lett. **85**, 2980 (2004).
- [16] C. Henkel, M. Wilkens, Europhys. Lett. **47**, 414 (1999); C. Henkel, S. Pötting, M. Wilkens, Appl. Phys. B **69**, 379 (1999); C. Henkel, S. Pötting, Appl. Phys. B **72**, 73 (2001); C. Henkel, Eur. Phys. J. D **35**, 59 (2005);
- [17] P.K. Rekdal, S. Scheel, P.L. Knight, E.A. Hinds, Phys. Rev. A **70**, 013811 (2004); S. Scheel, P.K. Rekdal, P.L. Knight, E.A. Hinds, e-print arXiv:quant-ph/0501149.
- [18] T. Varpula, T. Poutanen, J. Appl. Phys. **55**, 4015 (1984)
- [19] D. M. Harber, H. J. Lewandowski, J. M. McGuirk, and E. A. Cornell, Phys. Rev. A **66**, 053616 (2002).
- [20] P. Treutlein, P. Hommelhoff, T. Steinmetz, T. W. Hänsch, and J. Reichel, Phys. Rev. Lett. **92**, 203005 (2004).
- [21] R. Folman, P. Krüger, J. Schmiedmayer, J. Denschlag, and C. Henkel, Adv. At. Mol. Opt. Phys. **48**, 263 (2002).
- [22] G. Breit and I. I. Rabi, Phys. Rev. **38**, 2082 (1931).
- [23] J. Reichel, W. Hänsel, P. Hommelhoff, T. W. Hänsch, Appl. Phys. B **72**, 81 (2001).
- [24] R. Folman, P. Krüger, D. Cassettari, B. Hessmo, T. Maier, and J. Schmiedmayer, Phys. Rev. Lett. **84**, 4749 (2000).
- [25] By insulating the wires from the substrate by an evaporated SiO₂ layer as thin as 10 nm, relatively high current densities like that considered in our numerical simulations can be achieved [15].
- [26] M. A. Cirone, A. Negretti, T. Calarco, P. Krüger, and J. Schmiedmayer, Eur. J. Phys. D **35**, 165 (2005).
- [27] During the gate operation, the trapping frequencies vary in the ranges 13.0–10.9 kHz, 157.5–154.3 kHz and 153.8–150.9 kHz for $\nu_{x'}$, $\nu_{y'}$ and ν_z respectively.
- [28] L. F. Shampine and M. Gordon, *Computer solution of ordinary differential equations: the initial value problem*, W. H. Freeman and Company, San Francisco, (1975). http://www.csit.fsu.edu/~burkardt/f_src/ode/ode.f90
- [29] Most of the data on rubidium atoms used hereafter can be found in the notes by Steck at <http://steck.us/alkalidata/>
- [30] C. C. Gerry and J. H. Eberly, Phys. Rev. A **42**, 6805 (1990).
- [31] L. Wang, R. R. Puri, and J. H. Eberly, Phys. Rev. A **46**, 7192 (1992).
- [32] A.E. Leanhardt, Y. Shin, A.P. Chikkatur, D. Kielpinski, W. Ketterle, D.E. Pritchard, Phys. Rev. Lett. **90**, 100404 (2003); M.P.A. Jones, C.J. Vale, D. Sahagun, B.V. Hall, E.A. Hinds, Phys. Rev. Lett. **91**, 080401 (2003); D.M. Harber, J.M. McGuirk, J.M. Obrecht, E.A. Cornell, J. Low. Temp. Phys. **133**, 229 (2003); Y. Lin, I. Teper, C. Chin, V. Vuletic, Phys. Rev. Lett. **92**, 050404 (2004)
- [33] B. Zhang, C. Henkel, E. Haller, S. Wildermuth, S. Hofferberth, P. Krüger, and J. Schmiedmayer Eur. Phys. J. D **35**, 97 (2005) DOI: 10.1140/epjd/e2005-00227-1
- [34] V. Dikovsky, Y. Japha, C. Henkel, and R. Folman; Eur. Phys. J. D **35**, 87 (2005) DOI: 10.1140/epjd/e2005-00203-9
- [35] D. Vager, B. Segev, and Y. B. Band, Phys. Rev. A **72**, 022305 (2005).