Linear optics and quantum maps

A. Aiello, G. Puentes, and J. P. Woerdman Huygens Laboratory, Leiden University P.O. Box 9504, 2300 RA Leiden, The Netherlands

We present a theoretical analysis of the connection between classical polarization optics and quantum mechanics of two-level systems. First, we review the matrix formalism of classical polarization optics from a quantum information perspective. In this manner the passage from the Stokes-Jones-Mueller description of classical optical processes to the representation of one-and two-qubit quantum operations, becomes straightforward. Second, as a practical application of our classical-vs-quantum formalism, we show how two-qubit maximally entangled mixed states (MEMS), can be generated by using polarization and spatial modes of photons generated via spontaneous parametric down conversion.

PACS num bers: 03.65 J d, 03.67 M n, 42.25 Ja

I. INTRODUCTION

Quantum computation and quantum information have been amongst the most popular branches of physics in the last decade [1]. One of the reasons of this success is that the smallest unit of quantum information, the qubit, could be reliably encoded in photons that are easy to manipulate and virtually free from decoherence at optical frequencies [2, 3]. Thus, recently, there has been a growing interest in quantum information processing with linear optics [4, 5, 6, 7] and several techniques to generate and manipulate optical qubits have been developed for di erent purposes ranging from , e.g., teleportation [8, 9], to quantum cryptography [3], to quantum measurem ents of qubits states [10] and processes [11], etc. In particular, K wiat and coworkers [12, 13] were able to create and characterize arbitrary one-and two-qubit states, using polarization and frequency modes of photons generated via spontaneous param etric down conversion (SPDC) [14].

M an ipulation of optical qubits is performed by means of linear optical instrum ents such as half- and quarterwave plates, beam splitters, polarizers, m irrors, etc., and networks of these elements. Each of these devices can be thought as an object where incoming modes of the electrom agnetic elds are turned into outgoing modes by a linear transformation. From a quantum information perspective, this transforms the state of qubits encoded in some degrees of freedom of the incoming photons, according to a completely positive map E describing the action of the device. Thus, an optical instrument may be put in correspondence with a quantum map and vice versa. Such correspondence has been largely exploited [7, 12, 13, 15] and stressed [16, 17] by several authors. M oreover, classical physics of linear optical devices is a textbook matter [18, 19], and quantum physics of elem entary optical instrum ents has been studied extensively [20], as well. However, surprisingly enough, a system atic exposition of the connection between classical linear optics and quantum maps is still lacking.

In this paper we aim to lithis gap by presenting a detailed theory of linear optical instruments from a quan-

tum information point of view. Speci cally, we establish a rigorous basis of the connection between quantum maps describing one—and two-qubit physical processes operated by polarization—a ecting optical instruments, and the classical matrix formalism of polarization optics. Moreover, we will use this connection to interpret some recent experiments in our group [21].

We begin in Section II by reviewing the classical theory of polarization—a ecting linear optical devices. Then, in Section III we show how to pass, in a natural manner, from classical polarization—a ecting optical operations to one-qubit quantum processes. Such passage is extended to two-qubit quantum maps in Section IV. In Section V we furnish two explicit applications of our classical-vs-quantum formalism that illustrate its utility. Finally, in Section V we summarize our results and draw the conclusions.

II. CLASSICAL POLARIZATION OPTICS

In this Section we focus our attention on the description of non-image-forming polarization-a ecting optical devices. First, we shortly review the mathematical formalism of classical polarization optics and establish a proper notation. Second, we introduce the concepts of Jones and Mueller matrices as classical maps.

A. Polarization states of light beam s

M any textbooks on classical optics introduce the concept of polarized and unpolarized light with the help of the Jones and Stokes-M ueller calculi, respectively [18]. In these calculi, the description of classical polarization of light is form ally identical to the quantum description of pure and mixed states of two-level systems, respectively [22]. In the Jones calculus, the electric eld of a quasi-m onochromatic polarized beam of light which propagates close the z-direction, is represented by a complex-valued two-dimensional vector, the so-called Jones vector E 2 \mathbb{C}^2 : $\mathbb{E} = \mathbb{E}_0 x + \mathbb{E}_1 y$, where the three real-

valued unit vectors fx;y;zg de ne an orthogonal Cartesian frame. The same amount of information about the state of the eld is also contained in the 2 2 matrix J of components $J_{ij} = E_i E_j$; (i; j = 0;1), which is known as the coherency matrix of the beam [19]. The matrix J is Herm itean and positive semide nite

$$J^{y} = J;$$
 $(v;Jv) = j(v;E)^{2}j$ 0; (1)

where v 2 C², and (u;v) = $\frac{P}{i=0} u_i v_i$ denotes the ordinary scalar product in C². Further, J has the projection property

$$J^2 = J T r J; (2)$$

and its trace equals the total intensity of the beam: $TrJ = E_0 f + E_1 f$. If we choose the electric eld units in such a way that TrJ = 1, then J has the same properties of a density matrix representing a two-level quantum system in a pure state. In classical polarization optics the coherency matrix description of a light beam has the advantage, with respect to the Jones vector representation, of generalizing to the concept of partially polarized light. Form ally, the coherency matrix of a partially polarized beam of light is characterized by the properties (1), while the projection property (2) is lost. In this case J has the sam e properties of a density matrix representing a twolevel quantum system in a mixed state. C oherency matrices of partially polarized beam soflight may be obtained by tacking linear combinations $\ \ _{N}$ w_{N} J_{N} of coherency m atrices J_N of polarized beam s (all parallel to the sam e direction z), where the index N runs over an ensemble of eld con qurations and w 0. The degree of polarization (DOP, denoted P) of a partially polarized beam is de ned by the relation

$$D \text{ etJ} = (T \text{ rJ})^2 (1 P^2) = 4:$$
 (3)

For a polarized beam of light, projection property (2) implies $D \, \text{etJ} = 0$ and P = 1, otherwise $0 \, P < 1$. It should be noted that the o -diagonal elements of the coherency matrix are complex-valued and, therefore, not directly observables. However, as any $2 \, 2 \, \text{m}$ atrix, J can be written either in the Pauli basis X:

or in the Standard basis Y:

as

$$J = \frac{1}{2} \sum_{0}^{X^{3}} x X = \sum_{0}^{X^{3}} y Y ; \qquad (6)$$

where x = Tr(X J) 2 R, y = Tr(Y y J) 2 C and, from now on, all G reek indices ; ; ; ;:::, take the values 0;1;2;3. The four real coe cients x , called the Stokes param eters [23] of the beam , can be actually measured thus relating J w ith observables of the optical eld. For example, x_0 = TrJ represents the total intensity of the beam . Conversely, the four complex coe cients y are not directly measurable but have the advantage to furnish a particularly simple representation of the matrix J since y_0 = y_0 ; y_1 = y_1 ; y_2 = y_1 ; y_3 = y_1 . The two dierent representations x and y are related via the matrix

$$V = \begin{cases} 2 & 1 & 0 & 0 & 1 \\ 1 & 0 & 0 & 1 \\ 6 & 0 & 1 & 1 & 0 & 7 \\ 0 & i & i & 0 & 5 \\ 1 & 0 & 0 & 1 \end{cases}$$
 (7)

such that $x = {P \choose V}$ y, where V = Tr(X Y), and $V^yV = 2I_4 = VV^y$, where I_4 is the 4 4 identity m atrix.

B. Polarization-transform ing linear optical elem ents

When a beam of light passes through an optical system its state of polarization may change. Within the context of polarization optics, a polarization-a ecting linear optical istrument is any device that performs a linear transform ation upon the electric eld components of an incoming light beam without a ecting the spatial modes of the eld. Half-and quarter-wave plates, phase shifters, polarizers, are all examples of such devices. The class of polarization-a ecting linear optical elements comprises both non-depolarizing and depolarizing devices. Roughly speaking, a non-depolarizing linear optical elem ent transforms a polarized input beam into a polarized output beam . On the contrary, a depolarizing linear optical element transforms a polarized input beam into a partially polarized output beam [24]. A non-depolarizing device may be represented by a classical map via a single 2 2 complex-valued matrix T, the Jones matrix [18], such that

$$E_{in} ! E_{out} = TE_{in};$$
 (8)

for polarized input beam s or, for light beam s with arbitrary degree of polarization:

$$J_{in} ! J_{out} = T J_{in} T^{y};$$
 (9)

In this paper we consider only passive (namely, non-amplifying) optical devices for which the relation $T\pi J_{\rm out}$ $T\pi J_{\rm in}$ holds. There exist two fundamental kinds of non-depolarizing optical elements, namely retarders and diattenuators; any other non-depolarizing element can be modelled as a retarder followed by a diattenuator [25]. A retarder (also known as birefringent element) changes the phases of the two components

of the electric- eld vector of a beam , and m ay be represented by a unitary Jones matrix $T_{\rm U}$. A diattenuator (also known as dichroic element) instead changes the amplitudes of components of the electric- eld vector (polarization-dependent losses), and m ay be represented by a Herm itean Jones matrix $T_{\rm H}$.

Let T_{ND} denotes a generic non-depolarizing device represented by the Jones m atrix T, such that J_{in} ! J_{out} = $T\,J_{\text{in}}\,T^{\,y}$. We can rewrite explicitly this relation in terms of components as

$$(J_{\text{out}})_{ij} = T_{ik}T_{j1}(J_{in})_{k1};$$
 (10)

where, from now on, sum mation over repeated indices is understood and all Latin indices i; j;k;l;m;n;:::take the values 0 and 1. Since $T_{ik}T_{jl} = (T \ T)_{ij;kl} \ M_{ij;kl}$ we can rewrite Eq. (10) as

$$(J_{\text{out}})_{ij} = M_{ij;kl} (J_{in})_{kl};$$
 (11)

where M = T T is a 4 4 complex-valued matrix representing the device T_{ND} , and the symbol denotes the ordinary K roneckerm atrix product. M is also known as the M ueller matrix in the Standard matrix basis [26] and it is simply related to the more commonly used real-valued M ueller matrix M [18] via the change of basis matrix V:

$$M = \frac{1}{2}VM V^{y}$$
: (12)

For the present case of a non-depolarizing device, M is named as Mueller-Jones matrix. From Eqs. (6, 11) it readily follows that we can indi erently represent the transformation operated by $T_{\rm N\,D}$ either in the Standard or in the Pauli basis as

$$y^{out} = X^3$$
 y^{in} ; or $x^{out} = X^3$
 y^{in} ; or $x^{out} = X^3$
 y^{in} ; (13)

respectively.

W ith respect to the Jones matrix T, the Mueller matrices M and M have the advantage of generalizing to the representation of depolarizing optical elements. Mueller matrices of depolarizing devices may be obtained by taking linear combinations of Mueller-Jones matrices of non-depolarizing elements as

$$M = {\begin{array}{*{20}{c}} X \\ p_A M \\ {\phantom{*{20}{c}}} P_A & T_A \\ {\phantom{*{20}{c}}}$$

where p_A 0. Index A runs over an ensemble (either determ inistic [27] or stochastic [28]) of M ueller-Jonesm atrices M $_A$ = T_A T_A , each representing a non-depolarizing device. The real-valued matrix M corresponding to M written in Eq. (14), can be easily calculated by using Eq. (12) that it is still valid [26]. In the current literature M is often written as [25]

$$M = \begin{array}{ccc} M_{00} & d^{T} \\ p & W \end{array} ; \qquad (15)$$

where p 2 R³; d 2 R³, are known as the polarizance vector and the diattenuation vector (superscript T indicates transposition), respectively, and W is a 3 3 real-valued m atrix. Note that p is zero for pure depolarizers and pure retarders, while d is nonzero only for dichroic optical elements [25]. Moreover, W reduces to a three-dimensional orthogonal rotation for pure retarders. It the next Section, we shall show that if we choose M $_{00}$ = 1 (this can be always done since it amounts to a trivial polarization-independent renormalization), the Mueller matrix of a non-dichroic optical element (d = 0), is formally identical to a non-unital, trace-preserving, one-qubit quantum map (also called channel) [29]. If also p = 0 (pure depolarizers and pure retarders), then M is identical to a unital one-qubit channel (as de ned, e.g., in 1]).

III. FROM CLASSICAL TO QUANTUM MAPS: THE SPECTRAL DECOMPOSITION

An important theorem in classical polarization optics states that any linear optical element (either deterministic or stochastic) is equivalent to a composite devicemade of atmost four non-depolarizing elements in parallel [30]. This theorem follows from the spectral decomposition of the Hermitean positive semide nitematrix H \$1] associated to M. In this Section we shortly review such theorem and illustrate its equivalence with the Kraus decomposition theorem of one-qubit quantum maps [1].

G iven a Mueller matrix M , it is possible to built a 4 H erm itean positive sem ide nite matrix $H = H \ (M)$ by sim ply reshu ing [32] the indices of M :

$$H_{ij;kl}$$
 $M_{ik;jl} = {X \atop p_A (T_A)_{ij} (T_A)_{kl}}$ (16)

$$H = \begin{pmatrix} X^3 \\ (u) (u) ; (17) \end{pmatrix}$$

where 0 are the non-negative eigenvalues of H , and fu g = $\mathrm{fu_0}$; $\mathrm{u_1}$; $\mathrm{u_2}$; $\mathrm{u_3}$ g is the orthonormal basis of eigenvectors of H : H u = u . M oreover, from a straightforward calculation it follows that: $\mathrm{u_2} = \mathrm{u_3} = \mathrm{u_3$

$$T = \begin{array}{cccc} (u)_0 & (u)_1 \\ (u)_2 & (u)_3 \end{array} ; \qquad (18)$$

we can rewrite Eq. (17) as H = P (T) (T) . Since Eq. (18) can be rewritten as (T) $_{ij}$ = (u) $_{=2i+j}$, we can go back from G reek to Latin indices and rewrite Eq. (17) as

$$H_{ij;k1} = \begin{array}{c} X^3 & X^3 \\ (T)_{ij} (T)_{k1} = & (T)_{ik;j1} : (19) \\ = 0 & = 0 \end{array}$$

Finally, from the relation above and using Eq. (16), we obtain

$$M = \begin{array}{ccc} X^3 & & \\ & T & T : \end{array}$$
 (20)

Equation (20) represents the content of the decom position theorem in classical polarization optics, as given by C loude [30, 35]. It implies, via Eq. (11), that the most general operation that a linear optical device can perform upon a beam of light can be written as

$$J_{in} ! J_{out} = X^3$$
 $T J_{in} T^{y};$ (21)

where the four Jones matrices T represent four di erent non-depolarizing optical elements.

Since 0, Eq. (21) is form ally identical to the K raus form [1] of a completely positive one-qubit quantum map E. Therefore, because of the isomorphism between J and [22], when a single photon encoding a polarization qubit (represented by the 2 2 density matrix $_{\rm in}$), passes through an optical device classically described by the M ueller matrix M = T T, its state will be transformed according to

$$_{\text{in}} ! _{\text{out}} / _{\text{T}} ^{X^3}$$
 $T _{\text{in}} T^Y;$ (22)

where the proportionality symbol \/ "accounts for a possible renormalization to ensure $Tr_{out}=1$. Such renormalization is not necessary in the corresponding classical equation (21) since TrJ_{out} is equal to the total intensity of the output light beam that does not need to be conserved. Note that by using the denition (20) we can rewrite explicitly Eq. (22) as

$$out_{ij}$$
 / $e_{out_{ij}} = M_{ij;kl in;kl}$; (23)

where () $_{ij}$ = hij jji are density matrix elements in the single-qubit standard basis fjiig, i 2 f0;1g, and e_{out} is the un-normalized single-qubit density matrix such that $_{out}$ = e_{out} =Tr e_{out} . From Eqs. (12-15) and Eq. (23), it readily follows

$$Tre_{out} = M_{00} + M_{01} (i_{in;01} + i_{in;10}) + iM_{02} (i_{in;01} - i_{in;10}) + M_{03} (i_{in;00} - i_{in;11});$$
(24)

where we have assum ed Tr $_{\rm in}$ = 1. The equation above shows that M represents a trace-preserving map only if M $_{00}$ = 1 and d^T = (M $_{01}$;M $_{02}$;M $_{03}$) = (0;0;0), namely, only if M describes the action of a non-dichroic optical instrument. In addition, if $_{\rm in}$ represents a completely mixed state, that is if $_{\rm in}$ = X $_{0}$ =2, then from Eq. (23) it follows:

$$e_{out} = \frac{1}{2} \sum_{j=0}^{X^3} p_j X_j;$$
 (25)

were we have de ned p M $_{00}$ and $(p_1;p_2;p_3) = p$ is the polarizance vector. Equation (25) shows that in this case $Tre_{out} = M_{00}$, and $_{out} = e_{out} = M_{00} \in X_0 = 2$ if $p \in 0$, that is, the map represented by M $_{out} = 0$.

By writing Eqs. (21-25) we have thus completed the review of the analogies between linear optics and one-qubit quantum maps. In the next Section we shall study the connection between classical polarization optics and two-qubit quantum maps.

IV. POLARIZATION OPTICSAND TWO-QUBIT QUANTUM MAPS

Let us consider a typical SPDC setup where pairs of photons are created in the quantum state along two well de ned spatial modes (say, path A and path B) of the electrom agnetic eld, as shown in Fig. 1. Each pho-




FIG.1: (Color online) Layout of a typical SPDC experim ental setup. An optically pumped nonlinear crystal, em its photon pairs that propagate along path A and B through the scattering devices $T_{\rm A}$ and $T_{\rm B}$, respectively. Scattered photons are detected in coincidence by detectors $D_{\rm A}$ and $D_{\rm B}$ that perm it a tom ographically complete two-photon polarization state reconstruction.

ton of the pair encodes a polarization qubit and can be represented by a 4 $\,^{\circ}$ 4 Herm itean matrix. Let T_A and T_B be two distinct optical devices put across path A and path B, respectively. Their action upon the two-qubit state can be described by a bi-bcal quantum map $\,!\,E_A$ $E_B\,[\,]\,B6].$ A sub-class of bi-bcal quantum maps occurs when either T_A or T_B is not present in the setup, then either E_A = I or E_B = I, respectively, and the corresponding map is said to be bcal. In

the above expressions I represents the identity map: It does not change any input state. When a map is local, that is when it acts on a single qubit, it is subjected to som e restrictions. This can be easily understood in the following way: For de niteness, let assum e E = I so that the local map E can be written as E[] = E_A I[]. Let A lice and Bob be two spatially separated observer who can detect qubits in modes A and B, respectively, and let and E denote the two-qubit quantum state before and after T_A , respectively. In absence of any causal connection between photons in path A with photons in path B, special relativity dem ands that Bob cannot detect via any type of local measurement the presence of the device T_A located in path A . Since the state of each qubit received by Bob is represented by the reduced density matrix $_{E}^{B}$ = Trj_A ($_{E}$), the locality constraint can be written as

$$_{E}^{B} = _{B}^{B} :$$
 (26)

We can write explicitly the map E_A I as a Kraus operator-sum decomposition [1]

$$X^3$$
 (A I) A^y I; (27)

where, from now on, the symbol I denotes the 2 $\,$ 2 identity matrix and fA g is a set of four 2 $\,$ 2 Jones matrices describing the action of T_A . Then, Eq. (26) becomes

$$X$$
 X^3 X^3 X X^3 X^3 X^4 X^5 X^6 $X^$

which implies the trace-preserving condition on the local map $E_{\mathbb{A}}$ — I:

$$X^3$$
= 0 (29)

Localm aps that do not satisfy Eq. (29) are classi ed as non-physical. In this Section we show how to associate a general two-qubit quantum map E[]= E_A E_B [] to the classical M ueller m atrices M A and M B describing the optical devices T_A and T_B , respectively. Surprisingly, we shall nod that do exist physical linear optical devices (dichroic elements) that may generate non-physical two-qubit quantum maps [37].

Let denotes with jiji jii jji; i; j 2 f0;1g the two-qubit standard basis. A pair of qubits is initially prepared in the generic state = $_{ij;k1}$ jijihklj= $_{ik,j1}^R$ jijihklj jijihlj, where superscript R indicates reshu ing of the indices, the same operation we used to pass from M to H: $_{ik;j1}^R$ $_{ij;k1}$ = hijj jkli. is transformed under the action of the bi-local linear map E[] = $_{A}$ EB[] into the state

$$_{E}$$
 = E_{A} E_{B} [] / A B A^{y} B^{y} ; (30)

where fA g and fB g are two sets of 2 2 Jones matrices describing the action of T_A and T_B , respectively. From Eq. (30) we can calculate explicitly the matrix elements hijj $_E$ $_k$ li= ($_E$) $_{ij;k1}$ in the two-qubit standard basis:

$$(E)_{ij;kl} / (A)_{im} (A)_{kp} R_{p;nq} (B)_{jn} (B)_{lq}$$

$$= M A_{ik,mp} M B_{jl;nq} R_{p;nq};$$
(3)

where sum mation over repeated Latin and G reek indices is understood. Since by denition $(E)_{ij;kl} = (E)_{ik;jl}$ we can rewrite Eq. (31) using only G reek indices as

$$({R\atop E})$$
 / $M^{A}M^{B}$ R = M^{A} M^{B} ; (32)

where sum m ation over repeated G reek indices is again understood. Equation (32) relates classical quantities (the two M ueller m atrices M $^{\rm A}$ and M $^{\rm B}$) with quantum ones (the input and output density m atrices $^{\rm R}$ and $^{\rm E}_{\rm E}$, respectively). Moreover, it is easy to see that Eq. (32) is the two-qubit quantum analogue of Eq. (13). In fact, if we introduce the 16 16 two-qubit M ueller matrix M M $^{\rm A}$ M $^{\rm B}$, and the input and output two-qubit Stokes parameters in the standard basis dened as: $y_{\rm e-4}^{\rm in}$ + = ($^{\rm R}$) , $y_{\rm a=4}^{\rm out}$ + = ($^{\rm R}$) , where a;b2 f0;:::;15g, then we can write Eq. (32) as

$$y_a^{\text{out}} / M_{\text{ab}} y_b^{\text{in}}; \qquad (33)$$

which is form ally identical to Eq. (13). Thus, Eq. (33) realizes the connection between classical polarization optics and two-qubit quantum maps.

An important case occurs when E_{B} = I) M B = I_{4} and Eq. (32) reduces to

$$_{E}^{R}$$
 / $_{M}^{A}$ $_{R}$: (34)

Equation (34) illustrates once m ore the sim ple relation existing between the classical M ueller m atrix M $^{\rm A}$ and the quantum state $_{\rm E}$.

W ith a typical SPDC setup it is not di-cult to prepare pairs of entangled photons in the singlet polarization state. Via a direct calculation, it is simple to show that when represents two qubits in the singlet state $_{s}=\frac{1}{4}\left(X_{0}-X_{0}-X_{1}-X_{1}-X_{2}-X_{2}-X_{3}-X_{3}\right)$ and M A is normalized in such a way that M $_{00}^{A}=1$, then the proportionably symbol in the last equation above can be substituted with the equality symbol:

$$_{E}^{R} = M \quad _{S}^{R} \quad =) \qquad _{E} = M \quad _{S}^{R} \quad ; \qquad (35)$$

where, from now on, we write M for M $^{\rm A}$ to sim plify the notation. Note that this pleasant property is true not only or the singlet but for all four Bell states [1], as well. Equation (35) has several remarkable consequences: Let M denotes the real-valued M ueller matrix associated to

M and assume M $_{00}$ = 1. Then, the following results hold:

$$Tr(\frac{2}{E}) = Tr(M M^{T})=4;$$
 (36)
 $Trj_{A}(e_{E}) = (A + D) + M_{01}(B + C)$
 $+ iM_{02}(B C) + M_{03}(A D);$ (37)

where e_E M R is the un-normalized output density matrix. Equation (37) is more general than Eq. (36), since it holds for any input density matrix and not only for the singlet one $_{\rm S}$. In addition, in Eq. (37) we wrote the input density matrix in a block-matrix form as

$$= \begin{array}{ccc} A & B \\ C & D \end{array} ; \tag{38}$$

where A, B, C = B^y, and D are 2 2 sub-matrices and A + D = Trj. (). Equation (36) shows that the degree of mixedness of the quantum state $_{\rm E}$ is in a one-to-one correspondence with the classical depolarizing power [24] of the device represented by M . Finally, Eq. (37), together with Eqs. (15,26), tells us that the two-qubit quantum map Eq. (35) is trace-preserving only if the device is not dichroic, namely only if $d^{\rm T} = (M_{01}; M_{02}; M_{03}) = (0;0;0)$. This last result shows that despite of their physical nature (think of, e.g., a polarizer), dichroic optical elements must be handled with care when used to build two-qubit quantum maps. We shall discuss further this point in the next Section.

Before concluding this Section, we want to point out the analogy between the 16 $\,$ 16 M ueller m atrix M $\,$ = M $^{\rm A}$ M $^{\rm B}$ associated to a bi-local two-qubit quantum map, and the 4 $\,$ 4 M ueller-Jones matrix M $\,$ = T $\,$ T $\,$ representing a non-depolarizing device in a one-qubit quantum map. In both cases the M ueller matrix is said to be separable. Then, in Eq. (14) we learned how to build non-separable M ueller matrices representing depolarizing optical elements. By analogy, we can now build non-separable two-qubit M ueller matrices representing non-boal quantum maps, as

$$M = W_{AB} M^{A} M^{B}; \qquad (39)$$

where w_{AB} 0, w_{AB} 6 w_A w_B , and indices A;B run over two ensembles of arbitrary M ueller m atrices M A and M B representing optical devices located in path A and path B, respectively.

V. APPLICATIONS

In this Section we exploit our form alism, by applying it to two different cases. As a set application, we build a simple phenomenological model capable to explain certain of our recent experimental results [21] about scattering of entangled photons. The second application consists in the explicit construction of a bi-local quantum map generating two-qubit MEMS states. A realistic physical implementation of such map is also given.

A. Example 1: A simple phenom enological model

In Ref. [21], by using a setup similar to the one shown in Fig. 1, we have experimentally generated entangled two-qubit mixed states that lie upon and below the Wemer curve in the linear entropy-tangle plane [38]. In particular, we have found that: (a) Birefringent scatterers always produce generalized Wemer states of the form $_{GW} = V = I_{W} V^{y} = I$, where $_{W}$ denotes ordinary Wemer states [39], and Verpresents an arbitrary unitary operation; (b) Dichroic scatterers generate sub-Wemer states, that is states that lie below the Wemer curve in the linear entropy-tangle plane. In both cases, the input photon pairs were experimentally prepared in the polarization singlet state $_{S}$. In this subsection we build, with the aid of Eq. (35), a phenomenological model explaining both results (a) and (b).

To this end let us consider the experim ental setup represented in Fig. 1. A coording to the actual scheme used in Ref. [21], where a single scattering device was present, in this Subsection we assume $T_B = I$, so that the resulting quantum map is local. The scattering element T_A inserted across path A can be classically described by some Mueller matrix M . In Ref. [25], Lu and Chipm an have shown that any given Mueller matrix M can be decomposed in the product

$$M = M_D M_B M ; (40)$$

where M $_{\rm M}$, M $_{\rm B}$, and M $_{\rm D}$ are complex-valued M ueller m atrices representing a pure depolarizer, a retarder, and a diattenuator, respectively. Such decomposition is not unique, for example, M = M $_{\rm D}$ M $_{\rm B}$ is another valid decomposition [40]. Of course, the actual values of M $_{\rm M}$ M $_{\rm B}$, and M $_{\rm D}$ depend on the species order one chooses. However, in any case they have the general forms given below:

$$M = \begin{cases} 2 & \frac{1+c}{2} & 0 & 0 & \frac{1-c}{2} \\ 6 & 0 & \frac{a+b}{2} & \frac{a-b}{2} & 0 \\ 0 & \frac{a-b}{2} & \frac{a+b}{2} & 0 \\ \frac{1-c}{2} & 0 & 0 & \frac{1+c}{2} \end{cases}$$
(41)

$$M_{B} = T_{U} T_{U}; (42)$$

$$M_{D} = T_{H} T_{H}; (43)$$

where a;b;c 2 R, and T_U , T_H are the unitary and H em itean Jones matrices representing a retarder and a diattenuator, respectively. A ctually, the expression of M given in Eq. (41) is not the most general possible [25], but it is the correct one for the representation of pure depolarizers with zero polarizance, such as the ones used in Ref. [21]. Note that although M $_B$ and M $_D$ are M ueller-Jones matrices, M is not. W hen a = b = c p:p2 [0;1] the depolarizer is said to be isotropic (or, better, polarization-isotropic). This case is particularly relevant when birefringence and dichroism are absent. In this case M $_B$ = I $_A$ = M $_D$, and Eq. (40) gives M = M . Thus, by using Eq. (41) we can calcu-

late M (p) and use it in Eq. (35) to obtain

$$_{\rm E} = p_{\rm s} + \frac{1}{4} p_{\rm I_4} \qquad _{\rm W} ;$$
 (44)

that is, we have just obtained a W erner state: $_{\rm E}$ = $_{\rm W}$! Thus, we have found that a local polarization-isotropic scatterer acting upon the two-qubit singlet state, generates W erner states.

Next, let us consider the cases of birefringent (retarders) and dichroic (diattenuators) scattering devices that we used in our experiments. In these cases the total Mueller matrices M of the devices under consideration, can be written as M = M $_{\rm Z}\,\rm M$, where either Z = B or Z = D , and M = M (p) represents a polarization-isotropic depolarizer. For deniteness, let consider in detail only the case of a birefringent scatterer, since the case of a dichroic one can be treated in the same way. In this case

$$M_{B} M (p) = X^{3}$$
 $(p)T_{U} T T_{U} T$; (45)

where Eq. (44) has been used. Equation Eq. (46) clearly shows that the e ect of a birefringent scatterer is to generate what we called generalized W erner states, in full agreement with our experimental results [21].

The analysis for the case of a dichroic scatterer can be done in the samem anner leading to the result

$$_{E}$$
 / e_{E} = T_{H} I_{W} T_{H}^{Y} I_{r} (47)

where T_{H} is a 2 2 Herm itean matrix representing a generic diattenuator [18]:

$$T_{H} = \frac{d_{0} \cos^{2} + d_{1} \sin^{2} (d_{0} d_{1}) \cos \sin}{(d_{0} d_{1}) \cos \sin} (d_{0} \cos^{2} + d_{0} \sin^{2} (d_{0} \cos^{2} + d_{0} \sin^{2} d_{0}) \cos^{2} + d_{0} \sin^{2} d_{0}}; (48)$$

where d_i 2 [0;1], are the diattenuation factors, while 2 (0;2] gives the direction of the transmission axis of the linear polarizer to which T_H reduces when either $d_0=0$ or $d_1=0$. Figure 2 reports, in the tangle-linear entropy plane, the results of a numerical simulation were

we generated 10^4 states $_{\rm E}$ from Eq. (47), by random ly generating (with uniform distributions) the four parameters p; d₀; d₁, and in the ranges: p; d₀; d₁ 2 [0;1], 2 (0;2]. The numerical simulation shows that a local




FIG. 2: Numerical simulation from our phenomenological model qualitatively reproducing the behavior of a dichroic scattering system. The gray region represents unphysical states and it is bounded from below by MEMS (dashed curve). The lower continuous thick curve represents Werner states.

dichroic scatterer may generate sub-W erner two-qubit states, that is states located below the W erner curve in the tangle-linear entropy plane. The qualitative agreement between the result of this simulation and the experimental ndings shown in Fig. 3 of Ref. [21] is evident.

1. Discussion

It should be noticed that while we used the equality symbol in writing Eq. (46), we had to use the proportionality symbol in writing Eq. (47). This is a consequence of the H erm itean character of the Jonesmatrix T_H that generates a non-trace-preserving map. In fact, in this case from $M = M_D M$ (p), where $M_D = (V T_H T_H V^Y) = 2$ and M (p) = V M (p) $V^Y = 2$ [see Eq. (12)], we obtain $Tr(e_E) = (d_0^2 + d_1^2) = 2 + 1$. Moreover, Eq. (37) gives

$$\begin{array}{rcl}
 & = & \text{Trj}_{A} (E) \\
 & = & \frac{X_{0}}{2} & p & \frac{d_{0}^{2} + d_{1}^{2}}{d_{0}^{2} + d_{2}^{2}} & \frac{X_{1} \sin 2 + X_{3} \cos 2}{2};
\end{array} (49)$$

where $_E$ = e_E =Tr(e_E). This result is in contradiction, for $d_0 \in d_1$, with the locality constraint expressed by Eq. (26) which requires

$$_{\rm E}^{\rm B} = \frac{{\rm X}_{\rm 0}}{2}$$
: (50)

As we already discussed in the previous Section, only the latter result seems to be physically meaningful since photons in path B, described by $^{\rm B}_{\rm E}$, cannot carry information about device $T_{\rm A}$ which is located across path A. On the contrary, Eq. (49) shows that $^{\rm B}_{\rm E}$ is expressed in

term s of the four physical param eters $p;d_0;d_1$ and that characterize T_A . Is there a contradiction here?

In fact, there is none! One should keep in m ind that Eq. (49) expresses the one-qubit reduced density m atrix $_{\rm E}^{\rm B}$ that is extracted from the two-qubit density m atrix $_{\rm E}$ after the latter has been reconstructed by the two observers A lice and B ob by m eans of nonlocal coincidence m easurem ents. Such m atrix contains inform ation about both qubits and, therefore, contains also inform ation about ${\rm T_A}$. Conversely, $_{\rm E}^{\rm B}={\rm X_0=2}$ in Eq. (50), is the reduced density m atrix that could be reconstructed by B ob alone via local m easurem ents before he and A lice had compared their own experimental results and had selected from the raw data the coincidence counts.

From a physical point of view, the discrepancy between Eq. (49) and Eq. (50) is due to the polarization-dependent losses (that is, $d_0 \notin d_1$) that characterize dichroic optical devices and it is unavoidable when such elements are present in an experimental setup. A ctually, it has been already noticed that a dichroic optical element necessarily performs a kind of post-selective measurement [16]. In our case coincidence measurements post-select only those photons that have not been absorbed by the dichroic elements present in the setup. However, since in any SPDC setup even the initial singlet state is actually a post-selected state (in order to cut othe otherwise overwhelming vacuum contribution), the practical use of dichroic devices does not represent a severe limitation for such setups.

B. Example 2: Generation of two-qubit M EM S states

In the previous subsection we have shown that it is possible to generate two-qubit states represented by points upon and below the Wemer curve in the tangle-linear entropy plane, by operating on a single qubit (local operations) belonging to a pair initially prepared in the entangled singlet state. In another paper [37] we have shown that it is also possible to generate MEMS states (see, e.g., [38, 41] and references therein), via local operations. However, the price to pay in that case was the necessity to use a dichroic device that could not be represented by a \physical", namely a trace-preserving, quantum map. In the present subsection, as an example illustrating the usefulness of our conceptual scheme, we show that by allowing bi-local operations performed by two separate optical devices T_{A} and T_{B} located as in Fig. 1, it is possible to achieve MEMS states without using dichroic devices.

To this end, let us start by rewriting explicitly Eq. (30), where the most general bi-local quantum map $E[\]=E_A$ $E_B[\]$ operating upon the generic input two-qubit state , is represented by a K raus decomposition:

$$_{E}$$
 = E_{A} E_{B} [] = A B A^{y} B^{y} ; (51)

where now the equality symbol can be used since we assume that both single-qubit maps $E_{\text{A}}\,$ and $E_{\text{B}}\,$ are trace-preserving,

$$X^{3}$$
 $A^{y}A = I = X^{3}$
 $B^{y}B$; (52)

but not necessarily unital: E_F [I] \in I; F 2 fA;Bg [36]. Under the action of E, the initial state of each qubit travelling in path A or path B is transformed into either the output state

$$_{E}^{A} = Trj_{B}(_{E}) = X^{3}$$
 $_{= 0}^{A} A^{Y};$
(53)

or

$$_{E}^{B} = Trj_{A} (_{E}) = _{=0}^{X^{3}} B ^{B} B^{Y};$$
 (54)

respectively, where $^{\rm A}$ = Trj (), and $^{\rm B}$ = Trj (). W ithout loss of generality, we assume that the two qubits are initially prepared in the sipglet state: = $_{\rm S}$. Then Eqs. (53-54) reduce to $_{\rm E}^{\rm F}$ = $_{\rm F}$ F F $^{\rm Y}$ =2; F 2 fA;Bg. From the previous analysis [see Eqs. (30-32)] we know that to each bi-local quantum m ap E_A $_{\rm E}$ can be associated a pair of classical M ueller m atrices M $_{\rm A}$ and M $_{\rm B}$ such that

$$\begin{pmatrix} R \\ E \end{pmatrix} = \begin{pmatrix} X \\ M & M \end{pmatrix} M & \begin{pmatrix} R \\ S \end{pmatrix}$$
; (55)

The real-valued M uellerm atrices M $_{\rm A}$ and M $_{\rm B}$ associated via Eq. (12) to M $_{\rm A}$ and M $_{\rm B}$, respectively, can be written as

$$M_{A} = \begin{pmatrix} 1 & 0^{T} \\ a & A \end{pmatrix}; M_{B} = \begin{pmatrix} 1 & 0^{T} \\ b & B \end{pmatrix}; (56)$$

where Eq. (15) with $d_A = 0 = d_B$ and M $_{00} = 1$ has been used, and

are the polarizance vectors of M $_A$ and M $_B$, respectively. We remember that the condition $d_A=d_B=0$ is a consequence of the fact that both maps E_A and E_B are trace-preserving, while the conditions a $\mbox{\bf 6}$ 0 and b $\mbox{\bf 6}$ 0 re ect the non-unital nature of E_A and E_B . W ith this notation we can rewrite Eqs. (53-54) as

$$_{E}^{A} = \frac{1}{2} X^{3}$$
 a X ; (58)

$$_{E}^{B} = \frac{1}{2} \sum_{i=0}^{X^{3}} b X ; \qquad (59)$$

where we have de ned $a_0 = 1 = b_0$. Moreover, the output two-qubit density matrix E = E[s] can be decomposed into a real and an imaginary part as $E = \frac{Re}{E} + i \frac{Im}{E}$, w here

and

$$\frac{1}{E} = \frac{1}{4} \stackrel{6}{4} \stackrel{+}{+} 0 \stackrel{+}{0} \stackrel{+}{0} \stackrel{7}{5};$$
(61)

with

$$(1 + a_3)$$
 [b₃ (1 + a₃) C₃₃];
(1 a₃) [b₃ (1 a₃) + C₃₃]; (62)

and

$$b_1$$
 (a₃b₁ C₃₁);
 a_1 (a₁b₃ C₁₃);
 a_1b_1 C₁₁ (a₂b₂ C₂₂); (63)

and

$$b_2$$
 (a₃b₂ C₃₂);
 a_2 (a₂b₃ C₂₃);
 a_2b_1 C₂₁ (a₁b₂ C₁₂); (64)

where C_{ij} (AB^T)_{ij}; i; j2 f1;2;3g.

At this point, our goal is to determ ine the two vectors a; b and the two 3 3 m atrices A; B such that $_{\text{E}}^{\text{Im}} = 0$ and

w here

$$g(p) = \begin{cases} 8 & 2=3; & 0 & p & 2=3; \\ p; & 2=3 (66)$$

To this end, rst we calculate a and b by im posing:

$$_{E}^{A} = _{M EM S}^{A} = \begin{array}{ccc} 1 & g(p)=2 & 0 \\ 0 & g(p)=2 \end{array}$$
; (67)

$$_{E}^{B} = _{M EM S}^{B} = _{Q (p)=2}^{G (p)=2} 0$$
; (68)

respectively. Note that only ful lling Eqs. 67-68), together with $_{\rm E}^{\rm R\,e}=_{\rm M\,EM\,S}$ and $_{\rm E}^{\rm Im}=0$, will ensure the achievem ent of true MEMS states. It is surprising that

in the current literature the importance of this point is neglected. Thus, by solving Eqs. (67-68) we obtain $a_1 = a_2 = 0$, $a_3 = 1$ g(p), and b = a, where Eqs. (58-59) have been used. Then, after a little of algebra, it is not dicult to nd that a possible bi-local map $E = E_A$ E_B that generates a solution E for the equation E = MEMS, can be expressed as in Eqs. (55-56) in term s of the two real-valued M ueller m atrices

It is easy to check that both M $_{\rm A}$ and M $_{\rm B}$ are physically adm issible M ueller m atrices since the associated m atrices H $_{\rm A}$ and H $_{\rm B}$ have the same spectrum m ade of nonnegative eigenvalues $f g = f_0; 1; 2; 3g$. In particular:

$$f g = f0; 1 p; 0; 1 + pg; for 2=3$$

f
$$g = 0; \frac{1}{3}; \frac{5}{6}; \frac{p}{1+36p}; \frac{5+p}{1+36p}; \frac{5+p}{6}; \frac{71}{1+36p}$$

2=3. It is also easy to see that the map E can be decomposed as in Eq. (51) in a Kraus sum with $A_0 = A_2 = 0$,

$$A_{1} = \begin{bmatrix} 0 & p \\ \hline 1 & p \\ 0 & 0 \end{bmatrix}; A_{3} = \begin{bmatrix} 1 & 0 \\ 0 & p \\ \hline p \end{bmatrix}; (72)$$

and $B_0 = B_2 = 0$,

$$B_1 \xrightarrow{1} = \begin{pmatrix} 0 & p & 0 \\ 0 & 1 & p \end{pmatrix}; B_3 \xrightarrow{3} = \begin{pmatrix} 0 & p & \overline{p} \\ 1 & 0 & 1 \end{pmatrix}; (73)$$

for 2=3 < p 1. A nalogously, for 0 p 2=3 we have $A_0 = 0,$

$$A_{1} = \begin{bmatrix} p & -1 & 0 & 1 = \frac{p}{3} \\ 0 & 0 & 0 \end{bmatrix}; \tag{74}$$

$$A_{2} = 0$$
 ; $A_{3} = 0$; (75)

and $B_0 = 0$,

w here

$$\frac{1}{2} \frac{1}{1} \frac{1+6p}{1+36p}; \tag{78}$$

s
$$\frac{1}{\frac{1}{3}}$$
 1 $\frac{1}{p} \frac{1}{1+36p}$: (79)

Note that these coecients satisfy the following relations:

$$X^3$$
 $A^y A = {}^2_+ + {}^2_- = 1;$ (80)

$$X^3$$
 $B^y B = \frac{1}{3} + {}^2 + {}^2 = 1$: (81)

A straightforward calculation shows that the single-qubit maps E_A and E_B are trace-preserving but not unital, since

$$X^3$$
 A $A^y = \begin{pmatrix} 2 & g(p) & 0 \\ 0 & g(p) \end{pmatrix}$; (82)

and

$$X^3$$
 B B $y = g(p)$ 0 (83)

At this point our task has been fully accomplished. However, before concluding this subsection, we want to point out that both maps E_A and E_B must depend on the same parameter p in order to generate proper MEMS states. This means that either a classical communication must be established between T_A and T_B in order to x the same value ofp for both devices, or a classical signal encoding the information about the value ofp must be sent towards both T_A and T_B .

1. Physical im plem entation

Now we furnish a straightforward physical implementation for the quantum maps presented above. Up to now, several linear optical schemes generating MEMS states were proposed and experimentally tested. Kwiat and cow orkers [38] were the st to achieve M EMS using photon pairs from spontaneous param etric down conversion. Basically, they induced decoherence in SPDC pairs initially prepared in a pure entangled state by coupling polarization and frequency degrees of freedom of the photons. At the sam e time, a som ew hat di erent scheme was used by DeMartiniand coworkers [41] who instead used the spatial degrees of freedom of SPDC photons to induce decoherence. In such a scheme the use of spatial degrees of freedom of photons required the manipulation of not only the emitted SPDC photons, but also of the pum p beam.

In this subsection, we show that both single-qubit maps E_A and E_B can be physically in plemented as linear optical networks [6] where polarization and spatial modes of photons are suitably coupled, without acting upon the pump beam. The basic building blocks of such networks are polarizing beam splitters (PBSs), half-waveplates (HWPs), and mirrors. Let ji; N i be a single-photon basis, where the indices i and N label polarization and spatial modes of the electromagnetic eld, respectively. We can also write ji; N i = $a_{\rm in}^{\rm Y}$ 10 in terms of the annihilation operators $a_{\rm in}$ and the vacuum state 10. A polarizing beam splitter distributes horizontal (i = H) and vertical (i = V) polarization modes over two distinct spatial modes, say N = n and N = m, as follows:

$$\mbox{\mathfrak{H} ;ni_{in}$! \mathfrak{H} ;ni_{out}$ and \mathfrak{Y};ni_{in}$! \mathfrak{Y};mi_{out}$;} \hfill \hfill$$

as illustrated in Fig. 3. A half-waveplate does not cou-




FIG. 3: The polarizing beam splitter couples horizontal and vertical polarization modes (i; j 2 fH; Vg), with two distinct spatial modes N = n and N = m of the electrom agnetic eld.

ple polarization and spatialm odes of the electrom agnetic eld and can be represented by a 2 $\,$ 2 Jones m atrix $T_{\rm H~W~P}$ () as

$$T_{H W P} () = \frac{\cos 2}{\sin 2} \sin 2$$
 (85)

where $\,$ is the angle the optic axis m akes with the horizontal polarization. Two half-waveplates in series constitute a polarization rotator represented by T_R () = $T_{H\ W\ P}$ ($_0+$ =2) $T_{H\ W\ P}$ ($_0$), where $_0$ is an arbitrary angle and

$$T_R$$
 () = $\begin{array}{c} \cos & \sin \\ \sin & \cos \end{array}$: (86)

By combining these basic elements, composite devices may be built. Figures 4 (a-b) show the structure of a horizontal (a), and vertical (b) variable beam splitter, denoted HVBS and VVBS, respectively. HVBS performs the following transformation

$$\mathcal{H}$$
; $\operatorname{ni}_{\operatorname{in}} ! \cos \mathcal{H}$; $\operatorname{ni}_{\operatorname{out}} + \sin \mathcal{H}$; $\operatorname{mi}_{\operatorname{out}}$; (87)

while VVBS makes

$$y_{in} i_{in} ! cos y_{in} i_{out} + sin y_{in} i_{out}$$
 (88)

At this point we have all the ingredients necessary to built the optical linear networks corresponding to our maps. We begin by illustrating in detail the optical network im plem enting E_A (for 2=3 < p 1), which is shown in Fig. 5. Let $j_0 i = a H i + b$ ibe the input single-photon state entering the network. If we de ne the VVBS angle

$$p = \arccos^{p} \overline{p};$$
 (89)

then it is easy to obtain after a straightforward calculation:

$$j_{1}^{I}i = p_{1}A_{1}j_{0}i = p_{1}p_{1}$$
 (90)


$$\int_{3}^{1} \stackrel{\text{p}}{=} \frac{\text{p}}{_{3}} A_{3} \stackrel{\text{j}}{}_{0} \stackrel{\text{i}}{=} a \stackrel{\text{H}}{=} i + b^{p} \stackrel{\text{p}}{=} \stackrel{\text{y}}{=} i = (91)$$


Since detector D_A does not distinguish spatial mode 1 from spatial mode 2, the two states $j_1^{I}i$ and $j_3^{I}i$, sum incoherently and the single-photon output density m atrix can be written as $E_A = j \frac{1}{1} ih \frac{1}{1} j + j \frac{1}{3} ih \frac{1}{3} j$, where

$$E_{A} = \begin{array}{ccc} \dot{a} \dot{\hat{j}} + \dot{p} \dot{\hat{j}} & (1 & p) & ab & \bar{p} \\ a & p & \bar{p} & p & p & p \\ \end{array}$$
 (92)

Of course, if we write the input density matrix as $_0$ = joih oj it is easy to see that

$$_{E_{A}} = { \begin{array}{c} X^{3} \\ & A \\ & 0 \end{array}}$$
 (93)





PBS HWP

FIG. 4: The variable beam splitters HVBS and VVBS.




FIG. 5: Linear optical network im plem enting E_A (for 2=3 < p 1), for M EM S I generation.

where Eqs. (72) have been used. Equation (93), together with Eq. (53), proves the equivalence between the quantum m ap E_A and the linear optical setup shown in Fig. 5. Note that the Mach-Zehnder interferom eters present in Figs. 5 and 6 are balanced, that is their arm shave the sam e optical length. In a sim ilar manner, we can physically implement E_B (for 2=3 < p 1), in the optical network shown in Fig. 6, where we have de ned

$$j_{1}^{I}i = P_{1}B_{1}j_{0}i = p_{1}p_{1}y_{i};$$
 (94)

and, again, $E_B = j_1^I ih_1^I j + j_3^I ih_3^I j$.

The optical networks necessary to realize quantum maps generating MEMS II states are a bit more complicated. In order to illustrate them we need to de ne the following two angles $_{1=3}$ and that determ ine the transm ission amplitudes of two VVBSs used in the MEMS II networks:

$$r = \frac{r}{1};$$

$$1 = 3 = \arccos \frac{1}{3};$$

$$r = 1$$

$$1 = \arccos \frac{3}{2} + \frac{1}{3};$$

$$(96)$$

$$= \arccos \frac{3}{2} + : \tag{97}$$

In addition, a third angle determining the transmission amplitudes of a HVBS, must be introduced:

$$= \arccos_{+} :$$
 (98)

Then, the map E_A (for 0 p 2=3), is realized by the optical network shown in Fig. 7, where we have de ned

$$j_{2}^{\text{II}}i = p_{2}A_{2}j_{0}i = a \quad \text{Hi+b} + \text{Vi;} \quad (99)$$




FIG. 6: Linear optical network in plementing E_{B} (for 2=3 < p 1), for M EMS I generation.

$$j_{3}^{II}i = {}^{p} - {}_{3}A_{3}j_{0}i = a + H_{1}i + b + y_{1}i;$$
 (100)

$$j_{1}^{II}i = p_{1}A_{1}j_{0}i = p_{3}B_{1}i$$
: (101)

In this case, incoherent detection produces the output m ixed state $E_A = j_2^{\text{II}}$ ih j_2^{II} j+ j_3^{II} ih j_3^{II} j+ j_3^{II} ih j_3^{II} j. Finally, the map E_B (for 0 p 2=3), is realized by the optical network shown in Fig. 8, where we have de ned

$$j_{3}^{II}i = p_{3}b_{3}j_{0}i = b_{1}h_{1}+a_{+}y_{1};$$
 (103)

$$j_{1}^{II}i = p_{1}B_{1}j_{0}i = \frac{b}{p_{3}}y_{1}i;$$
 (104)

As before, now we have $E_B = j_2^{II} ih_2^{II} j+ j_3^{II} ih_3^{II} j+ j_1^{II} ih_1^{II} j$.

VI. SUMMARY AND CONCLUSIONS

Classical polarization optics and quantum mechanics of two-level systems are two dierent branches of physics that share the same mathematical machinery. In this paper we have described the analogies and connections between these two subjects. In particular, after a review of the matrix formalism of classical polarization optics, we established the exact relation between one- and two-qubit quantum maps and classical description of linear optical processes. Finally, we successfully applied the formalism just developed, to two cases of practical utility.

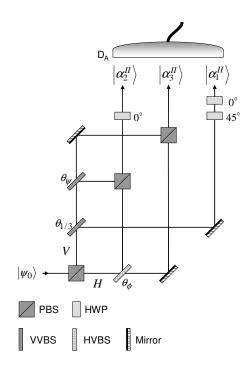


FIG. 7: Linear optical network in plementing E_A (for 0 p 2=3), for M EMS II generation. Each of the two M ach-Zehnder interferom eters constituting the network are balanced.

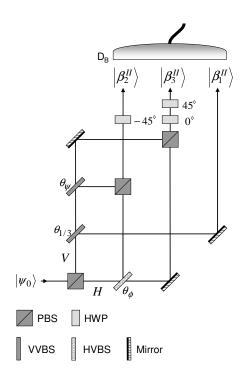


FIG.8: Linear optical network in plementing E_B (for 0 p 2=3), for MEMS II generation. Each of the two Mach-Zehnder interferom eters constituting the network are balanced.

We believe that the present paper will be useful to both the classical and the quantum optics community since it enlightens and puts on a rigorous basis, the so-

A cknow ledgm ents

widely used relations between classical polarization optics and quantum mechanics of qubits. A particularly interesting aspect of our work is that we describe in detail how dichroic devices (i.e., devices with polarization-dependent losses), t into this general scheme.

This project is supported by FOM.

- [1] M. A. Nielsen and I. L. Chuang, Quantum Computation and Quantum Information (Cambridge University Press, Cambridge, UK, 2002), reprinted rst ed.
- [2] A. Zeilinger, Rev. Mod. Phys. 71, S288 (1999).
- [3] N. Gisin, G. Ribody, W. Tittel, and H. Zbinden, Rev. Mod. Phys. 74, 145 (2002).
- [4] E.Knill, R.La amme, and G.Milburn, Nature (London) 409, 46 (2001).
- [5] J. L. O'Brien, G. J. Pryde, A. G. White, T. C. Ralph, and D. Branning, Nature (London) 426, 264 (2003).
- [6] J.Skaar, J.C.G. Escart n, and H. Landro, Am. J. Phys. 72, 1385 (2004).
- [7] P. Kok, W. J. Munro, K. Nemoto, T. C. Ralph, J. P. Dowling, and G. J. Mibum, quant-ph/0512071; and references therein.
- [8] D. Bouwm eester, J.W. Pan, K.M attle, M. Eibl, H.W e-infurter, and A. Zeilinger, Nature (London) 390, 575 (1997).
- [9] D. Boschi, S. Branca, F. D. Martini, L. Hardy, and S. Popescu, Phys. Rev. Lett. 80, 1121 (1998).
- [10] D.F.V. James, P.G. Kwiat, W. J. Munro, and A.G. White, Phys. Rev. A 64, 052312 (2001).
- [11] J.L.O 'B rien, G.J.P ryde, A.G ikhrist, D.F.V. James, N.K. Langford, T.C.Ralph, and A.G.W hite, Phys. Rev.Lett. 93, 080502 (2004).
- [12] N. Peters, J. Altepeter, E. Je rey, D. Branning, and P.Kwiat, Quantum Inf. Comput. 3, 503 (2003).
- [13] T.-C.W ei, J.B.A ltepeter, D.Branning, P.M. Goldbart, D.F.V. James, E. Je rey, P.G.Kwiat, S.Mukhopadhyay, and N.A.Peters, Phys. Rev. A 71, 032329 (2005).
- [14] A . Yariv, Q uantum E lectronics (John W iley & Son, New York, 1989), 3rd ed.
- [15] C.Zhang, Phys.Rev.A 69,014304 (2004).
- [16] N. Brunner, A. Acn, D. Collins, N. Gisin, and V. Scarani, Phys. Rev. Lett. 91, 180402 (2003).
- [17] A. A. iello, G. Puentes, D. Voigt, and J. P. Woerdman, Opt. Lett. 31, 817 (2006).
- [18] J. N. Damask, Polarization Optics in Telecommunications (Springer, New York, 2005).
- [19] M. Born and E. Wolf, Principles of Optics (Cambridge University Press, 1999), seventhed.
- [20] U. Leonhardt, Rep. Progr. Phys. 66, 1207 (2003).
- [21] G. Puentes, D. Voigt, A. Aiello, and J. P. Woerdman,

- quant-ph/0607014.
- [22] D.L.Falko , and J.E.M cD onald, J.Opt.Soc.Am .41, 862 (1951); U.Fano, Phys. Rev. 93, 121 (1954).
- [23] A ctually, our Stokes param eters x di er from the traditional ones s as given, e.g., in chapter 10 of [19]. However, the two sets of param eters are related by the simple relations: $s_0 = x_0$; $s_1 = x_3$; $s_2 = x_1$; $s_3 = x_2$.
- [24] F. L. Roy-Brehonnet and B. L. Jeune, Prog. Quant. Electr. 21, 109 (1997).
- [25] S.-Y. Lu and R.A. Chipman, J.Opt. Soc. Am. A 13, 1106 (1996).
- [26] A.A iello, and J.P.W oerdm an, m ath-ph/0412061.
- [27] J.J.Gil, J.Opt.Soc.Am.A 17, 328 (2000).
- [28] K.Kim, L.M andel, and E.W olf, J.Opt.Soc.Am.A 4, 433 (1987).
- [29] M. B. Ruskai, S. Szarek, and E. Werner, Linear Algebr. Appl. 347, 159 (2002).
- [30] D.G.M.Anderson and R.Barakat, J.Opt.Soc.Am.A 11, 2305 (1994).
- [31] R. Sim on, Optics Comm. 42, 293 (1982).
- [32] K. Zyczkowski, and I. Bengtsson, quant-ph/0401119 (2004).
- [33] E.C.G. Sudarshan, P.M. M athews, and J.Rau, Phys. Rev. 121, 920 (1961); M.-D. Choi, Linear Algebra Appl. 10, 285 (1975).
- [34] R.A. Horn and C.R. Johnson, Matrix Analysis (Cambridge University Press, New York, 1985).
- [35] S.R.C loude, Optik 75, 26 (1986); in Polarization considerations for Optical Systems II, R.A.Chipman, ed., Proc. Soc. Photo-Opt. Instrum. Eng. 1166, 177 (1989); Journal of electrom agnetic W aves and Applications 6, 947 (1992).
- [36] M. Zim an and V. Buzek, Phys. Rev. A 72, 052325 (2005).
- [37] A. A iello, G. Puentes, D. Voigt, and J. P. W oerdman, quant-ph/0603182 (2006).
- [38] N.A.Peters, J.B.A ltepeter, D.Branning, E.R.Je rey, T.-C.W ei, and P.G.Kwiat, Phys.Rev.Lett.92, 133601 (2004).
- [39] R.F.W emer, Phys. Rev. A 40, 4277 (1989).
- [40] J.M orio and F.G oudail, Opt.Lett.29, 2234 (2004).
- [41] M. Barbieri, F. De Martini, G. Di Nepi, and P. Mataloni, Phys. Rev. Lett. 92, 177901 (2004).