

Data-based guarantees of set invariance properties [★]

Andrea Bisoffi ^{*} Claudio De Persis ^{*} Pietro Tesi ^{**}

^{*} *ENTEG and the J.C. Willems Center for Systems and Control,
University of Groningen, 9747 AG Groningen, The Netherlands
(email: {a.bisoffi, c.de.persis}@rug.nl).*

^{**} *DINFO, University of Florence, 50139 Florence, Italy (email:
pietro.tesi@unifi.it)*

Abstract: For a discrete-time linear system, we use data from a single open-loop experiment to design directly a feedback controller enforcing that a given (polyhedral) set of the state is invariant and given (polyhedral) constraints on the control are satisfied. By building on classical results from model-based set invariance and a fundamental result from Willems et al., the controller designed from data has the following desirable features. The satisfaction of the above properties is guaranteed only from data, it can be assessed by solving a numerically-efficient linear program, and, under a certain rank condition, a data-based solution is feasible if and only if a model-based solution is feasible.

Keywords: Data-based control; Control of constrained systems; Constrained control; Linear Systems; Linear programming; Convex optimization.

1. INTRODUCTION

Data-driven control design is an approach that aims at designing control laws based on input-output data collected from a system through an experiment. As such, data-driven control bypasses completely the identification of a model of the plant from the input-output data.

Auto-tuning methods (e.g., Ziegler and Nichols’s method for proportional integral derivative controllers) can be seen as a seminal instance of data-driven control. More recent data-driven control techniques addressing model reference and tracking problems include iterative feedback tuning (Hjalmarsson et al., 1998), virtual reference feedback tuning (Campi et al., 2002), iterative correlation-based tuning (Karimi et al., 2004; Formentin et al., 2013), and unfalsified control (Battistelli et al., 2018). Data-driven methods have been considered also in connection with other control problems, including nonlinear (Novara et al., 2013, 2016), predictive (Salvador et al., 2018), robust (Dai and Sznaier, 2018) as well as optimal control (Markovsky and Rapisarda, 2007; Mukherjee et al., 2018; Baggio et al., 2019; Gonçalves da Silva et al., 2019).

Most recently, a fundamental result from Willems et al. (2005) has been given new attention because of its deep implications for data-driven control. Namely, Willems et al. (2005) claims in broad terms that the whole set of solutions of a *linear* system can be represented by a finite set of solutions as long as those arise from sufficiently excited dynamics. This result has been exploited in Coulson et al. (2019) for data-based predictive control, and in De Persis and Tesi (2019) for data-driven stabilization and optimal control. De Persis and Tesi (2019) shows in particular that

the result by Willems et al. can be used to achieve a data-based parametrization of feedback systems, enabling the design of (optimal) controllers directly via data-dependent linear matrix inequalities, also in the presence of noisy data. This idea has been further developed in van Waarde et al. (2019) to show that data-driven stabilization is possible even when data are not sufficiently rich to enable system identification, and in Berberich et al. (2019b) where – by formulating the data-based parametrization of closed-loop systems in the presence of noisy data obtained in De Persis and Tesi (2019) as a linear fractional transformation – data-driven H_∞ control is investigated, thus providing further evidence for developing a theory of data-driven control.

Except for contributions in the area of predictive control such as Salvador et al. (2018) and Berberich et al. (2019a), most of the works on data-driven control do not account for state and input constraints, which are one of the prime issues in many practical problems. In addition to the aforementioned papers, contributions to data-driven control in the presence of (state and input) constraints, also termed *safe control*, are found in the literature on learning-based control (Garcia and Fernández, 2015) and on safety certificates for learning-based control by convex optimization (Wabersich and Zeilinger, 2018), see also Remark 4 for a detailed comparison with our approach.

In this paper, we consider data-driven safe control using notions from set invariance (Blanchini, 1999). Specifically, we consider linear time invariant (LTI) systems in discrete time, i.e.,

$$x^+ = Ax + Bu,$$

and study the problem of designing a control law based on a finite number of input-state data in such a way that the controlled system satisfies prescribed safety constraints,

^{*} This research is partially supported by a Marie Skłodowska-Curie COFUND grant, no. 754315.

characterized in terms of set invariance and λ -contractivity (recalled in Definitions 2 and 3).

Set invariance is a dynamical property in its own right, and it is quite relevant as it translates the notion of safety, i.e., if the system has initial state in this (safe) set, its solutions will not leave the set. Invariance is a dynamical property that is less conservative than asymptotic stability (e.g., for continuous-time dynamical systems, invariance of a set is essentially equivalent to the fact that at each point of the *boundary* of the set, the vector field is included in the tangent cone to the set by the classical result in Nagumo (1942)), but arguably as essential in practical settings. Ellipsoidal and polyhedral sets are common choices in the study of invariance properties, with the former being the level sets of classical quadratic Lyapunov functions for linear systems. The complexity in the representation of an ellipsoidal set contained in \mathbb{R}^{ν} is given by ν , whereas that of a polyhedral set can be arbitrarily high, e.g., due to an arbitrarily high number of planes or vertices defining the polyhedral set. On the other hand, ellipsoidal sets cannot arbitrarily approximate any convex and compact set, whereas polyhedral sets can (see the discussion in (Blanchini and Miani, 2008, p. 110)). For this reason, we consider here polyhedral sets.

Controlled invariance of polyhedral sets for discrete-time linear systems has been thoroughly investigated in the late 80's assuming exact knowledge of the matrices A and B above, and key results were given (Gutman and Cwikel, 1986; Vassilaki et al., 1988; Blanchini, 1990). These results consider, among others, the presence of disturbances on the state equation and parametric uncertainties in the dynamical matrices. We refer the reader to the comprehensive survey Blanchini (1999) and the monograph Blanchini and Miani (2008) for an overview of these results.

Building on the notions of invariance and λ -contractivity, we show that the problem of designing safe controllers directly from data can be cast as a *linear program*, which can thus be efficiently solved. Further, as in Vassilaki et al. (1988); Blanchini (1990), the solution takes the form of a state-feedback gain, which avoids to iteratively solving an online optimization problem as in receding-horizon predictive control and learning-based methods. On the other hand, in this paper we do not investigate optimality features of the safe controller.

The paper is organized as follows. Section 2 introduces the problem of interest along with some preliminaries on set invariance. The main results are given in Section 3, while Section 4 provides a preliminary result in the case of noisy data. A numerical example is discussed in Section 5, and Section 6 provides concluding remarks.

Notation. \mathbb{Z} , \mathbb{N} , and \mathbb{R} denote the sets of integers, of nonnegative integers, and of real numbers. For $n \in \mathbb{N}$, $\mathbb{N}_n := \{1, \dots, n\}$. For column vectors $x_1 \in \mathbb{R}^{d_1}, \dots, x_m \in \mathbb{R}^{d_m}$, the notation (x_1, \dots, x_m) is equivalent to $[x_1^T \dots x_m^T]^T$. The $n \times n$ identity matrix is denoted by I_n . The vector $\mathbf{1}$ denotes the vector of all ones of appropriate dimension, i.e., $\mathbf{1} := (1, \dots, 1)$. Given two $n \times m$ matrices A and B , $A \geq 0$ indicates that each entry of A is nonnegative, and $A \geq B$ is equivalent to $A - B \geq 0$. For a polyhedron \mathcal{A} , $\text{vert } \mathcal{A}$ is the set of its vertices. Given a set \mathcal{A} and a scalar $\mu \geq 0$, $\mu\mathcal{A} := \{\mu x : x \in \mathcal{A}\}$.

2. PROBLEM STATEMENT AND PRELIMINARIES

In this section we give our problem statement and present essential preliminaries on set invariance.

2.1 Problem statement

We consider discrete-time linear time invariant (LTI) systems

$$x^+ = Ax + Bu, \quad (1)$$

with state $x \in \mathbb{R}^n$ and input $u \in \mathbb{R}^m$. Before we introduce our sets of interest, we need the next notion.

Definition 1. (Blanchini and Miani, 2008, Def. 3.10) *A C-set is a convex and compact subset of \mathbb{R}^{ν} including the origin as an interior point.*

The first set of interest is the set \mathcal{S} relative to the state x , which is based on a matrix $S \in \mathbb{R}^{n_s \times n}$ with rows $S^{(i)}$, $i = 1, \dots, n_s$. The set \mathcal{S} is a polyhedral C-set represented through S as

$$\begin{aligned} \mathcal{S} &:= \{x \in \mathbb{R}^n : Sx \leq \mathbf{1}\} \\ &= \{x \in \mathbb{R}^n : S^{(i)}x \leq 1, i = 1, \dots, n_s\}. \end{aligned} \quad (2)$$

The second set of interest is the set \mathcal{U} relative to the input u , which is based on a matrix $U \in \mathbb{R}^{n_u \times m}$ with rows $U^{(i)}$, $i = 1, \dots, n_u$. The set \mathcal{U} is a polyhedral convex set (including the origin as an interior point) represented through U as

$$\begin{aligned} \mathcal{U} &:= \{u \in \mathbb{R}^m : Uu \leq \mathbf{1}\} \\ &= \{u \in \mathbb{R}^m : U^{(i)}u \leq 1, i = 1, \dots, n_u\}. \end{aligned} \quad (3)$$

We would like to impose that the state x remains confined in the set \mathcal{S} , while input u is constrained in the set \mathcal{U} . To this end, we introduce the next notion of (controlled) invariance.

Definition 2. (Blanchini and Miani, 2008, Defs. 4.1, 4.4) *A set $\mathcal{S} \subset \mathbb{R}^n$ is invariant for*

$$x^+ = Fx \quad (4)$$

if each solution to (4) with initial condition $x(0) \in \mathcal{S}$ is such that $x(t) \in \mathcal{S}$ for all $t \geq 0$. A set $\mathcal{S} \subset \mathbb{R}^n$ is controlled invariant for

$$x^+ = Ax + Bu \quad (5)$$

if there exists a control function $u: \mathcal{S} \rightarrow \mathbb{R}^m$ such that for each $x(0) \in \mathcal{S}$, the corresponding solution to (5) satisfies $x(t) \in \mathcal{S}$ for all $t \geq 0$.

We would like to impose that \mathcal{S} is invariant and u satisfies the constraints given by \mathcal{U} without the knowledge of the matrices A and B , by relying only on a number of data samples collected from the system. Specifically, we make an experiment on the system by applying a sequence $u_d(0), \dots, u_d(T-1)$ of inputs and measuring the corresponding values $x_d(0), \dots, x_d(T)$ of the state response, where the subscript d emphasizes that these are data. Following the notation in De Persis and Tesi (2019), we organize these data as

$$U_{0,T} := [u_d(0) \dots u_d(T-1)] \quad (6a)$$

$$X_{0,T} := [x_d(0) \dots x_d(T-1)] \quad (6b)$$

$$X_{1,T} := [x_d(1) \dots x_d(T)]. \quad (6c)$$

We can now state the problem of interest.

Problem 1. Given a polyhedral C -set \mathcal{S} as in (2) and a polyhedral convex set \mathcal{U} as in (3), find a state-feedback law $u = Kx$, with gain matrix K based only on the data in (6), that guarantees that \mathcal{S} is invariant, the origin is asymptotically stable, and the control input $u = Kx$ always belongs to \mathcal{U} .

For brevity, we say in the following that \mathcal{S} is *admissible* for \mathcal{U} if for each $x \in \mathcal{S}$, we have $Kx \in \mathcal{U}$ (for some matrix K).

2.2 Preliminaries on (model-based) set invariance

In Problem 1, we ask that \mathcal{S} is invariant and the origin is asymptotically stable. These two properties can be embedded in the notion of λ -contractivity defined next.

Definition 3. (Blanchini and Miani, 2008, Def. 4.19) A C -set \mathcal{S} is λ -contractive for

$$x^+ = Fx \quad (7)$$

if for some $\lambda \in [0, 1)$, for each $x \in \mathcal{S}$

$$\inf\{\lambda' \geq 0: Fx \in \lambda'\mathcal{S}\} \leq \lambda. \quad (8)$$

A C -set \mathcal{S} is λ -contractive for

$$x^+ = Ax + Bu \quad (9)$$

if for some $\lambda \in [0, 1)$, there exists a control function $u: \mathcal{S} \rightarrow \mathbb{R}^m$ such that for each $x \in \mathcal{S}$

$$\inf\{\lambda' \geq 0: Ax + Bu(x) \in \lambda'\mathcal{S}\} \leq \lambda. \quad (10)$$

Note that if we allow $\lambda = 1$ in Definition 3, we recover invariance and controlled invariance of Definition 2 as a special case. We recall the next result on λ -contractivity.

Fact 1. (Blanchini and Miani, 2008, Thm. 4.43) Given a system

$$x^+ = Fx \quad (11)$$

and a polyhedral C -set \mathcal{S} of the form (2) with $S \in \mathbb{R}^{n_s \times n}$, the set \mathcal{S} is λ -contractive for (11) if and only if there exists a matrix $P \geq 0$ such that

$$P\mathbf{1} \leq \lambda\mathbf{1}, \quad (12)$$

$$PS = SF. \quad (13)$$

We have the next relationship between λ -contractivity and asymptotic stability.

Fact 2. (Blanchini and Miani, 2008, Cor. 4.52) Given a system $x^+ = Fx$, there exists a polyhedral C -set which is λ -contractive if and only if all the eigenvalues of F have modulus less or equal to λ and all the eigenvalues for which the equality holds have phases that are rational multiples of π ¹.

Some comments on Fact 2 are relevant for the sequel and are stated in the next remarks.

Remark 1. As a consequence of Fact 2, if a polyhedral C -set \mathcal{S} is λ -contractive, then the origin (contained in the interior of \mathcal{S} by Definition 1) is asymptotically stable. Instead of imposing that \mathcal{S} is invariant and the origin is asymptotically stable in Problem 1, we impose in the sequel that \mathcal{S} is λ -contractive. Invariance of \mathcal{S} ($\lambda = 1$) is equivalent to marginal stability of the origin along with certain conditions on the eigenvalues with unitary modulus

¹ Namely, their phase θ can be expressed as $\theta = \frac{p}{q}\pi$ for some integers p and q .

(Blanchini and Miani, 2008, Thm. 4.50), and does not guarantee asymptotic stability of the origin as required by Problem 1. Hence imposing $\lambda < 1$ is convenient to have asymptotic stability of the origin.

Remark 2. For state-feedback control laws $u = Kx$ as in Problem 1, controllability of the pair (A, B) implies that the closed-loop eigenvalues of $A + BK$ can be assigned to satisfy the necessary and sufficient condition in Fact 2, hence there exists a polyhedral C -set which is λ -contractive for $A + BK$.

3. DATA-BASED DESIGN AND GUARANTEES FOR λ -CONTRACTIVITY

We now present our data-based solution to Problem 1. By the foregoing considerations, we address this problem in the context of λ -contractivity.

Given system (1), \mathcal{S} , \mathcal{U} and u as in Problem 1 and level of contractivity $\lambda \in [0, 1)$, we have that \mathcal{S} is λ -contractive for $x^+ = (A + BK)x$ and admissible for \mathcal{U} if and only if there exist decision variables K and $P \geq 0$ such that

$$P\mathbf{1} \leq \lambda\mathbf{1} \quad (14a)$$

$$PS = S(A + BK) \quad (14b)$$

$$UKs \leq \mathbf{1} \quad \forall s \in \text{vert } \mathcal{S}. \quad (14c)$$

Indeed, λ -contractivity of \mathcal{S} is equivalent to (14a)-(14b) by Fact 1, and admissibility of \mathcal{S} for \mathcal{U} is equivalent to

$$Ks \in \mathcal{U} \quad \forall s \in \text{vert } \mathcal{S}$$

since \mathcal{U} is a polyhedral convex set, and the last expression is equivalent to (14c). As noted in Remark 1, a matrix K that satisfies (14) solves Problem 1.

We have the next result.

Theorem 1. Consider \mathcal{S} , \mathcal{U} and u as in Problem 1 and level of contractivity $\lambda \in [0, 1)$. Let the data matrices $U_{0,T}$, $X_{0,T}$ and $X_{1,T}$ be as in (6). If there exist decision variables G_K and $P \geq 0$ such that

$$P\mathbf{1} \leq \lambda\mathbf{1} \quad (15a)$$

$$PS = SX_{1,T}G_K \quad (15b)$$

$$UU_{0,T}G_Ks \leq \mathbf{1} \quad \forall s \in \text{vert } \mathcal{S} \quad (15c)$$

$$I_n = X_{0,T}G_K, \quad (15d)$$

then the state-feedback gain

$$K = U_{0,T}G_K \quad (16)$$

is such that \mathcal{S} is λ -contractive for the closed-loop system $x^+ = (A + BK)x$ and admissible for \mathcal{U} .

Proof. We show that the fulfilment of the constraints (15) implies the fulfilment of (14) with $K = U_{0,T}G_K$. Using (16) and (15d) we have

$$\begin{bmatrix} K \\ I_n \end{bmatrix} = \begin{bmatrix} U_{0,T} \\ X_{0,T} \end{bmatrix} G_K,$$

so that

$$\begin{aligned} A + BK &= [B \ A] \begin{bmatrix} K \\ I_n \end{bmatrix} \\ &= [B \ A] \begin{bmatrix} U_{0,T} \\ X_{0,T} \end{bmatrix} G_K = X_{1,T}G_K \end{aligned} \quad (17)$$

since $X_{1,T} = AX_{0,T} + BU_{0,T}$. This immediately gives the claim. \blacksquare

Remark 3. We note that Theorem 1 corresponds to solving a linear program in the decision variables G_K and P , hence it is numerically appealing.

Compared with the case where the matrices A and B are known (cf. (14)), the data-driven solution of Theorem 1 only provides sufficient conditions for λ -contractivity. The reason is that we made no assumptions on the data used for designing the controller. Intuitively, if the data do not carry enough information on the plant dynamics, it might be impossible to get a data-based solution.

In the context of stabilization (with no state and/or input constraints), De Persis and Tesi (2019) shows conditions on the data which enable a data-based parametrization of *all* stabilizing state-feedback gains. van Waarde et al. (2019) considers the *minimum* amount of information on the data under which *at least one* stabilizing gain can be found from data. Here, we follow the reasoning of De Persis and Tesi (2019), which lends itself to a direct extension to the case of state and/or input constraints. In fact, if the data enable a parametrization of *all* stabilizing gains, then any controller that guarantees λ -contractivity will necessarily belong to the feasibility set of (15) since λ -contractivity is a stronger property than asymptotic stability, as shown in Fact 2.

The next result holds.

Theorem 2. Consider \mathcal{S} , \mathcal{U} and u as in Problem 1 and level of contractivity $\lambda \in [0, 1)$. Let the data matrices $U_{0,T}$, $X_{0,T}$ and $X_{1,T}$ be as in (6). Assume further that the matrix

$$\Theta := \begin{bmatrix} U_{0,T} \\ X_{0,T} \end{bmatrix} \quad (18)$$

has full row rank. Then, there exists a controller K such that \mathcal{S} is λ -contractive for $x^+ = (A+BK)x$ and admissible for \mathcal{U} if and only if there exist decision variables G_K and $P \geq 0$ such that (15) holds. Moreover, any such controller can be expressed as in (16) for some G_K satisfying (15).

Proof. As justified below (14), there exists a controller K such that \mathcal{S} is λ -contractive for $x^+ = (A+BK)x$ and admissible for \mathcal{U} if and only if there exist K and $P \geq 0$ such that (14) holds. Theorem 1 proves that if (15)-(16) hold, then (14) holds (sufficiency of the first part of the statement). On the other hand, if Θ is full row rank, the identity

$$\begin{bmatrix} K \\ I_n \end{bmatrix} = \Theta G_K \quad (19)$$

can be solved for *arbitrary* K with respect to G_K , and by the same derivation as in (17), each solution G_K satisfies $A+BK = X_{1,T}G_K$. Thus, if (14) holds, then (15)-(16) hold (necessity of the first part of statement). Finally, (19) also implies that any such controller can be expressed as in (16) for some matrix G_K satisfying (15). ■

An interesting result related to the matrix Θ in (18) is that if the system (1) is controllable, then one can always ensure that Θ has full row rank if the experimental data originate from exciting input signals. The result is simple and worth mentioning in Fact 3 below after some needed definitions.

Definition 4. Given a sequence $z(0), z(1), \dots \in \mathbb{R}^\sigma$, we denote its Hankel matrix of depth t as

$$Z_{i,t,N} := \begin{bmatrix} z(i) & z(i+1) & \dots & z(i+N-1) \\ z(i+1) & z(i+2) & \dots & z(i+N) \\ \vdots & \vdots & \ddots & \vdots \\ z(i+t-1) & z(i+t) & \dots & z(i+t+N-2) \end{bmatrix}$$

where $i \in \mathbb{Z}$ and $t, N \in \mathbb{N}$. For $t = 1$, we denote its Hankel matrix² as $Z_{i,N} := [z(i) \dots z(i+N-1)]$.

Definition 5. The signal $z(0), \dots, z(T-1) \in \mathbb{R}^\sigma$ is persistently exciting of order L if the matrix $Z_{0,L,T-L+1}$ has full rank σL .

Fact 3. (Willems et al., 2005, Cor. 2) Let system (1) be controllable. If the input sequence $u_d(0), \dots, u_d(T-1)$ is persistently exciting of order $n+1$ then the matrix Θ has full row rank.

As shown in Fact 3, controllability of the system ensures that one can guarantee by design that Θ has full row rank. Controllability is actually also important for enabling the existence of a controller achieving λ -contractivity. In fact, for a given \mathcal{S} , a controller achieving λ -contractivity need not exist. In that case, one may use the same data and search for different sets \mathcal{S}' with different shapes until the constraints in (15) become feasible. Controllability is beneficial in this respect because it ensures that a λ -contractive C-set \mathcal{S}' exists, as pointed out in Remark 2. Alternatively, if one wants to design \mathcal{S}' , the corresponding matrix S' becomes a decision variable and (15) becomes a *bilinear* program, as pointed out in (Blanchini, 1999, p. 1755)).

Remark 4. Compared to Wabersich and Zeilinger (2018), our approach considers unknown linear dynamics instead of known linear dynamics with unknown nonlinear term. On the other hand, under a rank condition on the data, our approach always determines a solution if there is one (cf. Theorem 2) instead of providing ellipsoidal under-approximations of the original polyhedral set. Moreover, by approaching the problem in terms of λ -contractivity, our method does not involve switching between a given learning-based and a designed safe controller as in (Wabersich and Zeilinger, 2018, Eq. (2)), which may introduce undesired chattering.

3.1 λ -contractivity and decay rate

As shown in Vassilaki et al. (1988), the function $V: \mathcal{S} \rightarrow \mathbb{R}$ defined as

$$V(x) := \max_{i \in \{1, \dots, n_s\}} |S^{(i)}x| \quad (20)$$

is a *polyhedral* Lyapunov function for the closed-loop dynamics $x^+ = (A+BK)x$ constrained on the set \mathcal{S} , and ensures that the origin is asymptotically stable. Indeed, V satisfies the following properties:

- (i) $V(x) \geq 0$ for all $x \in \mathcal{S}$, and $V(x) = 0$ if and only if $x = 0$ ³,
- (ii) it holds that

² By Definition 4, the data matrices $U_{0,T}$, $X_{0,T}$ and $X_{1,T}$ in (6) are precisely the Hankel matrices of depth 1 of the input and (shifted) state sequences.

³ $V(x) = 0$ if and only if $Sx = 0$, whose only solution is $x = 0$ because S has rank n due to the C-set \mathcal{S} being bounded. Indeed, if S had not rank n , the nullspace of S would contain at least one nonzero vector $\bar{x} \neq 0$ satisfying $S\bar{x} = 0$, so that $S(M\bar{x}) = 0$ would also hold for an arbitrarily large M . But then $S(M\bar{x}) \leq \mathbf{1}$ and $M\bar{x} \in \mathcal{S}$, contradicting boundedness of \mathcal{S} .

$$\begin{aligned}
V(x^+) &:= \max_{i \in \{1, \dots, n_s\}} |S^{(i)}x^+| = \max_{i \in \{1, \dots, n_s\}} |S^{(i)}(A + BK)x| \\
&\stackrel{(14b)}{=} \max_{i \in \{1, \dots, n_s\}} \left| \sum_{j=1}^n p_{ij} S^{(j)}x \right| \leq \max_{i \in \{1, \dots, n_s\}} \sum_{j=1}^n |p_{ij}| |S^{(j)}x| \\
&\stackrel{(20)}{\leq} \max_{i \in \{1, \dots, n_s\}} V(x) \sum_{j=1}^n |p_{ij}| \stackrel{P \geq 0, (14a)}{\leq} \lambda V(x). \quad (21)
\end{aligned}$$

Properties (i) and (ii) imply asymptotic stability of the origin. In view of (21), the level of contractivity λ is also the decay rate of the Lyapunov function V , and it is thus of interest to minimize $\lambda \in [0, 1)$ as proposed for instance in Vassilaki et al. (1988). It is straightforward to do this based *only* on data, as shown in the next result.

Corollary 1. *Consider the same setting as in Theorem 1. If there exist decision variables λ , G_K and $P \geq 0$ solving*

$$\begin{aligned}
&\min \lambda \\
&\text{such that } 0 \leq \lambda < 1 \text{ and (15) holds,} \quad (22)
\end{aligned}$$

the controller K as in (16) ensures that \mathcal{S} is λ -contractive for $x^+ = (A + BK)x$ and admissible for \mathcal{U} . ■

The decision variables λ , G_K and P enter (22) in a linear fashion. Hence, (22) still corresponds to a linear program and can then be solved efficiently.

4. ROBUST DESIGN FOR NOISY DATA

In this section we present some preliminary result for the more realistic setting of noisy data. To this end, we consider a system of the form

$$x^+ = Ax + Bu + d, \quad (23)$$

where $d \in \mathcal{D} \subset \mathbb{R}^n$ and \mathcal{D} is a polyhedral C-set represented through convex combinations of its n_d vertices $d^{(1)}, \dots, d^{(n_d)} \in \mathbb{R}^n$ as

$$\mathcal{D} := \left\{ \sum_{i=1}^{n_d} \alpha_i d^{(i)} : \mathbf{1}^\top \alpha = 1, \alpha \geq 0 \right\}. \quad (24)$$

The disturbance affects both the data and the invariance properties of (23). As for the data, the experiment involves the quantities in (6) and, additionally, the *unknown* sequence $d_d(0), \dots, d_d(T-1)$ of disturbances, organized as

$$D_{0,T} := [d_d(0) \ \dots \ d_d(T-1)]. \quad (25)$$

The overall data in (25) and (6) satisfy then from (23) that

$$\begin{aligned}
X_{1,T} &= AX_{0,T} + BU_{0,T} + D_{0,T} \\
&= [B \ A] \begin{bmatrix} U_{0,T} \\ X_{0,T} \end{bmatrix} + D_{0,T}. \quad (26)
\end{aligned}$$

As for the invariance properties, we consider accordingly the next robust version of Definition 2.

Definition 6. (Blanchini, 1990, Def. 2.1) *A set \mathcal{S} is robustly invariant with respect to \mathcal{D} for*

$$x^+ = Fx + d \quad (27)$$

if for each initial condition $x(0) \in \mathcal{S}$ and each disturbance d satisfying $d(t) \in \mathcal{D}$ for all $t \geq 0$, the corresponding solution to (27) satisfies $x(t) \in \mathcal{S}$ for all $t \geq 0$.

In this section we consider a slightly different setting than the rest of the paper, that is, guaranteeing that \mathcal{S} is robustly invariant w.r.t. \mathcal{D} for the closed-loop system and is admissible for \mathcal{U} , in the presence of noisy data. We recall the next instrumental result.

Fact 4. (Blanchini, 1990, Thm. 2.1) *Let \mathcal{S} and \mathcal{D} be C-sets. The set \mathcal{S} is robustly invariant w.r.t. \mathcal{D} for (27) if and only if for each $s \in \text{vert } \mathcal{S}$ and each $w \in \text{vert } \mathcal{D}$, $Fs + w \in \mathcal{S}$.*

This fact allows us to conclude that given the system in (23) and for \mathcal{S} and \mathcal{U} and u as in Problem 1 and the C-set \mathcal{D} in (24), \mathcal{S} is

- (a) robustly invariant w.r.t. \mathcal{D} for $x^+ = (A + BK)x + d$,
- (b) admissible for \mathcal{U}

if and only if there exists a decision variable K such that

$$S((A + BK)s + w) \leq \mathbf{1} \quad \forall s \in \text{vert } \mathcal{S}, \forall w \in \text{vert } \mathcal{D} \quad (28a)$$

$$UKs \leq \mathbf{1} \quad \forall s \in \text{vert } \mathcal{S}. \quad (28b)$$

Let us apply to (28) the same approach as in Section 3 in light of the new dynamics in (26). If there exists a decision variable G_K such that

$$S((X_{1,T} - D_{0,T})G_Ks + w) \leq \mathbf{1} \quad \forall s \in \text{vert } \mathcal{S}, \forall w \in \text{vert } \mathcal{D} \quad (29a)$$

$$UU_{0,T}G_Ks \leq \mathbf{1} \quad \forall s \in \text{vert } \mathcal{S} \quad (29b)$$

$$I_n = X_{0,T}G_K, \quad (29c)$$

then the state-feedback gain $K = U_{0,T}G_K$ would ensure for \mathcal{S} its desired properties (a)–(b) above. In particular, (29a) follows from

$$\begin{aligned}
A + BK &= [B \ A] \begin{bmatrix} K \\ I_n \end{bmatrix} \\
&= [B \ A] \begin{bmatrix} U_{0,T} \\ X_{0,T} \end{bmatrix} G_K = (X_{1,T} - D_{0,T})G_K
\end{aligned}$$

where the last equality uses the new dynamics in (26). However, the disturbance sequence leading to $D_{0,T}$ in (29a) is unknown. A possible way of overcoming this issue is to ask conservatively that (29a) be satisfied for all the possible sequences of the disturbance $d_d(0), \dots, d_d(T-1)$ as long as each $d_d(0), \dots, d_d(T-1)$ belongs to \mathcal{D} . To this end, define for $j \in \mathbb{N}_T$ and $i \in \mathbb{N}_{n_d}$ the matrix $\delta_{ji} \in \mathbb{R}^{n \times T}$ being zero except for its j -th column equal to $Td^{(i)}$, i.e.,

$$\delta_{ji} := \left[\underbrace{0}_{1\text{-st}} \mid \dots \mid \underbrace{Td^{(i)}}_{j\text{-th}} \mid \dots \mid \underbrace{0}_{T\text{-th column}} \right].$$

The reason for the dependence on T in the j -th column of δ_{ji} becomes clear in the proof of our next result.

Proposition 1. *Consider \mathcal{S} , \mathcal{U} and u as in Problem 1, the disturbance d belonging to the C-set \mathcal{D} in (24), and let the data matrices $U_{0,T}$, $X_{0,T}$, $X_{1,T}$ and $D_{0,T}$ be as in (6) and (25). If there exists a decision variable G_K such that*

$$S((X_{1,T} - \delta_{ji})G_Ks + w) \leq \mathbf{1} \quad \forall s \in \text{vert } \mathcal{S}, \forall w \in \text{vert } \mathcal{D}, \forall j \in \mathbb{N}_T, \forall i \in \mathbb{N}_{n_d} \quad (30a)$$

$$UU_{0,T}G_Ks \leq \mathbf{1} \quad \forall s \in \text{vert } \mathcal{S} \quad (30b)$$

$$I_n = X_{0,T}G_K, \quad (30c)$$

then the state-feedback gain

$$K = U_{0,T}G_K$$

is such that \mathcal{S} is robustly invariant w.r.t. \mathcal{D} for $x^+ = (A + BK)x + d$ and admissible for \mathcal{U} .

Proof. The statement is proven if we show that (30a) implies that (29a) is verified for *all* possible $D_{0,T}$ because (29) implies that (28) holds (with the same arguments as in the proof of Theorem 1), and (28) guarantees the statement.

Since each column of $D_{0,T}$ belongs to the C-set \mathcal{D} in (24), $D_{0,T}$ can be written as

$$D_{0,T} = \left[\sum_{i=1}^{n_d} \alpha_{1,i} d^{(i)} \mid \dots \mid \sum_{i=1}^{n_d} \alpha_{T,i} d^{(i)} \right]$$

where the vectors $\alpha_1, \dots, \alpha_T$ satisfy $\mathbf{1}^\top \alpha_1 = 1$ and $\alpha_1 \geq 0$, \dots , $\mathbf{1}^\top \alpha_T = 1$ and $\alpha_T \geq 0$. Consider in the rest of the proof arbitrary $s \in \text{vert } \mathcal{S}$ and $w \in \text{vert } \mathcal{D}$. (30a) implies that for such s and w and for each $j \in \mathbb{N}_T$ and $i \in \mathbb{N}_{n_d}$,

$$\frac{\alpha_{j,i}}{T} S X_{1,T} G_K s - \frac{\alpha_{j,i}}{T} S \delta_{ji} G_K s + \frac{\alpha_{j,i}}{T} S w \leq \frac{\alpha_{j,i}}{T} \mathbf{1} \quad (31)$$

because each $\alpha_{j,i} \geq 0$. (31) implies that the summation over all $i \in \mathbb{N}_{n_d}$ holds as well, i.e., for each $j \in \mathbb{N}_T$

$$\begin{aligned} \frac{1}{T} S X_{1,T} G_K s - \frac{1}{T} S \left[0 \mid \dots \mid \sum_{i=1}^{n_d} \alpha_{j,i} T d^{(i)} \mid \dots \mid 0 \right] G_K s \\ + \frac{1}{T} S w \leq \frac{1}{T} \mathbf{1}. \quad (32) \end{aligned}$$

(32) implies that the summation over all $j \in \mathbb{N}_T$ holds as well, i.e.,

$$\begin{aligned} S X_{1,T} G_K s - S \left[\sum_{i=1}^{n_d} \alpha_{1,i} d^{(i)} \mid \dots \mid \sum_{i=1}^{n_d} \alpha_{T,i} d^{(i)} \right] G_K s \\ + S w \leq \mathbf{1} \end{aligned}$$

so (29a) holds indeed, which was the implication needed to complete the proof. \blacksquare

Proposition 1 is a preliminary result due to the conservatism of replacing the constraints in (29a) (where $D_{0,T}$ is unknown) with $n_d T$ as many such constraints in (30a). On the other hand, Proposition 1 still corresponds to solving a linear program in the decision variable G_K .

5. NUMERICAL EXAMPLE

In this section we illustrate the results of Section 3 through an example taken from Vassilaki et al. (1988).

The sets \mathcal{S} in (2) and \mathcal{U} in (3) are determined by the next matrices S and U :

$$S := \begin{bmatrix} 1/5 & 2/5 \\ -1/5 & -2/5 \\ -3/20 & 1/5 \\ 3/20 & -1/5 \end{bmatrix}, \quad U := \begin{bmatrix} 1/7 \\ -1/7 \end{bmatrix}, \quad (33)$$

so that the set \mathcal{S} corresponds to the quadrilateral in a green, solid line in Figure 2, while the set \mathcal{U} corresponds to the condition $-7 \leq u \leq 7$. The level of contractivity is selected as $\lambda = 0.84$.

The data are collected from an open-loop experiment as in Figure 1, where u is the realization of a random variable uniformly distributed on $[-1, 1]$, and show that the underlying linear system is unstable. The matrices A and B generating these data are

$$A := \begin{bmatrix} 4/5 & 1/2 \\ -2/5 & 6/5 \end{bmatrix}, \quad B := \begin{bmatrix} 0 \\ 1 \end{bmatrix}, \quad (34)$$

and are reported *only* for illustrative purposes, because our solution relies *only* on the collected data, as per Theorem 1.

Remark 5. Full row rank of Θ in (18) can be checked from data. However, this condition holds by Fact 3 if (A, B) is controllable and the input sequence is persistently

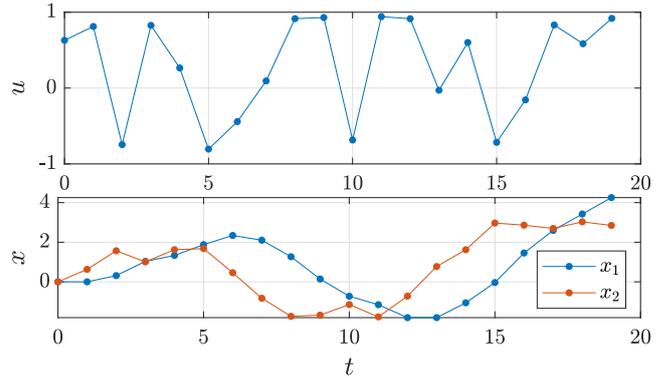


Fig. 1. Input and state sequences of data as in (6), with $T = 20$.

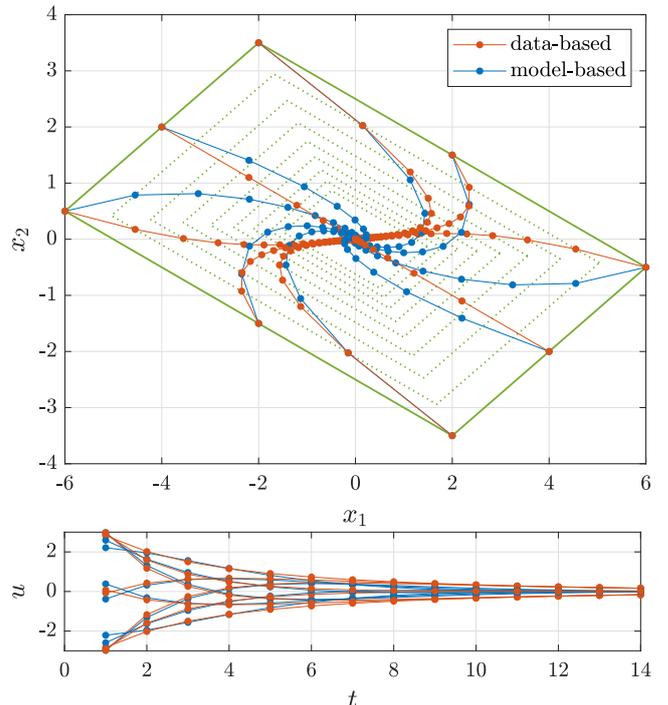


Fig. 2. Sets \mathcal{S} and \mathcal{U} given as in (33) and $\lambda = 0.84$. (Top) Solutions arising from the state feedback law $u = Kx$ (see (35)) designed based on data (orange), and from $u = K_{A,B}x$ (see (36)) based on the classical model-based approach (blue), set \mathcal{S} (green, solid) and the sets $\lambda\mathcal{S}, \lambda^2\mathcal{S}, \lambda^3\mathcal{S}, \dots$ (green, dotted). (Bottom) Control signal u corresponding to the solutions in orange and blue depicted on top. The control signal satisfies the constraints given by \mathcal{U} .

exciting of order $n + 1$. As noted in (De Persis and Tesi, 2019, § II.A), persistence of excitation (see Definition 5) poses a mild necessary condition on the number of samples, i.e., $T \geq (m + 1)n + m = 5$ in the considered case.

The linear optimization problem in Theorem 1 is solved in the variables G_K and P , and the resulting K in (16) is

$$K = [0.420 \quad -0.610]. \quad (35)$$

Only for illustrative purposes, we also solve the problem in (14) and obtain a gain matrix

$$K_{A,B} = [0.313 \quad -0.671]. \quad (36)$$

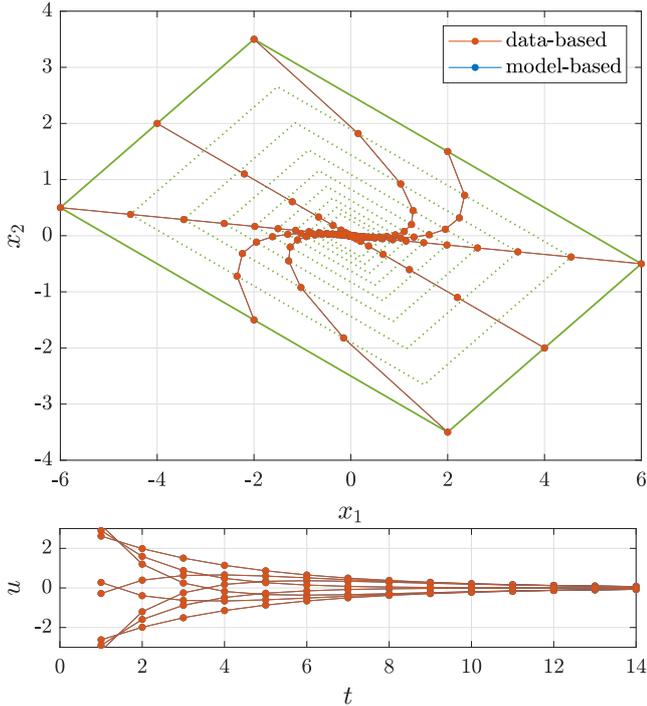


Fig. 3. See the caption of Figure 2 for the illustration convention of the quantities in this figure, which correspond to $\lambda = 0.758$ minimized as in Corollary 1.

The solutions resulting from simulating the system with state feedback law $u = Kx$ (our data-based solution) and $u = K_{A,B}x$ (the model-based solution) are in Figure 2 and show that Problem 1 is solved.

As an alternative to solving the feasibility problem in Theorem 1, we solve the minimization problem in Corollary 1 using the same data. In this case we obtain $\lambda = 0.758$ and $K = K_{A,B} = [0.379 \ -0.692]$ and the resulting solutions are in Fig. 3.

Some comments on the results corresponding to Figures 2 and 3 can be made. Because Θ in (18) has full row rank, feasibility of conditions (14) in the variables K and P is equivalent to feasibility of conditions (15) in the variables G_K and P by Theorem 2. In general, the two feasibility problems yield different solutions as in Figure 2, e.g., due to different initializations of the decision variables. However, since feasible linear programs have a global minimum, minimizing λ under (14) or (15) yields the same value for λ . Moreover, minimizing λ reduces the size of the feasibility set (due to the constraints $P \geq 0$ and $P1 \leq \lambda I$), which leads in this case to the fact that the minimizers G_K and P under the conditions in (15) yield the same feedback gain as the minimizers K and P under the conditions in (14).

6. CONCLUSIONS

This paper proposes a data-based solution for designing a controller enforcing that a given polyhedral C-set for the state is λ -contractive (hence, invariant) and given polyhedral convex constraints on the control are satisfied. With respect to classical approaches from set-invariance, we show that the data-based solution still arises from a numerically-efficient linear program, and that, under

a rank condition on the collected data, the data-based solution is feasible if and only if the model-based solution is feasible. The level of λ -contractivity is guaranteed based on the data. Our main results are given for the nominal case when the input and state data are not affected by noise and a preliminary result is given for noisy data.

REFERENCES

- Baggio, G., Katewa, V., and Pasqualetti, F. (2019). Data-driven minimum-energy controls for linear systems. *IEEE Control Systems Letters*, 3, 589–594.
- Battistelli, G., Mari, D., Selvi, D., and Tesi, P. (2018). Direct control design via controller unfalsification. *International Journal of Robust and Nonlinear Control*, 28, 3694–3712.
- Berberich, J., Köhler, J., Müller, M., and Allgöwer, F. (2019a). Data-driven model predictive control with stability and robustness guarantees. *arXiv preprint arXiv:1906.04679*, June 2019.
- Berberich, J., Romer, A., Scherer, C.W., and Allgöwer, F. (2019b). Robust data-driven state-feedback design. *arXiv preprint arXiv:1909.04314*, September 2019.
- Blanchini, F. (1990). Feedback control for linear time-invariant systems with state and control bounds in the presence of disturbances. *IEEE Trans. Automat. Contr.*, 35(11), 1231–1234.
- Blanchini, F. (1999). Set invariance in control. *Automatica*, 35(11), 1747–1767.
- Blanchini, F. and Miani, S. (2008). *Set-theoretic methods in control*. Springer, 2nd edition.
- Campi, M.C., Lecchini, A., and Savaresi, S.M. (2002). Virtual reference feedback tuning: a direct method for the design of feedback controllers. *Automatica*, 38(8), 1337–1346.
- Coulson, J., Lygeros, J., and Dörfler, F. (2019). Data-enabled predictive control: in the shallows of the DeePC. In *European Control Conference*, 307–312.
- Dai, T. and Sznaier, M. (2018). A moments based approach to designing MIMO data driven controllers for switched systems. In *57th IEEE Conference on Decision and Control*.
- De Persis, C. and Tesi, P. (2019). Formulas for data-driven control: Stabilization, optimality and robustness. *arXiv preprint arXiv:1903.06842*, March 2019.
- Formentin, S., Karimi, A., and Savaresi, S. (2013). Optimal input design for direct data-driven tuning of model-reference controllers. *Automatica*, 49, 1874–1882.
- Garcia, J. and Fernández, F. (2015). A comprehensive survey on safe reinforcement learning. *Journal of Machine Learning Research*, 16, 1437–1480.
- Gonçalves da Silva, G.R., Bazanella, A., Lorenzini, C., and Campestrini, L. (2019). Data-driven LQR control design. *IEEE Control Systems Letters*, 3, 180–185.
- Gutman, P.O. and Cwikel, M. (1986). Admissible sets and feedback control for discrete-time linear dynamical systems with bounded controls and states. *IEEE Trans. Automat. Contr.*, 31(4), 373–376.
- Hjalmarsson, H., Gevers, M., Gunnarsson, S., and Lequin, O. (1998). Iterative feedback tuning: theory and applications. *IEEE Control Systems Magazine*, 18(4), 26–41.
- Karimi, A., Mišković, L., and Bonvin, D. (2004). Iterative correlation-based controller tuning. *Int. Journal of Adaptive Control and Signal Processing*, 18(8), 645–664.

- Markovsky, I. and Rapisarda, P. (2007). On the linear quadratic data-driven control. In *European Control Conference*.
- Mukherjee, S., Bai, H., and Chakraborty, A. (2018). On model-free reinforcement learning of reduced-order optimal control for singularly perturbed systems. In *57th IEEE Conference on Decision and Control*.
- Nagumo, M. (1942). Über die Lage der integralkurven gewöhnlicher Differentialgleichungen. *Proceedings of the Physico-Mathematical Society of Japan. 3rd Series*, 24, 551–559.
- Novara, C., Fagiano, L., and Milanese, M. (2013). Direct feedback control design for nonlinear systems. *Automatica*, 49, 849–860.
- Novara, C., Formentin, S., Savaresi, S., and Milanese, M. (2016). Data-driven design of two degree-of-freedom nonlinear controllers: the D²-IBC approach. *Automatica*, 72, 19–27.
- Salvador, J., Muñoz de la Peña, D., Alamo, T., and Bemporad, A. (2018). Data-based predictive control via direct weight optimization. In *6th IFAC Conference on Nonlinear Model Predictive Control*, 356–361.
- van Waarde, H.J., Eising, J., Trentelman, H.L., and Camlibel, M.K. (2019). Data informativity: a new perspective on data-driven analysis and control. *arXiv preprint arXiv:1908.00468*, August 2019.
- Vassilaki, M., Hennes, J., and Bitsoris, G. (1988). Feedback control of linear discrete-time systems under state and control constraints. *Int. Journal of Control*, 47(6), 1727–1735.
- Wabersich, K.P. and Zeilinger, M.N. (2018). Scalable synthesis of safety certificates from data with application to learning-based control. In *European Control Conference*, 1691–1697.
- Willems, J.C., Rapisarda, P., Markovsky, I., and De Moor, B.L.M. (2005). A note on persistency of excitation. *Systems & Control Letters*, 54(4), 325–329.