

Approximate Performance Measures for a Single Station Two-Stage Reneging Queue

Katsunobu Sasanuma^{*,a}, Alan Scheller-Wolf^b

^aCollege of Business, Stony Brook University, Stony Brook, NY 11794, USA

^bTepper School of Business, Carnegie Mellon University, Pittsburgh, PA 15213, USA

Abstract

We study a single station *two-stage* renege queue with Poisson arrivals, exponential services, and two levels of exponential renege behaviors, extending the popular Erlang A model that assumes a constant renege rate. We derive approximate analytical formulas representing performance measures for our two-stage queue following the Markov chain decomposition approach. Our formulas not only give accurate results spanning the heavy-traffic to the light-traffic regimes, but also provide insight into capacity decisions.

Key words: single station, two-stage queue, exponential renege, Markov chain decomposition

1. Introduction

Models representing service systems with impatient customers have been studied extensively due to their practical importance. When analyzing such systems, it is often assumed that all customers are equally impatient and randomly renege (i.e., leave a queue after entering but before reaching service) at the same rate. This constant patience assumption may be reasonable when customers have no information about their position in queue (e.g., in some call centers). However, customers often change their level of patience, for example

*Corresponding author

Email addresses: katsunobu.sasanuma@stonybrook.edu (Katsunobu Sasanuma), awolf@andrew.cmu.edu (Alan Scheller-Wolf)

based on their queue position if they experience a different level of comfort, or
10 when they know they are close to, or far from, the front of the queue [1]. For
example, many restaurants provide some seats (capacity) for customers waiting
inside (1st stage queue), but not everybody can sit there; if all seats inside are
filled, any remaining waiting customers must wait outside where it may be cold
or raining (2nd stage queue). Our model aims to provide simple, yet accurate
15 formulas for practitioners who make capacity (in this case waiting room seating
capacity) decisions when their customers show stage-dependent renegeing be-
haviors. Specifically, we consider a single station two-stage renegeing queue with
Poisson arrivals, exponential services, and stage-dependent exponential renegeing
rates. We analyze three performance measures: probability of queueing, proba-
20 bility of customer abandonment (via renegeing or blocking), and average queue
length. Our two-stage renegeing model can cope with both finite and infinite
queues.

When the two renegeing rates match, our queue reduces to the Erlang A
model, an M/M/n+M queueing model with renegeing. This Erlang A model
25 and its variations have been utilized for the analysis of various real-world prob-
lems such as public housing [2], kidney transplantation [3], on-street parking
[4], and call centers [see, e.g., 5, 6, 7, 8, 9]. Most of the studies are based on
either heavy traffic approximation or asymptotic analysis [10], which are very
effective for analyzing a single stage renegeing queue. For more general queueing
30 systems with state-dependent general service times, the queueing and Markov
chain decomposition (QMCD) approach is versatile [see, e.g., 11, 12]; the QMCD
method can be used to analyze complicated models, such as a queue with orbit
or non-Markovian systems. Since our model has only two stages, we utilize a
simpler Markov chain decomposition approach [13], and evaluate each decom-
35 posed sub-system separately using a Poisson-Normal approximation [14] with a
continuity correction term [15, 16, 17]. This continuity correction term makes
our formulas accurate and robust over a wide range of parameters.

Figure 1: Two-Stage Reneging Model: Full Markov Chain.


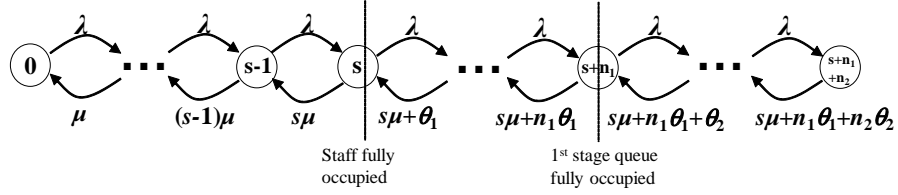


Figure 2: Decomposed Markov chains.

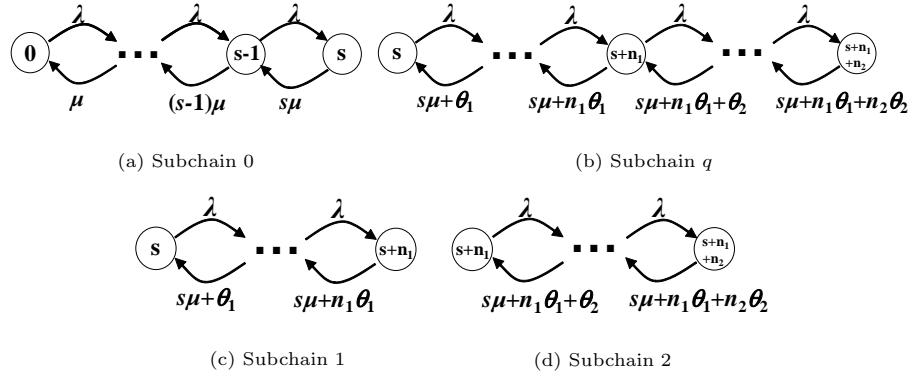

2. Single Station Two-Stage Reneging Model

In this section, we present our model and derive several basic performance
 40 measures following the Markov chain decomposition approach [13]. The for-
 mulas we derive in this section are exact; approximations are discussed in the
 following section.

2.1. Markov Chain Structure and Its Decomposed Subchains

Our two-stage model is a simple birth-death Markov chain (MC) (Fig. 1).
 45 Customers arrive according to Poisson process with rate λ , and are served by
 one of the s servers with exponential rate μ following a first-in first-out (FIFO)
 rule. This single station queue has two stages ($i = 1, 2$); stage i has n_i spaces;
 n_i can be either finite or infinite. Each customer in the i^{th} stage reneges after
 an exponentially distributed time with rate θ_i (> 0). When both stages of the
 50 queue are fully occupied in state $s + n_1 + n_2$, a new customer is unable to enter

the system (*blocked*). The arrival and departure rates at state k are

$$\lambda_k = \begin{cases} \lambda & 0 \leq k < s + n_1 + n_2 \\ 0 & s + n_1 + n_2 \leq k \end{cases}$$

$$\mu_k = \begin{cases} k\mu & 1 \leq k \leq s \\ s\mu + (k - s)\theta_1 & s < k \leq s + n_1 \\ s\mu + n_1\theta_1 + (k - s - n_1)\theta_2 & s + n_1 < k \leq s + n_1 + n_2 \\ 0 & s + n_1 + n_2 < k. \end{cases}$$

To analyze our system we decompose the full MC (Fig. 1) into subchains: an $M/M/s/s$ subchain (Subchain 0 in Fig. 2a: MC comprised of states 1 to s) and a queueing subchain (Subchain q in Fig. 2b: MC comprised of states s to $s + n_1 + n_2$). Subchain q is further decomposed into the 1st stage queue with reneging rate θ_1 (Subchain 1 in Fig. 2c: MC comprised of states s to $s + n_1$) and the 2nd stage queue with reneging rate θ_2 (Subchain 2 in Fig. 2d: MC comprised of states $s + n_1$ to $s + n_1 + n_2$). Let Ω and A_j represent a set of states for the full MC and subchain j ($= 0, 1, 2, q$), respectively. Thus: $\Omega = A_0 \cup A_q$,
 $A_q = A_1 \cup A_2$, $A_0 \cap A_q = A_0 \cap A_1 = \{s\}$, and $A_1 \cap A_2 = \{s + n_1\}$.

2.2. Representation of Performance Measures

We denote the steady-state probability of state k in the full MC and subchain j as π_k and π_k^j , respectively. Since the MC we consider is of the birth-death type, any truncated subchain j maintains the same stationary distribution as the full MC up to a normalization constant, i.e., $\pi_k^j = \frac{\pi_k}{\sum_{k' \in A_j} \pi_{k'}}$, $\forall k \in A_j$ (which we simply denote as $\pi_k^j \propto \pi_k$, $\forall k \in A_j$ in this paper). Define $\mathbb{E}[f(X)] = \sum_{k \in \Omega} f(k)\pi_k$, $\mathbb{E}_j[f(X)] = \sum_{k \in A_j} f(k)\pi_k^j$, and $r_1 = \frac{\pi_{s+n_1}^1}{\pi_s^1}$. The following proposition holds as a special case of the Markov chain decomposition method based on the total expectation theorem [13]. All proofs are given in appendices.

Proposition 1. *For any function of states $f(X)$ for the two-stage reneging queue, the following equations hold:*

$$\frac{\mathbb{E}[f(X)]}{\pi_s} = \frac{\mathbb{E}_0[f(X)]}{\pi_s^0} + \frac{\mathbb{E}_q[f(X)]}{\pi_s^q} - f(s), \quad (1)$$

$$\frac{\mathbb{E}_q[f(X)]}{\pi_s^q} = \frac{\mathbb{E}_1[f(X)]}{\pi_s^1} + r_1 \left(\frac{\mathbb{E}_2[f(X)]}{\pi_{s+n_1}^2} - f(s + n_1) \right). \quad (2)$$

Combining above, we obtain

$$\frac{\mathbb{E}[f(X)]}{\pi_s} = \frac{\mathbb{E}_0[f(X)]}{\pi_s^0} + \left(\frac{\mathbb{E}_1[f(X)]}{\pi_s^1} - f(s) \right) + r_1 \left(\frac{\mathbb{E}_2[f(X)]}{\pi_{s+n_1}^2} - f(s+n_1) \right). \quad (3)$$

70 Denote the queueing probability as P_Q , the abandonment probability (due to renegeing and blocking) as P_A , and the expected number of customers in queue as L . Using Proposition 1, we can obtain $1/\pi_s$ by setting $f(X) = 1$; P_Q by setting $f(X) = \mathbf{1}_{A_q}$ (an indicator function); P_A by setting $f(X) = N_A$ (a random variable representing the steady-state number of customer abandonments per
75 unit time); and L by setting $f(X) = N$ (a random variable representing the steady-state number of customers in queue).

Proposition 2. *The performance measures of the two-stage renegeing queue are*

$$\frac{1}{\pi_s} = \frac{1}{\pi_s^0} + \frac{1}{\pi_s^q} - 1 = \frac{1}{\pi_s^0} + \left(\frac{1}{\pi_s^1} - 1 \right) + r_1 \left(\frac{1}{\pi_{s+n_1}^2} - 1 \right), \quad (4)$$

$$\frac{P_Q}{\pi_s} = \frac{1}{\pi_s^q} = \frac{1}{\pi_s^1} + r_1 \left(\frac{1}{\pi_{s+n_1}^2} - 1 \right), \quad (5)$$

$$\frac{P_A}{\pi_s} = p \left(\frac{1}{\pi_s^q} - 1 \right) + 1 = p \left[\left(\frac{1}{\pi_s^1} - 1 \right) + r_1 \left(\frac{1}{\pi_{s+n_1}^2} - 1 \right) \right] + 1, \quad (6)$$

$$\frac{L}{\pi_s} = \frac{\lambda}{\theta_1} \left[p \left(\frac{1}{\pi_s^1} - 1 \right) + 1 - r_1 \right] + \frac{r_1 \lambda}{\theta_2} \left[\left(p + \frac{n_1(\theta_2 - \theta_1)}{\lambda} \right) \left(\frac{1}{\pi_{s+n_1}^2} - 1 \right) + 1 - r_2 \right], \quad (7)$$

where

$$r_1 = \frac{\pi_{s+n_1}^1}{\pi_s^1}, \quad r_2 = \frac{\pi_{s+n_1+n_2}^2}{\pi_{s+n_1}^2}, \quad \text{and} \quad p = 1 - \frac{s\mu}{\lambda}.$$

Proposition 2 expresses the performance measures of interest as simple functions of steady-state probabilities; these probabilities' exact expressions are given by

$$\frac{1}{\pi_s^0} = \frac{\sum_{k=0}^s \frac{(\lambda/\mu)^k}{k!}}{\frac{(\lambda/\mu)^s}{s!}}, \quad \frac{1}{\pi_s^1} = \sum_{k=0}^{n_1} \prod_{j=1}^k \frac{\lambda}{s\mu + j\theta_1}, \quad \frac{1}{\pi_{s+n_1}^2} = \sum_{k=0}^{n_2} \prod_{j=1}^k \frac{\lambda}{s\mu + n_1\theta_1 + j\theta_2}, \quad (8)$$

where we have an empty product (when $k = 0$), whose value is 1 by convention. When n_1 (or n_2) = ∞ , the last two equations have the following alternative expressions (the derivation utilizes gamma and beta functions; see [3]):

$$\frac{1}{\pi_s^1} = \frac{s\mu}{\theta_1} \int_0^1 e^{\frac{\lambda t}{\theta_1}} (1-t)^{\frac{s\mu}{\theta_1}-1} dt, \quad \frac{1}{\pi_{s+n_1}^2} = \frac{s\mu + n_1\theta_1}{\theta_2} \int_0^1 e^{\frac{\lambda t}{\theta_2}} (1-t)^{\frac{s\mu+n_1\theta_1}{\theta_2}-1} dt. \quad (9)$$

Proposition 2 with (8) and (9) gives the exact performance measures of our model; however, the result is cumbersome to evaluate and provides little intuition on the performance measures of interest. To gain some insight about the

80 performance measures, the following exact relationships (directly derived from Proposition 2) are useful.

Corollary 1. P_A is related to P_Q as follows:

$$P_A = p(P_Q - \pi_s) + \pi_s. \quad (10)$$

In addition, if $\theta = \theta_1 = \theta_2$, then L is related to P_Q as follows:

$$L = \frac{\lambda}{\theta} [p(P_Q - \pi_s) + \pi_s - \pi_{s+n_1+n_2}]. \quad (11)$$

Corollary 1 shows the impact of the discrete state space of the Markov chain on the performance measures. If we can assume that the system is sufficiently large to ignore the probabilities of being in any single state (specifically, π_s and $\pi_{s+n_1+n_2}$ in this case), then (10) and (11) reduce to simple relationships: 85 $P_A \approx pP_Q$ and $L \approx \frac{\lambda p P_Q}{\theta}$, where p is the abandonment probability when all servers are always busy. The former tells us that the probability of customer abandonment is approximately proportional to the probability of queueing. The latter is simply Little's law: the arrival to a subsystem representing a group of 90 people who abandon the system (i.e., $\lambda p P_Q$) stays in the subsystem on average $1/\theta$ period of time.

In general, we expect that relationships among performance measures as well as analytical representations of performance measures will take simpler forms at the limit of a large system where each individual state has only a negligible contribution to the properties of the full system. Unfortunately, such 95 a simplistic view is not appropriate when dealing with small systems, because for these systems the discreteness of the state space typically plays an important role. Thus, in our approximation procedure, we evaluate (and approximate) the discrete properties of the system without taking a limit of a large system.

100 3. Approximation Procedure

Our performance measures of interest are simple functions of subchains' steady-state probabilities. Thus, to find approximate representations of the

performance measures, we derive an approximate analytical representation of these steady-state probabilities.

105 *3.1. Steady-State Probabilities in Poisson and Normal Representations*

We first show the Poisson-Normal conversion formulas, which involve a Poisson random variable (RV) with mean R and the standard normal RV, whose cumulative distribution functions (CDFs) are $F_P(\cdot; R)$ and $\Phi(\cdot)$; their corresponding probability mass function (PMF) and probability density function
 110 (PDF) are $f_P(\cdot; R)$ and $\phi(\cdot)$, respectively. Define the standard normal hazard function as $h(x) = \phi(x)/(1 - \Phi(x)) (= \phi(-x)/\Phi(-x))$ and introduce parameters $c = (s - R)/\sqrt{R}$ and $\Delta = 0.5/\sqrt{R}$. The following result is based on [17].

Lemma 1. *The Poisson CDF/PMF are approximated by the standard normal CDF/PDF as:*

$$F_P(s; R) \approx \Phi(c + \Delta), \tag{12}$$

$$f_P(s; R) \approx \frac{\phi(c + \Delta)}{\sqrt{R}}, \tag{13}$$

$$\frac{f_P(s; R)}{1 - F_P(s; R)} \approx \frac{h(c + \Delta)}{\sqrt{R}}, \tag{14}$$

$$\frac{f_P(s; R)}{F_P(s; R)} \approx \frac{h(-c - \Delta)}{\sqrt{R}}. \tag{15}$$

Following conventions in capacity planning, we call the argument s of the Poisson PMF/CDF the *staffing level*, the mean R of the Poisson RV the *resource requirement*, and the argument c of the standard normal PDF/CDF the
 115 *square-root coefficient*. The term Δ is the *continuity correction term*, which is introduced due to the conversion from a discrete function (Poisson) to continuous (normal). The term Δ is non-negligible when R is small (around 10 or less), but diminishes to zero in the asymptotic limit of large R .

120 Corresponding to the three subchains (SC) 0 (M/M/s/s queue), 1 (1st stage queue), and 2 (2nd stage queue), we define parameters necessary for Poisson and standard normal representations in Table 1. Note that the staffing levels s , s_1 , and s_2 must be non-negative integers when they appear in a Poisson representation; if they are non-integer, we round them to their nearest integer

Table 1: Parameters for Poisson and Standard Normal Representations

SC	Staffing Level	Sq-root Coef.	Resource Req.	Cont. Correction
0	s	$c = \frac{s-R}{\sqrt{R}}$	$R = \frac{\lambda}{\mu}$	$\Delta = \frac{0.5}{\sqrt{R}}$
1	$s_1 = \frac{s\mu}{\theta_1}$ $s_{1+} = s_1 + n_1$	$c_1 = \frac{s_1 - R_1}{\sqrt{R_1}} (= \sqrt{\frac{\mu}{\theta_1}} c)$ $c_{1+} = \frac{s_{1+} - R_1}{\sqrt{R_1}}$	$R_1 = \frac{\lambda}{\theta_1}$ $(= \frac{\mu}{\theta_1} R)$	$\Delta_1 = \frac{0.5}{\sqrt{R_1}}$ $(= \sqrt{\frac{\theta_1}{\mu}} \Delta)$
2	$s_2 = \frac{s\mu + n_1\theta_1}{\theta_2}$ $s_{2+} = s_2 + n_2$	$c_2 = \frac{s_2 - R_2}{\sqrt{R_2}} (= \sqrt{\frac{\theta_1}{\theta_2}} c_{1+})$ $c_{2+} = \frac{s_{2+} - R_2}{\sqrt{R_2}}$	$R_2 = \frac{\lambda}{\theta_2}$ $(= \frac{\theta_1}{\theta_2} R_1 = \frac{\mu}{\theta_2} R)$	$\Delta_2 = \frac{0.5}{\sqrt{R_2}}$ $(= \sqrt{\frac{\theta_2}{\theta_1}} \Delta_1 = \sqrt{\frac{\theta_2}{\mu}} \Delta)$

125 values. (In other words, a Poisson representation is exact when staffing levels are integers and otherwise is an approximation.) This integer condition can be dropped when we convert to the normal; a major benefit of using the normal representation. In this conversion procedure, we take into consideration the impact of the discrete state space using the continuity correction terms (Δ , Δ_1 ,
130 Δ_2). These correction terms can be dropped only at the limit of large resource requirements ($R, R_1, R_2 \rightarrow \infty$, respectively).

Using Lemma 1 and parameters defined in Table 1, we obtain Proposition 3.

Proposition 3. *The steady-state probabilities of the subchains are approximately expressed in Poisson and normal representations as follows:*

1. $M/M/s/s$ (subchain 0):

$$\frac{1}{\pi_s^0} = \frac{F_P(s; R)}{f_P(s; R)} \approx \frac{\sqrt{R}}{h(-c - \Delta)} =: \tilde{h}. \quad (16)$$

2. 1^{st} stage queue (subchain 1):

$$r_1 = \frac{\pi_{s+n_1}^1}{\pi_s^1} = \frac{f_P(s_{1+}; R_1)}{f_P(s_1; R_1)} \approx \frac{\phi(c_{1+} + \Delta_1)}{\phi(c_1 + \Delta_1)} =: \tilde{r}_1,$$

$$\frac{1}{\pi_s^1} - 1 = \frac{1 - F_P(s_1; R_1)}{f_P(s_1; R_1)} - \frac{1 - F_P(s_{1+}; R_1)}{f_P(s_1; R_1)} \approx \sqrt{R_1} \left(\frac{1}{h(c_1 + \Delta_1)} - \frac{\tilde{r}_1}{h(c_{1+} + \Delta_1)} \right) =: \tilde{h}_1. \quad (17)$$

3. 2^{nd} stage queue (subchain 2):

$$r_2 = \frac{\pi_{s+n_1+n_2}^2}{\pi_{s+n_1}^2} = \frac{f_P(s_{2+}; R_2)}{f_P(s_2; R_2)} \approx \frac{\phi(c_{2+} + \Delta_2)}{\phi(c_2 + \Delta_2)} =: \tilde{r}_2,$$

$$\frac{1}{\pi_{s+n_1}^2} - 1 = \frac{1 - F_P(s_2; R_2)}{f_P(s_2; R_2)} - \frac{1 - F_P(s_{2+}; R_2)}{f_P(s_2; R_2)} \approx \sqrt{R_2} \left(\frac{1}{h(c_2 + \Delta_2)} - \frac{\tilde{r}_2}{h(c_{2+} + \Delta_2)} \right) =: \tilde{h}_2. \quad (18)$$

3.2. Performance Measures in Normal Representation

Combining Propositions 2 and 3 and using parameters defined in Table 1, we derive the approximate representations of our performance measures.

Proposition 4. *Performance measures of the two-stage reneging queue are approximately expressed in the standard normal representation as follows:*

$$\frac{1}{\pi_s} = \tilde{h} + \tilde{h}_1 + \tilde{r}_1 \tilde{h}_2, \quad \frac{P_Q}{\pi_s} = \frac{1}{\pi_s^q} = 1 + \tilde{h}_1 + \tilde{r}_1 \tilde{h}_2, \quad \frac{P_A}{\pi_s} = p \left(\tilde{h}_1 + \tilde{r}_1 \tilde{h}_2 \right) + 1,$$

$$\frac{L}{\pi_s} = R_1(p\tilde{h}_1 + 1 - \tilde{r}_1) + \tilde{r}_1 R_2 \left[\left(p + \frac{n_1}{R_2} - \frac{n_1}{R_1} \right) \tilde{h}_2 + 1 - \tilde{r}_2 \right].$$

Proposition 4 can represent both finite and infinite queues as well as the Erlang A model by choosing parameters appropriately. Notice that for $i \in \{1, 2\}$,
 $n_i \rightarrow \infty \iff \tilde{r}_i = 0$; and $n_i = 0 \iff \tilde{r}_i = 1, \tilde{h}_i = 0$. The above formulas
 reduce to the Erlang A formulas either by setting $\theta_1 = \theta_2$ and $\tilde{r}_2 = 0$ or by setting
 $\tilde{r}_1 = 1, \tilde{h}_1 = 0$, and $\tilde{r}_2 = 0$. Proposition 4 can be extended to more stages
 if desired (see Appendix G). Thanks to the linearity of Proposition 1, Proposition
 4 shows how each subchain (i.e., $\tilde{h}, \tilde{h}_1, \tilde{h}_2$) contributes to the performance
 measures.

Proposition 4 can be used to derive asymptotic formulas; such formulas can be useful, but they obscure the impact of the finite 1st stage queue and thus diminish the value of our two-stage model. However, the contrast between asymptotic formulas and our results illustrates some key elements of our results.
 For example, taking the Halfin-Whitt scaling (i.e., taking a limit of large R and s while maintaining $s = R + c\sqrt{R}$ with fixed c) would cause the constant term 1 to vanish from $\frac{P_Q}{\pi_s}$ (i.e., drop π_s from P_Q) as well as all Δ terms (due to large R_1 and R_2), leading to a well-known asymptotic formula for the Erlang A model with a single reneging rate θ in [5]: $P_Q \approx \left[1 + \frac{h(c\sqrt{\frac{\theta}{s}})}{\sqrt{\frac{\theta}{s}h(-c)}} \right]^{-1}$. The difference

155 from P_Q in Proposition 4 is the π_s and Δ terms, the correction necessary to accurately represent the discrete state space of MC systems, both of which become negligible in the limit for systems with a large resource requirement, but are critical for non-asymptotic systems.

Propositions 3 and 4 together with Table 1 provide important insights into
 160 our model. Quantitatively speaking, a dominant subchain exhibits a larger parameter, either \tilde{h} , \tilde{h}_1 , or \tilde{h}_2 , through which it has the correspondingly largest impact on the performance measures, following Proposition 4; but how can we identify which subchain is dominant? The key observation is that, in our approximation scheme, the number of customers in the system is distributed
 165 following a normal distribution, which is extended over three subchains. This distribution changes its z-score range in each subchain, but its sign does not change at the boundary of two subchains: subchain 0 ranges up to c , subchain 1 ranges from $c_1(= \sqrt{\frac{\mu}{\theta_1}}c)$ to c_{1+} , and subchain 2 ranges from $c_2(= \sqrt{\frac{\theta_1}{\theta_2}}c_{1+})$ to c_{2+} (here, we ignore all continuity correction terms to simplify the argument).
 170 Thus, the highest peak of the distribution (corresponding to $z = 0$) must fall into one of the subchains (or possibly none of them). We can reasonably assume that if one subchain contains both the highest peak of the distribution and a large portion of distribution, as is common, then this subchain should play an important role in the performance measures. Using this insight, we can make
 175 rough capacity planning decisions without evaluating the performance measures. We discuss this more in §4.2.


4. Numerical Experiments

We first demonstrate the accuracy of our approximate formulas and then examine the impact of selected parameters of the two-stage renegeing model.

180 4.1. Comparison with Exact Values

Fig. 3 compares the exact values with our approximation for fixed λ, μ, n_1, n_2 , and θ_2 . (We tested many parameter settings; results were similar.) Fig. 3 shows


Figure 3: Comparison between our approximation and exact values for different 1st stage reneing rates θ_1 .

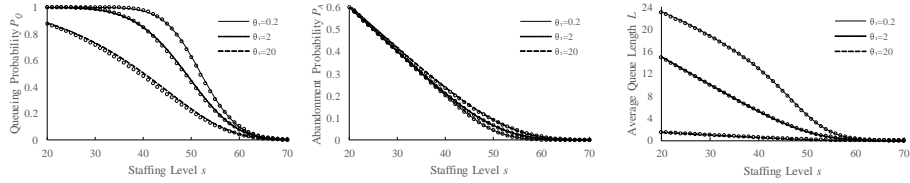

(a) Queuing Probability P_Q (b) Abandonment Probability P_A (c) Average Queue Length L

Notes: $\lambda = 50, \mu = 1, n_1 = 10, n_2 = 20, \theta_2 = 2$. s and θ_1 are variables. The open circles in the figures correspond to exact values.

Figure 4: Comparison between our approximation and exact values for different 2st stage reneing rates θ_2 .

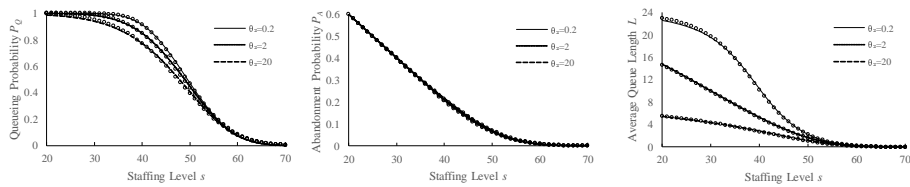

(a) Queuing Probability P_Q (b) Abandonment Probability P_A (c) Average Queue Length L

Notes: $\lambda = 50, \mu = 1, n_1 = 5, n_2 = 20, \theta_1 = 2$. s and θ_2 are variables; the lines for P_A are hardly distinguishable due to the the insensitivity of P_A to θ_2 in this example. The open circles in the figures correspond to exact values.

Table 2: Absolute error and relative error of our approximation when varying θ_1 and s .

	θ_1	s	20	30	40	50	60	70
P_Q	0.2	Abs.	4.25E-06	3.83E-04	4.05E-03	-7.86E-03	5.83E-03	1.76E-03
		Rel.	0.00%	0.04%	0.41%	-1.26%	5.47%	37.80%
	2	Abs.	4.96E-04	3.81E-03	-1.11E-03	-1.10E-02	3.69E-03	1.50E-03
		Rel.	0.05%	0.39%	-0.13%	-2.52%	4.53%	36.92%
	20	Abs.	-6.09E-03	-1.82E-02	-2.52E-02	-1.55E-02	4.97E-04	9.20E-04
		Rel.	-0.69%	-2.54%	-5.24%	-7.09%	1.10%	34.52%
P_A	0.2	Abs.	-2.36E-07	-2.46E-05	-4.97E-04	1.06E-04	4.27E-04	2.49E-05
		Rel.	0.00%	-0.01%	-0.25%	0.24%	17.32%	49.66%
	2	Abs.	-3.27E-05	-4.09E-04	-1.16E-03	7.15E-05	9.54E-04	1.29E-04
		Rel.	-0.01%	-0.10%	-0.55%	0.11%	11.79%	44.95%
	20	Abs.	-2.61E-03	-3.02E-03	-2.37E-03	1.28E-04	1.74E-03	3.62E-04
		Rel.	-0.43%	-0.73%	-1.01%	0.14%	10.66%	42.75%
L	0.2	Abs.	-6.54E-02	-2.54E-02	2.73E-02	-6.07E-02	4.55E-02	4.96E-03
		Rel.	-0.28%	-0.14%	0.21%	-1.32%	11.12%	45.94%
	2	Abs.	-1.97E-02	-1.21E-02	-2.92E-02	1.79E-03	2.39E-02	3.23E-03
		Rel.	-0.13%	-0.12%	-0.56%	0.11%	11.79%	44.95%
	20	Abs.	-6.50E-03	-7.55E-03	-5.91E-03	3.20E-04	4.36E-03	9.05E-04
		Rel.	-0.43%	-0.73%	-1.01%	0.14%	10.66%	42.75%

Notes: $\lambda = 50, \mu = 1, n_1 = 10, n_2 = 20, \theta_2 = 2$. $\theta_1 = 0.2, 2, 20$ and $s = 20$ to 70 .


staffing level s on the horizontal axis and different lines for different 1st stage
renewing rates θ_1 . Similarly, Fig. 4 compares the exact values with our ap-
185 proximation when staffing level s changes for different 2nd stage renewing rates
 θ_2 . Tables 2 and 3 show the errors of our approximation corresponding to
Figs. 3 and 4, respectively; we present both absolute error (denoted as Abs.;
defined as *exact* – *approximation*) and relative error (denoted as Rel.; defined
as $(\textit{exact} - \textit{approximation})/\textit{exact}$). The results demonstrate that our approxi-
190 mation is accurate, typically with small to very small absolute errors for a wide
range of parameters: the renewing rate ranging from patient ($\theta_i = 0.2$) to impa-
tient ($\theta_i = 20$) and the service capacity ranging from insufficient ($s \ll \lambda/\mu = 50$)
to ample ($s > \lambda/\mu = 50$). This small absolute error nevertheless yields a large
relative error when capacity is ample ($s > \lambda/\mu$) since *exact* values of perfor-
195 mance measures of interest, the denominator of our statistic, approach zero as
 s increases.

Table 3: Absolute error and relative error of our approximation when varying θ_2 and s .

	θ_2	s	20	30	40	50	60	70
P_Q	0.2	Abs.	1.31E-05	8.05E-04	-6.64E-04	-8.38E-03	4.37E-03	1.62E-03
		Rel.	0.00%	0.08%	-0.07%	-1.80%	5.22%	39.69%
	2	Abs.	5.04E-04	3.80E-03	-1.13E-03	-1.10E-02	3.69E-03	1.50E-03
		Rel.	0.05%	0.38%	-0.13%	-2.52%	4.53%	36.92%
	20	Abs.	6.53E-03	1.11E-02	-2.01E-03	-1.45E-02	2.29E-03	1.43E-03
		Rel.	0.66%	1.17%	-0.26%	-3.69%	2.99%	36.13%
P_A	0.2	Abs.	-7.46E-07	-6.29E-05	-6.63E-04	-1.76E-04	7.98E-04	7.92E-05
		Rel.	0.00%	-0.02%	-0.32%	-0.28%	10.47%	28.82%
	2	Abs.	-3.32E-05	-4.09E-04	-1.16E-03	7.17E-05	9.54E-04	1.29E-04
		Rel.	-0.01%	-0.10%	-0.55%	0.11%	11.79%	44.95%
	20	Abs.	-4.78E-04	-1.32E-03	-1.71E-03	3.96E-04	1.28E-03	1.58E-04
		Rel.	-0.08%	-0.33%	-0.79%	0.56%	13.91%	47.70%
L	0.2	Abs.	4.51E-01	2.84E-01	-1.04E-01	5.59E-02	3.28E-02	-1.15E-02
		Rel.	1.96%	1.43%	-1.01%	2.46%	14.43%	-152.68%
	2	Abs.	-6.81E-02	-2.91E-02	-3.09E-02	1.72E-03	2.39E-02	3.23E-03
		Rel.	-0.46%	-0.29%	-0.59%	0.10%	11.79%	44.95%
	20	Abs.	9.15E-02	2.98E-02	-5.59E-02	-4.60E-02	9.98E-03	2.64E-03
		Rel.	1.65%	0.68%	-2.02%	-4.31%	6.31%	41.79%

Notes: $\lambda = 50, \mu = 1, n_1 = 5, n_2 = 20, \theta_1 = 2$. $\theta_2 = 0.2, 2, 20$ and $s = 20$ to 70.

Figure 5: Impact of queuing capacities n_1 and n_2 on performance measures.

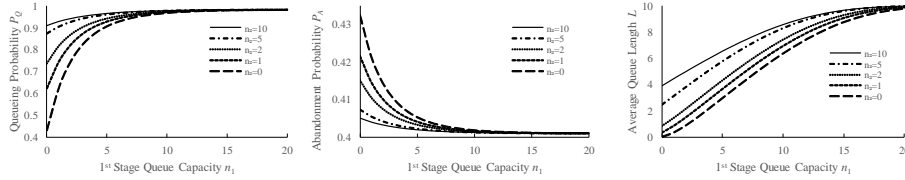

(a) Queuing Probability P_Q (b) Abandonment Probability P_A (c) Average Queue Length L

Note: $\lambda = 50, \mu = 1, s = 30, \theta_1 = 2, \theta_2 = 5$. n_1 and n_2 are variables.


Finally, we notice from Figs. 3b and 4b that P_A is largely insensitive to renegeing rates. This is because customer abandonment is independent from renegeing rates in the two extremes: When servers are too slow to handle arrivals (i.e., $s\mu < \lambda$), all customers not served must abandon (at rate $\lambda - s\mu$), and when server capacity is ample, almost nobody abandons. Figs. 3b and 4b confirm this view: P_A approaches $p = (\lambda - s\mu)/\lambda$, a linear function of s , when s is small (in the heavy-traffic limit; $s < 40$ in our example), while P_A is close to zero when s is large (in the light-traffic limit; $s > 60$ in our example). The renegeing rates have some impact on P_A only when $s \approx R$ ($40 \lesssim s \lesssim 60$ in our example).

4.2. Performance Measures' Dependence on Parameters

It is intuitive that if customers rarely exceed the 1st stage capacity—for example, due to large n_1 and/or large θ_1 —then the system will become insensitive to n_2 and θ_2 . Numerical experiments verify this: Figs. 5 and 6 show how n_1 and θ_1 (horizontal axis) impact performance measures for different n_2 and θ_2 , respectively; we observe all lines converge as n_1 and θ_1 increase. To illustrate how the 1st stage queue affects the system's dependence on the 2nd stage queue, we conduct the following experiment: Fig. 7 shows the impact of θ_2 (horizontal axis) on performance measures for different n_1 ; a steeper line corresponds to higher impact of θ_2 . We observe that, in this example, at least about $n_1 = 8$ is necessary to make the system insensitive to the change of θ_2 . A real-world implication of this result is that, by conducting a similar analysis on a spreadsheet, a restaurant owner could decide how many seats to provide for customers waiting inside (1st stage queue) to make the quality of service robust to the weather, which directly affects the level of patience for customers waiting outside (2nd stage queue).

Before we conclude this section, we provide further insight into this insensitivity. First, notice that the 1st stage queue is (approximately) represented by the standard normal distribution ranging from $c_1 (= \frac{s\mu - \lambda}{\sqrt{\lambda\theta_1}})$ to $c_{1+} (= \frac{s\mu + n_1\theta_1 - \lambda}{\sqrt{\lambda\theta_1}})$. To contain most waiting customers within the 1st stage queue, its distribution should cover a wide range of the standard normal distribution including the


Figure 6: Impact of renege rates θ_1 and θ_2 on performance measures.

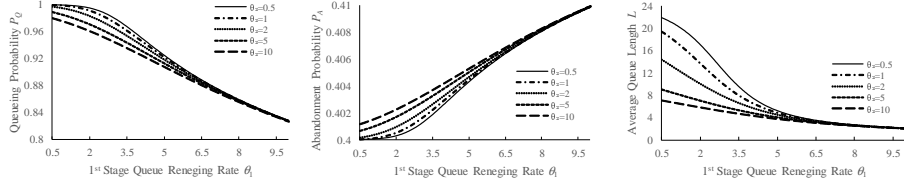

(a) Queuing Probability P_Q (b) Abandonment Probability P_A (c) Average Queue Length L

Note: $\lambda = 50, \mu = 1, s = 30, n_1 = 6, n_2 = 20$. θ_1 and θ_2 are variables.

Figure 7: Impact of 2nd stage renege rate θ_2 and 1st stage queue capacity n_1 on performance measures.

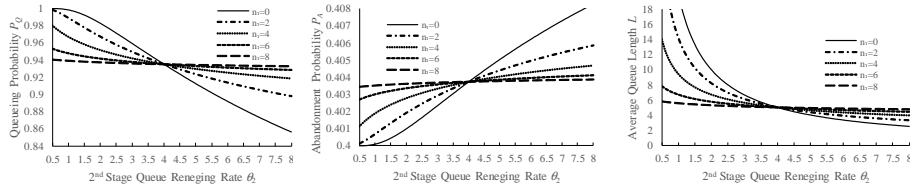

(a) Queuing Probability P_Q (b) Abandonment Probability P_A (c) Average Queue Length L

Note: $\lambda = 50, \mu = 1, s = 30, \theta_1 = 4, n_2 = \infty$. θ_2 and n_1 are variables.

center of the distribution. Since $c_1 < 0$ (i.e., $\lambda > s\mu$) in the case of interest (otherwise, there are only a small number of waiting customers), we require $c_{1+} \geq z$, where z is a decision variable representing a certain positive threshold on the standard normal distribution. For example, if we use $z = 1$, we obtain $n_1 \geq 15$ in Fig. 5; $\theta_1 \geq 6.3$ in Fig. 6; and $n_1 \geq 8.5$ (or 9 since n_1 should be an integer) in Fig. 7; these estimates turn out to be sufficiently good. Although this rule of thumb cannot replace accurate numerical calculations based on Proposition 4, it allows practitioners to make ballpark parameter estimates for containing most waiting customers in the 1st stage queue.

5. Conclusion and future work

In this paper we study a single station two-stage reneging model with finite or infinite queue capacity. Our two-stage model has wide applicability in the real world; for example, practitioners can utilize our formulas to make capacity
 240 decisions efficiently without solving Markov chains or conducting simulations.

There are several possible extensions of our results. First, our two-stage model can be straightforwardly extended to three or more stages if further accuracy is needed. Second, our paper assumes a constant arrival rate with no balking, but extension to a stage-dependent arrival rate (i.e., stage-dependent
 245 balking) is straightforward. Third, in addition to the three performance measures we analyze in this paper, we can also analyze other performance measures such as waiting time distribution. Our two-stage reneging model is simple, but more versatile than the Erlang A model that has inspired researchers for several decades; we hope our two-stage model opens a new avenue of research on service
 250 systems with impatient customers.

Appendix A Proof of Proposition 1

Since the MC we consider is a birth-death type, all decomposed subchains maintain a stationary distribution proportional to the full MC: for any subchain j , $\pi_k^j \propto \pi_k, \forall k \in A_j$, or equivalently, $\pi_k/\pi_k^j = \pi_{k'}/\pi_{k'}^j, \forall k, k' \in A_j$. Also, note that $A_0 \cap A_q = \{s\}$. Define $\mathbb{E}[f(X)] = \sum_{k \in \Omega} f(k)\pi_k$ and $\mathbb{E}_j[f(X)] = \sum_{k \in A_j} f(k)\pi_k^j$. Applying the total expectation theorem to the full MC, we derive

$$\begin{aligned} \mathbb{E}[f(X)] &= \sum_{k \in A_0} f(X)\pi_k + \sum_{k \in A_q} f(X)\pi_k - f(s)\pi_s \\ &= \sum_{k \in A_0} f(X)\pi_k \frac{\pi_s}{\pi_s^0} + \sum_{k \in A_q} f(X)\pi_k^q \frac{\pi_s}{\pi_s^q} - f(s)\pi_s \\ &= \mathbb{E}_0[f(X)] \frac{\pi_s}{\pi_s^0} + \mathbb{E}_q[f(X)] \frac{\pi_s}{\pi_s^q} - f(s)\pi_s, \end{aligned}$$

from which we obtain (1). The derivation of (2) is almost identical. Note that $A_1 \cap A_2 = \{s + n_1\}$. By decomposing subchain q into subchains 1 and 2, we

obtain

$$\frac{\mathbb{E}_q[f(X)]}{\pi_{s+n_1}^q} = \frac{\mathbb{E}_1[f(X)]}{\pi_{s+n_1}^1} + \frac{\mathbb{E}_2[f(X)]}{\pi_{s+n_1}^2} - f(s+n_1).$$

Multiplying both sides of the equation by $r_1 = \frac{\pi_{s+n_1}^1}{\pi_s^1}$, we obtain (2). Finally, (3) directly follows from (1) and (2).

Appendix B Proof of Proposition 2

For (4), we set $f(X) = 1$ in Proposition 1 and obtain $\frac{1}{\pi_s} = \frac{1}{\pi_s^0} + \frac{1}{\pi_s^q} - 1$ and $\frac{1}{\pi_s^q} = \frac{1}{\pi_s^1} + r_1 \left(\frac{1}{\pi_{s+n_1}^2} - 1 \right)$, from which we obtain the result. For (5), we set $f(X) = \mathbf{1}_{A_q}$, an indicator function. Note that $P_Q = E[\mathbf{1}_{A_q}]$, $E_0[\mathbf{1}_{A_q}] = \pi_s^0$, $E_q[\mathbf{1}_{A_q}] = 1$, and $E_s[\mathbf{1}_{A_q}] = 1$. Thus, we obtain $\frac{P_Q}{\pi_s} = \frac{E[\mathbf{1}_{A_q}]}{\pi_s} = \frac{1}{\pi_s^q} = \frac{1}{\pi_s^1} + r_1 \left(\frac{1}{\pi_{s+n_1}^2} - 1 \right)$. For (6), we set $f(X) = N_A$, a random variable representing the steady-state number of customer abandonments (via renegeing and blocking) per unit time. Note that $P_A = \frac{E[N_A]}{\lambda}$, $E_0[N_A] = \lambda \pi_s^0$, $E_s[N_A] = \lambda$, and $E_q[N_A] = \lambda - s\mu(1 - \pi_s^q)$ (the flow conservation law). Thus, we obtain $\frac{P_A}{\pi_s} = \frac{E[N_A]}{\lambda \pi_s} = p \left(\frac{1}{\pi_s^q} - 1 \right) + 1$, where $p = 1 - \frac{s\mu}{\lambda}$. Finally, as for (7), we set $f(X) = N$, a random variable representing the steady-state number of customers in queue. Let $L = E[N]$, $L_1 = E_1[N]$, and $L_2 = E_2[N]$. We obtain $\frac{L}{\pi_s} = \frac{E[N]}{\pi_s} = \frac{L_1}{\pi_s^1} + r_1 \left(\frac{L_2}{\pi_{s+n_1}^2} - n_1 \right)$. The remaining task is to find L_1 and L_2 . We use the flow conservation law for subchains 1 and 2: $\lambda(1 - \pi_{s+n_1}^1) = s\mu(1 - \pi_s^1) + \theta_1 L_1$ and $\lambda(1 - \pi_{s+n_1+n_2}^2) = (s\mu + n_1 \theta_1)(1 - \pi_{s+n_1}^2) + \theta_2(L_2 - n_1)$, from which we obtain the expressions for L_1 and L_2 :

$$\begin{aligned} \frac{L_1}{\pi_s^1} &= \frac{\lambda}{\theta_1} \left[p \left(\frac{1}{\pi_s^1} - 1 \right) + 1 - r_1 \right], \\ \frac{L_2}{\pi_{s+n_1}^2} - n_1 &= \frac{\lambda}{\theta_2} \left[\left(p - \frac{n_1(\theta_2 - \theta_1)}{\lambda} \right) \left(\frac{1}{\pi_{s+n_1}^2} - 1 \right) + 1 - r_2 \right], \end{aligned}$$

255 where $r_1 = \frac{\pi_{s+n_1}^1}{\pi_s^1}$ and $r_2 = \frac{\pi_{s+n_1+n_2}^2}{\pi_{s+n_1}^2}$.

Appendix C Proof of Corollary 1

The results directly follow from Proposition 2. We obtain (10) by eliminating π_s^q in (5) and (6). We obtain (11) by setting $\theta = \theta_1 = \theta_2$ in (7) and comparing it with (5).

260 **Appendix D Proof of Lemma 1**

The Poisson-to-Normal conversion is based on the Central Limit Theorem and is described in many textbooks [e.g., 15]. The approximation achieves high accuracy when the continuity correction term Δ is small (R is large); at the limit of small Δ (large R), the error of the approximation approaches zero. For (12), we make a discrete-to-continuous conversion from Poisson to normal with a continuity correction “+0.5” following [17]. We then convert normal to standard normal using $c = \frac{s-R}{\sqrt{R}}$ and $\Delta = \frac{0.5}{\sqrt{R}}$: $F_P(s; R) \approx \Phi\left(\frac{(s+0.5)-R}{\sqrt{R}}\right) = \Phi(c + \Delta)$. For (13), using the result above and the assumption that Δ is sufficiently small, we obtain $f_P(s; R) = F_P(s; R) - F_P(s-1; R) \approx \Phi(c+\Delta) - \Phi(c-\Delta) \approx \frac{\phi(c+\Delta)}{\sqrt{R}}$. For (14) and (15), we use the above results and the definition of the hazard function for the standard normal distribution. We obtain $\frac{f_P(s; R)}{1-F_P(s; R)} \approx \frac{\phi(c+\Delta)}{\sqrt{R}(1-\Phi(c+\Delta))} = \frac{h(c+\Delta)}{\sqrt{R}}$ and $\frac{f_P(s; R)}{F_P(s; R)} \approx \frac{\phi(c+\Delta)}{\sqrt{R}\Phi(c+\Delta)} = \frac{h(-c-\Delta)}{\sqrt{R}}$.

Appendix E Proof of Proposition 3

We discuss each subchain separately. We use parameters defined in Table 1. We assume that all staffing levels s , s' , and s'' are non-negative integers in a Poisson representation; if they are non-integer, we round them to their nearest integer values. This integer condition is dropped when we convert to the normal.

1. M/M/s/s (subchain 0): This result is familiar [see, e.g., 18]. Let $R = \frac{\lambda}{\mu}$ and consider a random variable $X \sim \text{Pois}(R)$; thus $\Pr\{X = i\} = \frac{e^{-R} R^i}{i!}$, $\forall i \in \mathbb{Z}_{\geq 0}$. This subchain is a birth-death MC with the total departure rate $k\mu$ at state k . Hence, for all $k = 1, 2, \dots, s$,

$$\pi_k^0 = \pi_{k-1}^0 \frac{\lambda}{k\mu} = \pi_{k-1}^0 \frac{R}{k} = \dots = \pi_0^0 \frac{R^k}{k!} \propto \Pr\{X = k\}.$$

Note that $\pi_k^0 \propto \Pr\{X = k\}$ means the distributions of π_k^0 and $\Pr\{X = k\}$ for $k \in A_0$ are the same except for the normalization constant. By summing up the terms with respect to k and applying the normalization condition, we obtain

$$\frac{1}{\pi_s^0} = \frac{\Pr\{0 \leq X \leq s\}}{\Pr\{X = s\}} = \frac{F_P(s; R)}{f_P(s; R)}.$$

Let $c = \frac{s-R}{\sqrt{R}}$ and $\Delta = \frac{0.5}{\sqrt{R}}$. Using (15), we obtain (16).

2. 1st stage queue (subchain 1): Let $R_1 = \frac{\lambda}{\theta_1}$, $s_1 = \frac{s\mu}{\theta_1}$, and $s_{1+} = s_1 + n_1$. Consider a random variable $X_1 \sim \text{Pois}(R_1)$; thus $\Pr\{X_1 = i\} = \frac{e^{-R_1}(R_1)^i}{i!}$, $\forall i \in \mathbb{Z}_{\geq 0}$. This subchain is a birth-death MC with the total departure rate $s\mu + k\theta_1 = (\frac{s\mu}{\theta_1} + k)\theta_1 = (s_1 + k)\theta_1$ at state $s + k$. For all $k = 1, 2, \dots, n_1$,

$$\begin{aligned} \pi_{s+k}^1 &= \pi_{s+k-1}^1 \frac{\lambda}{(s_1 + k)\theta_1} = \pi_{s+k-1}^1 \frac{R_1}{s_1 + k} = \dots = \pi_s^1 \frac{(R_1)^{s_1+k}}{(s_1 + k)!} \frac{s_1!}{(R_1)^{s_1}} \\ &\propto \Pr\{X_1 = s_1 + k\}. \end{aligned}$$

By summing up the terms with respect to k and applying the normalization condition, we obtain

$$\begin{aligned} \frac{1}{\pi_s^1} &= \frac{\Pr\{s_1 \leq X_1 \leq s_1 + n_1\}}{\Pr\{X_1 = s_1\}} = \frac{\Pr\{X_1 = s_1\} - \Pr\{X_1 \leq s_1\} + \Pr\{X_1 \leq s_1 + n_1\}}{\Pr\{X_1 = s_1\}} \\ &= 1 + \frac{1 - F_P(s_1; R_1)}{f_P(s_1; R_1)} - \frac{1 - F_P(s_{1+}; R_1)}{f_P(s_1; R_1)} \\ &= 1 + \frac{1 - F_P(s_1; R_1)}{f_P(s_1; R_1)} - \frac{f_P(s_{1+}; R_1)}{f_P(s_1; R_1)} \frac{1 - F_P(s_{1+}; R_1)}{f_P(s_{1+}; R_1)}. \end{aligned}$$

Let $c_1 = \frac{s_1 - R_1}{\sqrt{R_1}}$, $c_{1+} = \frac{s_{1+} - R_1}{\sqrt{R_1}}$, and $\Delta_1 = \frac{0.5}{\sqrt{R_1}}$. Using (13) and (14), we obtain (17).

280

3. 2nd stage queue (subchain 2): The argument is almost identical to the case of the 1st stage queue. Let $R_2 = \frac{\lambda}{\theta_2}$, $s_2 = \frac{s\mu + n_1\theta_1}{\theta_2}$, and $s_{2+} = s_2 + n_2$. Consider a random variable $X_2 \sim \text{Pois}(R_2)$; thus $\Pr\{X_2 = i\} = \frac{e^{-R_2}(R_2)^i}{i!}$, $\forall i \in \mathbb{Z}_{\geq 0}$. This subchain is a birth-death MC with the total departure rate $s\mu + n_1\theta_1 + k\theta_2 = (s_2 + k)\theta_2$ at state $s + n_1 + k$. For all $k = 1, 2, \dots, n_2$,

$$\begin{aligned} \pi_{s+n_1+k}^2 &= \pi_{s+n_1+k-1}^2 \frac{\lambda}{(s_2 + k)\theta_2} = \pi_{s+n_1+k-1}^2 \frac{R_2}{s_2 + k} = \dots \\ &= \pi_{s+n_1}^2 \frac{(R_2)^{s_2+k}}{(s_2 + k)!} \frac{s_2!}{(R_2)^{s_2}} \propto \Pr\{X_2 = s_2 + k\}, \end{aligned}$$

from which we obtain

$$\frac{1}{\pi_{s+n_1}^2} = \frac{\Pr\{s_2 \leq X_2 \leq s_2 + n_2\}}{\Pr\{X_2 = s_2\}} = 1 + \frac{1 - F_P(s_2; R_2)}{f_P(s_2; R_2)} - \frac{f_P(s_{2+}; R_2)}{f_P(s_2; R_2)} \frac{1 - F_P(s_{2+}; R_2)}{f_P(s_{2+}; R_2)}.$$

Let $c_2 = \frac{s_2 - R_2}{\sqrt{R_2}}$, $c_{2+} = \frac{s_{2+} - R_2}{\sqrt{R_2}}$, and $\Delta_2 = \frac{0.5}{\sqrt{R_2}}$. Using (13) and (14), we obtain (18).

Appendix F Proof of Proposition 4

The results directly follow from Propositions 2 and 3.

Appendix G Extension to a Three-Stage Reneging Queue

To extend the two-stage renegeing model to three-stage, we introduce the 3rd subchain with capacity n_3 and renegeing rate θ_3 . Define parameters accordingly: $R_3 = \frac{\lambda}{\theta_3}$, $s_3 = \frac{s\mu + n_1\theta_1 + n_2\theta_2}{\theta_3}$, $s_{3+} = s_3 + n_3$, $c_3 = \frac{s_3 - R_3}{\sqrt{R_3}}$, $c_{3+} = \frac{s_{3+} - R_3}{\sqrt{R_3}}$, $\Delta_3 = \frac{0.5}{\sqrt{R_3}}$. Also, we introduce $r_3 = \frac{\pi_{s+n_1+n_2+n_3}^3}{\pi_{s+n_1+n_2}^3} \approx \frac{\phi(c_{3+} + \Delta_3)}{\phi(c_3 + \Delta_3)} =: \tilde{r}_3$ and $\frac{1}{\pi_{s+n_1+n_2}^3} - 1 \approx \sqrt{R_3} \left(\frac{1}{h(c_3 + \Delta_3)} - \frac{r_3}{h(c_{3+} + \Delta_3)} \right) =: \tilde{h}_3$. It is straightforward to obtain the expressions for the three-stage renegeing queue.

$$\frac{1}{\pi_s} = \tilde{h} + \tilde{h}_1 + \tilde{r}_1 \tilde{h}_2 + \tilde{r}_1 \tilde{r}_2 \tilde{h}_3, \quad \frac{P_Q}{\pi_s} = 1 + \tilde{h}_1 + \tilde{r}_1 \tilde{h}_2 + \tilde{r}_1 \tilde{r}_2 \tilde{h}_3, \quad \frac{P_A}{\pi_s} = p \left(\tilde{h}_1 + \tilde{r}_1 \tilde{h}_2 + \tilde{r}_1 \tilde{r}_2 \tilde{h}_3 \right) + 1,$$

$$\begin{aligned} \frac{L}{\pi_s} &= R_1(p\tilde{h}_1 + 1 - \tilde{r}_1) + \tilde{r}_1 R_2 \left[\left(p + \frac{n_1}{R_2} - \frac{n_1}{R_1} \right) \tilde{h}_2 + 1 - \tilde{r}_2 \right] \\ &\quad + \tilde{r}_1 \tilde{r}_2 R_3 \left[\left(p + \frac{n_1 + n_2}{R_3} - \frac{n_1}{R_1} - \frac{n_2}{R_2} \right) \tilde{h}_3 + 1 - \tilde{r}_3 \right]. \end{aligned}$$

Observe that the formulas we obtain here are simply the formulas in Proposition 4 with extra terms added to account for the 3rd subchain. If it is necessary, an extension to four or more stages is also straightforward.

References

- 290 [1] K. Kuzu, L. Gao, S. H. Xu, To wait or not to wait: The theory and practice of ticket queues, *Manufacturing & Service Operations Management* 21 (4) (2019) 853–874.
- [2] E. H. Kaplan, Analyzing tenant assignment policies, *Management Science* 33 (3) (1987) 395–408.
- 295 [3] S. A. Zenios, Modeling the transplant waiting list: A queueing model with renegeing, *Queueing systems* 31 (3-4) (1999) 239–251.
- [4] R. C. Larson, K. Sasanuma, Congestion pricing: A parking queue model, *Journal of Industrial and Systems Engineering* 4 (1) (2010) 1–17.
- [5] O. Garnett, A. Mandelbaum, M. Reiman, Designing a call center with
300 impatient customers, *Manufacturing & Service Operations Management* 4 (3) (2002) 208–227.

- [6] N. Gans, G. Koole, A. Mandelbaum, Telephone call centers: Tutorial, review, and research prospects, *Manufacturing & Service Operations Management* 5 (2) (2003) 79–141.
- 305 [7] S. Borst, A. Mandelbaum, M. I. Reiman, Dimensioning large call centers, *Operations research* 52 (1) (2004) 17–34.
- [8] A. Mandelbaum, S. Zeltyn, Service engineering in action: The Palm/Erlang-A queue, with applications to call centers, in: *Advances in services innovations*, Springer, 2007, pp. 17–45.
- 310 [9] O. Baron, J. Milner, Staffing to maximize profit for call centers with alternate service-level agreements, *Operations Research* 57 (3) (2009) 685–700.
- [10] S. Halfin, W. Whitt, Heavy-traffic limits for queues with many exponential servers, *Operations research* 29 (3) (1981) 567–588.
- [11] H. Abouee-Mehrzi, O. Baron, State-dependent M/G/1 queueing systems, *Queueing Systems* 82 (1) (2016) 121–148.
- 315 [12] O. Baron, A. Economou, A. Manou, The state-dependent M/G/1 queue with orbit, *Queueing Systems* 90 (1-2) (2018) 89–123.
- [13] K. Sasanuma, R. Hampshire, A. Scheller-Wolf, Markov chain decomposition based on total expectation theorem, arXiv preprint arXiv:1901.06780.
- 320 [14] H. C. Tijms, *A first course in stochastic models*, John Wiley & Sons, 2003.
- [15] W. Feller, *Probability theory and its applications*, vol. 1, John Wiley & Sons, Inc., 1968.
- [16] D. Cox, The continuity correction, *Biometrika* (1970) 217–219.
- [17] H. C. Tijms, *Stochastic modelling and analysis: A computational approach*, John Wiley & Sons, Inc., 1986.
- 325 [18] M. Harchol-Balter, *Performance modeling and design of computer systems: Queueing theory in action*, Cambridge University Press, 2013.