

# COMPOSITIONAL SYNTHESIS OF CONTROL BARRIER CERTIFICATES FOR NETWORKS OF STOCHASTIC SYSTEMS AGAINST $\omega$ -REGULAR SPECIFICATIONS

MAHATHI ANAND<sup>1</sup>, ABOLFAZL LAVAEI<sup>2</sup>, AND MAJID ZAMANI<sup>3,1</sup>

**ABSTRACT.** This paper is concerned with a compositional scheme for the construction of control barrier certificates for interconnected discrete-time stochastic systems. The main objective is to synthesize switching control policies against  $\omega$ -regular properties that can be described by accepting languages of deterministic Streett automata (DSA) along with providing probabilistic guarantees for the satisfaction of such specifications. The proposed framework leverages the interconnection topology and a notion of so-called *control sub-barrier certificates* of subsystems, which are used to compositionally construct control barrier certificates of interconnected systems by imposing some dissipativity-type compositionality conditions. We propose a systematic approach to decompose high-level  $\omega$ -regular specifications into simpler tasks by utilizing the automata corresponding to the complement of specifications. In addition, we formulate an alternating direction method of multipliers (ADMM) optimization problem in order to obtain suitable control sub-barrier certificates of subsystems while satisfying compositionality conditions. We also provide a sum-of-squares (SOS) optimization problem for the computation of control sub-barrier certificates and local control policies of subsystems. Finally, we demonstrate the effectiveness of our proposed approaches by applying them to a physical case study.

## 1. INTRODUCTION

Formal verification and synthesis of complex dynamical systems against high-level logic specifications, *e.g.*, those expressed as linear temporal logic (LTL) formulae [Pnu77], have gained remarkable attentions over the past few years [Tab09]. Such problems are particularly challenging when dealing with high-dimensional continuous-state systems with stochasticity inside the models, especially, in real-world safety-critical scenarios such as traffic networks, power grids, etc.

Verification and synthesis of large-scale stochastic systems have been discussed in the relevant literature mainly based on abstraction-based techniques. Some existing results include providing probabilistic guarantees for discrete-time stochastic hybrid systems against safety and reachability properties [APLS08], game-based abstractions for verification and controller synthesis of hybrid automata enforcing reachability specifications [KKNP10, HNP<sup>+</sup>11], and symbolic controller synthesis for Markov decision processes against Büchi specifications [MMS20]. These techniques, however, rely on state-space discretization and therefore suffer severely from the *curse of dimensionality*: the computational complexity increases exponentially with respect to the dimension of the state space. Hence, these approaches are not applicable to large-scale complex systems. This issue has been partly mitigated by utilizing adaptive sequential gridding algorithms [SA13] or input-set abstractions for incrementally stable stochastic control systems [ZTA17]. Another promising alternative to alleviate the state-explosion problem is to consider the large-scale complex system as an interconnection of smaller subsystems and construct finite abstractions of the interconnected system from abstractions of subsystems via compositional techniques [SAM15, LSZ20d, LSZ19, LSZ20a, LSZ20c, LSZ18, LZ19, LSZ20b, Lav19, LSAZ20, NSZ21, NZ20].

More recently, discretization-free approaches via control barrier certificates have been proposed for the verification and synthesis of stochastic systems. Existing results include verification and synthesis of continuous and hybrid stochastic systems over infinite-time horizons [PJP07, HCL<sup>+</sup>17, WB18], safety verification of discrete-time stochastic systems [ACJT18], verification and synthesis of discrete-time stochastic control systems against

LTL specifications over finite-time horizons [JSZ18, PSM20], compositional construction of control barrier certificates for stochastic switched systems via max small-gain conditions [NSZ20a], and recently, control barrier functions for stochastic systems in the presence of process and measurement noise [Cla20].

The proposed results in the above-mentioned literature require control barrier certificates to have a certain parametric form, such as polynomial, in order to search for their unknown coefficients under some mild assumptions. Although searching for those coefficients might be possible for systems with lower dimensions, it will become increasingly difficult and computationally intractable for large-scale complex systems. In order to alleviate this issue, one promising solution is to develop a compositional approach by considering the large-scale stochastic system as an interconnection of lower-dimensional subsystems and searching for so-called *control sub-barrier certificates* for subsystems along with the corresponding local control policies. One can then utilize control sub-barrier certificates of subsystems to compositionally construct a control barrier certificate of the complex monolithic system.

In this paper, we propose a compositional technique based on dissipativity approaches for the construction of control barrier certificates for interconnected discrete-time stochastic systems. The proposed compositional condition may leverage the structure of the interconnection topology together with dissipativity-type properties of subsystems and be potentially fulfilled independently of the number or gains of the subsystems. The main goal is to synthesize switching control policies against  $\omega$ -regular properties that can be described by accepting languages of deterministic Streett automata (DSA). We provide a systematic approach to decompose high-level  $\omega$ -regular specifications into simpler tasks by employing the automata corresponding to the complement of specifications. Control sub-barrier certificates are obtained for these tasks along with the corresponding local control policies. Correspondingly, a switching control policy that ensures the satisfaction of the specification with some probability is synthesized.

Conventionally, in order to satisfy the compositionality condition, the required parameters for finding suitable control sub-barrier certificates are pre-selected and the compositionality condition is checked a posteriori. While this method can provide tractable results in certain scenarios for systems with specific interconnection structures, it is not particularly useful in large-scale networks where structural properties of interconnected systems are not apparent. Besides, since control sub-barrier certificates are not optimized with respect to the compositionality condition, obtained results can be conservative. In order to provide scalable, less-conservative results, we employ a distributed optimization method based on an alternating direction method of multipliers (ADMM) algorithm which allows us to break down a large optimization problem into several smaller sub-problems which can be easier to handle. The solution to the optimization problem provides us with suitable control sub-barrier certificates along with local control policies, allowing computation of control barrier certificates for the interconnected system. We demonstrate the effectiveness of our proposed results by applying them to a room temperature network in a circular building containing 300 rooms.

**Related Literature.** Compositional construction of control barrier certificates for discrete-time stochastic systems enforcing simple safety specifications is recently proposed in [ALZ20] and then extended in [ALZ21] for a larger class of specifications that can be admitted by accepting languages of deterministic finite automata (DFA). Both works use a different compositionality scheme, namely, max *small-gain* conditions. Our approach here differs from the one in [ALZ21] in four main directions. First and foremost, our proposed compositionality approach here is potentially less conservative than the one presented in [ALZ21] since the dissipativity-type reasoning proposed in this work can leverage the structure of the interconnection topology and may not require any constraint on the number or gains of the subsystems (cf. Remark 4.4). Second, the provided results in [ALZ21] asks an additional condition (*i.e.*, [ALZ21, condition (3.1)]) which is required for the satisfaction of *small-gain* type conditions, while we do not need such an assumption in our setting. Third, while [ALZ21] provides probabilistic guarantees for finite-time horizons, we generalize those results to *infinite-time* horizons. Consequently, we enlarge the class of specifications here to  $\omega$ -regular properties. As our last contribution, we propose here a distributed optimization method based on an ADMM algorithm which allows us to break down a large optimization problem into several smaller sub-problems. In particular, the solution to the optimization problem provides suitable control sub-barrier certificates together with local control policies

satisfying the main compositionality condition and, hence, allowing us to compute control barrier certificates for the interconnected system efficiently.

Compositional construction of control barrier functions for interconnected control systems is also presented in [JSZ20]. Our proposed approach differs from the one in [JSZ20] in four directions, two of which are common with the first two differences we discussed above for [ALZ20]. As the third distinction, the proposed results in [JSZ20] are presented for non-stochastic settings while our work deals with stochastic ones. As our last contribution, the results in [JSZ20] are provided for specifications described by deterministic co-Büchi automata (a subset of  $\omega$ -regular specifications), whereas we deal with general  $\omega$ -regular specifications in this paper. Lastly, compositional construction of control barrier functions for large-scale stochastic systems has also been presented in [NSZ20b, NSZ20c] but for continuous-time stochastic systems using a different compositional scheme, namely, sum-type small-gain conditions. Unfortunately, those conditions are formulated in terms of “almost” linear gains and require subsystems to have a (nearly) linear behavior, making it much more conservative than our proposed approach here.

## 2. DISCRETE-TIME STOCHASTIC CONTROL SYSTEMS

**2.1. Preliminaries.** We consider the probability space  $(\Omega, \mathcal{F}_\Omega, \mathbb{P}_\Omega)$ , where  $\Omega$  is the sample space,  $\mathcal{F}_\Omega$  is a sigma-algebra on  $\Omega$  consisting subsets of  $\Omega$  as events, and  $\mathbb{P}_\Omega$  is the probability measure that assigns probability to those events. Random variables in this paper are assumed to be measurable functions of the form  $X : (\Omega, \mathcal{F}_\Omega) \rightarrow (S_X, \mathcal{F}_X)$ . Any random variable  $X$  induces a probability measure on  $(S_X, \mathcal{F}_X)$  as  $\text{Prob}\{A\} = \mathbb{P}_\Omega\{X^{-1}(A)\}$  for any  $A \in \mathcal{F}_X$ . The topological space  $S$  is a Borel space if it is homeomorphic to a Borel subset of a Polish space, *i.e.*, a separable and completely metrizable space. The Borel sigma-algebra generated from Borel space  $S$  is denoted by  $\mathcal{B}(S)$  and the map  $f : S \rightarrow Y$  is measurable whenever it is Borel measurable.

**2.2. Notations.** We use  $\mathbb{R}, \mathbb{R}_{>0}$ , and  $\mathbb{R}_{\geq 0}$  to denote the set of real, positive and non-negative real numbers, respectively, while  $\mathbb{R}^n$  represents a real space of the dimension  $n$ . The set of non-negative integers and positive integers are denoted by  $\mathbb{N} := \{0, 1, \dots\}$  and  $\mathbb{N}_{\geq 1} = \{1, 2, \dots\}$ , respectively. Given  $N$  vectors  $x_i \in \mathbb{R}^{n_i}$ , we use  $x = [x_1; \dots; x_N]$  to denote the corresponding column vector of the dimension  $\sum_i n_i$ . We denote by  $\text{diag}(a_1, \dots, a_N)$  a diagonal matrix in  $\mathbb{R}^{N \times N}$  with diagonal entries  $a_1, \dots, a_N$ . For a vector  $x \in \mathbb{R}^n$ ,  $\|x\|$  denotes the infinity norm of  $x$ . For a matrix  $A \in \mathbb{R}^{n \times n}$ ,  $\|A\|_F$  denotes the Frobenius norm of  $A$ . The identity matrix in  $\mathbb{R}^{n \times n}$  is denoted by  $\mathbb{I}_n$ . Given functions  $f_i : X_i \rightarrow Y_i$ , for any  $i \in \{1, \dots, N\}$ , their Cartesian product  $\prod_{i=1}^N f_i : \prod_{i=1}^N X_i \rightarrow \prod_{i=1}^N Y_i$  is defined as  $(\prod_{i=1}^N f_i)(x_1, \dots, x_N) = [f_1(x_1); \dots; f_N(x_N)]$ . To denote a set of vectors  $\{x_1, \dots, x_N\}$ , we use the notation  $x_{1:N}$ . For a set  $S$ ,  $|S|$  denotes its cardinality and  $\emptyset$  denotes the empty set. The complement of the set  $P$  with respect to  $S$  is represented by  $S \setminus P = \{x \mid x \in S, x \notin P\}$ . The power set of  $S$  is the set of all subsets of  $S$  and is denoted by  $2^S$ . We employ  $\top$  and  $\perp$  to represent logical *true* and *false*, respectively.

**2.3. Discrete-Time Stochastic Control Systems.** In this paper, we consider discrete-time stochastic control systems as formalized in the following definition.

**Definition 2.1.** A discrete-time stochastic control system (*dt-SCS*) is a tuple

$$\mathfrak{S} = (X, U, W, \varsigma, f, Y, h), \quad (2.1)$$

where,

- $X \subseteq \mathbb{R}^n$  is a Borel space as the state space of the system. The tuple  $(X, \mathcal{B}(X))$  is the measurable state space where  $\mathcal{B}(X)$  denotes the Borel sigma-algebra on the state space;
- $U \subseteq \mathbb{R}^m$  and  $W \subseteq \mathbb{R}^p$  are Borel spaces as external and internal input spaces of the system;
- $\varsigma := \{\varsigma(k) : \Omega \rightarrow \mathcal{V}_\varsigma, k \in \mathbb{N}\}$  is a sequence of independent and identically distributed (*i.i.d.*) random variables from a sample space  $\Omega$  to the measurable space  $(\mathcal{V}_\varsigma, \mathcal{F}_\varsigma)$ ;

- $f : X \times U \times W \times \mathcal{V}_\zeta \rightarrow X$  is a measurable function that characterizes the state evolution of  $\mathfrak{S}$ ;
- $Y \subseteq \mathbb{R}^r$  is a Borel space as external output space of the system;
- $h : X \rightarrow Y$  is a measurable function that map a state  $x \in X$  to its internal output  $y = h(x)$ .

We associate sets  $\mathcal{U}$  and  $\mathcal{W}$  to respectively sets  $U$  and  $W$  as collections of external and internal input sequences  $\{\nu(k) : \Omega \rightarrow U, k \in \mathbb{N}\}$  and  $\{w(k) : \Omega \rightarrow W, k \in \mathbb{N}\}$ . Both  $\nu(k)$  and  $w(k)$  are independent of the random variable  $\zeta(l)$  for all  $k, l \in \mathbb{N}$  and  $l \geq k$ . The state evolution of dt-SCS  $\mathfrak{S}$  for a given initial state  $x(0) \in X$ , and input sequences  $\{\nu(k) : \Omega \rightarrow U, k \in \mathbb{N}\}$  and  $\{w(k) : \Omega \rightarrow W, k \in \mathbb{N}\}$  is characterized by:

$$\mathfrak{S} : \begin{cases} x(k+1) = f(x(k), \nu(k), w(k), \zeta(k)), \\ y(k) = h(x(k)), \end{cases} \quad (2.2)$$

for any  $k \in \mathbb{N}$ . For a given initial state  $a \in X$ ,  $\nu(\cdot) \in \mathcal{U}$  and  $w(\cdot) \in \mathcal{W}$ , a random sequence  $x^{a\nu w} : \Omega \times \mathbb{N} \rightarrow X$  denotes the solution process of  $\mathfrak{S}$  under the influence of the internal input  $\nu$ , the external input  $w$ , and started from the initial state  $a$ .

The control of dt-SCS  $\mathfrak{S}$  in (2.1) is enforced by history-dependent policies given by  $\varpi = (\varpi_0, \varpi_1, \dots)$  with  $\varpi_i : \mathcal{D}_i \rightarrow U$ , where  $\mathcal{D}_i$  is the set of all  $i$ -histories  $d_i$  that can be defined as  $d_i := (x(0), \nu(0), x(1), \nu(1), \dots, x(i-1), \nu(i-1), x(i))$ . We consider a subclass of these policies called as stationary policies where  $\varpi = (\nu, \nu, \dots)$ ,  $\nu : X \rightarrow U$ . In this case, the mapping at any time  $i$  only depends on the current state  $x(i)$  and is time-invariant.

The main focus of the paper is on the control of large-scale interconnected systems without internal inputs and outputs which can be regarded as a composition of smaller subsystems with internal inputs and outputs. Such an interconnected dt-SCS can be represented by the tuple  $\mathfrak{S} = (X, U, \zeta, f)$  where  $f : X \times U \times \mathcal{V}_\zeta \rightarrow X$ . In this case, equation (2.2) is reduced to

$$\mathfrak{S} : x(k+1) = f(x(k), \nu(k), \zeta(k)), \quad k \in \mathbb{N}. \quad (2.3)$$

Note that although there is an internal output in the definition of dt-SCS in (2.2), the full state information is assumed to be available for the interconnected system (*i.e.*, its output map is identity) for the sake of controller synthesis. More precisely, the role of the internal output in (2.2) is mainly for the sake of interconnecting subsystems as it will be discussed in detail in Section 4.

In the followings, we first introduce the notion of control sub-barrier certificates (CSBC) for dt-SCS with internal inputs and outputs as well as control barrier certificates (CBC) for interconnected dt-SCS without internal inputs and outputs. We then utilize those notions to provide some probabilistic upper bounds for solution processes of the interconnected system to reach some unsafe regions over *infinite-time* horizons.

### 3. CONTROL (SUB-)BARRIER CERTIFICATES

**Definition 3.1.** Consider a dt-SCS  $\mathfrak{S} = (X, U, W, \zeta, f, Y, h)$  with both internal and external inputs and outputs, and sets  $X_0, X_u \subseteq X$  as initial and unsafe sets of the system, respectively. A function  $\mathbb{B} : X \rightarrow \mathbb{R}_{\geq 0}$  is called a control sub-barrier certificate (CSBC) for  $\mathfrak{S}$  if there exists a constant  $\eta \in \mathbb{R}_{\geq 0}$  and a symmetric matrix  $\underline{X}$  with conformal block partitions  $\underline{X}^{ij}, i, j \in \{1, 2\}$  such that

$$\mathbb{B}(x) \leq \eta, \quad \forall x \in X_0, \quad (3.1)$$

$$\mathbb{B}(x) \geq 1, \quad \forall x \in X_u, \quad (3.2)$$

and  $\forall x \in X, \exists \nu \in U$ , such that  $\forall w \in W$ ,

$$\mathbb{E} \left[ \mathbb{B}(x(k+1)) \mid x(k) = x, \nu(k) = \nu, w(k) = w \right] - \mathbb{B}(x(k)) \leq \begin{bmatrix} w \\ h(x) \end{bmatrix}^T \begin{bmatrix} \underline{X}^{11} & \underline{X}^{12} \\ \underline{X}^{21} & \underline{X}^{22} \end{bmatrix} \begin{bmatrix} w \\ h(x) \end{bmatrix}. \quad (3.3)$$

We now define a similar notion for interconnected dt-SCS without internal inputs and outputs as the following.

**Definition 3.2.** Consider an interconnected dt-SCS  $\mathfrak{S} = (X, U, \varsigma, f)$  without internal inputs and outputs. A function  $\mathbb{B} : X \rightarrow \mathbb{R}_{\geq 0}$  is called a control barrier certificate (CBC) for  $\mathfrak{S}$  if there exists constants  $\eta \in \mathbb{R}_{\geq 0}$  and  $\beta \in \mathbb{R}_{> 0}$  with  $\beta > \eta$  such that

$$\mathbb{B}(x) \leq \eta, \quad \forall x \in X_0, \quad (3.4)$$

$$\mathbb{B}(x) \geq \beta, \quad \forall x \in X_u, \quad (3.5)$$

and  $\forall x \in X, \exists \nu \in U$ , such that

$$\mathbb{E} \left[ \mathbb{B}(x(k+1)) \mid x(k) = x, \nu(k) = \nu \right] - \mathbb{B}(x(k)) \leq 0. \quad (3.6)$$

**Remark 3.3.** The condition  $\beta > \eta$  is required in Definition 3.2 for interconnected dt-SCS for the sake of providing meaningful probabilistic guarantees over the satisfaction of safety specifications given by Theorem 3.4. However, the same condition is not necessarily required in Definition 3.1 for dt-SCS with internal inputs and outputs.

We now use Definition 3.2 to quantify an upper bound on the probability that the interconnected dt-SCS  $\mathfrak{S}$  reaches unsafe regions in an *infinite-time* horizon.

**Theorem 3.4.** Let  $\mathfrak{S} = (X, U, \varsigma, f)$  be an interconnected dt-SCS without internal inputs and outputs, and  $\mathbb{B}$  be a CBC for  $\mathfrak{S}$ . Then the upper bound on the probability that the solution process of  $\mathfrak{S}$  starts from any initial state  $a \in X_0$  and reaches an unsafe region  $X_u$  under the control policy  $\varpi$  is given by

$$\mathbb{P}_{\varpi}^a \left\{ \sup_{0 \leq k < \infty} \mathbb{B}(x(k)) \geq \beta \mid a \right\} \leq \frac{\eta}{\beta}. \quad (3.7)$$

Proof of Theorem 3.4 is provided in Appendix.

**Remark 3.5.** In order to provide probabilistic guarantees in infinite-time horizons, CBC  $\mathbb{B}$  in (3.6) is required to be a non-negative supermartingale. However, a c-martingale condition can be employed if the analysis is performed only in finite-time horizons [ALZ20].

The proposed results in Theorem 3.2 simply provide a lower bound on the probability that the interconnected system satisfies the safety property over infinite-time horizons as

$$\mathbb{P}_{\varpi}^a \left\{ x(k) \notin X_u \text{ for } 0 \leq k < \infty \mid a \right\} \geq 1 - \frac{\eta}{\beta}.$$

Unfortunately, finding a CBC for large-scale interconnected systems can be difficult due to computational complexity associated with the dimension of the state space. In this article, we consider a large-scale system as an interconnection of several smaller subsystems and develop a compositional scheme to construct the CBC of the interconnected system based on CSBCs of individual subsystems. This is explained in detail in the following section.

## 4. COMPOSITIONAL CONSTRUCTION OF CBC FOR INTERCONNECTED SYSTEMS

**4.1. Interconnected Stochastic Control Systems.** In this subsection, we provide the formal definition of interconnected discrete-time stochastic control systems as the following.

**Definition 4.1.** Suppose we are given  $N \in \mathbb{N}_{\geq 1}$  control subsystems  $\mathfrak{S}_i = (X_i, U_i, W_i, \varsigma_i, f_i, Y_i, h_i), i \in \{1, \dots, N\}$ , where  $X_i \in \mathbb{R}^{n_i}, U_i \in \mathbb{R}^{m_i}, W_i \in \mathbb{R}^{p_i}, Y_i \in \mathbb{R}^{r_i}$  along with a matrix  $M$  that describes the coupling between the subsystems, with the constraint  $M \prod_{i=1}^N Y_i \subseteq M \prod_{i=1}^N W_i$  to provide a well-posed interconnection. Then the interconnection of subsystems  $\mathfrak{S}_i, i \in \{1, \dots, N\}$ , denoted by  $\mathcal{I}(\mathfrak{S}_1, \dots, \mathfrak{S}_N)$ , is the dt-SCS  $\mathfrak{S} = (X, U, \varsigma, f)$  such that  $X := \prod_{i=1}^N X_i, U := \prod_{i=1}^N U_i$ , and  $f := \prod_{i=1}^N f_i$ , with internal inputs constrained according to

$$[w_1; \dots; w_N] = M[h_1; \dots; h_N]. \quad (4.1)$$

**Remark 4.2.** *For the sake of controller synthesis, we assume that all subsystems  $\mathfrak{S}_i, i \in \{1, \dots, N\}$ , have access to their full-state information. The main goal is to synthesize external inputs in order to satisfy specifications over the states of the interconnected system.*

**4.2. Compositional CBC for Interconnected Systems.** We now provide a compositional framework for obtaining CBC for interconnected dt-SCS  $\mathfrak{S}$  based on CSBCs of subsystems  $\mathfrak{S}_i$ . Let us assume that there exist a CSBC  $\mathbb{B}_i$  as in Definition 3.1 for each control subsystem  $\mathfrak{S}_i, i \in \{1, \dots, N\}$ , with  $\eta_i \in \mathbb{R}_{\geq 0}$  and symmetric matrix  $\underline{X}_i$  with conformal block partitions  $\underline{X}_i^{11}, \underline{X}_i^{12}, \underline{X}_i^{21}, \underline{X}_i^{22}$ . We propose the following theorem in order to provide sufficient conditions to obtain a CBC for the interconnected dt-SCS  $\mathfrak{S}$  from the CSBCs of subsystems  $\mathfrak{S}_i, i \in \{1, \dots, N\}$ .

**Theorem 4.3.** *Consider an interconnected dt-SCS  $\mathfrak{S} = \mathcal{I}(\mathfrak{S}_1, \dots, \mathfrak{S}_N)$  composed of  $N$  control subsystems  $\mathfrak{S}_i, i \in \{1, \dots, N\}$ , with an interconnection matrix  $M$ . Assume each control subsystem  $\mathfrak{S}_i$  admits a CSBC  $\mathbb{B}_i$  according to Definition 3.1. If*

$$\sum_{i=1}^N \eta_i < N, \quad (4.2)$$

$$\begin{bmatrix} M \\ I_{\tilde{r}} \end{bmatrix}^T \underline{X}^{comp} \begin{bmatrix} M \\ I_{\tilde{r}} \end{bmatrix} \leq 0, \quad (4.3)$$

then

$$\mathbb{B}(x) = \sum_{i=1}^N \mathbb{B}_i(x_i) \quad (4.4)$$

is a CBC for the interconnected system  $\mathfrak{S} = \mathcal{I}(\mathfrak{S}_1, \dots, \mathfrak{S}_N)$ , where

$$\underline{X}^{comp} := \begin{bmatrix} \underline{X}_1^{11} & & \underline{X}_1^{12} & & \\ & \ddots & & \ddots & \\ & & \underline{X}_N^{11} & & \underline{X}_N^{12} \\ \underline{X}_1^{21} & & & \underline{X}_1^{22} & \\ & \ddots & & & \ddots \\ & & \underline{X}_N^{21} & & \underline{X}_N^{22} \end{bmatrix}, \quad (4.5)$$

and  $\tilde{r} = \sum_{i=1}^N r_i$  where  $r_i$  is the dimension of the internal output of subsystem  $\mathfrak{S}_i$ .

Proof of Theorem 4.3 is given in the Appendix.

**Remark 4.4.** *Condition (4.3) is similar to the linear matrix inequality (LMI) appeared in [AMP16] as a compositional stability condition based on the dissipativity theory. It is shown in [AMP16] that this condition holds independently of the number of subsystems in many physical applications with particular interconnection topologies, e.g., skew symmetric.*

Conventionally, in order to satisfy the compositionality condition in (4.3), the required parameters for sub-barrier certificates (*i.e.*, conditions (3.1)-(3.3)) are pre-selected and the compositionality condition is checked a posteriori. While this method may provide tractable results for systems with specific interconnection structures, it may not be tractable for networks where structural properties of interconnection topology and subsystems are not apparent. Hence, obtained control sub-barrier certificates may not satisfy the compositionality condition (4.3) a posteriori and one needs to redesign them from scratch again. In order to design control sub-barrier certificates while having the compositionality condition (4.3) in mind a priori, we employ a distributed

optimization method based on an alternating direction method of multipliers (ADMM) algorithm. It allows us to break down a large optimization problem into several smaller sub-problems which can be easier to handle. The solution to the optimization problem provides us with suitable control sub-barrier certificates along with local control policies, satisfying the compositionality condition (4.3) and, hence, allowing the computation of control barrier certificates for the interconnected system.

**4.3. Compositional Certification using ADMM Algorithm.** In this subsection, we discuss the ADMM algorithm [BPC<sup>+</sup>11] which allows us to decompose the condition (4.3) into local sub-problems and a global one involving the interconnection matrix  $M$ , as well as matrices  $\underline{X}_i, \forall i \in \{1, \dots, N\}$ , and  $\underline{X}^{comp}$ . Consider an interconnected system  $\mathfrak{S} = \mathcal{I}(\mathfrak{S}_1, \dots, \mathfrak{S}_N)$ . The task of constructing CSBC  $\mathbb{B}_i$  of subsystems  $\mathfrak{S}_i, i \in \{1, \dots, N\}$ , can be formulated as a local optimization problem given by

$$\mathcal{S}_i = \left\{ (\underline{X}_i, \eta_i) \mid \exists \text{ CSBC } \mathbb{B}_i \text{ w.r.t. conditions (3.1)-(3.3)} \right\}. \quad (4.6)$$

Verifying the compositionality condition is a global feasibility problem that can be formulated as

$$\mathcal{G} = \left\{ (\underline{X}_1, \dots, \underline{X}_N, \eta_1, \dots, \eta_N) \mid \text{conditions (4.2) - (4.3) are satisfied} \right\}. \quad (4.7)$$

We now restate Theorem 4.3 as a feasibility problem in the following lemma.

**Lemma 4.5.** *Consider an interconnected system  $\mathfrak{S} = \mathcal{I}(\mathfrak{S}_1, \dots, \mathfrak{S}_N)$ . If there exist matrices  $\underline{X}_1, \dots, \underline{X}_N$  and constants  $\eta_1, \dots, \eta_N$  such that*

$$(\underline{X}_i, \eta_i) \in \mathcal{S}_i, \forall i \in \{1, \dots, N\}, (\underline{X}_1, \dots, \underline{X}_N, \eta_1, \dots, \eta_N) \in \mathcal{G}, \quad (4.8)$$

then  $\mathbb{B}(x) = \sum_i^N \mathbb{B}_i(x_i)$  is a CBC for the interconnected system.

In order to convert the feasibility problem of Lemma 4.5 to an ADMM form, we first define the following indicator functions:

$$\mathbb{I}_{\mathcal{S}_i}(\underline{X}_i, \eta_i) = \begin{cases} 0, & (\underline{X}_i, \eta_i) \in \mathcal{S}_i, \\ \infty, & \text{otherwise,} \end{cases}$$

$$\mathbb{I}_{\mathcal{G}}(\underline{X}_1, \dots, \underline{X}_N, \eta_1, \dots, \eta_N) = \begin{cases} 0, & (\underline{X}_1, \dots, \underline{X}_N, \\ & \eta_1, \dots, \eta_N) \in \mathcal{G}, \\ \infty, & \text{otherwise.} \end{cases}$$

Now, by introducing auxiliary variables  $\underline{Z}_i$  and  $\zeta_i$  for each subsystem, we can rewrite (4.8) as an optimization problem in the ADMM form as

$$\text{ADMM: } \begin{cases} \min_d & \mathbb{I}_{\mathcal{S}_i}(\underline{X}_i, \eta_i) + \mathbb{I}_{\mathcal{G}}(\underline{Z}_1, \dots, \underline{Z}_N, \zeta_1, \dots, \zeta_N), \\ \text{s.t.} & \underline{X}_i - \underline{Z}_i = 0, \quad \forall i \in \{1, \dots, N\}, \\ & \eta_i - \zeta_i = 0, \quad \forall i \in \{1, \dots, N\}, \end{cases} \quad (4.9)$$

where  $d = (\underline{X}_1, \dots, \underline{X}_N, \eta_1, \dots, \eta_N, \underline{Z}_1, \dots, \underline{Z}_N, \zeta_1, \dots, \zeta_N)$ . In order to decompose large optimization problems into smaller sub-problems, one potential solution, commonly used in the optimization theory, is to split the objective function. Since the first part of the objective function, *i.e.*,  $\mathbb{I}_{\mathcal{S}_i}$ , is separable by subsystems, one can find a solution parallelly by iterating over  $\underline{X}_i, \eta_i, \underline{Z}_i$ , and  $\zeta_i$ , alternately with the help of new scaled dual variables  $\Lambda_i$  and  $\xi_i$  which can take real values over corresponding dimensions. The iterative updating of variables is performed in the following manner:

- For each  $i \in \{1, \dots, N\}$ , solve the following local problem:

$$\underline{\mathbf{X}}_i^{k+1}, \eta_i^{k+1} = \underset{(\underline{\mathbf{X}}_i^*, \eta_i^*) \in \mathcal{S}_i}{\operatorname{argmin}} \left\{ \|\underline{\mathbf{X}}_i^* - \underline{\mathbf{Z}}_i^k + \Lambda_i^k\|_F^2 + (\eta_i^* - \zeta_i + \xi_i^k)^2 \right\}.$$

- If  $\underline{\mathbf{X}}_{1:N}^{k+1}, \eta_{1:N}^{k+1} \in \mathcal{G}$ , then the optimal solution is found and the algorithm can be terminated. If not, we solve the following global problem:

$$\underline{\mathbf{Z}}_i^{k+1}, \zeta_i^{k+1} = \underset{(\underline{\mathbf{Z}}_{1:N}, \zeta_{1:N}) \in \mathcal{G}}{\operatorname{argmin}} \left\{ \|\underline{\mathbf{X}}_i^{k+1} - \underline{\mathbf{Z}}_i + \Lambda_i^k\|_F^2 (\eta_i^{k+1} - \zeta_i + \xi_i^k)^2 \right\}.$$

- We update our dual variables as

$$\Lambda_i^{k+1} = \underline{\mathbf{X}}_i^{k+1} - \underline{\mathbf{Z}}_i^{k+1} + \Lambda_i^k, \quad \zeta_i^{k+1} = \eta_i^{k+1} - \zeta_i^{k+1} + \xi_i^k,$$

and return to the first step until a possible convergence.

Optimal solutions of local problems for subsystems  $\mathfrak{S}_i$ ,  $i \in \{1, \dots, N\}$ , can be found parallelly by utilizing sum-of-squares optimization (SOS) formulation, as will be discussed later in Subsection 4.4. This provides us with  $\underline{\mathbf{X}}_i$  that is closest to  $\Lambda_i - \underline{\mathbf{Z}}_i$  in the Frobenius norm and  $\eta_i$  that is closest to the value of  $\xi_i - \zeta_i$ . These values are then passed to the global problem whose solution can be found by using semi-definite programming (SDP). Using the optimal values of both local and global problems, the dual variables  $\Lambda_i$  and  $\xi_i$  are updated and this procedure is repeated until the solutions converge. Since objective functions of the problem (4.9) are both convex, solutions are guaranteed to converge to optimal ones [MLAP15].

In the next subsection, we describe how to find CSBC of subsystems and compute corresponding local control policies.

**4.4. Computation of CSBC and Control Policy.** The ADMM algorithm described in the previous subsection requires computation of optimal values of  $\underline{\mathbf{X}}_i$  and  $\eta_i$  for subsystems  $\mathfrak{S}_i$  such that the objective function of the local problem is minimized subject to satisfaction of conditions (3.1)-(3.3). One can reformulate these conditions as a sum-of-squares (SOS) optimization problem [Par03] to search for suitable CSBC and corresponding local control policies while computing optimal values of  $\underline{\mathbf{X}}_i$  and  $\eta_i$ . This can be done by restricting the CSBC to be a non-negative polynomial that can be written as sum-of-squares of different polynomials. To do so, we raise the following assumption.

**Assumption 1.** *The stochastic control subsystem  $\mathfrak{S}_i$  has a continuous state set  $X_i \subseteq \mathbb{R}^{n_i}$ , and continuous external and internal input sets  $U_i \subseteq \mathbb{R}^{m_i}$  and  $W_i \subseteq \mathbb{R}^{p_i}$ . Its transition map  $f_i : X_i \times U_i \times W_i \times \mathcal{V}_{\zeta_i} \rightarrow X_i$  is a polynomial function of the state  $x_i$ , the external input  $\nu_i$ , and the internal input  $w_i$ .*

Under Assumption 1, conditions (3.1)-(3.3) can be reformulated as an SOS optimization problem to search for a polynomial CSBC  $\mathbb{B}_i$  and a polynomial controller  $\nu_i(\cdot)$  for the subsystem  $\mathfrak{S}_i$ . The following lemma provides the SOS formulation.

**Lemma 4.6.** *Suppose Assumption 1 holds and sets  $X_i$ ,  $X_{0_i}$ ,  $X_{u_i}$  can be defined by vectors of polynomial inequalities  $X_i = \{x_i \in \mathbb{R}^{n_i} \mid b_i(x_i) \geq 0\}$ ,  $X_{0_i} = \{x_i \in \mathbb{R}^{n_i} \mid b_{0_i}(x_i) \geq 0\}$ , and  $X_{u_i} = \{x_i \in \mathbb{R}^{n_i} \mid b_{u_i}(x_i) \geq 0\}$ , where inequalities are provided element-wise. Similarly, let the internal input set  $W_i$  be defined by vectors of a polynomial inequality  $W_i = \{w_i \in \mathbb{R}^{p_i} \mid b_{w_i}(w_i) \geq 0\}$ . Suppose for a given control subsystem  $\mathfrak{S}_i$ , there exists a sum-of-squares polynomial  $\mathbb{B}_i(x_i)$ , a constant  $\eta_i \in \mathbb{R}_{\geq 0}$ , vectors of sum-of-squares polynomials  $\lambda_{0_i}(x_i)$ ,  $\lambda_{u_i}(x_i)$ ,  $\lambda_i(x_i)$ ,  $\lambda_{w_i}(w_i)$  and polynomials  $\lambda_{\nu_{j_i}}(x_i)$  corresponding to the  $j^{\text{th}}$  input in  $\nu_i = (\nu_{1_i}, \dots, \nu_{m_i}) \in U_i \subseteq \mathbb{R}^{m_i}$  of*

appropriate dimensions such that the following expressions are sum-of-squares polynomials:

$$-\mathbb{B}_i(x_i) - \lambda_{0_i}^T(x_i)b_{0_i}(x_i) + \eta_i, \quad (4.10)$$

$$\mathbb{B}_i(x_i) - \lambda_{u_i}^T(x_i)b_{u_i}(x_i) - 1, \quad (4.11)$$

$$\begin{aligned} & -\mathbb{E}\left[\mathbb{B}_i(f_i(x_i, \nu_i, w_i, \varsigma_i)) \mid x_i, \nu_i, w_i\right] + \mathbb{B}_i(x_i) + \begin{bmatrix} w \\ h(x) \end{bmatrix}^T \begin{bmatrix} \underline{X}^{11} & \underline{X}^{12} \\ \underline{X}^{21} & \underline{X}^{22} \end{bmatrix} \begin{bmatrix} w \\ h(x) \end{bmatrix} \\ & + \sum_{j=1}^{m_i} (\nu_{j_i} - \lambda_{\nu_{j_i}}(x_i)) - \lambda_i^T(x_i)b_i(x_i) - \lambda_{w_i}^T(w_i)b_{w_i}(w_i). \end{aligned} \quad (4.12)$$

Then  $\mathbb{B}_i(x_i)$  is a CSBC satisfying conditions (3.1)- (3.3) and  $\nu_i = [\lambda_{\nu_{1_i}}(x_i); \dots; \lambda_{\nu_{m_{i_i}}}(x_i)]$ ,  $\forall i \in \{1, \dots, N\}$ , is the corresponding controller for the subsystem  $\mathfrak{S}_i$ .

Proof of Lemma 4.6 is provided in Appendix.

**Remark 4.7.** Our proposed computational method is based on SOS optimization in combination with ADMM algorithm and it relies on the assumption that sub-barrier certificates are polynomial. However, there are other methods for the computation of barrier certificates such as the counter-example guided inductive synthesis (CEGIS) [PSM20, JSZ20] where such an assumption is no longer required at the cost of having more computational complexity.

**Remark 4.8.** The extent of coupling between subsystems can affect the computational complexity in our setting. In particular, if interconnection topology is too dense (e.g., fully interconnected network), the computational complexity of the ADMM algorithm and SOS optimization problem potentially increases. More precisely, if each subsystem is affected by more (neighboring) subsystems in the interconnection topology, finding sub-barrier certificates satisfying (4.12) as well as LMI (4.3) via ADMM algorithm becomes more complex.

In the next section, we discuss our properties of interest in this work which are any  $\omega$ -regular property. We then propose a systematic procedure to obtain probabilistic guarantees ensuring the satisfaction of such specifications with the help of barrier certificates.

## 5. CLASS OF SPECIFICATIONS

The main goal in this work is to synthesize controllers for interconnected dt-SCS ensuring the satisfaction of  $\omega$ -regular properties [Tho91]. Such specifications can be expressed by  $\omega$ -automata that can recognize infinite words, such as non-deterministic Büchi automata [Bö90], deterministic Rabin automata [Rab68], deterministic Streett automata [Str82], parity automata or Muller automata [Mul63]. While the above mentioned automata have different acceptance conditions, they have the same expressive power and all of them recognize  $\omega$ -regular languages. Here, we use deterministic Streett automata to describe  $\omega$ -regular properties, whose formal definition is provided as follows.

**Definition 5.1.** A deterministic Streett automaton (DSA) is a tuple  $\mathcal{A} = (Q, q_0, \Sigma, \delta, \text{Acc})$ , where  $Q$  is a finite set of states,  $q_0 \in Q$  is the initial state,  $\Sigma$  is a finite set of input symbols called alphabet,  $\delta : Q \times \Sigma \rightarrow Q$  is the transition function and  $\text{Acc} = \{ \langle E_1, F_1 \rangle, \langle E_2, F_2 \rangle, \dots, \langle E_z, F_z \rangle \}$  refers to the accepting condition of the DSA where  $\langle E_i, F_i \rangle$  with  $E_i, F_i \in Q, \forall i \in \{1, \dots, z\}$ , are accepting state pairs.

For the sake of an easier presentation, we define sets  $E = \{E_1, E_2, \dots, E_z\}$  and  $F = \{F_1, F_2, \dots, F_z\}$  where  $\langle E_i, F_i \rangle \in \text{Acc}, \forall i \in \{1, \dots, z\}$ . An infinite sequence of input symbols  $\sigma = (\sigma_0, \sigma_1, \dots) \in \Sigma^\omega$  is called an infinite word or trace. An infinite run  $\mathbf{q} = (q_0, q_1, \dots) \in Q^\omega$  on the word  $\sigma = (\sigma_0, \sigma_1, \dots)$  is an infinite sequence of states such that for every  $m \geq 0$ , we have  $q_{m+1} = \delta(q_m, \sigma_m)$ . Let  $\text{inf}(\mathbf{q})$  denote the set of states in  $Q$  that are visited infinitely often during the run  $\mathbf{q}$ . Then  $\mathbf{q}$  is said to be an accepting run if for all  $E_i \in E$  and  $F_i \in F, i \in \{1, \dots, z\}$ , we have  $\text{inf}(\mathbf{q}) \cap E_i = \emptyset$  or  $\text{inf}(\mathbf{q}) \cap F_i \neq \emptyset$ , and the corresponding word  $\sigma$  is said to be accepted by the DSA  $\mathcal{A}$ . The language of  $\mathcal{A}$ , denoted by  $\mathcal{L}(\mathcal{A})$ , comprises all the words accepted by  $\mathcal{A}$ .

Complementation of DSA  $\mathcal{A}$  results in a deterministic Rabin automaton (DRA)  $\mathcal{A}^c$ , which is defined similarly to DSA but has a dual acceptance condition. In other words, an infinite word  $\sigma = (\sigma_0, \sigma_1, \dots) \in \Sigma^\omega$  is said to be accepted by the DRA if there exists a corresponding infinite run  $\mathbf{q}$  such that there exists  $i \in \{1, \dots, z\}$  for which  $\text{inf}(\mathbf{q}) \wedge E_i \neq \emptyset$  and  $\text{inf}(\mathbf{q}) \wedge F_i = \emptyset$ .

We consider specifications expressed by accepting languages of DSA  $\mathcal{A}$  when input symbols are defined over a set of atomic propositions  $\mathcal{AP}$  as the alphabet, *i.e.*,  $\Sigma = 2^{\mathcal{AP}}$ . Specifications expressed as linear temporal logic (LTL) formulae can be represented by DSA with the help of existing tools like `ltl2dstar` [Kle].

**Remark 5.2.** *Any DSA  $\mathcal{A}$  with the set  $E = \emptyset$  accepts any infinite run. Therefore, without loss of generality, we assume that the set  $E$  is non-empty. Moreover, DSA  $\mathcal{A}$  is usually constructed over the alphabet  $\Sigma = 2^{\mathcal{AP}}$ . However, without loss of generality, we work directly with the atomic proposition rather than its power set, implying that we consider  $\Sigma = \mathcal{AP}$ .*

It should be noted that while deterministic Büchi automata are also a class of  $\omega$ -automata and are used for representing languages over infinite words, their expressive power is strictly weaker than other classes of  $\omega$ -automata such as non-deterministic Büchi, deterministic Streett or Rabin automata. It is worth mentioning that if the verification is the main objective, one can utilize both deterministic and non-deterministic Büchi automata. The latter is preferred because it has higher expressive power, and accordingly, it can represent omega-regular properties. However, in our work, we deal with controller synthesis problem where the determinism of automata is crucial, and one cannot directly work with non-deterministic Büchi automata (NBA). In this case, one needs to determinize the automata without losing their expressiveness. Although the idea of this paper can be applied to less expressive automata including deterministic Büchi automata, we prefer to deal with the full class of LTL properties. Hence, we work with deterministic Streett automata since they have the same expressive power as NBA.

**5.1. Satisfaction of Specifications by Interconnected Systems.** Here, we define how  $\omega$ -regular properties are connected to solution processes of interconnected dt-SCS  $\mathfrak{S} = (X, U, \varsigma, f)$  via a measurable labeling function  $L : X \rightarrow \mathcal{AP}$ .

**Definition 5.3.** *For an interconnected dt-SCS  $\mathfrak{S} = (X, U, \varsigma, f)$  and a DSA  $\mathcal{A} = (Q, q_0, \mathcal{AP}, \delta, \text{Acc})$ , consider a labeling function  $L : X \rightarrow \mathcal{AP}$ . For an infinite-state sequence  $\mathbf{x} = (x(0), x(1), \dots) \in X^\omega$ , the corresponding word over  $\mathcal{AP}$  is given by  $L(\mathbf{x}) := (\sigma_0, \sigma_1, \dots) \in \mathcal{AP}^\omega$ , where  $\sigma_i = L(x(i))$  for all  $i \in \mathbb{N}$ .*

The set of atomic propositions  $\mathcal{AP} = \{p_0, p_1, \dots, p_R\}$ ,  $R \in \mathbb{N}$ , provides a measurable partition of the state space  $X = \bigcup_{i=1}^R X^i$  via the labeling function  $L : X \rightarrow \mathcal{AP}$  such that  $L(x \in X^i) = p_i$ . Without loss of generality, it can be assumed that  $X^i \neq \emptyset$  for any  $i \in \{1, \dots, R\}$ .

We now define the probability with which solution processes of interconnected dt-SCS  $\mathfrak{S}$  defined in (2.3) satisfy an  $\omega$ -regular specification represented by DSA  $\mathcal{A}$ .

**Definition 5.4.** *Consider an interconnected dt-SCS  $\mathfrak{S} = (X, U, \varsigma, f)$ , a specification given by the accepting language of the DSA  $\mathcal{A} = (Q, q_0, \mathcal{AP}, \delta, \text{Acc})$  and a labeling function  $L : X \rightarrow \mathcal{AP}$ . Then the probability with which the solution process  $\mathbf{x}^{a^\varpi}$  under the control policy  $\varpi$  with an initial condition  $x(0) = a$  satisfies the specification expressed by  $\mathcal{A}$  is given by  $\mathbb{P}\{L(\mathbf{x}^{a^\varpi}) \models \mathcal{A}\}$ .*

In order to tackle the synthesis problem considered in this paper, we should compute a control policy along with a tight lower bound on the probability that the interconnected dt-SCS satisfies a specification expressed by DSA. This is formally stated as follows.

**Problem 5.5.** *Given a dt-SCS  $\mathfrak{S} = (X, U, \varsigma, f)$ , a specification represented by the accepting language of a DSA  $\mathcal{A} = (Q, q_0, \mathcal{AP}, \delta, \text{Acc})$  over a set of atomic propositions  $\mathcal{AP} = \{p_0, p_1, \dots, p_R\}$ ,  $R \in \mathbb{N}$ , and a labeling function  $L : X \rightarrow \mathcal{AP}$ , compute a control policy  $\varpi$  (if existing) and a constant  $\epsilon \in [0, 1]$  such that  $\mathbb{P}\{L(\mathbf{x}^{a^\varpi}) \models \mathcal{A}\} \geq \epsilon$ .*

Two underlying challenges make this problem difficult to tackle. First and foremost, since the dimension of the system is potentially very high, computing a CBC for a large-scale system is computationally intractable. To tackle this issue, we consider a dt-SCS  $\mathfrak{S}$  (without internal inputs and outputs) as an interconnection of smaller subsystems  $\mathfrak{S}_i$ , and utilize the proposed compositional framework to construct a CBC of the interconnected system based on CSBCs of subsystems, as discussed in Section 4. The second difficulty is due to the complex specification. The notion of CBCs as given in Definition 3.2 only allows us to provide guarantees over safety specifications. We now extend this notion to cover properties represented by DSA. In order to address this problem, we work with the complement of the given specification represented by a DRA, and then decompose the DRA into simple reachability tasks. The negation of each of this task results in a safety problem for which the corresponding CBC is computed along with an appropriate control policy.

Let sets  $X_0$  and  $X_u$ , as introduced in Definition 3.2, be connected to the atomic proposition  $\mathcal{AP}$  via some labeling function  $L : X \rightarrow \mathcal{AP}$ . We assume that these sets are decomposed as  $X_0 = \prod_{i=1}^N X_{0_i}$  and  $X_u = \prod_{i=1}^N X_{u_i}$ . In other words, sets  $X_0$  and  $X_u$  can be written as Cartesian products of their counterparts for subsystems. This implies that sets  $X_{0_i}$  and  $X_{u_i}$ ,  $i \in \{1, \dots, N\}$ , are connected to the corresponding decomposed structure of the atomic proposition  $\mathcal{AP}$  via the same labeling function. Now, given an interconnected dt-SCS  $\mathfrak{S}$  and a desired specification as a DSA  $\mathcal{A}$ , our aim is to first decompose negation of the specification into simple reachability problems. We then compute CBC along with a suitable control policy compositionally via CSBC and local control policies of subsystems by utilizing Theorem 4.3. Accordingly, we obtain probabilistic upper bounds for these reachability tasks, which can then be combined to acquire an overall lower bound on the probability that solution processes of the interconnected system satisfy the original specification. Next, we describe the sequential reachability decomposition method for specifications expressed by DSA, inspired by [WTL16].

**5.2. Sequential Reachability Decomposition.** In order to facilitate controller synthesis for general  $\omega$ -regular specifications represented by accepting languages of DSA, we use a divide-and-conquer method and reduce the automaton to a set of sequential reachability tasks. To do this, we utilize the complement of the specification. Consider a DSA  $\mathcal{A} = (Q, q_0, \mathcal{AP}, \delta, Acc)$  which expresses the desired specification for dt-SCS  $\mathfrak{S}$ . The complement of  $\mathcal{A}$  would be a DRA  $\mathcal{A}^c = (Q, q_0, \mathcal{AP}, \delta, Acc)$  which has the same structure as that of  $\mathcal{A}$ , but with the Rabin acceptance condition. Therefore, an infinite run  $\mathbf{q} = (q_0, q_1, \dots) \in Q^\omega$  is accepted by  $\mathcal{A}^c$  if there exists  $E_i \in E$  and  $F_i \in F$ , for some  $i \in \{1, \dots, z\}$ , such that  $\text{inf}(\mathbf{q}) \wedge E_i \neq \emptyset$  and  $\text{inf}(\mathbf{q}) \wedge F_i = \emptyset$  with a corresponding infinite word  $\sigma(\mathbf{q}) = (\sigma_0, \sigma_1, \dots) \in \mathcal{AP}^\omega$  such that  $\delta(q_c, \sigma_c) = q_{c+1}$  for all  $c \geq 0$ . We call an infinite run  $\bar{\mathbf{q}} = (q_0, q_1, \dots)$  a partially accepting state run iff there exists  $E_i \in E$  such that  $\text{inf}(\bar{\mathbf{q}}) \wedge E_i \neq \emptyset$  and the corresponding infinite word is denoted by  $\sigma(\bar{\mathbf{q}})$ . Such an infinite run is of the form  $\bar{\mathbf{q}} = (q_0^f, q_1^f, \dots, q_{a_f}^f, (q_0^l, q_1^l, \dots, q_{a_l}^l)^\omega) \in Q^\omega$ , where  $a_f, a_l \in \mathbb{N}$ ,  $q_0^f = q_0$  and  $q_0^l \in E$ . Let us obtain a finite fragment of  $\bar{\mathbf{q}}$  by considering the infinite repetition  $(q_0^l, q_1^l, \dots, q_{a_l}^l)$  only once. This is given by  $\tilde{\mathbf{q}} = (q_0^f, q_1^f, \dots, q_{a_f}^f, q_0^l, q_1^l, \dots, q_{a_l}^l, q_0^l) \in Q^*$ . Now, we define a set  $\mathcal{R}$  as containing all such finite run fragments excluding self-loops, *i.e.*,

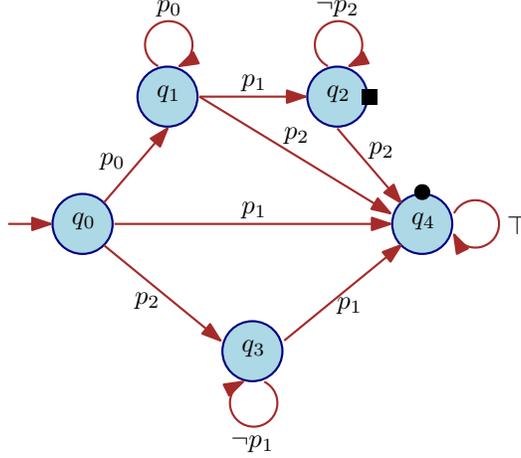
$$\mathcal{R} := \{ \tilde{\mathbf{q}} = (q_0^f, q_1^f, \dots, q_{a_f}^f, q_0^l, q_1^l, \dots, q_{a_l}^l, q_0^l) \mid q_0^f = q_0, q_0^l \in E, q_r^f \neq q_{r+1}^f, r \leq a_f, \text{ and } q_s^l \neq q_{s+1}^l, \forall s \leq a_l \}.$$

One can compute the set  $\mathcal{R}$  in an algorithmic fashion by considering a directed graph  $(\mathcal{V}, \mathcal{E})$  representing the DRA  $\mathcal{A}^c$  with vertices  $\mathcal{V} = Q$  and edges  $\mathcal{E} \subseteq \mathcal{V} \times \mathcal{V}$  such that  $(q, q') \in \mathcal{E}$  if and only if  $q' \neq q$ , and there exists  $\sigma \in \mathcal{AP}$  such that  $\delta(q, \sigma) = q'$ . Depth-first search algorithms [RN03] can be employed for this purpose. Now, for each  $p \in \mathcal{AP}$ , we define a set  $\mathcal{R}^p$  as

$$\mathcal{R}^p := \{ \tilde{\mathbf{q}} = (q_0^f, q_1^f, \dots, q_{a_f}^f, q_0^l, q_1^l, \dots, q_{a_l}^l, q_0^l) \in \mathcal{R} \mid \text{sigma}(q_0^f, q_1^f) = p \in \mathcal{AP} \}. \quad (5.1)$$

Now, to perform decomposition into sequential reachabilities, we define a set  $\mathcal{P}^p(\tilde{\mathbf{q}})$  for any  $\tilde{\mathbf{q}} = (q_0, q_1, \dots, q_{a_f+a_l+3})$  as

$$\mathcal{P}^p(\tilde{\mathbf{q}}) = \{ (q_i, q_{i+1}, q_{i+2}) \mid 0 \leq i \leq a_f + a_l + 1 \}. \quad (5.2)$$

FIGURE 1. DRA  $\mathcal{A}^c$  employed in Example 5.6.

Each element in  $\mathcal{P}^p(\tilde{\mathbf{q}})$  has a length of 3 and corresponds to a reachability element in the finite run fragment  $\tilde{\mathbf{q}}$ . We also consequently define  $\mathcal{P}(\mathcal{A}^c) = \bigcup_{p \in \mathcal{AP}} \bigcup_{\tilde{\mathbf{q}} \in \mathcal{R}^p} \mathcal{P}^p(\tilde{\mathbf{q}})$  as the set of all reachability elements arising from finite fragments in DRA  $\mathcal{A}^c$ . We employ the following example for the sake of better illustration.

**Example 5.6.** We perform sequential reachability decomposition for the DRA  $\mathcal{A}^c$  shown in Figure 1. The figure indicates with an arrow  $\rightarrow$  the initial state of the system, while  $\bullet$  and  $\blacksquare$  indicate the states that can be visited infinitely many and finitely many times, respectively. In other words, we have  $q_0$  as initial state, the set of the atomic proposition  $\mathcal{AP} = \{p_0, p_1, p_2\}$  and  $\text{Acc} = \langle q_4, q_2 \rangle$  as the acceptance condition. Therefore, an infinite run  $\mathbf{q}$  is accepted if it visits  $q_4$  infinitely often and  $q_2$  only finitely often. In order to decompose the problem into sequential reachabilities, we only consider partially accepting state runs which visit  $q_4$  infinitely often and their corresponding finite run fragments. The set  $\mathcal{R}$  of all such finite run fragments excluding self-loops is given by

$$\mathcal{R} = \{(q_0, q_4, q_4), (q_0, q_3, q_4, q_4), (q_0, q_1, q_4, q_4), (q_0, q_1, q_2, q_4, q_4)\}.$$

The sets  $\mathcal{R}^p$  for  $p \in \mathcal{AP}$ , are obtained as

$$\begin{aligned} \mathcal{R}^{p_0} &= \{(q_0, q_1, q_4, q_4), (q_0, q_1, q_2, q_4, q_4)\}, \\ \mathcal{R}^{p_1} &= \{(q_0, q_4, q_4)\}, \\ \mathcal{R}^{p_2} &= \{(q_0, q_3, q_4, q_4)\}. \end{aligned}$$

Now for each of finite run fragments in  $\tilde{\mathbf{q}} \in \mathcal{R}^p$ , we define  $\mathcal{P}^p(\tilde{\mathbf{q}})$  as follows:

$$\begin{aligned} \mathcal{P}^{p_0}(q_0, q_1, q_2, q_4, q_4) &= \{(q_0, q_1, q_2), (q_1, q_2, q_4), (q_2, q_4, q_4)\}, \\ \mathcal{P}^{p_0}(q_0, q_1, q_4, q_4) &= \{(q_0, q_1, q_4), (q_1, q_4, q_4)\}, \\ \mathcal{P}^{p_1}(q_0, q_4, q_4) &= \{(q_0, q_4, q_4)\}, \\ \mathcal{P}^{p_2}(q_0, q_3, q_4, q_4) &= \{(q_0, q_3, q_4), (q_3, q_4, q_4)\}. \end{aligned}$$

Finite words  $\sigma(\tilde{\mathbf{q}})$  corresponding to  $\tilde{\mathbf{q}} \in \mathcal{R}^p$  are obtained as

$$\begin{aligned} \sigma(q_0, q_1, q_2, q_4, q_4) &= (p_0, p_1, p_2, \top), \\ \sigma(q_0, q_1, q_4, q_4) &= (p_0, p_2, \top), \quad \sigma(q_0, q_4, q_4) = (p_1, \top), \\ \sigma(q_0, q_3, q_4, q_4) &= (p_2, p_1, \top). \end{aligned}$$

We now propose a systematic procedure utilizing CBC to obtain a suitable control policy while computing (preferably minimizing) the upper bound on the probability that interconnected dt-SCS  $\mathfrak{S}$  satisfies the specification expressed by DRA  $\mathcal{A}^c$ . This in turn ensures that we preferably maximize the probability that the interconnected dt-SCS  $\mathfrak{S}$  satisfies the original specification represented by the DSA  $\mathcal{A}$ . To do this, we first consider all the elements in the set  $\mathcal{P}(\mathcal{A}^c)$ , each of which characterizes a reachability task. We compute upper bounds for these individual problems, and then combine them to obtain an overall upper bound on the probability of satisfaction of the specification given by  $\mathcal{A}^c$ .

As a direct consequence of Theorem 3.4, we propose the following lemma to obtain CBC and upper bounds on probabilities of satisfying these reachability tasks.

**Lemma 5.7.** *For a finite run fragment  $\tilde{q} \in \mathcal{R}^p$  with  $p \in \mathcal{AP}$ , consider a reachability element  $\vartheta = (q, q', q'') \in \mathcal{P}^p(\tilde{q})$ . If there exists a CBC and a suitable control policy  $\varpi$  such that conditions (3.4)-(3.6) are satisfied with  $X_0 = L^{-1}(\sigma(q, q'))$ ,  $X_u = L^{-1}(\sigma(q', q''))$  and constants  $\eta_\vartheta \in \mathbb{R}_{\geq 0}$  and  $\beta_\vartheta \in \mathbb{R}_{> 0}$ , then the probability that the solution process of dt-SCS  $\mathfrak{S}$  with initial condition  $a \in X_0$  reaches the region  $X_u$  under the policy  $\varpi$  is upper bounded with  $\frac{\eta_\vartheta}{\beta_\vartheta}$  as obtained in (3.7).*

**Remark 5.8.** *The acceptance condition of DRA  $\mathcal{A}^c$  requires the conjunction of two different occurrences, i.e., states in  $E$  should be visited infinitely often and states in  $F$  should be visited only finitely often. However, the probability of violation of the specification represented by the DRA can be ultimately upper bounded by the probability of not visiting states in  $E$  at all. Therefore, we can ignore states in  $F$  and proceed with sequential reachability decomposition only by taking into account states in  $E$ .*

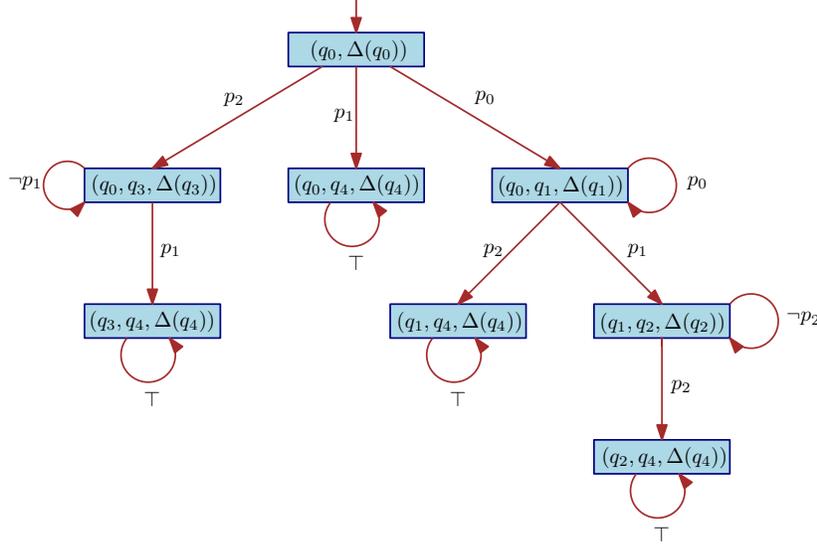
**Remark 5.9.** *Note that we use a conservative approach to provide probabilistic guarantees for the satisfaction of DSA properties (i.e., breaking down the problem to multiple simpler invariant ones and trying to find a barrier for each of them). However, this conservatism is tailored to the nature of control barrier certificates which are equipped only for ensuring safety specifications (i.e. never reaching  $E$ ). This, unfortunately, excludes the effect of those traces in the automaton which visit  $E$  finitely often. As a future direction, we plan to work on a different notion of barrier certificates that can ensure the reachability instead of invariant, and accordingly, the aforementioned conservatism can be potentially alleviated. However, this is out of the scope of our current work.*

**Remark 5.10.** *For any  $\vartheta = (q, q', q'')$ , if we have  $L^{-1}(\sigma(q, q')) \cap L^{-1}(\sigma(q', q'')) \neq \emptyset$ , then the reachability element does not admit any control barrier certificate. This is due to the conflict between conditions (3.4) and (3.5).*

## 6. CONTROL POLICY AND PROBABILITY COMPUTATION

Generally, every reachability element of  $\mathcal{P}(\mathcal{A}^c)$  admits a single CBC and its corresponding control policy. However, in a scenario where there is more than one edge emanating from a single state in the automaton, this can result in ambiguities. For this reason, we combine multiple reachability elements into a single partition set and adopt a switching control policy dependent on the location in the automaton. The next subsection explains the switching control policy in detail. We also discuss the computation of the overall lower bound on the probability that solution processes of the interconnected system satisfy the original specification.

**6.1. Control Policy.** Consider the DRA  $\mathcal{A}^c$  shown in Figure 1. Consider two reachability elements from the set  $\mathcal{P}(\mathcal{A}^c)$  as  $\vartheta_1 = (q_0, q_1, q_2)$  and  $\vartheta_2 = (q_0, q_1, q_4)$ . Ideally, we must compute two different CBC and control policies for each of these elements, one for not reaching the region  $L^{-1}(p_1)$  and the other for not reaching  $L^{-1}(p_2)$  from a *common* initial region  $L^{-1}(p_0)$ . Since one cannot employ two different controllers simultaneously in the same region of the state space, this issue results in ambiguity while deploying controllers for the closed-loop system. We resolve this issue by combining the two reachability tasks into one by simply replacing the set  $X_u$  in Lemma 5.7 with the union of regions corresponding to the alphabet present in all

FIGURE 2. Automaton  $\mathcal{A}_s^c$  representing switching mechanism.

outgoing edges from the common state. To do so, we combine all reachability elements of  $\mathcal{P}(\mathcal{A}^c)$  with a common CBC and put them together in a single partition set. Such sets are defined as

$$\gamma_{(q,q',\Delta(q'))} := \{(q, q', q'') \in \mathcal{P}(\mathcal{A}^c) \mid q, q', q'' \in Q \text{ and } q'' \in \Delta(q')\},$$

where  $\Delta(q)$  is the set of states that can be reached from a state  $q \in Q$ . For the partition set  $\gamma_{(q,q',\Delta(q'))}$ , the corresponding CBC and control policy are denoted as  $\mathbb{B}_{\gamma_{(q,q',\Delta(q'))}}(x)$  and  $\nu_{\gamma_{(q,q',\Delta(q'))}}$ , respectively. For all reachability elements  $\vartheta \in \mathcal{P}_M(\mathcal{A}^c)$ , we therefore have

$$\mathbb{B}_{\vartheta}(x) = \mathbb{B}_{\gamma_{(q,q',\Delta(q'))}}(x) \text{ and } \nu_{\vartheta}(x) = \nu_{\gamma_{(q,q',\Delta(q'))}}(x), \text{ if } \vartheta \in \gamma_{(q,q',\Delta(q'))}.$$

The system admitting a switching control policy as the control input depending on the state of the automaton. To represent such a switching control policy, a new switching automaton  $\mathcal{A}_s^c$  is constructed. This method has been adapted from [PSM20] where switching policy was obtained in the context of DFA.

For the DRA  $\mathcal{A}^c = (Q, q_0, \mathcal{AP}, \delta, Acc)$ , we represent the corresponding switching mechanism as  $\mathcal{A}_s^c = (Q_s, q_{0_s}, \mathcal{AP}_s, \delta_s)$  where  $Q_s := q_{0_s} \cup \{(q, q', \Delta(q')) \mid q, q' \in Q\}$  is the set of states,  $q_{0_s} := (q_0, \Delta(q_0))$  is the initial state and  $\mathcal{AP}_s = \mathcal{AP}$  is the set of atomic proposition. The transition function  $\delta_s$  is defined as

- for  $q_{0_s} = (q_0, \Delta(q_0))$ , we have  $\delta_s((q_0, \Delta(q_0)), \sigma_{(q_0, q'_0)}) = (q_0, q'_0, \Delta(q'_0))$  such that  $q'_0 \in \Delta(q_0)$ ;
- for all  $q_s = (q, q', \Delta(q')) \in Q_s \setminus q_{0_s}$ , we have  $\delta_s((q, q', \Delta(q')), \sigma_{q', q''}) = (q', q'', \Delta(q''))$  such that  $q, q', q'' \in Q, q'' \in \Delta(q')$ .

Finally, one can obtain the control policy for Problem 5.5 as

$$\varpi(x, q_s) = \nu_{(\gamma_{q_s, L(x), q'_s})}(x), \quad \forall (q_s, L(x), q'_s) \in \delta_s. \quad (6.1)$$

**Example 5.6 (continued.)** The automaton  $\mathcal{A}_s^c$  representing the switching control policy for Example 5.6 is shown in Figure 2.

**6.2. Probability Computation.** Since we obtain a CBC and a suitable control policy for each partitioned set, we now discuss the procedure to compute the lower bound on the probability that the interconnected dt-SCS  $\mathcal{S}$  satisfies the desired specification expressed by the DSA  $\mathcal{A}$ . This is done by first computing the

upper bounds of reachability probabilities of elements  $\vartheta = (q, q', q'')$  in  $\mathcal{A}^c$ , and then combining them together to obtain an upper bound on the violation of the original specification. This is formally explained in the following theorem.

**Theorem 6.1.** *For a specification expressed by a DSA  $\mathcal{A}$ , let the DRA  $\mathcal{A}^c$  represent its complement. Let  $\mathcal{R}^p$  be all finite run fragments in  $\mathcal{A}^c$  for  $p \in \mathcal{AP}$ , and  $\mathcal{P}^p(\tilde{\mathbf{q}})$  be the set of reachability elements derived from run fragments. The probability upper bound that the solution processes of dt-SCS  $\mathfrak{S}$  start from an initial state  $a \in L^{-1}(p)$  and satisfy the specification represented by  $\mathcal{A}^c$  is given by*

$$\mathbb{P}\{L(x^{a\varpi}) \models \mathcal{A}^c\} \leq \sum_{\tilde{\mathbf{q}} \in \mathcal{R}^p} \prod_{\vartheta \in \mathcal{P}^p(\tilde{\mathbf{q}})} \left\{ \frac{\eta_{\vartheta}}{\beta_{\vartheta}} \mid \vartheta = (q, q', q'') \in \mathcal{P}^p(\tilde{\mathbf{q}}) \right\},$$

and  $\frac{\eta_{\vartheta}}{\beta_{\vartheta}}$  comes from the probability bounds obtained for reachability element  $\vartheta = (q, q', q'')$  in Lemma 5.7.

Proof of Theorem 6.1 is provided in Appendix.

**Remark 6.2.** *Note that if a reachability element does not admit a CBC, the probability upper bound for that reachability task is considered to be 1. To obtain potentially a non-trivial probability lower bound for the satisfaction of the original property, at least one reachability element should have a suitable CBC.*

**Remark 6.3.** *The sum-of-products expression in Theorem 6.1 may exceed 1 if the probability upper bounds of individual reachability elements are either very high (close to 1) or trivial (equal to 1). In addition, the number of subsystems can potentially affect the probabilistic guarantee depending on the values of  $\eta_i$  obtained in (4.10) for each subsystem. For instance, when subsystems are identical (i.e.,  $\eta_i$  obtained for subsystems are equal), the upper bound in (3.7) remains unchanged w.r.t. the number of subsystems and is always equal to  $\eta_i$  since  $\eta = N\eta_i$  and  $\beta = N$  (see case study). When subsystems are not identical, the upper bound in (3.7) is always equal to the average of  $\eta_i$ , i.e.,  $\frac{\sum_i^N \eta_i}{N}$ . In this case, adding more subsystems can either increase or decrease the upper bound.*

Upon finding an upper bound for the probability of violation of the specification represented by  $\mathcal{A}$ , the following corollary gives the final result for a lower bound on the probability that the solution processes of dt-SCS  $\mathfrak{S}$  satisfy the original specification expressed by  $\mathcal{A}$ .

**Corollary 6.4.** *The probability that the solution processes of  $\mathfrak{S}$  starting from any initial state  $a \in L^{-1}(p)$  satisfy the specification given by the accepting language of the DSA  $\mathcal{A}$  is lower bounded by*

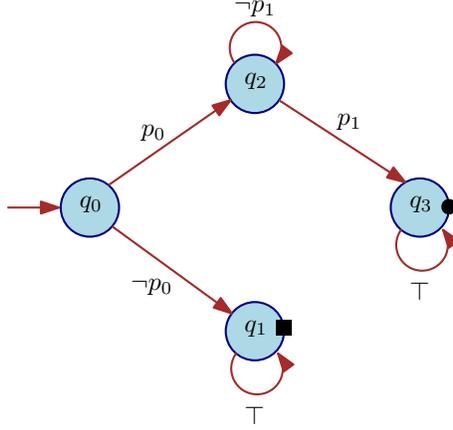
$$\mathbb{P}\{L(x^{a\varpi}) \models \mathcal{A}\} \geq 1 - \sum_{\tilde{\mathbf{q}} \in \mathcal{R}^p} \prod_{\vartheta \in \mathcal{P}^p(\tilde{\mathbf{q}})} \left\{ \frac{\eta_{\vartheta}}{\beta_{\vartheta}} \mid \vartheta = (q, q', q'') \in \mathcal{P}^p(\tilde{\mathbf{q}}) \right\}.$$

**Remark 6.5.** *Trivial probability with  $\epsilon = 0$  and arbitrary control policy is possible only in the worst-case scenario where our algorithm fails to compute CBCs for all reachability elements in the automaton. The ADMM algorithm proposed here aims at minimizing the value of  $\eta_i$  for subsystems as per equation (4.9), thereby minimizing overall  $\eta$  in equation (3.7) and allowing the maximization of  $\epsilon$  according to Corollary 6.4. This ensures that the probability bounds are (potentially) as tight as possible.*

**Remark 6.6.** *While the computation of probabilities of satisfaction for DSA specifications via Corollary 6.4 requires the enumeration of run fragments, the maximum number of CBCs and associated probabilities we need to compute depends on the cardinality of the set of atomic propositions. For instance, if the set of atomic propositions has only three elements, we only require computing a maximum of six CBCs independently of the structure of DSA.*

## 7. CASE STUDY

To demonstrate the effectiveness of our results, we apply our approach to a room temperature regulation problem in a circular building. The model for this case study has been adapted from [MGW18] by including

FIGURE 3. DSA  $\mathcal{A}$  representing the specification.

stochasticity as a multiplicative noise. The evolution of the temperature  $T(\cdot)$  in the interconnected system is governed by the following dynamics:

$$\mathfrak{S} : T(k+1) = AT(k) + \mu T_H \nu(k) + \theta T_E + 0.01 \zeta(k) T(k),$$

where  $A \in \mathbb{R}^{n \times n}$  is a matrix with diagonal elements given by  $\bar{a}_{ii} = (1 - 2\alpha - \theta - \mu\nu_i(k))$ , off-diagonal elements  $\bar{a}_{i,i+1} = \bar{a}_{i+1,i} = \bar{a}_{1,n} = \bar{a}_{n,1} = \alpha$ ,  $i \in \{1, \dots, n-1\}$ , and all other elements are identically zero. The parameters  $\alpha = 0.005$ ,  $\theta = 0.06$  and  $\mu = 0.145$  are conduction factors between rooms  $i$  and  $i \pm 1$ , external environment and room  $i$ , heater and room  $i$ , respectively. The heater temperature is maintained at  $T_H = 40^\circ\text{C}$  and the outside temperature  $T_{ei} = -5^\circ\text{C}$  for all rooms  $i \in \{1, \dots, n\}$ . We also have  $T(k) = [T_1(k); \dots; T_n(k)]$ ,  $T_E = [T_{e1}; \dots; T_{en}]$ ,  $\nu(k) = [\nu_1(k); \dots; \nu_n(k)]$  and  $\zeta(k) = \text{diag}(\zeta_1(k), \dots, \zeta_n(k))$ .

The regions of interest are given by  $X = [0, 20]^n$ ,  $X^0 = [17, 18]^n$ ,  $X^1 = [0, 15]^n$  and  $X^2 = X \setminus (X^0 \cup X^1)$ . We consider these regions to be associated with a set of atomic propositions  $\mathcal{AP} = \{p_0, p_1, p_2\}$  via a labeling function  $L : X \rightarrow \mathcal{AP}$  such that  $L(x \in X^z) = p_z$  for all  $z \in \{0, 1, 2\}$ . The requirement of our case study is to synthesize a controller  $\nu \in [0, 0.5]^n$  satisfying the specification represented by DSA  $\mathcal{A}$  in Figure 3 with  $Acc = \langle q_3, q_1 \rangle$ . The temporal logic specification corresponding to  $\mathcal{A}$  is given by  $p_0 \implies G\neg p_1$  which in English reads as any trajectory starting from the region  $X^0$  must always stay away from the region  $X^1$ . In order to achieve this, we must perform sequential reachability decomposition on the DRA  $\mathcal{A}^c$  describing the complement of the specification, which has the same structure as in Figure 3 but with the Rabin acceptance condition. This means that the DRA  $\mathcal{A}^c$  would be accepted iff there exists a run  $\mathbf{q}$  such that  $q_3$  is visited infinitely often and  $q_1$  is visited only finitely often.

Now, to decompose DRA  $\mathcal{A}^c$  into simple reachability tasks, we consider the finite run fragments  $\mathcal{R}^p$  for each  $p \in \mathcal{AP}$ . This is obtained as  $\mathcal{R}^{p_0} = \{(q_0, q_2, q_3, q_3)\}$ . As it can be clearly seen, there is only one finite run fragment  $\tilde{\mathbf{q}} \in \mathcal{R}^{p_0}$  for which we obtain  $\mathcal{P}^{p_0}(\tilde{\mathbf{q}}) = \{(q_0, q_2, q_3), (q_2, q_3, q_3)\}$ . This constitutes two different reachability elements for which we need to compute control barrier certificates and their corresponding local control policies along with upper bounds on reachability probabilities. To do this, we consider our network  $\mathfrak{S}$  as an interconnection of  $n = 300$  subsystems, each of which constitutes a room. The state evolution of these individual subsystems is given by

$$\mathfrak{S}_i : T_i(k+1) = \bar{a}T_i(k) + \mu T_H \nu_i(k) + \alpha w_i(k) + \theta T_{ei} + 0.01 \zeta_i(k) T_i(k).$$

It can be easily verified that  $\mathfrak{S} = \mathcal{I}(\mathfrak{S}_1, \dots, \mathfrak{S}_n)$  with coupling matrix  $M$  such that  $m_{i,i+1} = m_{i+1,i} = m_{1,n} = m_{n,1} = 1$ ,  $i \in \{1, \dots, n-1\}$  and all other elements are identically zero. We now utilize the ADMM algorithm in conjunction with SOS formulation with the help of YALMIP tool [Löf04, Löf09] to compute CSBCs for subsystems  $\mathfrak{S}_i$ ,  $i \in \{1, \dots, N\}$ . For the reachability element  $\vartheta_1 = (q_0, q_2, q_3)$ , CSBC is obtained as an order 4

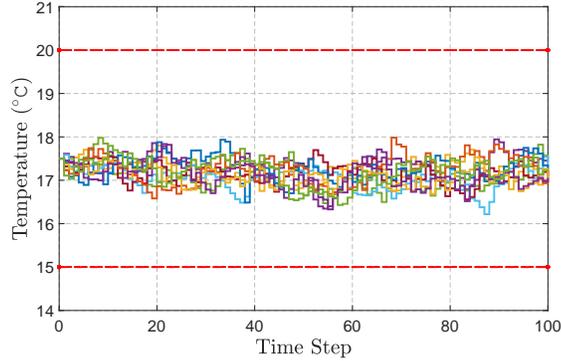


FIGURE 4. Closed-loop state trajectories of a representative room for 10 noise realizations in a network of 300 rooms.

polynomial  $\mathbb{B}_i(T_i) = 11.3244 - 0.5215T_i + 0.0676T_i^2 - 0.01105T_i^3 + 0.0003T_i^4$  and the corresponding controller is computed to be  $\nu_i(T_i) = 0.59 - 0.011T_i$ . Parameters satisfying conditions (3.1)-(3.3) are obtained as  $\eta_i = 0.0535$  and  $\underline{X}_i = 10^{-3} \times \begin{bmatrix} 0.0678 & 0.0001 \\ 0.0001 & -0.2839 \end{bmatrix}$ . One can readily verify that compositionality conditions of Theorem 4.3 are satisfied with  $\eta = 53.5$ ,  $\beta = 1000$  and  $\underline{X}^{comp}$  obtained from  $\underline{X}_i$ ,  $i \in \{1, \dots, 300\}$ , via equation (4.5). Therefore, the overall CBC of the interconnected system is obtained to be  $\mathbb{B}(T) = \sum_{i=1}^{300} (11.3244 - 0.5215T_i + 0.0676T_i^2 - 0.01105T_i^3 + 0.0003T_i^4)$ , while the suitable control policy for the trajectories in  $X^0 = L^{-1}(p_0)$  is obtained as  $\nu_{p_0}(T) = [0.59 - 0.011T_1; \dots; 0.59 - 0.011T_{300}]$ . The upper bound on the probability that the solution processes of the interconnected system  $\mathfrak{S}$  start from  $X_0 = X^0$  and reach  $X_u = X^1$  is computed to be equal to 0.0535 by using Lemma 5.7. Now, for the second reachability element  $\vartheta_2 = (q_2, q_3, q_3)$ , following Remark 5.10, we can conclude that there exists no suitable CBC for the interconnected system and assign a pessimistic upper bound of 1 for the reachability problem. The corresponding controller is assumed to take any random value constrained within the input set. Finally, a switching mechanism for controllers is obtained as explained in Subsection 6.1.

Having an upper bound on the probability of satisfying each reachability problem, we now compute an overall lower bound on the probability of satisfaction of specification expressed by DSA  $\mathcal{A}$  when starting from an initial state  $a \in X^0$  by using Corollary 6.4:

$$\mathbb{P}\{L(x^{a\nu}) \models \mathcal{A}\} \geq 0.9465.$$

Figure 4 shows the simulation for state trajectories of a representative room in the network for 10 different noise realizations when starting from region  $X^0$ . The computation of CSBC and corresponding local control policy take up to 240 seconds on a machine with Linux Ubuntu 18.04 OS (Intel i7-8665U CPU with 32GB RAM).

## 8. CONCLUSION

In this paper, we proposed a compositional approach for the construction of control barrier certificates for large-scale interconnected discrete-time stochastic control systems. We first introduced notions of control sub-barrier certificates and control barrier certificates for control subsystems and interconnected systems, respectively. We then leveraged the interconnection topology to construct control barrier certificates of the interconnected system using control sub-barrier certificates of subsystems by imposing some dissipativity-type compositionality conditions. Obtained control barrier certificates were employed to provide probabilistic upper bounds for reaching unsafe regions. In order to extend this synthesis procedure for  $\omega$ -regular specifications, we also proposed a systematic approach to decompose specifications given by accepting languages of deterministic

Streett automata into simple reachability tasks by utilizing the automata corresponding to the complement of the original specifications. We then combined the probabilities obtained for the satisfaction of these tasks to obtain a lower bound on the probability of satisfaction of the original specification. We utilized alternating direction method of multipliers (ADMM) algorithm to obtain suitable control sub-barrier certificates for subsystems while ensuring satisfaction of compositionality conditions simultaneously. We also provided a sum-of-squares (SOS) formulation to compute appropriate control sub-barrier certificates along with their corresponding local control policies for subsystems. Finally, we illustrated our proposed methods by applying them to a room temperature regulation problem.

## REFERENCES

- [ACJT18] M. Ahmadi, M. Cubuktepe, N. Jansen, and U. Topcu. Verification of Uncertain POMDPs Using Barrier Certificates. In *Annual Allerton Conference on Communication, Control, and Computing*, pages 115–122, 2018.
- [ALZ20] M. Anand, A. Lavaei, and M. Zamani. Compositional construction of control barrier certificates for large-scale interconnected stochastic systems. In *21st IFAC World Conference*, 2020.
- [ALZ21] M. Anand, A. Lavaei, and M. Zamani. From small-gain theory to compositional construction of barrier certificates for large-scale stochastic systems. *arXiv:2101.06916*, 2021.
- [AMP16] M. Arcak, C. Meissen, and A. Packard. *Networks of dissipative systems: compositional certification of stability, performance, and safety*. Springer Briefs in Control, Automation and Robotics. Springer International Publishing, 2016.
- [APLS08] A. Abate, M. Prandini, J. Lygeros, and S. Sastry. Probabilistic reachability and safety for controlled discrete time stochastic hybrid systems. *Automatica*, 44(11):2724–2734, 2008.
- [B90] J. R. Büchi. On a decision method in restricted second order arithmetic. In *The Collected Works of J. Richard Büchi*, pages 425–435. Springer, 1990.
- [BPC<sup>+</sup>11] Stephen P. Boyd, Neal Parikh, E. Chu, Borja Peleato, and J. Eckstein. Distributed Optimization and Statistical Learning via the Alternating Direction Method of Multipliers. *Found. Trends Mach. Learn.*, 2011.
- [Cla20] A. Clark. Control barrier functions for stochastic systems. *arXiv:2003.03498*, 2020.
- [HCL<sup>+</sup>17] C. Huang, X. Chen, W. Lin, Z. Yang, and X. Li. Probabilistic safety verification of stochastic hybrid systems using barrier certificates. *ACM Transactions on Embedded Computing Systems*, 16(5s):186:1–186:19, 2017.
- [HNP<sup>+</sup>11] E.M. Hahn, G. Norman, D. Parker, B. Wachter, and L. Zhang. Game-based abstraction and controller synthesis for probabilistic hybrid systems. In *Eighth International Conference on Quantitative Evaluation of SysTems*, pages 69–78, 2011.
- [JSZ18] P. Jagtap, S. Soudjani, and M. Zamani. Temporal logic verification of stochastic systems using barrier certificates. In *Proceedings of the International Symposium on Automated Technology for Verification and Analysis*, pages 177–193, 2018.
- [JSZ20] P. Jagtap, A. Swikir, and M. Zamani. Compositional construction of control barrier functions for interconnected control systems. In *Proceedings of the 23rd International Conference on Hybrid Systems: Computation and Control*, pages 1–11, 2020.
- [KKNP10] M. Kattenbelt, M. Kwiatkowska, G. Norman, and D. Parker. A game-based abstraction-refinement framework for Markov decision processes. *Formal Methods in System Design*, 36(3):246–280, 2010.
- [Kle] J. Klein. Itl2dstar- LTL to deterministic Streett and Rabin automata.
- [Kus67] H.J. Kushner. *Stochastic Stability and Control*. Mathematics in Science and Engineering. Elsevier Science, 1967.
- [Lav19] A. Lavaei. *Automated Verification and Control of Large-Scale Stochastic Cyber-Physical Systems: Compositional Techniques*. PhD thesis, Department of Electrical Engineering, Technische Universität München, Germany, 2019.
- [Löf04] J. Löfberg. Yalmip : A toolbox for modeling and optimization in matlab. In *In Proceedings of the CACSD Conference*, Taipei, Taiwan, 2004.
- [Löf09] Johan Löfberg. Pre- and post-processing sum-of-squares programs in practice. *IEEE Transactions on Automatic Control*, 54(5):1007–1011, 2009.
- [LSAZ20] A. Lavaei, S. Soudjani, A. Abate, and M. Zamani. Automated verification and synthesis of stochastic hybrid systems: A survey. *Automatica*, accepted as a survey paper proposal, *arXiv:2101.07491*, 2020.
- [LSZ18] A. Lavaei, S. Soudjani, and M. Zamani. From dissipativity theory to compositional construction of finite Markov decision processes. In *Proceedings of the 21st ACM International Conference on Hybrid Systems: Computation and Control*, pages 21–30, 2018.
- [LSZ19] A. Lavaei, S. Soudjani, and M. Zamani. Compositional construction of infinite abstractions for networks of stochastic control systems. *Automatica*, 107:125–137, 2019.
- [LSZ20a] A. Lavaei, S. Soudjani, and M. Zamani. Compositional abstraction-based synthesis for networks of stochastic switched systems. *Automatica*, 114, 2020.
- [LSZ20b] A. Lavaei, S. Soudjani, and M. Zamani. Compositional abstraction-based synthesis of general MDPs via approximate probabilistic relations. *Nonlinear Analysis: Hybrid Systems*, 39, 2020.

- [LSZ20c] A. Lavaei, S. Soudjani, and M. Zamani. Compositional abstraction of large-scale stochastic systems: A relaxed dissipativity approach. *Nonlinear Analysis: Hybrid Systems*, 36, 2020.
- [LSZ20d] A. Lavaei, S. Soudjani, and M. Zamani. Compositional (in)finite abstractions for large-scale interconnected stochastic systems. *IEEE Transactions on Automatic Control*, 65(12):5280–5295, 2020.
- [LZ19] A. Lavaei and M. Zamani. Compositional verification of large-scale stochastic systems via relaxed small-gain conditions. In *Proceedings of the 58th IEEE Conference on Decision and Control*, pages 2574–2579, 2019.
- [MGW18] P.-J. Meyer, A. Girard, and E. Witrant. Compositional abstraction and safety synthesis using overlapping symbolic models. *IEEE Transactions on Automatic Control*, 63(6):1835–1841, 2018.
- [MLAP15] Chris Meissen, Laurent Lessard, Murat Arcak, and Andrew K. Packard. Compositional performance certification of interconnected systems using ADMM. *Automatica*, 61:55–63, 2015.
- [MMS20] R. Majumdar, K. Mallik, and S. Soudjani. Symbolic controller synthesis for Büchi specifications on stochastic systems. In *Proceedings of the 23rd International Conference on Hybrid Systems: Computation and Control*, pages 1–11, New York, NY, USA, 2020. Association for Computing Machinery.
- [Mul63] D. E. Muller. Infinite sequences and finite machines. In *Proceedings of the Fourth Annual Symposium on Switching Circuit Theory and Logical Design*, pages 3–16, 1963.
- [NSZ20a] A. Nejati, S. Soudjani, and M. Zamani. Compositional construction of control barrier certificates for large-scale stochastic switched systems. *IEEE Control Systems Letters*, 4(4):845–850, 2020.
- [NSZ20b] A. Nejati, S. Soudjani, and M. Zamani. Compositional construction of control barrier functions for continuous-time stochastic hybrid systems. *arXiv:2012.07296*, 2020.
- [NSZ20c] A. Nejati, S. Soudjani, and M. Zamani. Compositional construction of control barrier functions for networks of continuous-time stochastic systems. In *Proceedings of the 21st IFAC World Congress, to appear*, 2020.
- [NSZ21] A. Nejati, S. Soudjani, and M. Zamani. Compositional abstraction-based synthesis for continuous-time stochastic hybrid systems. *European Journal of Control*, 57:82–94, 2021.
- [NZ20] A. Nejati and M. Zamani. Compositional construction of finite MDPs for continuous-time stochastic systems: A dissipativity approach. In *Proceedings of the 21st IFAC World Congress*, 2020.
- [Par03] P. A. Parrilo. Semidefinite programming relaxations for semialgebraic problems. *Mathematical Programming*, 96(2):293–320, 2003.
- [PJP07] S. Prajna, A. Jadbabaie, and G. J. Pappas. A framework for worst-case and stochastic safety verification using barrier certificates. *IEEE Transactions on Automatic Control*, 52(8):1415–1428, 2007.
- [Pnu77] A. Pnueli. The temporal logic of programs. In *Proceedings of the 18th Annual Symposium on Foundations of Computer Science*, pages 46–57. IEEE, 1977.
- [PSM20] P. Jagtap, S. Soudjani, and M. Zamani. Formal synthesis of stochastic systems via control barrier certificates. *IEEE Transactions on Automatic Control*, 2020.
- [Rab68] M. O. Rabin. Decidability of second-order theories and automata on infinite trees. *Bulletin of the American Mathematical Society*, 74(5):1025–1029, 1968.
- [RN03] S. J. Russell and P. Norvig. *Artificial Intelligence: A Modern Approach*. Pearson Education, 2nd edition, 2003.
- [SA13] S. Soudjani and A. Abate. Adaptive and sequential gridding procedures for the abstraction and verification of stochastic processes. *SIAM Journal on Applied Dynamical Systems*, 12(2):921–956, 2013.
- [SAM15] S. Soudjani, A. Abate, and R. Majumdar. Dynamic Bayesian networks as formal abstractions of structured stochastic processes. In *Proceedings of the 26th International Conference on Concurrency Theory*, pages 1–14, 2015.
- [Str82] R. S. Streett. Propositional dynamic logic of looping and converse is elementarily decidable. *Information and Control*, 54(1):121–141, 1982.
- [Tab09] P. Tabuada. *Verification and Control of Hybrid Systems*. Springer, 2009.
- [Tho91] W. Thomas. Automata on infinite objects. In *Handbook of Theoretical Computer Science (vol. B): Formal Models and Semantics*, pages 133–191. MIT Press, Cambridge, MA, USA, 1991.
- [WB18] Rafael Wisniewski and Manuela L. Bujorianu. Stochastic safety analysis of stochastic hybrid systems. In *Proceedings of the 57th IEEE Conference on Decision and Control*, pages 2390–2395, 2018.
- [WTL16] T. Wongpiromsarn, U. Topcu, and A. Lamperski. Automata theory meets barrier certificates: Temporal logic verification of nonlinear systems. *IEEE Transactions on Automatic Control*, 61(11):3344–3355, 2016.
- [ZTA17] M. Zamani, I. Tkachev, and A. Abate. Towards scalable synthesis of stochastic control systems. *Discrete Event Dynamic Systems*, 27(2):341–369, 2017.

## 9. APPENDIX

*Proof.* (**Theorem 3.4**) According to the condition (3.5),  $X_u \subseteq \{x \in X \mid \mathbb{B}(x) \geq \beta\}$ . Therefore, we have

$$\mathbb{P}_\infty^a \left\{ x(k) \in X_u \text{ for } 0 \leq k < \infty \mid a \right\} \leq \mathbb{P}_\infty^a \left\{ \sup_{0 \leq k < \infty} \mathbb{B}(x(k)) \geq \beta \mid a \right\}. \quad (9.1)$$

Since the condition (3.6) implies that the CBC  $\mathbb{B}$  is a non-negative supermartingale, the probability bounds (3.7) follows directly from [Kus67, Theorem 12, Chapter II] by applying it to (3.6) and (3.4).  $\square$

---


$$\begin{aligned}
\mathbb{E}\left[\mathbb{B}(f(x, \nu, \varsigma) \mid x, \nu) - \mathbb{B}(x)\right] &= \mathbb{E}\left[\sum_{i=1}^N \mathbb{B}_i(f_i(x_i, \nu_i, w_i, \varsigma_i)) \mid x, \nu, w\right] - \sum_{i=1}^N \mathbb{B}_i(x_i) \\
&= \sum_{i=1}^N \mathbb{E}\left[\mathbb{B}_i(f_i(x_i, \nu_i, w_i, \varsigma_i)) \mid x_i, \nu_i, w_i\right] - \sum_{i=1}^N \mathbb{B}_i(x_i) \leq \sum_{i=1}^N \begin{bmatrix} w_i \\ h(x_i) \end{bmatrix}^T \begin{bmatrix} \underline{X}_i^{11} & \underline{X}_i^{12} \\ \underline{X}_i^{21} & \underline{X}_i^{22} \end{bmatrix} \begin{bmatrix} w_i \\ h(x_i) \end{bmatrix} \\
&= \begin{bmatrix} w_1 \\ \vdots \\ w_N \\ h_1(x_1) \\ \vdots \\ h_N(x_N) \end{bmatrix}^T \begin{bmatrix} \underline{X}_1^{11} & & & \underline{X}_1^{12} & & \\ & \ddots & & & \ddots & \\ & & \underline{X}_N^{11} & & & \underline{X}_N^{12} \\ \underline{X}_1^{21} & & & \underline{X}_1^{22} & & \\ & \ddots & & & \ddots & \\ & & \underline{X}_N^{21} & & & \underline{X}_N^{22} \end{bmatrix} \begin{bmatrix} w_1 \\ \vdots \\ w_N \\ h_1(x_1) \\ \vdots \\ h_N(x_N) \end{bmatrix} = \begin{bmatrix} M \\ \vdots \\ h_1(x_1) \\ \vdots \\ h_N(x_N) \end{bmatrix}^T \underline{X}^{comp} \begin{bmatrix} M \\ \vdots \\ h_1(x_1) \\ \vdots \\ h_N(x_N) \end{bmatrix} \\
&= \begin{bmatrix} h_1(x_1) \\ \vdots \\ h_N(x_N) \end{bmatrix}^T \begin{bmatrix} M \\ I_{\bar{r}} \end{bmatrix}^T \underline{X}^{comp} \begin{bmatrix} M \\ I_{\bar{r}} \end{bmatrix} \begin{bmatrix} h_1(x_1) \\ \vdots \\ h_N(x_N) \end{bmatrix} \leq 0. \tag{9.2}
\end{aligned}$$


---

*Proof. (Theorem 4.3)* First we show that the CBC  $\mathbb{B}$  as (4.4) satisfies conditions (3.4) and (3.5). For any  $x := [x_1; \dots; x_N] \in X_0 = \prod_{i=1}^N X_{0_i}$  and from (3.1), we have

$$\mathbb{B}(x) = \sum_{i=1}^N \mathbb{B}_i(x_i) \leq \sum_{i=1}^N \eta_i = \eta,$$

and similarly for any  $x := [x_1; \dots; x_N] \in X_u = \prod_{i=1}^N X_{u_i}$  and from (3.2), one has

$$\mathbb{B}(x) = \sum_{i=1}^N \mathbb{B}_i(x_i) \geq N,$$

satisfying conditions (3.4) and (3.5) with  $\eta = \sum_{i=1}^N \eta_i$  and  $\beta = N$ . Since  $\sum_{i=1}^N \eta_i < N$  according to (4.2), one has  $\beta > \eta$ . Now we show that  $\mathbb{B}(x)$  satisfies the condition (3.6) as well. For any  $i \in \{1, \dots, N\}$ , let there exist  $\nu_i \in U_i$ , with  $\nu = [\nu_1; \dots; \nu_N] \in U$  satisfying the condition (3.3) and internal inputs given as  $[w_1; \dots; w_N] = M[h_1(x_1); \dots; h_N(x_N)]$ . Then, we can reach the chain of inequalities in (9.2) which completes the proof.  $\square$

*Proof. (Theorem 6.1)* Consider the set of finite run fragments  $\mathcal{R}^p$  for all  $p \in \mathcal{AP}$  and set  $\mathcal{P}^p(\tilde{\mathbf{q}})$  as the set of state runs of a length 3. For  $\vartheta = (q, q', q'') \in \mathcal{P}^p(\tilde{\mathbf{q}})$ , we can obtain from Lemma 5.7 the upper bound of the probability that the solution process of dt-SCS  $\mathfrak{S}$  starts from  $X_0 = L^{-1}(\sigma(q, q'))$  and reaches  $X_u = L^{-1}(\sigma(q', q''))$  under the control input  $\nu_\vartheta$ . This is given by  $\frac{\eta_\vartheta}{\beta_\vartheta}$ . Now the product of all such probability bounds corresponding to  $\vartheta = (q, q', q'') \in \mathcal{P}^p(\tilde{\mathbf{q}})$  gives the probability of the solution process following the word corresponding to  $\tilde{\mathbf{q}}$  starting from  $X_0 = L^{-1}(\sigma(q, q'))$  and is upper bounded by

$$\mathbb{P}\{\sigma(\tilde{\mathbf{q}}) \models \mathcal{A}^c\} \leq \prod_{\vartheta \in \mathcal{P}^p(\tilde{\mathbf{q}})} \left\{ \frac{\eta_\vartheta}{\beta_\vartheta} \mid \vartheta = (q, q', q'') \in \mathcal{P}^p(\tilde{\mathbf{q}}) \right\}.$$

Now given the initial condition  $a \in L^{-1}(p)$ , the upper bound for a solution process  $x^{a\nu}$  of  $\mathfrak{S}$  to violate the required specification is basically the summation of probabilities of all possible finite run fragments  $\mathcal{R}^p$ , and is obtained by

$$\mathbb{P}\{L(x^{a\nu}) \models \mathcal{A}^c\} \leq \sum_{\tilde{\mathbf{q}} \in \mathcal{R}^p} \prod_{\vartheta \in \mathcal{P}^p(\tilde{\mathbf{q}})} \left\{ \frac{\eta_\vartheta}{\beta_\vartheta} \mid \vartheta = (q, q', q'') \in \mathcal{P}^p(\tilde{\mathbf{q}}) \right\}.$$

□

*Proof. (Lemma 4.6)* Since  $\mathbb{B}_i(x_i)$  and  $\lambda_{0_i}(x_i)$  in (4.10) are sum-of-squares, we have  $\eta_i \leq \mathbb{B}_i(x_i) - \lambda_{0_i}^T(x_i)b_{0_i}(x_i)$ . Since the term  $\lambda_{0_i}^T(x_i)b_{0_i}(x_i)$  is non-negative over  $X$ , the condition (4.10) implies the condition (3.1). Similarly, we can show that (4.11) and (4.12) imply conditions (3.2) and (3.3). □

<sup>1</sup>DEPARTMENT OF COMPUTER SCIENCE, LMU MUNICH, GERMANY

*Email address:* mahathi.anand@lmu.de

<sup>2</sup>INSTITUTE FOR DYNAMIC SYSTEMS AND CONTROL, ETH ZURICH, SWITZERLAND

*Email address:* alavaei@ethz.ch

<sup>3</sup>DEPARTMENT OF COMPUTER SCIENCE, UNIVERSITY OF COLORADO BOULDER, USA.

*Email address:* majid.zamani@colorado.edu