

Towards Single Atom Computing via High Harmonic Generation

Gerard McCaul,^{1,*} Kurt Jacobs,^{2,3} and Denys I. Bondar¹

¹*Tulane University, New Orleans, LA 70118, USA*

²*U.S. Army Research Laboratory, Sensors and Electron Devices Directorate, Adelphi, Maryland 20783, USA*

³*Department of Physics, University of Massachusetts at Boston, Boston, MA 02125, USA*

(Dated: January 4, 2022)

The development of alternative platforms for computing has been a longstanding goal for physics, and represents a particularly pressing concern as conventional transistors approach the limit of miniaturization. A potential alternative paradigm is that of *reservoir computing*, which leverages unknown, but highly non-linear transformations of input-data to perform computations. This has the advantage that many physical systems exhibit precisely the type of non-linear input-output relationships necessary for them to function as reservoirs. Consequently, the quantum effects which obstruct the further development of silicon electronics become an advantage for a reservoir computer. Here we demonstrate that even the most basic constituents of matter - atoms - can act as a reservoir for computing where all input-output processing is optical, thanks to the phenomenon of High Harmonic Generation (HHG). A prototype single-atom computer for classification problems is proposed, where a classification model is mapped to an all-optical setup, with linear filters chosen to correspond to the trained model's parameters. We numerically demonstrate that this 'all-optical' computer can successfully perform classification tasks, and does so with an accuracy that is strongly dependent on dynamical non-linearities. This may pave the way for the development of petahertz information processing platforms.

I. INTRODUCTION

Since the birth of information theory [1], there has been an irresistible similarity between computation as a means of processing of information, and the dynamical evolution of physical systems. This isomorphism was striking enough that John Wheeler speculated that the ultimate origin of physical laws may lie in informational dynamics – that we obtain ‘it from bit’ [2]. The cross-pollination of information theory and physics has been particularly fruitful. Considering physical systems as information processors has allowed for the formulation of physical bounds based on informational principles [3–5], but perhaps the most important consequence of this synthesis has been the realisation that with suitable interpretation, *all* physical systems can act as computers [6, 7].

The appeal of using physical systems for computation lies in the trade off it performs between the computational and energetic costs of a problem. An archetypal example of this is the demonstration that an analog ‘quantum computer’ consisting of layers of multi-slit screens can be used to solve NP-complete problems in polynomial time, but with an exponential energetic cost [8]. As conventional electronics progress rapidly towards their ultimate limits [9–11], the development of such alternative computing platforms is of great importance.

The best known example of a physical computer – the brain – has inspired a number of approaches collectively known as neuromorphic computing [12]. Within this paradigm, the most relevant framework is that of *reservoir computing* [13, 14]. A reservoir computer is one

in which only the input and output weights connecting to a ‘reservoir’ network are trained. The effect of such a reservoir is to perform a non-linear transformation on the input data, increasing the effective dimensionality of the data. This transformation exploits the crucial property that a set of non-linearly separable data may become linearly separable in a higher dimensional space, facilitating computation [15, 16].

Given the purpose of a reservoir is to act as a non-linear transformation of inputs, physical systems with a sufficiently non-linear response are natural candidates to fulfil this role [17]. The existence of such highly non-linear systems has resulted in a number of proposals for physical reservoir computers, harnessing both quantum [18–21] and classical dynamics [22]. Some of the most promising platforms for reservoir computing are photonic [23], as not only have deep learning networks been implemented optically [24–26], but some of the core functionalities of an electronic computer, such as hashing [27] and programmability [28], can be efficiently realised with optics.

In conjunction with this progress in optical computing, atomic scale control has increased to the point where single atoms can act as transistors [29], and be entangled with single photons [30]. Given any system with sufficiently non-linear behaviour can serve as a processor for encoded data, this begs the question as to whether it is possible to perform the ultimate act of miniaturisation and implement an optical computer that uses a single atom as its reservoir. In fact, the general public have anticipated such developments with greater foresight than the scientific community. In a recent online educational video concerning atomic networks, one commentator predicted that it would soon be possible to “run Doom [31, 32] on a single atom” [33].

* gmccaul@tulane.edu

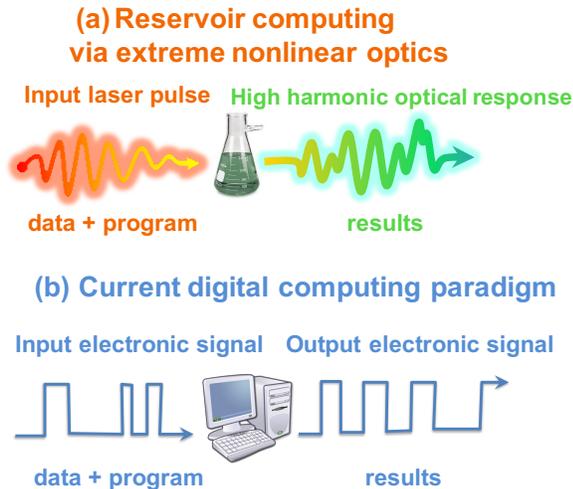


FIG. 1. Computations performed via High Harmonic Generation (HHG) are analogous to standard digital methods. HHG is the production of high frequency overtones by driving a system with an intense laser pulse. Figure (a) illustrates the input-output universality of HHG, where a laser pulse (input) can always be found that induces a desired optical response (output) from an arbitrary optically active system. (b) The universality of digital computations implies that all outputs are attainable irrespective of hardware with appropriate software and data.

Computing on a single atom has more than just memetic appeal however – atomic systems exhibit one of the most extreme non-linear effects yet observed, a phenomenon known as High Harmonic Generation (HHG) [34–37]. HHG occurs when a short and intense laser pulse generates responses of up to ≈ 100 times the frequency of the incident field. It has been shown that both atomic [38] and solid-state [39, 40] systems exhibiting HHG also possess the equally desirable property of *universality*. In a computational context, universality implies that regardless of architecture, any output result can be obtained by suitable input data and software. An analogous physical property is present in HHG systems (see Fig. 1), where it has been shown [38–40] that regardless of the physical specifics of the system, there always exists an incident laser field (input) that will induce a desired optical response (output). This suggests that a single atom undergoing HHG is a good candidate for reservoir computing.

While the aforementioned reservoir computing schemes all contain physical systems at the heart of their computational network, a similarly physical interpretation of the input and output layers of these networks has often been lacking. This suggests that the use of physical systems as computers requires some attendant electronic computation both to encode information and decode outputs. In other words, a reservoir computer may simply behave like an ‘ordinary’ computer with an intermediate

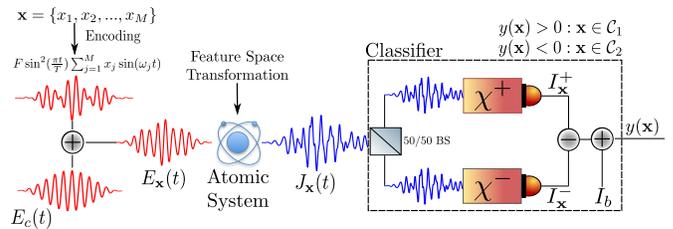


FIG. 2. Optical setup for binary classification. After encoding information into the incident laser pulse, the atomic system acts as reservoir, performing a non-linear feature space transformation on the data. Parameter optimisation during training corresponds to the design of linear filters χ^\pm . The difference between the intensity of light passing through these filters (with a constant bias) can then be used to classify the input data.

nonlinear element.

Here we address this, and propose a simple procedure for constructing an ‘all optical’ computation using a single atom exhibiting HHG as the reservoir. Specifically, we demonstrate how one can construct an optical classifier which requires no electronic post-processing to classify data points. Moreover, the proposed setup is similar to those currently employed in HHG experiments [41]. In Sec. II we detail the mapping of a maximum margin classifier to optical elements, before applying this to several problems in Sec. III. The potential applications and feasibility of this setup is then discussed in Sec. IV.

II. MODEL

Our goal is to map a classification problem onto an all-optical setup (see Fig. 2), minimising the degree of electronic computation required. The first step is to encode the input data \mathbf{x} into an electromagnetic field to be applied to the atomic system. While this encoding can itself be optimised as a layer in the network, this may result in technically unfeasible pulse shapes. To ensure experimentally viable laser fields are generated, we therefore prescribe that the data be encoded in a set of enveloped plane waves:

$$E_{\mathbf{x}}(t) = F \sin^2\left(\frac{\pi t}{T}\right) \left(\sum_{j=1}^M x_j \sin(\omega_j t) \right) + E_c(t). \quad (1)$$

Here T is the total duration of the pulse, F is its amplitude and the ω_j are a set of M frequencies matching the dimensionality of the data. An additional *carrier field*

$$E_c(t) = F_c \sin^2\left(\frac{\pi t}{T}\right) \sin(\omega_c t) \quad (2)$$

is also included, so as to guarantee the full field will induce a non-linear response in the atomic system [22].

The atomic system is modelled with the single active electron approximation, such that the atom's dynamics can be represented as a single particle moving in an effective potential [42]

$$V(\hat{r}) = -\frac{Z_e}{\sqrt{\hat{r}^2 + a^2}}, \quad (3)$$

where we have employed \hat{r} as the 1D position operator to distinguish it from the input data vector \mathbf{x} . For the sake of specificity we take $Z_e = 1$ and $a^2 = 2.37$ a.u., a parametrisation corresponding to an argon atom. Atomic units (a.u.), where $\hbar = m_e = e = 1$, are used throughout. Finally, the field is coupled to the system via the dipole approximation, such that the total system Hamiltonian is described by:

$$\hat{H}(t) = \frac{1}{2}\hat{p}^2 + V(\hat{r}) - \hat{r}E_{\mathbf{x}}(t) \quad (4)$$

In general the precise physical system used is immaterial, provided that it exhibits a sufficiently non-linear response to act as a reservoir in the computation [17]. After encoding the data into a pulse that irradiates the atomic system, we obtain an optical response $J(\omega) = \mathcal{F}_{t \rightarrow \omega} \left[\frac{d}{dt} \langle p \rangle \right]$ from the system, where $\mathcal{F}_{t \rightarrow \omega}$ denotes the Fourier transform. Using this response, a set of optical elements can then be constructed such that the the input data is classified purely from a set of measured intensities.

To show this, let us first briefly examine the mechanics of a maximum margin classifier. The extension to more sophisticated classifiers (such as a support vector machine with slack variables) will not materially affect the mapping between the classifier and physical quantities [43]. Furthermore, we will focus exclusively on mapping a binary classification problem, as any multiclass classifier may be constructed from a set of binary classifications [44]. Consider first a model mapping an input \mathbf{x} to an output $y(\mathbf{x})$:

$$y(\mathbf{x}) = \mathbf{w}^T \phi(\mathbf{x}) + b \quad (5)$$

where $\phi(\mathbf{x})$ is a data point transformed to some feature space, and b is a bias parameter. We wish to find the weights \mathbf{w} such that if the data point \mathbf{x}_n in the training set of N data points is classified by a target value $t_n = 1$ then $y(\mathbf{x}_n) > 0$, and conversely if $t_n = -1$ then $y(\mathbf{x}_n) < 0$. These weights are found by maximising the margin between the $y = 0$ hyperplane and the nearest data points. This problem is equivalent to minimising $|\mathbf{w}|^2$, subject to the inequality constraint

$$t_n (\mathbf{w}^T \phi(\mathbf{x}_n) + b) \geq 1, \quad n = 1, \dots, N. \quad (6)$$

Such a constrained minimisation problem can be solved with the introduction of Lagrange multipliers a_n . After optimisation of the a_n , we can re-express Eq. (5) as:

$$y(\mathbf{x}) = \sum_{n=1}^N a_n t_n \phi^T(\mathbf{x}_n) \phi(\mathbf{x}) + b. \quad (7)$$

where the parameters a_n parameters obey the Karush-Kuhn-Tucker conditions [45, 46]:

$$a_n \geq 0, \quad (8)$$

$$t_n y(\mathbf{x}_n) - 1 \geq 0, \quad (9)$$

$$a_n (t_n y(\mathbf{x}_n) - 1) = 0. \quad (10)$$

The last condition is of particular importance, as it results in $a_n = 0$ for all points except those lying closest to the $y(\mathbf{x})$ hyperplane [43].

Anticipating the mapping of Eq. (7) to an optical process, we define two sets whose union contains all the non-zero $a_n - \mathcal{S}^+$ for those points where $t_n = +1$, and \mathcal{S}^- for points corresponding to $t_n = -1$. Finally, we make the mappings:

$$b \rightarrow I_b, \quad (11)$$

$$\phi(\mathbf{x}) \rightarrow |J_{\mathbf{x}}(\omega)|^2, \quad (12)$$

$$\sum_{a_n \in \mathcal{S}^\pm} a_n \phi^T(\mathbf{x}_n) \rightarrow \int d\omega |\chi^\pm(\omega)|^2, \quad (13)$$

where $\chi^\pm(\omega)$ describes the susceptibility of a linear filter [47]. The intensity I of light after the response $J(\omega)$ is passed through such a filter is given by:

$$I_{\mathbf{x}}^\pm = \int d\omega |\chi^\pm(\omega)|^2 |J_{\mathbf{x}}(\omega)|^2. \quad (14)$$

meaning that Eq. (7) can be remapped to

$$y(\mathbf{x}) = I_{\mathbf{x}}^+ - I_{\mathbf{x}}^- + I_b. \quad (15)$$

Consequently, the classification problem can be expressed in optical terms by splitting the response $J(\omega)$ and measuring the intensities after passing it separately through the filters χ^+ and χ^- . The data point can then be classified according to whether the difference between these intensities is greater than I_b .

Finding both I_b and χ^\pm first requires an electronic computation, taking a set of training data and classifying the simulated set of $\{J_{\mathbf{x}}(\omega)\}$ using a quadratic kernel. Once the optimal values for a_n have been found, this can be translated directly into both a value for I_b and a susceptibility profile for the filters. Using this information, new data may be encoded and classified using the single-atom computer setup shown in Fig. 2. Given the (almost) zero computational overhead involved, new data may be classified at close to light speed.

III. RESULTS

We now detail the application of this method to several classification problems, simulating the atomic system's optical response and training on this data to generate susceptibility profiles. In all cases, data is normalised in order to ensure $F \sum_{j=1}^M |x_j| < F_c$, so that any one dimension of the data encoded in the pulse does not dominate

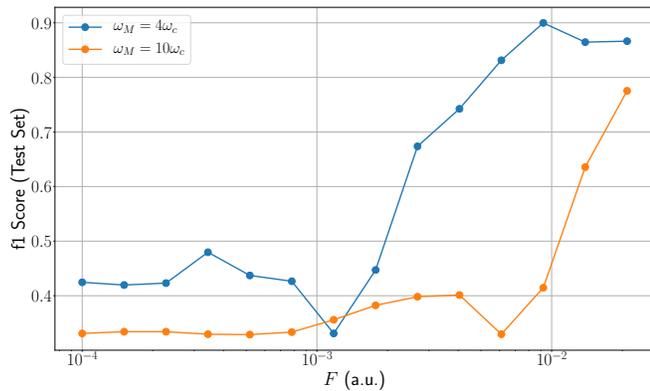


FIG. 3. Example of f1-score dependence on field amplitude F for binary classification of digits. The ability of the model to successfully classify points is heavily dependent on whether a threshold amplitude for the input pulse has been reached. This threshold is itself dependent on ω_M , the highest frequency used to encode data.

over the carrier wave. The carrier wave has a frequency $\omega_c = 0.06$ a.u., and encoding frequencies are regularly spaced between ω_c and the largest encoding frequency ω_M .

Additionally, in order to ensure the atomic system is acting as a reservoir, and that the classifier is being trained on a non-linear function of the input data, all sub-linear frequencies (in relation to the encoding frequencies) are pre-filtered from the response before training: $J(\omega) \rightarrow J(\omega)\Theta(\omega - \omega_M)$, where $\Theta(z)$ is the Heaviside function. Finally, the accuracy of the trained models is assessed using their f1-score, the harmonic mean of the trained model's precision and recall on test data [48]. An f1-score of 1 indicates perfect classification of data, while a score of 0 corresponds to perfect misclassification.

A. Digit Recognition

As a first test of the method, we use the archetypal dataset of handwritten digits, each described by a 64 dimensional vector [49]. While the optical system is quite capable of classifying each digit, for the sake of clarity and simplicity we reduce the problem to binary classification. To do so, we assign any digit < 5 to class \mathcal{C}_1 , and all others to \mathcal{C}_2 , i.e. $\{0, 1, 2, 3, 4\} = \mathcal{C}_1$, $\{5, 6, 7, 8, 9\} = \mathcal{C}_2$.

The dataset contains $N = 1797$ points, and unless otherwise stated, 10% of the data is used for training and 90% for testing. Each point is encoded according to Eq. (1), generating a simulated response $|J_{\mathbf{x}}(\omega)|^2$ used to both train and test the model. In all cases the bottom encoding frequency is taken to be $\omega_1 = 2\omega_c$.

Figure 3 shows the trained model's accuracy as a function of the laser field amplitude, demonstrating the classifier's success is heavily dependent on the incident light's intensity. Given all sub-linear frequencies are filtered out,

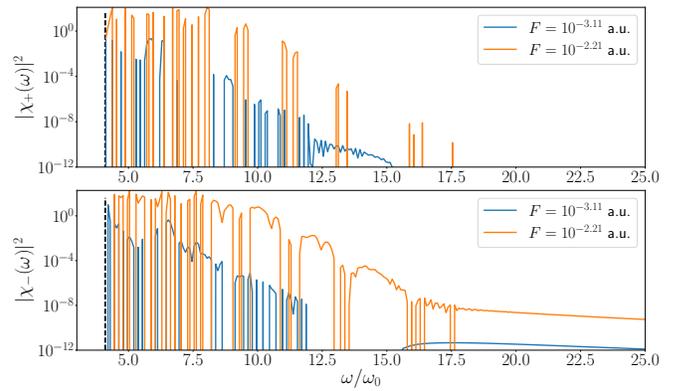


FIG. 4. Example susceptibilities for the encoding $\omega_M = 4\omega_c$ for digit recognition. These profiles are constructed from the weights of the optimised model, which in turn depend on the encoding field amplitude F . The dashed black-line indicates ω_M .

the f1-score serves as an indicator of the degree of non-linearity present in the response. In order to accurately classify the data, the field amplitude must be sufficiently large that the information in the lowest encoding frequency ω_1 is present in the response frequencies $\omega > \omega_M$. For this reason, while a larger ω_M makes the different encoding frequencies more distinguishable, it also requires a more intense laser to ensure all information is transmitted to the high harmonics. Once the model has been trained, it is possible to extract susceptibility profiles for the filters via Eq. (13), as shown in Fig. 4. As the classifier accuracy is dependent on F , it is not surprising that the trained model weights (and hence χ) will change with the field amplitude.

B. Iris Classification

Here we use the atomic computer for a ternary classification problem. Specifically, we use the iris dataset [50], where each data point describes four measurements of one of three types of iris flower. This dataset has the advantage that only one of the three classes is linearly separable from the other two, and thus the atomic system must truly act as a reservoir in order to successfully classify points. The dataset consists of 150 data points (50 of each type of flower), with the same training fraction and bottom encoding frequency as for digit recognition.

Figure 5 once again demonstrates the dependence of the model accuracy on both F and ω_M . While $\omega_M = 4\omega_c$ produces good results across the range of intensities considered, the $\omega_M = 10\omega_c$ has a clear threshold amplitude, below which the model cannot make accurate predictions. As a multiclass problem, the optical computer requires three sets of χ_{\pm} filters. This is due to ternary classification being equivalent to a set of three 'one versus one' binary classifications. An example set of these filters is

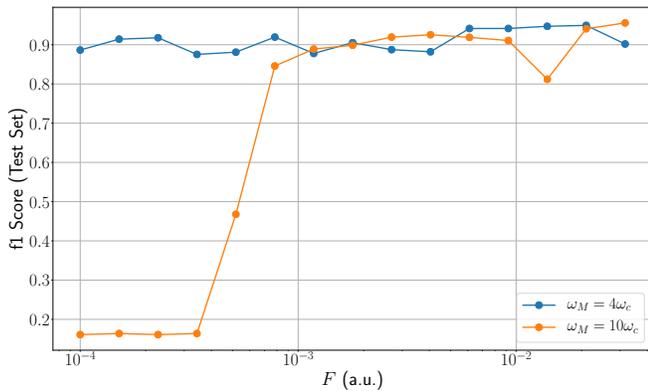


FIG. 5. Example of f1-score dependence on field amplitude F for ternary classification of iris flowers. Once again, for a larger top encoding frequency $\omega_M = 10\omega_c$, a threshold laser amplitude must be reached before the data can be accurately classified

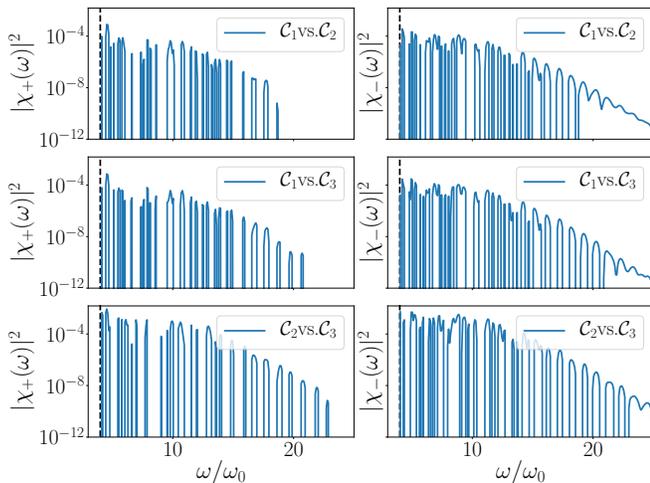


FIG. 6. Example susceptibilities for the encoding $\omega_M = 4\omega_c$ for digit recognition. These profiles are constructed from the weights of the optimised model, which in turn depend on the encoding field amplitude F . The dashed black-line indicates ω_M .

shown in Fig. 6, and are once again dependent on F (not shown).

IV. DISCUSSION

Conventional computing is rapidly approaching the point at which tunnelling effects render further miniaturisation of transistors impossible. The development of alternative computing platforms is therefore of urgent concern. In this manuscript we have outlined a potential alternative architecture, which seeks to utilise rather than avoid quantum dynamics. In particular, a mapping

was established between optimised network weights and optical elements. Consequently, we have demonstrated the feasibility of constructing an ‘all optical’ single-atom computer.

This approach was tested with several benchmark classification problems, where in each case the ability of the atomic computer to successfully classify data was strongly dependent on both the top encoding frequency ω_M and the laser amplitude F . After training the model on the simulated responses $|J_{\mathbf{x}}(\omega)|^2$, it is possible to extract susceptibility profiles for linear filters via the optimised weights of the trained model. These filters can then be used to perform classification of encoded data solely via an intensity measurement of the optical response after passing through the filters.

The potential benefits of such a computing system are numerous. Atomic systems exhibiting HHG not only possess an extreme non-linearity that makes them ideal reservoirs, but display input-output universality. This guarantees that it is in-principle always possible to encode a computational problem into an optical setup of the type detailed here. This has the distinct advantage that computations are performed at the speed of the atomic dynamics. Consequently, the ultrafast dynamics of HHG raises the possibility of processing information at petahertz speeds [41, 51–53].

Finally, we would like to conjecture an equivalence between a quantum computer and a single atom computer via HHG. To model the latter, classical electromagnetic radiation has been employed for both input and output. Only the coupling between light and matter has been described quantum mechanically. Thus, quantum effects serve as a source of extreme optical nonlinearities. We conjecture that quantum information processing can be performed on such a platform if we slice the input pulse as well as output into three time intervals t_1 , t_2 , and t_3 as shown in Fig. 7: Time slot t_1 contains a shaped laser pulse that prepares the initial state necessary for a quantum computation; t_2 – a shaped pulse generating a desired unitary gate. Both the pulses can be obtained, e.g., by using optimal quantum control [54]. The remaining time interval t_3 is used to perform tomography of the final quantum state [55], which contains a result of quantum computation. This analogy between quantum and single atom computer offers a natural way for implementing a hybrid computation.

ACKNOWLEDGMENTS

The authors would like to thank Claudio Conti for helpful discussions. G.M. would also like to thank Josh McNamee for their suggestion of Ref. [31]. This work has been generously supported by Army Research Office (ARO) (grant W911NF-19-1-0377, program manager Dr. James Joseph, and grant W911NF-21-2-0139). The views and conclusions contained in this document are those of the authors and should not be interpreted as

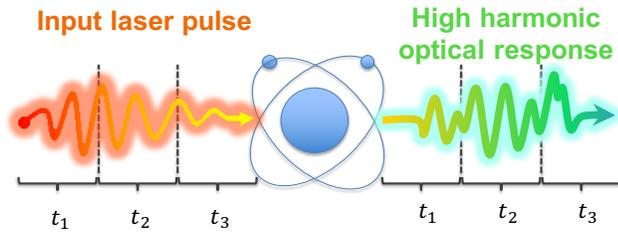


FIG. 7. A connection of a single atom computer with a quantum computer

representing the official policies, either expressed or implied, of ARO or the U.S. Government. The U.S. Government is authorized to reproduce and distribute reprints for Government purposes notwithstanding any copyright notation herein.

-
- [1] C. E. Shannon, A mathematical theory of communication, *Bell System Technical Journal* **27**, 379 (1948), <https://onlinelibrary.wiley.com/doi/pdf/10.1002/j.1538-7305.1948.tb01338.x>.
- [2] *Mathematical Foundations of Quantum Theory* (Elsevier, 1978).
- [3] E. H. Lieb and D. W. Robinson, The finite group velocity of quantum spin systems, *Communications in Mathematical Physics* **28**, 251 (1972).
- [4] S. Lloyd and S. Montangero, Information theoretical analysis of quantum optimal control, *Phys. Rev. Lett.* **113**, 1 (2014), arXiv:1401.5047.
- [5] A. B. Magann, C. Arenz, M. D. Grace, T.-S. Ho, R. L. Kosut, J. R. McClean, H. A. Rabitz, and M. Sarovar, From pulses to circuits and back again: A quantum optimal control perspective on variational quantum algorithms, *PRX Quantum* **2**, 010101 (2021).
- [6] Seth Lloyd, Ultimate physical limits to computation, *Nature* **406**, 1047 (2000).
- [7] S. Lloyd, Computational Capacity of the Universe, *Phys. Rev. Lett.* **88**, 4 (2002), arXiv:0110141 [quant-ph].
- [8] V. Aerný, Quantum computers and intractable (NP-complete) computing problems, *Phys. Rev. A* **48**, 116 (1993).
- [9] B. Hoeneisen and C. Mead, Fundamental limitations in microelectronics i. mos technology, *Solid-State Electronics* **15**, 819 (1972).
- [10] H. Radamson, E. Simeon, J. Luo, and G. Wang, 2 - scaling and evolution of device architecture, in *CMOS Past, Present and Future*, Woodhead Publishing Series in Electronic and Optical Materials, edited by H. H. Radamson, J. Luo, E. Simeon, and C. Zhao (Woodhead Publishing, 2018) pp. 19–40.
- [11] S. Siddiqui, T. Ando, R. K. Pandey, and D. Schepis, Chapter 5 - limits of gate dielectrics scaling, in *Handbook of Thin Film Deposition (Fourth Edition)*, edited by K. Seshan and D. Schepis (William Andrew Publishing, 2018) fourth edition ed., pp. 107–145.
- [12] C. D. Schuman, T. E. Potok, R. M. Patton, J. D. Birdwell, M. E. Dean, G. S. Rose, and J. S. Plank, A Survey of Neuromorphic Computing and Neural Networks in Hardware, arXiv , 1 (2017), arXiv:1705.06963.
- [13] M. Lukosevičius and H. Jaeger, Reservoir computing approaches to recurrent neural network training, *Computer Science Review* **3**, 127 (2009).
- [14] G. Tanaka, T. Yamane, J. B. Héroux, R. Nakane, N. Kanazawa, S. Takeda, H. Numata, D. Nakano, and A. Hirose, Recent advances in physical reservoir computing: A review, *Neural Networks* **115**, 100 (2019), arXiv:1808.04962.
- [15] S. Anco, G. Bluman, and T. Wolf, Invertible mappings of nonlinear PDEs to linear PDEs through admitted conservation laws, *Acta Applicandae Mathematicae* **101**, 21 (2008).
- [16] L. Appeltant, M. C. Soriano, G. Van Der Sande, J. Danckaert, S. Massar, J. Dambre, B. Schrauwen, C. R. Mirasso, and I. Fischer, Information processing using a single dynamical node as complex system, *Nature Communications* **2**, 1 (2011).
- [17] H. Jaeger and H. Haas, Harnessing Nonlinearity: Predicting Chaotic Systems and Saving Energy in Wireless Communication, *Science* **304**, 78 (2004).
- [18] K. Fujii and K. Nakajima, Harnessing disordered-ensemble quantum dynamics for machine learning, *Phys. Rev. Applied* **8**, 2 (2017).
- [19] S. Ghosh, A. Opala, M. Matuszewski, T. Paterek, and T. C. Liew, Quantum reservoir processing, *npj Quantum Information* **5**, 10.1038/s41534-019-0149-8 (2019), arXiv:1811.10335.
- [20] L. C. Govia, G. J. Ribeill, G. E. Rowlands, H. K. Krovi, and T. A. Ohki, Quantum reservoir computing with a single nonlinear oscillator, *Phys. Rev. Research* , 013077 (2020), arXiv:2004.14965.
- [21] W. D. Kalfus, G. J. Ribeill, G. E. Rowlands, H. K. Krovi, T. A. Ohki, and L. C. G. Govia, Neuromorphic computing with a single qudit, arXiv e-prints , arXiv:2101.11729 (2021), arXiv:2101.11729 [quant-ph].
- [22] G. Marcucci, D. Pierangeli, and C. Conti, Theory of Neuromorphic Computing by Waves: Machine Learning by Rogue Waves, Dispersive Shocks, and Solitons, *Phys. Rev. Lett.* **125**, 93901 (2020), arXiv:1912.07044.
- [23] D. Pierangeli, G. Marcucci, and C. Conti, Photonic extreme learning machine by free-space optical propagation, *Photonics Research* **9**, 1446 (2021).
- [24] Y. Shen, N. C. Harris, S. Skirlo, M. Prabhu, T. Baehr-Jones, M. Hochberg, X. Sun, S. Zhao, H. Larochelle, D. Englund, and M. Soljacic, Deep learning with coherent nanophotonic circuits, *Nature Photonics* **11**, 441 (2017), arXiv:1610.02365.
- [25] A. Opala, S. Ghosh, T. C. Liew, and M. Matuszewski, Neuromorphic Computing in Ginzburg-

- Landau Polariton-Lattice Systems, *Phys. Rev. Applied* **11**, 1 (2019), arXiv:1808.05135.
- [26] R. Hamerly, L. Bernstein, A. Sludds, M. Soljačić, and D. Englund, Large-Scale Optical Neural Networks Based on Photoelectric Multiplication, *Phys. Rev. X* **9**, 1 (2019), arXiv:1812.07614.
- [27] R. Pappu, B. Recht, J. Taylor, and N. Gershenfeld, Physical one-way functions, *Science* **297**, 2026 (2002).
- [28] W. Bogaerts, D. Pérez, J. Capmany, D. A. Miller, J. Poon, D. Englund, F. Morichetti, and A. Melloni, Programmable photonic circuits, *Nature* **586**, 207 (2020).
- [29] M. Fuechsle, J. A. Miwa, S. Mahapatra, H. Ryu, S. Lee, O. Warschkow, L. C. Hollenberg, G. Klimeck, and M. Y. Simmons, A single-atom transistor, *Nature Nanotechnology* **7**, 242 (2012).
- [30] T. Wilk, S. C. Webster, A. Kuhn, and G. Rempe, Single-atom single-photon quantum interface, *Science* **317**, 488 (2007).
- [31] F. Sanglard, *Game engine black book : Doom* (CreateSpace Independent Publishing Platform, United States Middletown, DE, 2018).
- [32] D. Kushner, *Masters of Doom : how two guys created an empire and transformed pop culture* (Random House Trade Paperbacks, New York, 2004).
- [33] S. Riley and P. Moriarty, Atomic brain? - computerphile (2021), <https://www.youtube.com/watch?v=LdGMDUZVvSM>.
- [34] H. Liu, C. Guo, G. Vampa, J. L. Zhang, T. Sarmiento, M. Xiao, P. H. Bucksbaum, J. Vučković, S. Fan, and D. A. Reis, Enhanced high-harmonic generation from an all-dielectric metasurface, *Nature Physics* **14**, 1006 (2018), arXiv:1710.04244.
- [35] C. Jin, G. Wang, H. Wei, A. T. Le, and C. D. Lin, Waveforms for optimal sub-keV high-order harmonics with synthesized two- or three-colour laser fields, *Nature Communications* **5**, 1 (2014).
- [36] T. Kroh, C. Jin, P. Krogen, P. D. Keathley, A.-L. Calendron, J. P. Siqueira, H. Liang, E. L. Falcão-Filho, C. D. Lin, F. X. Kärtner, and K.-H. Hong, Enhanced high-harmonic generation up to the soft X-ray region driven by mid-infrared pulses mixed with their third harmonic, *Optics Express* **26**, 16955 (2018).
- [37] R. E. Silva, I. V. Blinov, A. N. Rubtsov, O. Smirnova, and M. Ivanov, High-harmonic spectroscopy of ultrafast many-body dynamics in strongly correlated systems, *Nature Photonics* **12**, 266 (2018).
- [38] A. G. Campos, D. I. Bondar, R. Cabrera, and H. A. Rabitz, How to Make Distinct Dynamical Systems Appear Spectrally Identical, *Phys. Rev. Lett.* **118**, 083201 (2017).
- [39] G. McCaul, C. Orthodoxou, K. Jacobs, G. H. Booth, and D. I. Bondar, Driven imposters: Controlling expectations in many-body systems, *Phys. Rev. Lett.* **124**, 183201 (2020).
- [40] G. McCaul, C. Orthodoxou, K. Jacobs, G. H. Booth, and D. I. Bondar, Controlling arbitrary observables in correlated many-body systems, *Phys. Rev. A* **101**, 053408 (2020).
- [41] A. Sommer, E. M. Bothschafter, S. A. Sato, C. Jakubeit, T. Latka, O. Razskazovskaya, H. Fattahi, M. Jobst, W. Schweinberger, V. Shirvanyan, V. S. Yakovlev, R. Kienberger, K. Yabana, N. Karpowicz, M. Schultze, and F. Krausz, Attosecond nonlinear polarization and lightâ€matter energy transfer in solids, *Nature* **534**, 86 (2016).
- [42] D. Bauer, Two-dimensional, two-electron model atom in a laser pulse: Exact treatment, single-active-electron analysis, time-dependent density-functional theory, classical calculations, and nonsequential ionization, *Phys. Rev. A* **56**, 3028 (1997).
- [43] C. Bishop, *Pattern recognition and machine learning* (Springer, New York, 2006).
- [44] N. Cristianini, *An introduction to support vector machines : and other kernel-based learning methods* (Cambridge University Press, Cambridge New York, 2000).
- [45] H. W. Kuhn and A. W. Tucker, Nonlinear programming, in *Proceedings of the Second Berkeley Symposium on Mathematical Statistics and Probability, 1950* (University of California Press, Berkeley and Los Angeles, 1951) pp. 481–492.
- [46] M. Avriel, *Nonlinear programming : analysis and methods* (Dover Publications, Mineola, NY, 2003).
- [47] R. W. Boyd, *Nonlinear optics*, 3rd ed. (Academic Press, Amsterdam ; Boston, 2008).
- [48] L. Derczynski, Complementarity, F-score, and NLP evaluation, in *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC'16)* (European Language Resources Association (ELRA), Portorož, Slovenia, 2016) pp. 261–266.
- [49] D. Dua and C. Graff, UCI machine learning repository (2017).
- [50] R. Duda, *Pattern classification and scene analysis* (Wiley, New York, 1973).
- [51] J. Li, J. Lu, A. Chew, S. Han, J. Li, Y. Wu, H. Wang, S. Ghimire, and Z. Chang, Attosecond science based on high harmonic generation from gases and solids, *Nature Communications* **11**, 10.1038/s41467-020-16480-6 (2020).
- [52] P. B. Corkum and F. Krausz, Attosecond science, *Nature Physics* **3**, 381 (2007).
- [53] F. Krausz and M. Ivanov, Attosecond physics, *Rev. Mod. Phys.* **81**, 163 (2009).
- [54] D. d'Alessandro, *Introduction to quantum control and dynamics* (Chapman and Hall/CRC, 2007).
- [55] P. Yang, M. Yu, R. Betzholz, C. Arenz, and J. Cai, Complete Quantum-State Tomography with a Local Random Field, *Phys. Rev. Lett.* **124**, 010405 (2020).