

Analysis of taste heterogeneity in commuters' travel decisions using joint parking- and mode-choice model: A case from urban India

Janak Parmar*, Gulnazbanu Saiyed†, Sanjaykumar Dave‡

August 15, 2021

Abstract

Transportation system is among the priority areas for sustainable development as it plays a significant role in the world economy and environment. The concept of transportation demand management (TDM) upholds the development of sustainable mobility through the triumph of optimally balanced transport modal share in cities. The modal split management directly reflects on TDM of each transport subsystem, including parking. In developing countries like India, the policy-makers have largely focused on supply-side measures, yet demand-side measures have remained unaddressed in policy implications. Ample literature is available presenting responses of TDM strategies, but most studies account mode choice and parking choice behaviour separately rather than considering trade-offs between them. Failing to do so may lead to biased model estimates and impropriety in policy implications. This paper seeks to fill this gap by admitting parking choice as an endogenous decision within the model of mode choice behaviour. This study integrates attitudinal factors and built-environment variables in addition to parking and travel attributes for developing comprehensive estimation results. A mixed logit model with random coefficients is estimated using hierarchical Bayes approach based on the Markov Chain Monte Carlo simulation method. The results reveal significant influence of mode/parking specific attitudes on commuters' choice behaviour in addition to the built-environment factors and mode/parking related attributes. It is identified that considerable shift is occurring between parking-types in preference to switching travel mode with hypothetical changes in parking attributes. Besides, study investigates the heterogeneity in the willingness-to-pay (WTP) through a follow-up regression model, which provides important insights for identifying possible sources of this heterogeneity among respondents. The study provides remarkable results which may be beneficial to planning authorities for improving transport demand management strategies especially in developing countries.

Keywords: Commuting travel behaviour; Built-environment; Hierarchical Bayes; Willingness-to-pay; Parking choice; Heterogeneity.

* The Maharaja Sayajirao University of Baroda; mail.janakp@yahoo.com

† The Maharaja Sayajirao University of Baroda; mail.naaz@yahoo.com

‡ The Maharaja Sayajirao University of Baroda; smdave-ced@msubaroda.ac.in

1. Introduction

The phrase “sustainable development” is one of the most frequently used syntaxes in current times, and is almost inextricable part of modern politics and economics. This concept aims at balancing social, economic and technological development that will not significantly or almost not impact the environment. Transportation system is among priority areas for sustainable development (Litman, 2017) as it plays significant role in the world economy and environment. Large metropolitan cities around the world have been facing ever-increasing automobile population which is frequently cited culprit for the urban traffic congestion, health and environmental issues, and depletion in valuable lands. In India, private vehicle stock has swelled from 45.6 million in 2001 to 182.9 million in 2015 (MoRT&H, India, 2018) and this growth is expected to continue in future. As per the study by the Boston Consulting Group (2018), leading consequences like delay and vehicle idling culminate into huge economic loss, estimated as USD 22 billion per year in four major cities Delhi, Kolkata, Mumbai, and Bangalore. Sustainable transport is one that is accessible, safe, environment-friendly, and affordable in which congestion, social and economic access are of such levels that they can be sustained without causing great harm to future generations (ECMT, 2004; Richardson, 1999). Hence, the concept of transportation demand management (TDM) upholds the development of sustainable mobility through the triumph of optimally balanced transport modal share in cities. It directly impacts the TDM of each transport subsystem, including parking. In developing countries like India, the policy-makers have largely focused on supply-side measures, such as increasing supply of roads and promotion of large-scale infrastructure projects like metro-rails, yet demand-side measures have not been prominently addressed in the policy debate (Chidambaram et al., 2014). For an efficient design of TDM strategy, it is important to understand travellers’ needs and decision-making process.

Studying behaviour-pattern of traveller is one of the pivot points in developing policies that make a travel behaviour more sustainable (Van Wee et al., 2013). This involves discouraging a travel by private modes and encouraging public transit (PT) and non-motorized transport (NMT) use. Parking policies are playing an increasingly important role across the world as a TDM tool in order to achieve these goals. Parking charge is referred as the second-best alternative to mitigate traffic congestions (Albert and Mahalel, 2006; Kelly and Clinch, 2006), preceded only by congestion pricing, but it is more commonly used because it has better acceptance rate among the different user-groups in comparison with other restrictions (Milosavljevic and Simicevic, 2019, Chapter 7). Possible reactions to parking policies involve changes in parking type (e.g., between on- and off-street parking), parking location, transportation mode, car occupancy, and frequency and trip-time. Several past studies focused on parking as a TDM strategy (e.g., Rye et al., 2006; Simićević et al., 2013; Christiansen et al., 2017;

Evangelinos et al., 2018), but most studies have considered only an aspect of private vehicle (PV) use rather than trade-offs between them. Ignoring this realm may lead to biased model estimates and impropriety in policy implications. For instance, it is likely that changes in the parking attributes viz. parking cost, search time or walking to destination elicit parking relocation (e.g., from on-street to off-street parking) instead of modal shift. In that case, a mode-shift model may decree, for example, parking price elasticity (with respect to PV choice) to be short of its actual value and subsequently may lead to wrong interpretations about the efficacy of pricing policy. Besides, parking strategies may be imposed to relieve parking demand from CBDs by enhancing access to fringe-parking and to the destination. Beholding to this set-up, it is worth investigating the parking choice as an endogenous decision within the model of mode choice behaviour.

This paper seeks to fill this gap by building a joint model of parking and mode choice and assessing the possible behavioural change that could better address the feasibility of TDM strategies. In particular, this study develops a joint-model of travel-mode and parking-choice (on-street & off-street) behaviour for commuters with origin and destination within the boundary of Delhi-National Capital Region (NCR) in India based on revealed-preference (RP) data. The model examines the impacts of attitudes toward parking and travel-modes, parking attributes such as duration, search and walk time, and built-environment of both work and home locations on commuters' behaviour. A mixed logit model with random parameters is estimated using hierarchical Bayes approach based on the Markov Chain Monte Carlo (MCMC) simulation method. The study also investigates the taste heterogeneity in the willingness-to-pay (WTP) through regression model, which provides significant insights to identify possible sources for this preference heterogeneity among respondents. The results of such an investigation would enhance the sensitivity of the development strategies and would assist in accurate formulation of land-use modelling.

The rest of the paper is organized as follows: Section 2 reviews the literature on the interaction of travel behaviour and above-mentioned measures with additional focus on parking in brief. Section 3 presents the overview of the methodology, which contains theoretical framework of the proposed model to estimate the latent variables (section 3.1), choice model based on hierarchical Bayes estimator (section 3.2 and 3.3) and marginal WTP (section 3.4). Section 4 gives a comprehensive overview of survey as well as settings and specifications of different variables analysed in the model, followed by the analysis including measurement model (section 5.1), choice model (section 5.2) and WTP analysis (section 5.3), and related discussion in Section 5. Lastly, Section 6 discusses the major findings and conclusions drawn from this study.

2. Review of Relevant Literature

2.1. Work Trips and Parking

Most of the parking related research has been focused on sensitivity to parking pricing (Willson and Shoup, 1990; Fearnley and Hanssen, 2012; Nourinejad and Roorda, 2017; Parmar et al., 2021), role of parking in TDM (Gillen, 1978; Shiftan and Golani, 2005; Christiansen et al., 2017; Litman 2017), impacts of employer-paid parking (Aldridge et al., 2006; Su and Zhou, 2012; Pandhe and March, 2012; Brueckner and Franco, 2018). A common finding of these studies is that the parking pricing policies plays a significant role in reducing commuter's private vehicle use. For instance, Willson and Shoup (1990) analyzed the effects of parking pricing at workplaces in Los Angeles and Washington D.C. in USA, and Ottawa in Canada based on four before-and-after studies. They showed 19 to 81 percent reduced car-use by employees if the free parking charges were eliminated at workplace. Similar kind of study in Norway revealed that commuters become more positive toward a parking fee led to significant drop in car-use and control over spillover of parking to local streets (Christiansen, 2014). Su and Zhou (2012) documented that discounts in parking charges for ride-sharers, reduction in parking supply or increased parking charges for drive-alone employees are positive steps employers could take to reduce the share of drive-alone mode of travel. Many researchers have acknowledged the time-factor as an equally strong metric apart from parking pricing which influences both travel mode- and parking location-choice behaviour (e.g., Ibeas et al., 2014; Meng et al., 2017; Yan et al., 2018) but only a few travel behaviour studies have incorporated it to analyse its effects. Marsden (2006) noted that "less evidence is available on observed responses to excess-time, particularly the time taken between parking vehicle and the final destination of commute trips." It may lead to a potential misspecification in mode-choice models and subsequently the policymakers have vague knowledge about an efficacy of time-factors in TDM and reducing PV use. Further discussions can be found at Young et al. (1991), Marsden (2006), Inci (2015) and Parmar et al. (2019).

In addition to reducing PV-use, relieving congestion and parking demand pressure in CBDs is one of the desirable goals of TDM. A policy based on driver's parking location choice has potential to achieve this goal by diminishing cruising for parking (Shoup, 2006) which in turn attracted many studies to analyse driver's behaviour towards parking type and location choice (Hunt and Teply, 1993; Hess and Polak, 2004; Ibeas et al., 2014; Chaniotakis and Pel, 2015; Meng et al., 2017; Hoang et al., 2019). Hess and Polak (2004) have developed mixed logit (ML) based parking choice model and noticed significant taste variations in time-factors such as search time for parking space and walking time to the final destination. Ibeas et al. (2014) did use stated choice data to model parking choice between on-street and underground parking locations in Santoña,

Spain. They assessed the interaction terms defining the effects of the individuals' characteristics in behaviour. Their study showed parking space search time to be more important than the time to the final destination. Hoang et al. (2019) compared multinomial logit (MNL), nested-logit (NL) and mixed-logit (ML) models to evaluate the parameters influencing motorcycle drivers' parking location choice behaviour. A dominated ML model showed that parking pricing, walking to destination, queuing time (waiting for parking), and capacity of parking lot have significant impacts on parking choice.

Notwithstanding, most parking studies encompassed the various parking attributes apart from parking charges, utmost emphasis is given to the consequences of parking pricing policies at policy level decisions (Except few, e.g., Simićević et al., 2013, Meng et al., 2017). Additionally, a little amount of research developed conclusions on travel behaviour (i.e., mode choice) considering the abovementioned parking strategies (Litman, 2018).

2.2. Travel Behaviour Analysis

Researchers have identified substantial range of variables to evaluate travel behaviour, typically classified as built environment, mode-specific level-of-service (LOS) attributes, parking attributes, and subjective attitudes. The effects of parking attributes are discussed in the previous subsection. This subsection briefly discusses the literature which incorporated remaining aspects. Knowledge on how built environment shapes the travel behaviour is one of the critical elements to form sustainable strategies in land-use planning. Numerous studies have explored the potential of built environment of both residential and work locations (e.g., Frank et al., 2008; Guan and Wang; 2019) to control travel behaviour. These factors usually termed as D-factors: density, diversity, design, distance to transit, and destination accessibility which are well explained by Ewing and Cervero (2010). Additionally, they found the population and job density have smaller effects on travel behaviour. However, a few studies indicated strong correlation between travel behaviour and density (Naess, 2012; Rahul and Verma, 2017). Studies in developing countries by Zegras and Srinivasn (2006), Sanit et al. (2013) and Rahul and Verma (2017) found a positive change towards the use of NMT with improved built environment factors. Studies shown that land-use diversity has significant influence on travel behaviour. For instance, when residence, work, leisure, and entertainment locations are adjacent to each other, travel distance will be reduced and subsequently NMT based trips will be increased and car-trips will be reduced (Cervero and Radisch, 1996; Yue et al., 2016). Besides, the proximity of residence and work-place with respect to different parts of the city directly affect the urban travel. People living farther from the city center (e.g., outer fringe of the city) need to travel significantly more by motorized-mode (Engebretsen and Christiansen, 2011) which reflects the poor

accessibility. Also, people working near central parts have lesser car-use and most trips generally made by NMT or public transit (Rahul and Verma, 2017). Lastly, transit accessibility also plays critical role in people's travel behaviour. This may be in terms of average distance through shortest paths from the residence or workplaces to the nearest transit station, transit route density within defined area around origin/destination, distance between transit stops, or the number of stations per unit area (Ewing and Cervero, 2010).

Apart from the urban form characteristics, psychological characteristics of the individual traveller, usually known as subjective attitudes have received increased attention from the researchers in recent years. These studies demonstrated that individual behaviour pattern is rooted in psychological constructs such as values, attitudes, subjective norms, perceptions and desires (Abrahamse et al., 2009; Paulssen et al., 2013). A few studies examined the effects of travel attitudes on car-use and choice of vehicle type (Steg and Kalfs, 2000; Cao et al., 2009; Van Acker et al., 2014; Etminani-Ghasrodashti and Ardeshiri, 2015; Guan and Wang, 2019). They showed how the subjective attitudes along with land-use attributes could influence the travel behaviour. Paulssen et al. (2013) developed a mixed logit-based model to map the effects of latent variables (i.e., values and attitudes) on individual's travel behaviour. Their study acclaimed that attitudinal factors concerning flexibility, comfort and convenience, and ownership have greater impacts on travel behaviour than more conventional mode specific LOS variables. Similarly, Steg and Kalfs (2000) posed that beliefs, preferences and social norms primarily determine modal choice, much more than by available alternatives. Therefore, a better understanding of people's motivations is essential in order to facilitate shift towards sustainable transport modes from private vehicles.

Generally, modal responses are highly sensitive to the local conditions and competitiveness of travel modes. For example, in response to parking policy, people may shift their parking location instead of changing travel mode. As per Marsden (2006), shift in parking locations is more probable response to parking interventions than shifting travel mode. Authors are of the opinion that this study is first-of-its-kind in India which intends to explore the influence of built environment and commuters' attitudes as well as parking parameters on both parking- and travel mode-choice behaviour simultaneously.

3. Model Formulation

The model is specified based upon the random utility theory, which assumes that an individual's choice would be subjected to the highest utility depending on the considered parameters as well as unobserved part of this utility. First four subsections

describe the mathematical framework followed in this study to develop a model and analyze WTP, while the remaining subsections explain the data used to fit the model.

3.1. Estimation of Latent Variables

As the latent variables cannot be directly measured using survey, a measurement model obtained through confirmatory factor analysis (CFA) within the structural equation modeling (SEM) framework is used to estimate the relationship between latent variable and observed variable. A most general equation of measurement model can be written as:

$$Z = \Lambda_z \eta + \varepsilon \quad (1)$$

Where, Z is a vector of observed variable; Λ_z is the matrix of the obtained load factors for Z on η ; η is the latent variable, which is to be determined; and ε is the error vector.

In order to add the latent variables in the econometric models (e.g., logit model), η is required to be estimated based on the Equation 1 which can be rewritten in vectorized form as follows:

$$\begin{pmatrix} z_{11} \\ z_{12} \\ \dots \\ z_{1n} \end{pmatrix} = \begin{pmatrix} \Lambda_{z1} \\ \Lambda_{z2} \\ \dots \\ \Lambda_{zn} \end{pmatrix} \eta_1 \quad (2)$$

The path coefficients Λ_{zn} for the latent variable η_1 are standardized and can be considered as the weights of the observed variables, and the assigned weights can be calculated as per the Equation 3 (Han et al., 2018). Lastly, the model fitted values of each latent variable are obtained based on the responded values of every related observed variables (Equation 4).

$$\begin{pmatrix} a_{z1} = \frac{\Lambda_{z1}}{\Lambda_{z1} + \Lambda_{z2} + \dots + \Lambda_{zn}} \\ a_{z2} = \frac{\Lambda_{z2}}{\Lambda_{z1} + \Lambda_{z2} + \dots + \Lambda_{zn}} \\ \dots \\ a_{zn} = \frac{\Lambda_{zn}}{\Lambda_{z1} + \Lambda_{z2} + \dots + \Lambda_{zn}} \end{pmatrix} \quad (3)$$

$$\eta_1 = a_{z1}z_{11} + a_{z2}z_{12} + \dots + a_{zn}z_{1n} \quad (4)$$

3.2. Random Parameter Logit Model

In order to consider the heterogeneity in the choice behaviour among the respondents, a random parameter mixed logit model (Train, 2009) is applied to the survey data. A general form of the mixed logit (ML) model with a linear utility of a person i for a given choice s is given as follows:

$$U_{is} = V_{is} + \epsilon_{is} = \beta_i X_{is} + \epsilon_{is} \quad (Normal) \quad (5)$$

OR

$$U_{is} = V_{is} + \epsilon_{is} = (e^{\beta_i}) X_{is} + \epsilon_{is} \quad (Log - normal) \quad (6)$$

Where U_{is} is individual respondent i 's utility for alternative s (i.e., travel & parking choices in this case); X_{is} is the non-stochastic vector of the attributes of given alternative s for an individual i ; ϵ_{is} is an econometric error term which follows IID extreme value (or Gumble) distribution; and β_i is random coefficients vector denoting taste of respondent i , which follows the normal distribution with mean vector μ (normal with extremely large variance) and covariance vector ω (inverted Wishart with K degrees of freedom), which can be represented as $\beta \sim \mathcal{N}(\mu, \omega)$ and Log-normal: $\ln \beta \sim \mathcal{N}(\mu, \omega)$ for normally and log-normally distributed random parameters respectively.

If the chosen alternative is denoted as y_i , the probability of an individual i 's choice for alternative s can be expressed as,

$$P_s(y_i | \beta_i) = \prod \frac{e^{\beta_{is} x_{is}}}{\sum_s e^{\beta_{is} x_{is}}} \quad (Normal) \quad (7)$$

OR

$$P_s(y_i | \beta_i) = \prod \frac{e^{(e^{\beta_{is}}) x_{is}}}{\sum_s e^{(e^{\beta_{is}}) x_{is}}} \quad (Log - normal) \quad (8)$$

Here, the value of β_i is unknown. The unconditional probability (likelihood) of the choice probability of choosing s given parameters μ, ω , and density function for β be $f(\beta_i | \mu, \omega)$, is the integral of Equation 7 or 8 for all probabilities of β_i :

$$P(y_i | \mu, \omega) = \int P_s(y_i | \beta_i) f(\beta_i | \mu, \omega) d \beta_i \quad (9)$$

3.3. The Hierarchical Bayes Approach to Mixed Logit (HBML)

The classical maximum likelihood estimator only estimates the population level parameters, while Hierarchical Bayes (HB) estimator considers the individual-level parameters as unknown parameters as well. The Bayesian procedure imparts two main advantages over the maximum simulated likelihood approach: (1) it avoids

maximizations of any function, which can be difficult numerically, and (2) it is consistent with fixed number of draws and efficient with rise in number of draws at any rate (Train, 2009). Within a Bayesian framework, the logit models can evaluate the full posterior distribution of population-level mean vector, related covariance matrix, and the individual-specific parameters. It greatly simplifies the interrelated tasks of estimation, inference and communication compared to classical estimator (Jackman, 2000). Consider $k(\mu)$ and $k(\omega)$ be the prior density functions for μ and ω , then the posterior distribution for μ and ω is defined as:

$$\mathcal{K}(\mu, \omega | y_i \forall i) \propto \prod P(y_i | \mu, \omega) k(\mu) k(\omega) \quad (10)$$

Here, the prior distributions for μ (normal) and ω (inverted Wishart) are given as:

$$k(\mu) = \mathcal{N}(\mu_0, A)$$

$$k(\omega) = IW(\vartheta, D)$$

Where μ_0 is prior mean with any value (e.g., zeros or MNL model estimates) and A is a diagonal matrix of prior covariance whose size is depends on the number of unknown population-level mean parameters. ϑ is the prior degrees of freedom parameter and D is the scale parameter (Lenk, 2014). The joint posterior distribution $\mathcal{K}(\cdot)$ for the stated three parameters is shown in the Equation 11, which is proportional to the prior on μ , ω and mixed logit probability.

$$\mathcal{K}(\mu, \omega, \beta_i \forall i | y_i \forall i) \propto P_s(y_i | \beta_i) f(\beta_i | \mu, \omega) k(\mu) k(\omega) \quad (11)$$

It should be noted that researcher can provide the prior information by specifying priors at the starting of Bayesian model simulation, which is one of the key advantages of Bayesian approach over classical approach.

Based on the joint posterior distribution stated in Equation 11, the estimates of the parameters μ , ω and $\beta_i \forall i$ can be obtained through different sampling methods. In the present study, Gibbs sampling and Metropolis-Hastings (MH) sampling algorithms – jointly called as Markov Chain Monte Carlo (MCMC) – is used to obtain draws from the posterior distribution. This procedure involves three steps at t th iteration of Gibbs sampler:

1. Take a draw of μ^t from $\mathcal{N}(\bar{\beta}_i^{t-1}, \omega^{t-1}/N)$, where $\bar{\beta}_i^{t-1}$ is the mean of total N realizations before t th iteration (all β_i^{t-1} 's);
2. Draw ω^t from $IW(K + N, (KI + NS^{t-1})/(K + N))$,
where $S^{t-1} = \sum_i (\beta_i^{t-1} - \mu^t)(\beta_i^{t-1} - \mu^t)' / N$
3. Take a draw of $\beta_i^t \forall i$ conditional on μ^t and ω^t using the random walk MH algorithm, starting from β_i^{t-1} and using the normal density $\varphi(\beta_i | \mu^t, \omega^t)$.

These steps are sequentially repeated over many iterations until the parameter values converge to draws from the posterior. The assertion of the convergence can be made by

examining if the draws after burn-in period are moving around the posterior (Train, 2009).

3.4. Estimation of Marginal Willingness-to-pay (MWTP)

The proposed model allows random coefficients to capture the taste heterogeneity in choice behaviour. Considering the distribution of β_i for a given sampled population be $f(\beta_i|\mu, \omega)$ and joint posterior for μ , ω and $\beta_i \forall i$ as defined in Equation 11, the conditional probability (posterior) of respondent's choice can be defined as:

$$H_{is}(\beta_i|\mu, \omega, y_i \forall i) = \frac{P_s(y_i|\beta_i) f(\beta_i|\mu, \omega)}{\int P_s(y_i|\beta_i) f(\beta_i|\mu, \omega) d\beta_i} \quad (12)$$

Since, the quantities on the RHS of Equation 12 is known as a result of the choice model, the mean β_i for each respondent i in the sampled population for choosing y_i can be obtained as:

$$\begin{aligned} \bar{\beta}_i &= E(\beta_i|\mu, \omega, y_i \forall i) = \int \beta_i H_{is}(\beta_i|\mu, \omega, y_i \forall i) d\beta_i \\ &= \iint \dots \int \beta_i \mathcal{K}(\mu, \omega, \beta_i \forall i | y_i \forall i) d\mu d\omega d\beta_1 d\beta_2 \dots d\beta_l \end{aligned} \quad (13)$$

The above multidimensional integral does not have a closed form, and is approximated through simulation. In HB model, the draws for μ , ω and $\beta_i \forall i$ are obtained from their joint posterior defined in Equation 11. If $\bar{\beta}_{ia}$ be the coefficient of attribute a for individual i and β_c be the cost coefficient, then the individual-specific MWTP can be calculated as:

$$MWTP_{ia} = -\frac{\bar{\beta}_{ia}}{\beta_c} \quad (14)$$

Once the individual level MWTP is estimated, the variations in calculated MWTP among the individuals can be analysed by establishing the relationship between possible sources (e.g., socioeconomic characteristics) and MWTP through regression. This type of two-step approach was used in a very few studies in different aspects (Campbell, 2007; Hoshino, 2011) to analyse the preference heterogeneity in choice behaviour, but yet to be explored in the context of travel behaviour. These studies showed that this approach yielded greater validity and explanatory power than standard methods used to incorporate individual-specific variables into the analysis. The MWTP regression in this study assumes that respondents' socioeconomic characteristics primarily influence the heterogeneity in MWTP. Based on the individual MWTP calculated using Equation 14, and considering q_{ia} be a vector of respondent i 's socioeconomic characteristics, the regression model can be expressed as:

$$MWTP_{ia} = \alpha_a + \gamma'_a q_{ia} + \varepsilon_{ia} \quad (15)$$

Where, α_a is an intercept, which is constant for all individuals; γ'_a is the coefficient vector; and ε_{ia} is an unobserved random term reflecting the effect of omitted variables.

4. Survey and Data Description

For this study, data were collected through face-to-face interview survey of commuters (students were not included) in Delhi, India. The urban population of the city was estimated as 26 million (97.5% share), making it the world's second largest urban areas and comprises second-highest GDP per capita in India (Planning Dept., 2019). The city has been experiencing perturbing inflation in traffic congestion and air pollution in past two decades which are the consequences of the rapidly soared motor-vehicle population. Currently, it has 11.27 million of registered vehicles in terms of cars, jeeps and motorized two-wheelers (MTW) sharing nearly 95% of the total vehicles (Economic Survey of Delhi, 2021). Additionally, they demand huge space for parking in CBD areas to waste valuable land resources. It is estimated that the annual demand for car parking space in Delhi can be equivalent to as much as 471 football fields. Public transit in Delhi has two major services- bus (fleet size of 6572) and metro, having daily ridership of nearly 11 million as per Economic Survey of Delhi (2021). The public transit share is near to 50%, while private vehicles including cars and MTW cater to about 32% of total motorized trips in the city.

This study used the data collected through RP survey conducted between September to November 2019 in Delhi. Respondents were recruited randomly at their work locations in order to complete the survey form making sure that the respondent is eligible for the interview (i.e., the trip is within study area, had an alternative transport mode and parking-type available to use). A questionnaire includes the information regarding personal and household (HH) characteristics, vehicle-ownership levels, trip and parking related attributes, and access/egress details. It also comprises several modes- and parking-specific attitudinal statements on a 5-point Likert-scale from “strongly disagree” to “strongly agree”. The collected data was continuously monitored while survey was in progress to ensure a good balance of data spreading across the city and having well distributed trip characteristics. A total of 650 respondents were interviewed of which 602 samples were refined (excluding unqualified and incorrect answers; effective rate of 92.6%) to be eligible for further use in analysis. The key socio-demographic statistics of the 602 respondents is demonstrated in Table 1. It can be seen that the proportion of respondents with service as an employment status is much higher (84%) compare to other categories. In the survey data, the observations of part-time working people were very less and hence it was merged with full-time working observations to denote a merged category as a service. Also, it was noticed that near to 24% of the off-street parking users had employer-paid parking and none of their employer has parking cash-out scheme in place.

Table 1 Descriptive Statistics of analysed samples

Individual Characteristics	Category	Frequency (%)
Sex	Male	404 (67.1)
	Female	198 (32.9)
Age	18 – 24	13 (2.2)
	25 – 39	351 (58.3)
	40 – 64	238 (39.5)
Income (Thousand ₹)	< 20	66 (11)
	20 – 35	204 (33.9)
	35 – 50	129 (21.4)
	50 – 70	76 (12.6)
	> 70	127 (21.1)
Education level	Primary-school	4 (0.7)
	High-school	122 (20.3)
	Graduate	393 (65.3)
	Postgraduate and higher	83 (13.8)
Employment Status	Service	506 (84)
	Business	36 (6)
	Self-employed	60 (10)
Current Transport Mode*	Car & Off-street parking (Car_Off)	104 (17.3) [37.55]
	Car & On-street parking (Car_On)	46 (7.6) [16.61]
	Motorcycle & Off-street parking (MTW_Off)	68 (11.3) [14.08]
	Motorcycle & On-street parking (MTW_On)	84 (13.9) [17.39]
	Public transport– Bus	148 (24.6) [24.58]
	Public transport– Metro	100 (16.6) [16.61]
	Non-motorized modes (NMT)	52 (8.6) [42.28]
Household Characteristics		Mean (Std. Dev.)
Members in HH		3.83 (1.44)
Number of working members		1.65 (0.65)
Number of Cars in HH		0.53 (0.63)
Number of MTW in HH		1.06 (0.68)
Number of Bicycles in HH		0.69 (0.61)

* The values in square brackets show *percent times chosen when available/feasible*.

The trip features such as trip distance, trip time (purely an in-vehicle time), trip cost, and parking features such as parking duration, search time for parking space, and walk time to destination (i.e., egress time) were considered in this study. All these indicators were self-reported by the respondents. The average travel distance across all modes was observed to be about 10 km which is also an average commute distance across the Delhi-NCR. For trip time, only in-vehicle time was considered as a trip attribute. This is because the access and egress features for public modes are taken as BE factors whereas for the private modes, access features are neglected as people park their vehicles right in-front of their homes and egress features are considered within parking attributes. Trip cost is estimated on monthly-basis in this study because for PV categories, maintenance cost is also taken into account in addition to fuel cost to demonstrate the full cost people incur for using PVs. In a similar fashion, monthly charges for using PT (either daily tickets or monthly pass) were asked to the respondents in the survey. To distinguish between the on-street and off-street parking, parking demand in terms of duration, search time for parking space, and egress time for both the parking types were considered. Though the parking price is one of the most important deciding factors in parking choice, it was not taken into account, because as per the current scenario, the parking price for both on-street and off-street parking is same in study location. Further, the current parking tariff is ₹20 per hour with the maximum of ₹100 per day for car, and ₹10 per hour with the maximum of ₹50 per day for MTW in the city. Since the minimum parking duration is greater than 5 hours as per the data, parking cost incur to PV users become constant to all individuals. In this sense, it does not have influence on commuters' parking choice decision.

4.1. Built Environment Factors

Using the information developed from the geo-coded land use database, several spatial characteristics of the built environment were estimated in this study. A political ward map (272 wards) was considered as a base map to identify the origin and destination of the respondents on the map. The built environment factors include land use diversity (entropy index), road density, working population density, and accessibility– distance from home and work location to the closest metro station and closest bus stop (self-reported). It should be noted that density and diversity indicators are calculated at the trip origins only.

4.2. Attitudinal Factors

As this study tries to identify objective as well as subjective influences on commute travel behaviour, individuals' attitudinal preferences towards travel modes and parking were captured in the survey. The list of the statements regarding attitudes included in the survey is shown in the Appendix. The responses to these statements were then

factor analysed using principal axis factoring method (promax rotation) to find out how they can be related to each other. The factors (latent variables) were extracted from these observed attitudes for individual modes to understand which latent variables are important to which specific mode. Cronbach's alpha was used to measure the internal consistency i.e., how closely a set of indicators for each latent variable related to each other in a same group. The obtained alpha values for each group were acceptable ($\alpha > 0.7$) as listed in the respective Tables in Appendix. Additionally, Pearson's correlation matrix presented high correlation values between factors which also support the factor analysis used in this study. The Kaiser-Meyer-Olkin's (KMO) sampling adequacy test was employed to check the suitability of data for factor analysis. The latent variables obtained from the observed attitudes are: 1. Individualist, pro-environment, economy, comfort, and flexibility for PVs (68.63% variance explained, KMO = 0.73); 2. Comfort, convenience, safety, and flexibility for PT (60.76% variance explained, KMO = 0.69); 3. Health, safety, comfort, and convenience for NMT modes (71.78% variance explained, KMO = 0.81); and Safety and convenience for Parking types (59.85% variance explained, KMO = 0.71). Next, confirmatory factor analysis (CFA) was conducted within the structural equation modeling (SEM) framework to validate the relationships between the observed and latent variables, which is discussed in the next section.

5. Model Estimation and Results

5.1. The Measurement Model

After ensuring the adequacy of the factor analysis, CFA models (also known as measurement model) were developed for each transport modes group (i.e., PV, PT & NMT) and parking type in order to obtain the path coefficients. As the observed attitudes were considered as ordered-categorical variables, diagonally weighted least squares (DWLS) estimator with the bounds constrained quasi-Newton optimizer was used to estimate path coefficients. This approach uses the WLS estimator with polychoric correlations as input to create an asymptotic covariance matrix. In this model, the ordered categories are considered as discretized normally distributed latent continuous response through a number of threshold parameters (see, Muthén, 1994). These thresholds denote values of the latent continuous variable where respondents cross over from one ordinal category to the next. The method is typically paired with robust estimation adjustments (called "sandwich" estimator) that improves chi-square, standard error, and fit indices and observed to perform statistically better as well (Rhemtulla et al., 2012).

The estimated path coefficients for each indicator subjected to the respective latent variable are presented in the Tables 2, 3, 4 and 5. It can be seen that all the estimated coefficients had the expected sign and significant at the 90% confidence level or higher.

The threshold parameters are also significant at 90% level or higher which shows that the proposed ordered-models adequately reflect individual's opinions on the attitudinal statements presented to them. The fit values of each latent variable were then derived based on the path-coefficients as discussed in the subsection 3.1.

Table 2 Confirmatory factor analysis for private vehicles

Indicator	Estimate	Thresholds			
		1	2	3	4
Individualist1	0.344**	-0.959***	0.502***	1.196***	
Individualist2	0.691***	-1.162***	-0.492***	0.701***	1.196***
Individualist3	0.381***	-1.344***	-0.158**	0.437***	1.505***
Individualist4	0.488***	-0.788***	-0.108*	0.895***	
Pro-environment1	0.851***	-2.175***	-1.146***	-0.243***	0.999***
Pro-environment2	0.872***	-1.267***	-0.649***	0.075*	1.455***
Pro-environment3	0.691***	-0.788***	-0.108*	0.895***	
Economy1	0.606***	-2.715***	-0.722***	0.108*	1.935***
Economy2	0.969***	-2.715***	-1.130***	-0.777***	0.383***
Economy3	0.214***	-1.681***	-0.744***	-0.252***	0.959***
Comfort1	0.447***	-1.681***	-0.744***	-0.252***	0.959***
Comfort2	-0.498***	-2.477***	-1.324***	-0.511***	1.084***
Flexibility1	0.109*	-1.162***	0.330***		
Flexibility2	0.526***	-2.477***	-1.617***	-0.711***	1.409***
Flexibility3	0.354***	-2.329***	-1.100***	-0.218***	1.084***

Goodness of Fit: Chi-squared/df=70.85/25; CFI=0.91; TLI=0.88; RMSEA=0.076

Table 3 Confirmatory factor analysis for public transport

Indicator	Estimate	Thresholds			
		1	2	3	4
Comfort1	0.285***	-1.144***	-0.485***	0.223***	1.220***
Comfort2	0.753***	-1.646***	-0.375***	0.452***	1.697***
Comfort3	0.588***	-1.556***	-0.331***	0.693***	
Comfort4	0.437***	-2.395***	-1.105***	-0.058*	1.082***
Convenience1	0.187***	-2.714***	-1.529***	-0.693***	0.448***
Convenience2	0.447***	-0.542***	0.244***	0.775***	1.835***
Convenience3	-0.452***	-2.055***	-1.752***	-0.963***	0.646***
Safety1	0.269***	-1.237***	-0.566***	0.150***	1.053***
Safety2	-0.390***	-2.714***	-1.543***	-0.214***	0.997***
Safety3	-0.516***	-1.680***	-1.090***	-0.425***	0.605***
Flexibility1	0.636***	-1.813***	-0.636***	0.113**	1.385***

Flexibility2	0.623***	-0.868***	0.054*	0.527***	1.332***
Flexibility3	0.546***	-2.022***	-0.736***	0.142***	1.529***

Goodness of Fit: Chi-squared/df=404.56/50; CFI=0.89; TLI=0.86; RMSEA=0.09

Table 4 Confirmatory factor analysis for non-motorized modes

Indicator	Estimate	Thresholds			
		1	2	3	4
Health1	1.278**	-1.991***	-0.914***	0.265***	
Health2	-0.197*	-1.813***	-0.468***	0.404***	1.165***
Health3	0.418***	-2.110***	-1.109***	-0.132*	1.288***
Safety1	1.654**	-1.571***	-0.015***		
Safety2	-2.087***	-0.638***	0.436***	1.435***	
Safety3	-0.315***	-0.603***	0.161*	1.224***	
Comfort1	1.222*	-1.743***	-0.586***	0.621***	
Comfort2	1.640***	-1.396***	-0.250***	0.914***	
Convenience1	1.085**	-1.358***	-0.436***	0.603***	
Convenience2	0.353***	-1.743***	0.029*		

Goodness of Fit: Chi-squared/df=99.64/43; CFI=0.98; TLI=0.96; RMSEA=0.04

Table 5 Confirmatory factor analysis for parking types

Indicator	Estimate	Thresholds			
		1	2	3	4
Safety1	0.498***	-1.888***	-0.877***	-0.044	0.937***
Safety2	0.754***	-1.302***	-0.360***	0.737***	
Convenience1	0.692***	-0.867***	0.382***	1.095***	1.888***
Convenience2	-0.091*	-1.587***	-0.389***	1.145***	
Convenience3	-0.728***	-2.552***	-1.159***	-0.262***	1.002***

Goodness of Fit: Chi-squared/df=13.03/4; CFI=0.99; TLI=0.96; RMSEA=0.04

5.2. The Choice Model

In what follows, the latent variables were introduced into the HBML model together with the other parameters discussed previously. Several trial-and-error iterations were carried out by adding and removing different variables considering their sign, significance, and importance in the model in order to obtain the best possible model. To estimate the proposed model, MCMC algorithm was performed with 80,000 draws of which 30,000 sweeps were discarded as burn-in. The next 50,000 sweeps were retained to estimate the posterior means of considered parameters. Figure 1 shows traces of each iteration, which depicts a stationary distribution around posteriors. At the starting of the MCMC run, informative priors were defined for normally and lognormally

distributed parameters taking into account previous studies cited in literature review section as well as pre-developed MNL models.

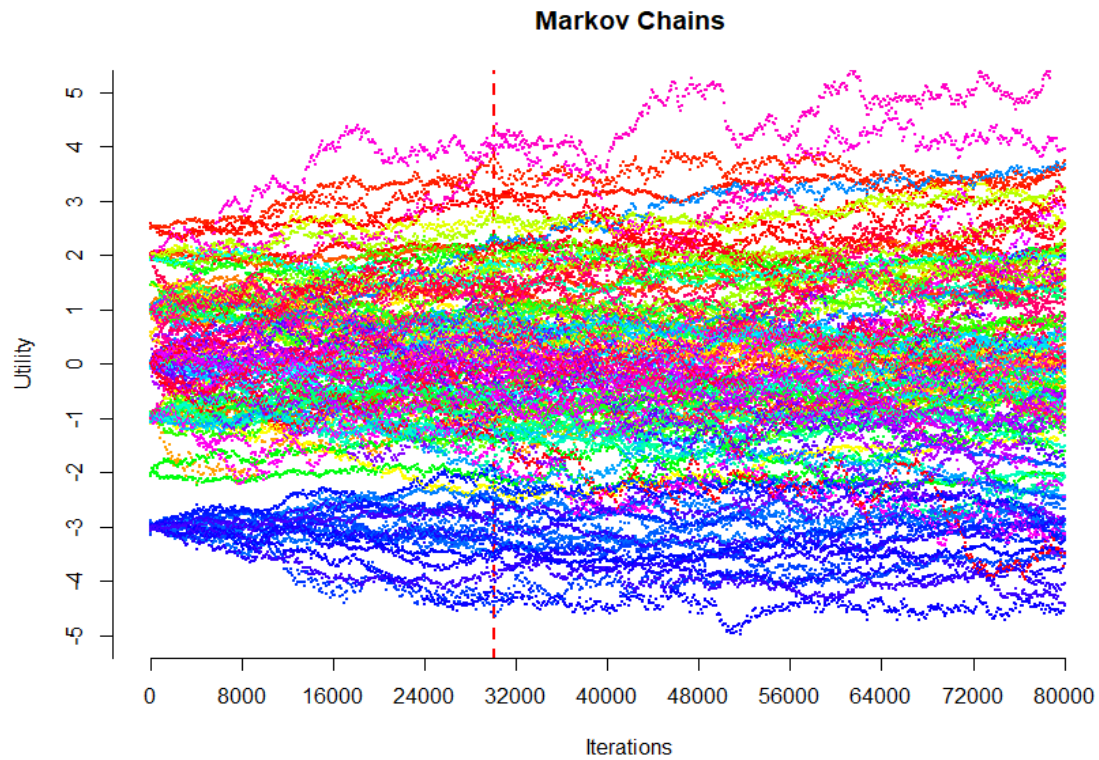


Figure 1 Parameter chains for the estimated HB model

Table 6 Estimated parameters for the choice model

Variable	Distribution	Alternatives	Posterior Mean	Variance	Coefficients
ASCs#	Normal	Car_Off	3.127*	14.834**	3.127
		Car_On	0.613	4.406	0.613
		MTW_Off	2.972**	4.196***	2.972
		MTW_On	2.246***	7.205***	2.246
		Metro	-0.454***	3.543**	-0.454
		NMT	0.721*	2.989	0.721
Socio-demographic parameters					
Female	Fixed	PT & NMT	-0.598***	–	-0.598
Education	Fixed	Car	-0.198	–	-0.198
		MTW	0.287**	–	0.287
		Bus	-1.862***	–	-1.862
		Metro	1.298***	–	1.298
		NMT	-0.468***	–	-0.468

Income	Fixed	Car	0.152***	–	0.152
		MTW	-0.438**	–	-0.438
		Bus	-0.639**	–	-0.639
		Metro	0.056***	–	0.056
		NMT	-0.578*	–	-0.578
Number of working members	Fixed	Car	-3.687	–	-3.687
		MTW	-0.765*	–	-0.765
		PT	0.562	–	0.562
		NMT	-0.235***	–	-0.235
Built-environment parameters					
Access distance–Bus	Normal	Car	1.387***	0.945*	1.387
		MTW	1.943***	0.688	1.943
		Bus	-0.585**	0.422***	-0.585
		Metro	0.191***	0.886***	0.191
Access distance–Metro	Normal	Car	0.556***	0.506**	0.556
		MTW	0.071***	0.384***	0.071
		Bus	0.015***	0.871*	0.015
		Metro	-0.856***	1.012***	-0.856
Egress distance–Bus	Normal	Car	0.383*	0.559**	0.383
		MTW	0.744***	0.919***	0.744
		Bus	-0.731*	0.663***	-0.731
		Metro	0.033***	1.867*	0.033
Egress distance–Metro	Normal	Car	0.067***	0.298***	0.067
		MTW	0.132***	0.392**	0.132
		Bus	0.361***	0.246***	0.361
		Metro	-1.849***	0.419***	-1.849
Entropy index	Fixed	Car	-4.287*	–	-4.287
		MTW	-2.137*	–	-2.137
		Bus	3.065***	–	3.065
		Metro	1.278***	–	1.278
		NMT	-0.093***	–	-0.093
Residential density	Fixed	Car	-1.255***	–	-1.255
		MTW	-2.251	–	-2.251
		Bus	1.078*	–	1.078
		Metro	2.415**	–	2.415
		NMT	-1.185**	–	-1.185
Working population density	Fixed	Car	0.841	–	0.841
		MTW	3.008***	–	3.008
		Bus	1.251***	–	1.251
		Metro	0.226***	–	0.226
		NMT	2.721**	–	2.721
Attitudinal parameters					
PV_Individualist	Normal	Car	2.820*	1.927	2.820
		MTW	2.987*	0.632***	2.987

PV_Pro-environment	Normal	Car	-1.120***	3.993***	-1.120
		MTW	-0.624***	1.819**	-0.624
PV_Economy	Normal	Car	-2.515***	0.393	-2.515
		MTW	0.739***	1.116***	0.739
PV_Comfort	Normal	Car	1.882***	0.941*	1.882
		MTW	3.120	1.112*	3.12
PV_Flexibility	Normal	Car	-0.953***	2.108***	-0.953
Parking_Safety	Normal	Car_Off	2.519**	0.785*	2.519
		Car_On	-1.662***	0.392**	-1.662
		MTW_Off	1.020***	0.981***	1.020
		MTW_On	-0.071*	0.106**	-0.071
Parking_Convenience	Normal	Car_Off	-1.054**	0.835*	-1.054
		Car_On	0.953***	0.877**	0.953
		MTW_Off	-1.691***	1.084*	-1.691
		MTW_On	2.073*	1.238***	2.073
PT_Comfort	Normal	Car	1.695	1.077***	1.695
		MTW	2.703***	1.793*	2.703
		Bus	2.156**	2.594	2.156
		Metro	-0.906	3.151*	-0.906
		NMT	-0.452**	3.613**	-0.452
PT_Convenience	Normal	Car	0.517	2.983*	0.517
		MTW	0.978***	2.129***	0.978
		Bus	-1.502***	0.804***	-1.502
		Metro	1.851	0.763**	1.851
		NMT	-1.062***	0.536***	-1.062
PT_Safety	Normal	Bus	-2.636***	0.832*	-2.636
		Metro	-1.426**	1.117***	-1.426
PT_Flexibility	Normal	Car	-0.368	2.030**	-0.368
		MTW	0.799**	4.700***	0.799
		Bus	0.927	1.205	0.927
		Metro	0.829	0.654*	0.829
		NMT	-0.615	7.239	-0.615
NMT_Health	Normal	Car	-0.658**	0.763***	-0.658
		MTW	-0.632**	1.926**	-0.632
		Bus	-1.82	1.858	-1.82
		NMT	4.320**	1.661***	4.320
NMT_Safety	Normal	Car	1.355***	4.849***	-1.355
		MTW	0.084**	0.962***	-0.084
		Bus	0.866***	0.612**	-0.866
		NMT	-2.278**	1.207*	-2.278
NMT_Comfort	Normal	Car	0.457***	0.980**	0.457
		MTW	1.045*	2.992***	1.045
		Bus	-1.201***	1.110*	-1.201
		NMT	-1.467***	0.257	-1.467

NMT_Convenience	Normal	Car	-0.719***	0.395*	-0.719
		MTW	0.070***	0.791	0.070
		Bus	0.048***	1.15	0.048
		NMT	1.745*	1.772**	1.745
Parking & travel parameters					
Employer paid parking	Fixed	Car_Off	1.075***	–	1.075
		MTW_Off	1.902**	–	1.902
		PT	-0.883	–	-0.883
Parking duration	Normal	Car_Off	2.152*	0.448**	2.152
		Car_On	-0.863*	0.296*	-0.863
		MTW_Off	1.852**	0.885*	1.852
		MTW_On	-0.558***	0.331**	-0.558
Parking search time	Lognormal	Car_Off	-0.122***	0.525***	-1.151
		Car_On	-0.035***	0.227**	-1.082
		MTW_Off	-0.024	1.443*	-2.009
		MTW_On	-0.028***	0.447*	-1.216
Parking egress time	Lognormal	Car_Off	-0.041*	0.323***	-1.128
		Car_On	-0.050***	0.723**	-1.366
		MTW_Off	-0.025***	0.572**	-1.298
		MTW_On	-0.099***	0.509***	-1.168
In-vehicle travel time	Lognormal	Car	-0.115***	1.006**	-1.477
		MTW	-0.076*	0.858	-1.424
		Bus	-0.181**	2.069***	-2.377
		Metro	-0.119*	0.364*	-1.064
		NMT	-0.131*	0.420***	-1.083
Trip cost (₹)	Lognormal	Car	-0.033***	0.294***	-1.121
		MTW	-0.052***	1.271**	-1.792
		Bus	-0.058***	0.652*	-1.307
		Metro	-0.061***	0.279***	-1.081
Trip distance (km)	Fixed	Car	0.669*	–	0.669
		MTW	-0.489*	–	-0.489
		Bus	0.399**	–	0.399
		Metro	1.382*	–	1.382
		NMT	-1.547***	–	-1.547

Notes: 1. #ASC for bus mode is set to zero for the identifiability reasons.

2. *: Significant at $p < 0.10$; **: Significant at $p < 0.05$; ***: Significant at $p < 0.01$.

3. Null loglik = -901.854; Final loglik = -192.287; adj. $\rho^2 = 0.559$.

Table 6 shows the estimated parameters as well as goodness of fit for the final model and results are broadly conform to the expectations. The final loglikelihood value depicts significant improvement as it is able to impart sufficient information on individuals' choice behaviour. The underlying mean and variance estimate for the random effects based on posterior distribution are reported (except for the fixed

parameters). Most of the parameters are significant at 90% or higher confidence level. A significant heterogeneity in more or less amount is observed for all parameters, as evidenced by the significant variances, which the standard logit model is unable to capture. A few non-significant parameters were also retained in model as they provide important information regarding respondents' decision-making.

The ASCs in the model show that all the modes but metro was preferable over bus given the availability. Further, the magnitude is observed to be higher for private modes (car & MTW) compare to others. It is noticed that the utility of the private modes increases with the increased income, also the use of metro is observed to increase but the coefficient is less in magnitude. These results are in line with the higher mode share for private transport observed in New Delhi. The probability of increased modal share of public transport modes improves as the number of working members rises in a family. The primary reasons for this might be the limited vehicle ownership and different work places for the family members.

The built-environment factors also exhibit significant influence especially on the mode-choice which are in line with the past studies discussed in LITERATURE. In the model, access distance for metro was not found significant and hence removed. It is seen that the propensity to ride with bus decreases with increase in access distance as the coefficient of bus possessed negative sign for access distance. In a similar fashion, the coefficients of egress distance to both bus and metro are negative for the respective modes. That is, when egress distance increases, the probability of using bus and metro for commuting decreases. It can be noticed that the coefficient of egress distance from bus stop is comparatively much lesser, which means the tendency to shift from bus mode is not very high. The entropy index has a negative effect on car, MTW, and NMT modes, while it is positive for the bus and metro. It reveals that the more diversified the land-use, the higher will be use of public modes of transport. Unlike previous works, this model shows that use of NMT decreases for higher entropy index, though the magnitude of the coefficient is much lower. The model results for residential density demonstrate that the use of public transport modes is positively related to the denser urban area. Further, it can be perceived that people are likely to use MTW or bus for travel or to walk to a greater extent when they reside in the area with higher working population density.

Looking to the model, almost all considered attitudinal factors are significantly related to mode-choice behaviour, indicating that these attitudinal parameters are determinants for mode choice. PV_Individualist attitude has a significant positive impact on private mode use for commuters. The proposed model allows to calculate the probability given the coefficient for an attribute as the density function for the coefficient vector β_i , $\mathcal{N}(\mu, \omega)$ is now known. Hence, the probability given the positive coefficient for PV_Individualist for car can be estimated as $P(\beta_{PV_Individualist} > 0) = 0.979$, which suggests that almost all respondents prefer to use car when their attitude is positively associated with the related response to the statements. Similar is the case for

MTW mode. In contrary, the awareness on environmental concerns causes negative effects on both the private modes, but the magnitude of coefficient is higher for car. It dictates that the use of car is substantially dependent on the pro-environment attitude ($P(\beta_{PV_Pro-environment} < 0) = 0.712$). It can be noted that commuting by MTW is positively related to the attitude of economy. It reveals respondents are less concerned about economic aspects since the current levels of travel cost and parking fees are comparatively much lesser for MTW. The attitude related to the travel comfort is positively associated with the choice of private modes and supports the statements for the same. Flexibility has overall negative effect on the car use given the higher covariances for Flexibility2 and Flexibility3 (Table 2). The model also suggests that car users put more weightage on safety while selecting parking type. Conversely, MTW users consider convenience as more important compare to safety. The related probabilities are estimated as: $P(\beta_{Parkng_Safety} > 0) = 0.999$ for Car_Off; $P(\beta_{Parkng_Safety} > 0) = 0.857$ for MTW_Off; $P(\beta_{Parkng_Convenience} > 0) = 0.861$ for Car_On; and $P(\beta_{Parkng_Convenience} > 0) = 0.953$ for MTW_On. These state that the parking users with safety concerns in their mind tend to park their vehicle at off-street parking, whereas individuals would prefer the on-street parking given their positive attitudes towards parking convenience.

The results of public transit attitudes are in line with those found in the LITERATURE. From the association of four attitudes of public transit with bus use, it is clear that safety followed by convenience are the most detrimental factors for bus use. It can be observed that the magnitude of mean of coefficients are higher with lower variance, which shows lesser heterogeneity in decision-making. The probability is estimated as $P(\beta_{PT_Safety} < 0) = 0.998$ and $P(\beta_{PT_Convenience} < 0) = 0.953$, which indicates almost all individuals who confer more importance on these aspects, have a lower use of bus. Further, the comfort (in negative manner) has positive coefficient for bus indicate that people give less emphasize to it given their lower cost affordability and lesser income (particularly who use bus in Delhi). Likewise, safety influence attitudes towards using metro for commuting though the extent is lower compared to bus. Convenience and flexibility are related positively with the use of metro, which is in contrary to what observed for the bus. It shows that keeping other parameters constant, respondents are more likely to select a metro over bus for commuting given their psychological mindset for convenience (primarily time-reliability) and flexibility. Further it can be recognized that respondents give least preference to walking/cycling modes as all the attitudinal parameters associated with the public transit are negatively related to NMT modes.

Higher and positive β_{NMT_Health} confirm that the respondents who are health-concerned tend to use NMT modes over all other modes given the calculated probability of this choice being close to 1. It is also found that the more someone perceive NMT a convenient mode, the more he/she will use NMT for short-distant commute trips. On the other hand, those who value safety and comfort (in negative manner) feel negatively towards walking/cycling.

Parking and travel parameters possess a considerable impact on individuals' choice behaviour. It is observed that the likeliness of using public transport and car increases for longer trips, whereas people are less likely to use MTW and NMT modes. A quite higher coefficient of distance for metro compare to other modes (car and bus) indicates its attractiveness for large distance trips. This finding is supported by an estimate of average trip length of Delhi metro being approximately 15 km (Goel and Tiwari, 2016). IVTT and travel cost are negatively associated with the selection of a travel mode. Coefficient of IVTT for bus has the highest value among the considered modes, which shows that a small rise in IVTT would have a significant effect on bus being chosen as a travel mode. Such effect is seen smaller in case of metro looking to the coefficient for IVTT in metro. Generally, rail-based transit is preferred to avoid inconvenience caused due to traffic jams on roads and hence such tendency in terms of IVTT makes sense. The model shows that parking related attributes also have a significant influence in respondents' decision-making. Parking search time and parking egress time has negative coefficients for both the parking types and indicate that the utility decreases when the value of these variables increases. Also, it is noticed that respondents put nearly equal importance to both the variables. Parking duration also has a significant impact on joint mode-parking choice behaviour. It is obvious that people who need to use a parking for more duration would prefer off-street parking as captured by the model. Relatively higher magnitude of parking duration for car users (both on street and off street) shows their higher tendency to shift to off-street parking when parking duration increases. The Employer-paid parking can be treated as a very deciding factor for choosing PVs as commute modes as can be seen from the model. Here, only off-street is considered for employer-paid parking as no related on-street parking was reported in survey.

5.3. Willingness to pay analysis

Figure 2 presents the box plot showing the distribution of individual level MWTP estimates based on the developed mixed model. Please note that the distance is in the scale of 100 meters and time is in hour. The cross-marks in the box indicate the mean values of MWTP. Among the accessibility parameters, egress distance to metro clearly shows the largest MWTP value with less variation, indicating that commuters are more willing to pay for higher accessible metro at their work place. This is also supported by the higher coefficient value of attitude towards PT convenience in the model. Further, it is revealed that the commuters put more value to the egress distance compare to access distance for both the PT modes. This finding is similar to one observed in meta-analysis by Ewing and Cervero (2010). Some of the respondents put negative values on MWTP, which shows that they have to be compensated by the stated amounts (for e.g., maximum of ₹1.89 per trip for access distance to bus) in order to add the positivity for using bus. In case of IVTT, car users are comparatively more willing to pay to reduce their travel time on an average, followed by bus users. A reasonable explanation for this is that, car and bus affect more in congestion due to bigger size compared to MTW,

while metro has the dedicated track. While Figure 2 unveils the preferences among commuters for the considered attributes, these preferences are accompanied by significant taste heterogeneity, which is manifested by relatively higher standard deviations. To date, very little is known in regard to this heterogeneity in context of transport mode choice. Planners and policy makers are interested in understanding the association of socioeconomic characteristics with the heterogeneity in MWTP in order to better plan the transportation systems. In line with this, the follow-up regression models are developed considering individual-level MWTP (conditional upon their current choice) as dependent variable and their socioeconomic characteristics (see Table 1) as the explanatory variables. Table 7 demonstrates the estimation results for the same.

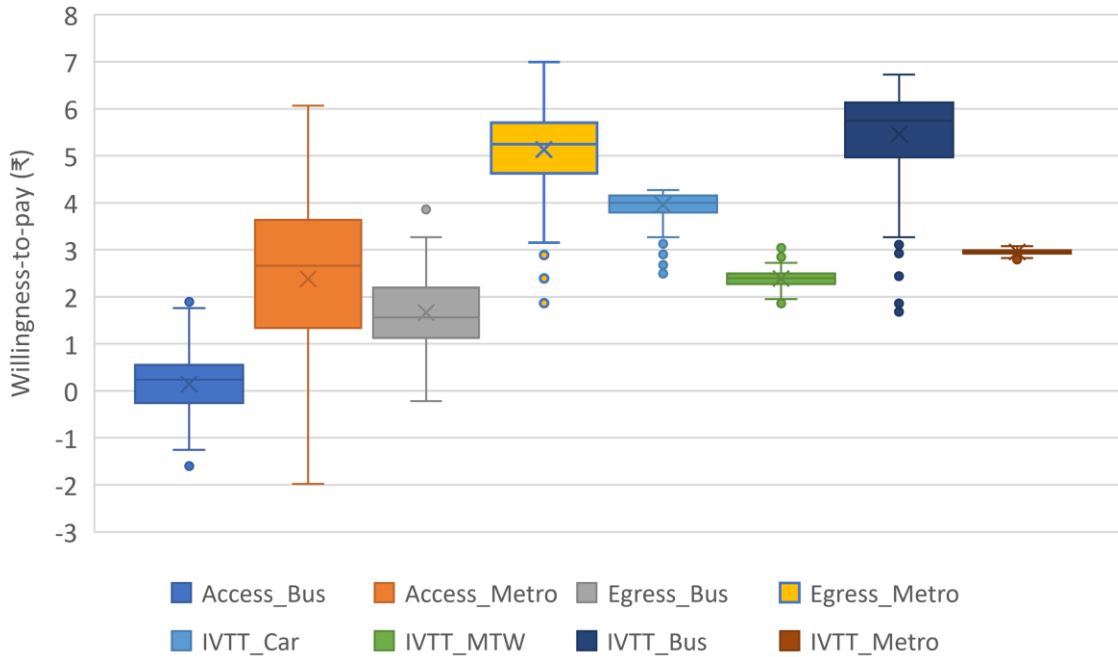


Figure 2 Distribution of individual-level marginal willingness to pay

Table 7 Marginal willingness to pay regression models (S.E. in parenthesis)

Dependent Variable (MWTP for... ↓)	Intercept	Female	Age	Education	Income	No. of Working members	R^2
Access distance- Bus (Bus users)	0.676*** (0.153)	-0.121** (0.048)	-0.093*** (0.026)	-0.034* (0.016)	0.006 (0.004)	-0.027* (0.008)	0.33
Egress distance- Bus	1.148*** (0.208)	0.217* (0.095)	-0.115*** (0.036)	-0.007 (0.051)	-0.012 (0.014)	0.043 (0.048)	0.23

(Bus users)							
Access distance- Metro (Metro users)	3.521*** (0.429)	-0.296** (0.135)	-0.240*** (0.075)	0.062* (0.013)	0.008** (0.002)	-0.091 (0.089)	0.26
Egress distance- Metro (Metro users)	5.715*** (0.208)	-0.105* (0.056)	-0.121*** (0.036)	0.007 (0.051)	0.013* (0.005)	-0.058* (0.026)	0.34
In-vehicle travel time (Car users)	4.124*** (0.067)	-0.055*** (0.021)	-0.036*** (0.011)	0.020 (0.016)	0.077** (0.022)	-0.122 (0.158)	0.28
In-vehicle travel time (MTW users)	2.457*** (0.042)	-0.025* (0.013)	-0.019** (0.007)	0.009 (0.010)	-0.031** (0.003)	-0.010* (0.004)	0.20
In-vehicle travel time (Bus users)	6.243*** (0.241)	-0.150** (0.076)	-0.140*** (0.042)	-0.021* (0.006)	-0.006 (0.079)	-0.081* (0.036)	0.29
In-vehicle travel time (Metro users)	2.993*** (0.014)	-0.088** (0.044)	-0.006*** (0.002)	-0.001 (0.004)	0.010** (0.004)	-0.002 (0.003)	0.22

Note: *: Significant at $p < 0.10$; **: Significant at $p < 0.05$; ***: Significant at $p < 0.01$.

Before carrying out analysis, the variables were scaled to ensure the proportionality. Though the regression fit (R^2) values are relatively lower, the models are able to explain approximately 20% to 34% of heterogeneity in MWTP. It can be seen that gender and age are significant at 90% or higher level in all the models. It is noticed that females are less likely to pay more price in account of the calculated MWTP. The coefficient for age is negative for all the cases which signifies that older commuters are less willing to pay additional amount against the improvement in respected parameters. The coefficient for education level is found significant and negative for MWTP for access distance to bus as well as IVTT by bus, while it is positive for access distance to metro. It implies that the bus users become more reluctant to pay extra when their education level is comparatively higher. While, the opposite is true in case of MWTP for access distance to metro. A possible reason for this is that the commuters with higher education levels prefer to travel by metro rather than use bus for work. The coefficient for income is negatively associated with IVTT for MTW users, though the magnitude is very less. It indicates that higher the income of MTW users, lesser would be their willingness to pay for an improved IVTT. In a reverse way, higher willingness to pay is observed with increased income for IVTT of car and metro. With the increased income, commuters tend to shift to car or metro rather than paying extra for travel time (see Table 6), which could explain why they placed less importance to MWTP for IVTT. The MWTP for egress distance to metro also possess the similar result as the coefficient shows the positive sign. In a similar way, MWTP for reducing parking search time and egress time to destination can also be analysed considering the parking price coefficient instead of travel cost coefficient. But it wasn't possible for this case as the current

parking price structures in the study location are equivalent for both types of parking. The coefficient for number of working members in family is negatively associated with MWTP. The possible reason can be identified in integration with household structure. For example, MWTP for a person from household having five people with two working members could be lesser than that for a person from household having two people with both as working members, given that both households have nearly same income.

6. Discussion and Conclusions

This paper investigates commuters' travel behaviour by considering parking choice as an endogenous decision within travel mode choice framework. Using the RP data collected through individual survey, a mixed logit model with hierarchical Bayes estimator was formulated to examine the relationships between commuters' subjective evaluations as well as objective characteristics and their choice behaviour. As the proposed model has an ability to provide individual-specific parameter estimation through simulation, it is possible to understand the heterogeneity in respondents' willingness-to-pay.

Model estimation results show that various psychological factors attributable to the travel modes and parking types are significant in determining commuters' choice behaviour. The model showed that the attitudes towards safety, comfort and convenience are strong drivers for respondents' parking choice as well as mode-shift decisions in general. Particularly for PVs, individualist attitude is seen to have large influence on both car and MTW choices. In countries like India, vehicle ownership is seen as a reflection of the wealth and social status. This in turn encourages individuals to use their private vehicles given the lack of ample knowledge of sustainability. Further, there is no policy in place to control the vehicle ownership. Even the parking charges are very low compared to other similar size cities across the world (MoHUA, 2019). City authorities should focus on these aspects as they are key elements in habit-breaking (of PV-use). Apart from improving the public transit service quality, educational program should be organized which can strengthen individuals' perception and responsibility towards sustainability. Public transit users place highest importance to safety and convenience (in terms of accessibility) and hence, it should be of utmost importance to planning authorities also to promote the PT use. The lower-income group tend to live farther from the city center and CBDs. They don't have much viable transport options but to use MTW for commute because of non-affordability of car and poor first/last mile connectivity issues with transit, which is also confirmed by this study. These is the primary reason for higher MTW ownership in developing countries. The choice model shows that rise in access/egress distance make transit modes less attractive. Willingness-to-pay analysis shows the significance of access/egress characteristics on selection of main transport mode. Hence, due consideration should be given to improve last-mile connectivity of public transport modes. Increasing coverage of public transit seem to be a solution to address this issue. Practically, it is difficult to provide fixed-guideway mass transit (like metro) in all areas of the city due to higher

marginal costs. Hence, such area should be facilitated by lower category of transit service like bus, regulated para-transit service. Apart from this, providing efficient feeder services can confine the existing transit users escaping from using the service and attract private vehicle users towards transit. In addition, integration of PT system (bus + metro in this case) in terms of schedule, fare, and stops seem to increase the PT ridership as it can effectively compete with private vehicles usage (Zimmerman and Fang, 2015). Such integration with common mobility fare card and well-organized feeder-service may prove to be a promising action for promoting PT.

The model results illustrate key findings for NMT-use: all four latent variables – health, safety, comfort and convenience – have strong impacts on peoples’ intention to use NMT. In most Indian cities including Delhi, a common problem is observed that the sidewalks are generally occupied by the vendors and in poor condition at many locations forcing pedestrians to get down on the carriageway. Also, bicyclists generally ride in mixed traffic due to absence of dedicated path or hindrance by vendors (if present) which declines bicycle-usage significantly. Policy interventions have to be focused on improving peoples’ satisfaction which may in turn improve the NMT share. The educational program focusing on coexistence of transport modes might be accompanied with these interventions for better outcomes. The *Street Vending Policy* should appropriately address the vending management in cities to overcome the stated issues. The guidelines published in Tender S.U.R.E. (Specifications for Urban Road Execution) and implemented in the city of Bangalore can be considered in this line (Ramanathan, 2011).

This study also revealed important results regarding the shift between parking types. Authors have tried to increase the search time and egress time by 50% for parking to assess how the shift takes place. Table 8 summarizes the current market share, model-predicted market share, and change in share with respect to increase in parking parameters. It clearly reveals that major shift occurs between parking types instead of switching travel mode when parking attributes of one of the types rises. Also, the car users seem more vulnerable to these changes compared to MTW users. Individuals of current off-street parking users shift more towards metro while individuals of current on-street parking users shift more towards bus. Since bus is more accessible than metro, these findings reveal that current on-street parking users are less prone to walk more to get transit even if they shift from PV to PT mode. The last two rows of the Table 8 try to identify the users’ response to the increase in parking attributes for both parking-types. It reports the interesting results that significant shift would take place between PV modes only (i.e., from car to MTW) which reveals that these respondents are highly habitual to use PVs. The basic reasons for such behaviour are latent variables which are discussed earlier. Even though this study couldn’t identify the monetary value of parking search time and egress time, these results can be used to compare the valuation of search time and egress time. On-street parkers put more value to egress time while off-street parkers to the search time. From the combined scenarios, overall valuation is higher for search time than that for egress time. Lastly,

no shift is seen towards NMT modes except when parking search time increases. These group of respondents may not be willing to spend much time to search for vacant parking place as they travel for much lesser time between origin and destination.

Table 8 Change in market share (%) under different scenarios

Scenario	Car_Off	Car_On	MTW_Off	MTW_On	Bus	Metro	NMT
Current market share	17.28	7.64	11.30	13.95	24.58	16.61	8.64
Predicted market share	18.37	6.54	9.88	15.37	24.58	16.62	8.64
Increase off-street parking search time	-2.35	1.60	-1.77	1.48	0.37	1.10	0.00
Increase on-street parking search time	0.54	-1.52	0.40	-0.91	0.27	0.20	0.00
Increase on-street parking egress time	0.87	-2.45	1.01	-1.41	0.30	0.25	0.00
Increase off-street parking egress time	-1.74	1.58	-1.16	1.07	0.37	0.45	0.00
Increase parking egress time for both types	-1.66	-1.37	1.03	0.31	0.53	0.69	0.00
Increase parking search time for both types	-1.84	-1.95	0.45	0.47	0.75	0.95	0.08

Another important observation from the present study is the positive association of employer-paid parking with PV-use. It can create hindrance in attaining sustainability if there are no counter policies like parking cash-out or mass transit subsidies established alongside. The related concerns are well discussed by Shoup (2005) and Parmar et al. (2021). As a policy measure, urban local bodies may introduce *parking credit system* for encouraging PV users to utilize PT system for select work trips of the week. For such trips, the PV users can earn parking credit points which may be encashed against parking charges at sites of higher parking cost (e.g., shopping areas). This may gradually improve the PT modal share for commute trips. Moreover, appropriate parking fare structure including differential parking pricing for on-street and off-street lots should be formulated to effectively manage the parking supply as well as to confront the serious on-street parking issues. Though there is a less room for intentional changes in parking search time and egress time compared to parking pricing, building remote parking lots in the peripheral parts of CBDs with proper integration with transit in inner parts can be considered as a long-term sustainable solution.

In general, this study provides important evidence on how commuters' attitudes and built-environment can act as decisive factors in determining their travel mode and parking-type choice. It should be noted that the model results and MWTP values could not be directly compared to developed countries just like rapidly urbanizing developing countries in south Asia as income and population densities play major roles in this case. To overcome the limitations related to parking cost in this study, a combined framework of RP-SP survey data should be deployed to assess commuters' response to various parking pricing policies in addition to other attributes.

APPENDIX

Table A1 Indicators for latent variables for private vehicles

Latent Variable	Indicator
Individualist	Individualist1. I have social status. I will use my vehicle only.
	Individualist2. I can afford PV and related costs. Why should I go for PT!!
	Individualist3. Driving is fun and relaxing.
	Individualist4. Driving to destination provides safety and privacy compare to other alternatives.
Pro-environment	Pro-environment1. Private vehicles are the reason for congestion and pollution.
	Pro-environment2. I can contribute to make difference on environmental problems.
	Pro-environment3. People should be made aware of environmental concerns.
Economy	Economy1. Higher tax should be levied from PV users against congestion.
	Economy2. The fuel price should be increased to limit PV-use.
	Economy3. Parking fees should be high to limit PV-use.
Comfort	Comfort1. Crowding and comfort are main reasons why I prefer PV over PT.
	Comfort2. Using PV is time saving and reliable.
Flexibility	Flexibility1. PV offers flexibility of choosing route and I can make multiple stops if required.
	Flexibility2. It is difficult to find parking space nowadays.
	Flexibility3. Looking to congestion, I worry to be on time at my destination while using my car.

Table A2 Indicators for latent variables for public transport

Latent Variable	Indicator
Comfort	Comfort1. Crowding and comfort are main reasons why I prefer PV over PT.
	Comfort2. It is annoying to take multiple stops/transfers while travelling by PT.
	Comfort3. Waiting for bus is annoying.
	Comfort4. Taking PT is difficult when I travel with bags/luggage.
Convenience	Convenience1. We need more accessible PT to limit PV-use.
	Convenience2. I am not sure whether I will be on time to my destination while traveling by Bus.
	Convenience3. I will be on time if travel by Metro.
Safety	Safety1. Lesser chances of accidents if we use PT.
	Safety2. PT (including stops) is not safe from theft when comparing with other alternatives.
	Safety3. I do not like to be surrounded by unknown people.
Flexibility	Flexibility1. Services (like shops and food stalls) make waiting more pleasant.
	Flexibility2. Getting a seat from time-to-time is not my concern.
	Flexibility3. Waiting is not much annoying as I can find schedules from internet.

Table A3 Indicators for latent variables for non-motorized modes

Latent Variable	Indicator
Health	Health1. It is healthier to use walk/bicycle mode.
	Health2. I will prefer walk/bicycle looking to the environmental issues.
	Health3. Cycling is relaxing and fun.
Safety	Safety1. Lack in infrastructure makes these modes most vulnerable.
	Safety2. Walking is not safe without CCTV surveillance.
	Safety3. It is not preferable during late evening and night.
Comfort	Comfort1. It is annoying during summer and rains.
	Comfort2. No safe parking for bicycle, issues of theft.
Convenience	Convenience1. Walking/Cycling are flexible and time-saving for short trips.

	Convenience2. Almost no travel cost for these modes.
--	--

Table A4 Indicators for latent variables for parking types

Latent Variable	Indicator
Safety	Safety1. My vehicle will not be safe if parked on-street for long time.
	Safety2. On-street parking is hazardous for traffic.
Convenience	Convenience1. I hate walking. On-street parking is superior for me.
	Convenience2. Getting on-street parking space is difficult and time-consuming.
	Convenience3. Compare to cruising for on-street parking, I will prefer to walk from off-street parking.

References

- Abrahamse, W., Steg, L., Gifford, R., Vlek, C., 2009. Factors influencing car use for commuting and the intention to reduce it: A question of self-interest or morality? *Transp. Res. Part F: Traffic Psychol. Behav.* 12, 317–324.
- Albert, G., Mahalel, D., 2006. Congestion tolls and parking fees: a comparison of the potential effect on travel behaviour. *Transp. Policy* 13, 496–502.
- Aldridge, K., Carreno, M., Ison, S., Rye, T., Straker, I., 2006. Car parking management at airports: a special case? *Parking. Transport Policy* 13 (6), 511–521.
- Brueckner, J.K., Franco, S.F., 2018. Employer-paid parking, mode choice, and suburbanization. *Journal of Urban Economics*, 104, 35–46.
- Campbell, D., 2007. Willingness to pay for rural landscape improvements: combining mixed logit and random-effects models. *Journal of Agricultural Economics*. 58(3), 467-483.
- Cao, X., Mokhtarian, P.L., Handy, S.L., 2009. Examining the impacts of residential self-selection on travel behaviour: a focus on empirical findings. *Transp. Rev.* 29(3), 359-395.
- Cervero, R., Radisch, C., 1996. Travel choices in pedestrian versus automobile oriented neighborhoods. *Transp. Policy* 3, 127–141.
- Chaniotakis, E., Pel, A. J., 2015. Drivers' parking location choice under uncertain parking availability 33 and search times: A stated preference experiment. *Transp. Res. Part A Policy Pract.*, 82, 228-239.
- Chidambaram, B., Janssen, M. A., Rommel, J., Zikos, D., 2014. Commuters' mode choice as a coordination problem: A framed field experiment on traffic policy in Hyderabad, India. *Transp. Res. Part A Policy Pract.*, 65, 9-22.
- Christiansen, P., 2014. A case study of parking charges at work places – effects on travel behaviour and acceptance. In: *Selected Proceedings from the Annual Transport Conference at Aalborg University*.
- Christiansen, P., Engebretsen, Ø., Fearnley, N., Usterud Hanssen, J., 2017. Parking facilities and the built environment: Impacts on travel behaviour. *Transp. Res. Part A Policy Pract.* 95, 198–206.
- Directorate of Economics & Statistics, Govt. of NCT of Delhi. “Delhi Statistical Handbook 2020.” January 2021. <http://www.des.delhigovt.nic.in/>
- ECMT, 2004. In: *Assessment and Decision Making for Sustainable Transport*. European Conference of Ministers of Transportation, Organization of Economic Coordination and Development. www.oecd.org
- Engebretsen, Ø., Christiansen, P., 2011. Bystruktur og transport. En studie av personreiser i byer og tettsteder. TØI-rapport 1178/2011

- Etminani-Ghasrodashti, R., Ardeshiri, M., 2015. Modeling travel behavior by the structural relationships between lifestyle, built environment and non-working trips. *Transp. Res. Part A Policy Pract.*, 78, 506-518.
- Evangelinos, C., Tscharaktschiew, S., Marcucci, E., Gatta, V., 2018. Pricing workplace parking via cash-out: Effects on modal choice and implications for transport policy. *Transp. Res. Part A Policy Pract.*, 113, 369–380.
- Ewing, R., Cervero, R., 2010. Travel and the built environment: a meta-analysis. *J. Am. Plan. Assoc.* 76(3), 265-294.
- Fearnley Nils, Hanssen Jan Usterud, 2012. Basic Data about Urban Parking and Parking Price Elasticity. TOI Report 1206/2012
- Frank, L., Bradley, M., Kavage, S., Chapman, J., Lawton, T.K., 2008. Urban form, travel time, and cost relationships with tour complexity and mode choice. *Transportation*, 35(1), 37-54.
- Gillen, D.W., 1978. Parking policy, parking location decisions and distribution of congestion. *Transportation* 7 (1), 69–85.
- Goel, R., Tiwari, G., 2016. Access–egress and other travel characteristics of metro users in Delhi and its satellite cities. *IATSS Research*. 39(2), 164-172.
- Golias, J., Yannis, G., Harvatis, M., 2002. Off-street parking choice sensitivity. *Transp. Plan. Technol.* 25 (4), 333–348.
- Guan, X., & Wang, D., 2019. Influences of the built environment on travel: A household-based perspective. *Transp. Res. Part A Policy Pract.*, 130, 710–724.
- Guan, X., Wang, D. 2019. Influences of the built environment on travel: A household-based perspective. *Transp. Res. Part A Policy and Pract.*, 130, 710–724.
- Han, Y., Li, W., Wei, S., Zhang, T., 2018. Research on Passenger’s Travel Mode Choice Behavior Waiting at Bus Station Based on SEM-Logit Integration Model. *Sustainability*. 10(6), 1996.
- Hess, S., Polak, J.W., 2004. Mixed logit estimation of parking type choice. In: 83rd Annual Meeting of the Transportation Research Board. Washington, DC.
- Hoang, P.H., Zhao, S., Houn, S.E., 2019. Motorcycle Drivers’ Parking Lot Choice Behaviors in Developing Countries: Analysis to Identify Influence Factors. *Sustainability*, 11(9), 2463.
- Hoshino, T., 2011. Estimation and analysis of preference heterogeneity in residential choice behaviour. *Urban Studies*. 48(2), 363-382.
- Hunt, J.D., Teply, S., 1993. A nested logit model of parking location choice. *Transp. Res.* 27B, 253–265.
- Ibeas, A., dell’Olio, L., Bordagaray, M., Ortúzar, J. de D., 2014. Modelling parking choices considering user heterogeneity. *Transp. Res. Part A Policy Pract.*, 70, 41–49.
- Inci, E. 2015. A review of the economics of parking. *Economics of Transportation*, 4(1-2), 50-63.

- Jackman, S., Estimation and inference are missing data problems: unifying social science via Bayesian simulation. *Political Analysis*. 8(4), 307-332.
- Lenk, P., 2014. Bayesian estimation of random utility models, in: *Handbook of Choice Modelling*. Edward Elgar Publishing. 457-497.
- Litman, T., 2017. *Sustainable Transportation and TDM: Planning that Balances Economic, Social and Ecological Objectives*. Victoria Transport Policy Institute. <http://www.vtpi.org/tdm/tdm67.htm>
- Marsden, G. 2006. The evidence base for parking policies—a review. *Transport policy*, 13(6), 447-457
- Meng, F., Du, Y., Chong Li, Y. and Wong, S.C., 2018. Modeling heterogeneous parking choice behavior on university campuses. *Transp. Plan. Technol.*, 41(2), 154-169.
- Milosavljevic, N., Simicevic, J., 2019. *Parking Strategy*. In: *Sustainable Parking Management: Practices, Policies and Metrics*. pp. 139-163. Elsevier.
- Ministry of Road Transport and Highways (MoRT&H), India, 2018. Open Government Data (OGD) platform India. <https://www.data.gov.in/> (Accessed 6 November 2018).
- Muthén B. O., 1984. A general structural equation model for dichotomous, ordered categorical and continuous latent variable indicators. *Psychometrika*. 49, 115–132.
- Naess, P., 2012. Urban form and travel behaviour: experience from a Nordic context. *J. Transp. Land Use* 5(2), 21-45.
- Nourinejad, M., Roorda, M.J., 2017. Impact of hourly parking pricing on travel demand. *Transp. Res. Part A Policy Pract.*, 98, 28-45.
- Pandhe, Amruta, March, Alan, 2012. Parking availability influences on travel mode: Melbourne CBD offices. *Austral. Plan.* 49 (2), 161–171.
- Parmar, J., Das, P., Dave, S.M. (2021). A machine learning approach for modelling parking duration in urban land-use. *Physica A: Statistical Mechanics and its Applications*. 572, 125873.
- Parmar, J., Das, P., Dave, S.M., 2019. Study on demand and characteristics of parking system in urban areas: A review. *J. Traffic Transp. Eng. (Engl. Ed.)*, 7(1), 111-124.
- Paulssen, M., Temme, D., Vij, A., & Walker, J. L., 2013. Values, attitudes and travel behavior: a hierarchical latent variable mixed logit model of travel mode choice. *Transportation*, 41(4), 873–888.
- Planning Department, Government of Delhi. "Gross State Domestic Product of Delhi". pg. 16. Retrieved 9 June 2019. [http://delhiplanning.nic.in/sites/default/files/Budget%202019-20 English%20for%20CM.pdf](http://delhiplanning.nic.in/sites/default/files/Budget%202019-20%20English%20for%20CM.pdf)
- Planning Department, Govt. of NCT of Delhi. "Economic Survey of Delhi 2018-19." 2019. <http://delhiplanning.nic.in/content/economic-survey-delhi-2018-19>
- Rahul, T.M., Verma, A. 2017. The influence of stratification by motor-vehicle ownership on the impact of built environment factors in Indian cities. *J. Transp. Geogr.*, 58, 40–51.

- Ramanathan, S. (2011). Tender S.U.R.E. (Specifications for Urban Road Execution) Volume I. <https://www.janausp.org/wp-content/uploads/2021/02/tendersure-vol1.pdf>
- Rhemtulla, M., Brosseau-Liard, P. É., & Savalei, V., 2012. When can categorical variables be treated as continuous? A comparison of robust continuous and categorical SEM estimation methods under suboptimal conditions. *Psychological methods*, 17, 354-373.
- Richardson, B., 1999. Towards a policy on a sustainable transportation system. *Transportation Research Record*, 1670, 27–34.
- Rye, T., Cowan, T., Ison, S., 2006. Expansion of a controlled parking zone (CPZ) and its influence on modal split: the case of Edinburgh. *Transp. Plan. Technol.* 29(1), 75–89.
- Sanit, P., Nakamura, F., Tanaka, S., Wang, R., 2013. Location and Mode Choice Decision Mechanism Analysis of Multi-Worker Household in Bangkok, Thailand. (In the Proceedings of the Eastern Asia Society for Transportation Studies 9).
- Shiftan, Y., Golani, A., 2005. Effect of Auto Restraint Policies on Travel Behavior 1932, 156–163.
- Shoup, D., 2005. *The high cost of free parking*. Planners Press.
- Shoup, D., 2006. Cruising for parking. *Transport Policy*, 13(6), 479-486.
- Steg, L., Kalfs, N., 2000. *Altijd weer die auto*. Sociaal en Cultureel Planbureau/Adviesdienst Verkeer en Vervoer, The Hague.
- Su, Q., Zhou, L., 2012. Parking management, financial subsidies to alternatives to drive alone and commute mode choices in Seattle. *Reg. Sci. Urban Econ.* 42 (1–2), 88–97.
- The Boston Consulting Group, 2018. *Unlocking Cities: The impact of ridesharing across India*. http://image-src.bcg.com/Images/BCG-Unlocking-Cities-Ridesharing-India_tcm9-185213.pdf
- Train, K., 2009. *Discrete Choice Methods with Simulation*. Cambridge University Press.
- Van Acker, V., Mokhtarian, P. L., Witlox, F., 2014. Car availability explained by the structural relationships between lifestyles, residential location, and underlying residential and travel attitudes. *Transp. Policy*, 35, 88–99.
- Van Wee, B., Annema, J.A., Banister, D. (Eds.), 2013. *The Transport System and Transport Policy: An Introduction*. Edward Elgar, Cheltenham, UK/ Northampton, Massachusetts.
- Willson, R. W., & Shoup, D. C. 1990. Parking subsidies and travel choices: assessing the evidence. *Transportation*, 17(2), 141-157.
- Young, W., Thompson, R. G., & Taylor, M.A. 1991. A review of urban car parking models. *Transport reviews*, 11(1), 63-84.

- Yue, Y., Zhuang, Y., Yeh, A.G.O., Xie, J.-Y., Ma, C.-L, Li, Q.-Q, 2016. Measurement of POI-based mixed use and their relationships with neighborhood vibrancy. *Int. J. Geograp. Inform. Sci.* 31, 658-675.
- Zegras, P.C., Srinivasan, S., 2006. Household Income, Travel Behavior, Location and Accessibility: Sketches from Two Different Developing Contexts. *Transport. Res. Rec.: J. Transport. Res. Board*, 2038(1), 128-138.
- Zimmerman, S., and Fang, K. (2015). *Public Transport Service Optimization and System Integration*. China Transport Topics, no. 14. World Bank. Washington D.C.