

Error Analysis of the Light Curve Solution of Contact Binaries Based on the W-D Code

Liang Liu^{1,2,3,4}

ABSTRACT

We use the idea of repeat measurement to determine the mean value and error of light curve solution parameters of contact binaries. Our simulation is realized by the Monte Carlo algorithm and Wilson-Devinney code. This method can obtain the systematic and random error simultaneously. Within our 48 models, the systematic errors are smaller than the random errors in most case. According to the numerical calculations, it is found that the relative errors of photometric mass ratios are less than 1 % for totally eclipsing contact binaries, while they are generally between 10 % and 20 % for partly eclipsing ones. The effect of third light on the errors of photometric solution is also investigated. With a third light, these errors are close to 10 % for totally eclipsing contact binaries. Specially, it is better to set the third light to zero in flux if that light is very faint (e.g., less than 1 % contribution in luminosity), because such faint third light will bring big errors to the light curve solutions.

Subject headings: contact binary stars, mass ratio

1. Introduction

Contact binaries are one type of close binary whose components have overflowed their Roche lobes and shared convective or radiative common envelopes. The W UMa-type contact binaries refer to FGK main-sequence contact binaries which have convective common

¹Yunnan Observatories, Chinese Academy of Sciences, 396 Yangfangwang, Guandu District, Kunming, 650216, P. R. China (e-mail: LiuL@ynao.ac.cn)

²Key Laboratory for the Structure and Evolution of Celestial Objects, Chinese Academy of Sciences, 396 Yangfangwang, Guandu District, Kunming, 650216, P. R. China

³Center for Astronomical Mega-Science, Chinese Academy of Sciences, 20A Datun Road, Chaoyang District, Beijing, 100012, P. R. China

⁴University of Chinese Academy of Sciences, Yuquan Road 19#, Sijingshang Block, 100049 Beijing, China

envelopes (CCEs; e.g., Lucy 1968a,b). Because of CCEs, thermal timescale mass transfer (TRO, Lucy 1976; Flannery 1976; Robertson & Eggleton 1977) and large scale energy transfer (e.g., Stępień 2009) are very important physical processes which seriously affect the evolution of contact binaries. Accurate basic physical parameters (masses, radii and luminosities of each component) are the key information for studying these two physical processes. Furthermore, contact binaries may be progenitors of luminous red novae (LRNs; e.g., V1309 Sco, Tylenda et al. 2011; Stępień 2011; Zhu et al. 2016; Pietrukowicz et al. 2017) and blue stragglers (BSs; e.g., Eggleton 2012; Ferreira et al. 2019). The basic physical parameters of contact binaries are also necessary to understand the formation of these peculiar objects.

To obtain the accurate basic physical parameters of contact binaries, it is necessary to analyze light curves and radial velocity curves simultaneously. We can obtain orbital inclinations via light curves and determine mass ratios as well as mass functions through radial velocity curves. Combining these two results, we can calculate the basic physical parameters. However, due to the circularization and synchronization of orbit, the self-rotational linear velocities of components of a contact binary are almost the same as the orbital velocity. Moreover, because of the short orbital period of contact binaries (a peak of 0.31 days, Qian et al. 2020), the rotating velocities of their components are as large as hundreds of kilometers per second, resulting in very serious Doppler broadenings. To make matters worse, such Doppler broadenings are also asymmetric due to geometric asymmetry of components. Thus, the shifts of spectral lines are high probable to be covered by the line broadenings, which limits the accuracy of spectroscopic mass ratio (q_{sp}). Rucinski (1992, 2002) had developed the broadening function (BF method) to solve this problem, and the typical relative errors of q_{sp} are about 2%.

In addition to the above methods, the basic physical parameters of contact binaries can also be obtained through the combination of light curve and parallax data, but the errors may be larger. This method would work because of the fact that components have filled and overflowed their Roche lobes so that the mass ratio of a contact binary is related to the size of Roche lobe and consequently it could be yielded from light curves. Mass ratios obtained from light curves are called as photometric mass ratios (q_{ph}). Nevertheless, q_{ph} may be reliable only for totally eclipsing contact systems due to the influence of geometric space projection (Pribulla et al. 2003; Terrell & Wilson 2005).

Through the above introductions, it can be seen that both of these two methods to determine the basic physical parameters have limitations. We also note that no matter which method is applied, the light curve solution is a necessary process. On the other hand, orbital inclinations and contact degrees only can be obtained by the light curve solution. Hence, it is significance to study how to obtain an accurate solution from the light curve. However,

before this paper, except for some individual samples, there was no investigation specifically aimed at analyzing errors of the light curve solution parameters for contact binaries. As mentioned above, due to the limitation, till now the number of the contact binaries which have been obtained q_{sp} is less than 200. Even if totally eclipsing contact systems which are potential systems to yield accurate q_{ph} are included, the total fraction of such samples still seems less than 20 % (according to Li et al. 2020). In contrast, Chen et al. (2020) have found nearly 350,000 light curves of eclipsing binaries via the latest photometric survey (Zwicky Transient Facility, ZTF for short), including a large number of contact binaries. With the more and more abundant light curves of contact binaries, it is expected that a large number of photometric parameters for contact binaries will be obtained. To evaluate the errors of light curve solutions will become one of the important steps for the further statistical investigation of these photometric parameters. This is also the main goal of this paper.

2. Method

We were inspired by the practice of repeat measurement. As we known, the repeat measurement can effectively reduce random errors. The final value of measurement is the mean and the corresponding error is the standard deviation. The process obtaining a light curve for a contact binary is also essentially a measurement process. We can simulate such more complex process numerically.

Any single measurement should include a random error. The measurement of light curve is no exception yet. Let us envisage a situation in which a contact binary system has been observed many times under almost the same observational conditions, and each time its complete light curves have been obtained. It can be predicted that these observed light curves will not be the same exactly because of random errors. Each observed complete light curve will yield a set of independently photometric solution. These solutions have already been affected by random errors. To reduce such errors, we use mean values for each solved photometric parameters. And we take standard deviations as uncertainties for the parameters because the solutions should be Gaussian distributions in an ideal situation. The above process can be achieved with help of the Wilson-Devinney program.

Wilson-Devinney program (W-D for short) is a comprehensive analysis method for solving light and radial velocity curves, which has been developed to the 2015 version (Wilson & Devinney 1971; Wilson 1979, 1990, 2008, 2012; Van Hamme & Wilson 2007; Wilson et al. 2010; Wilson & Van Hamme 2014). It includes the LC and DC programs. The LC generates theoretical light or radial velocity curves according to the given parameters, while the DC uses difference correction method to correct the adjusted parameters.

In our method, we use the LC to generate "observed" light curves, and then use the DC to solve them. We generate N sets of light curves, obtaining N groups of solutions. The solutions yield a statistical result. Then, we repeat those steps to another contact binary model. Because the real values of the solution have been already known, we can compute the deviation of the mean value from the true value. Mark the deviation as δ_E , while mark the standard deviation as σ_E . δ_E and σ_E are corresponding to systematic errors and random errors, respectively, which could be simultaneously determined via our method. Next, we will introduce how to generate "observed" light curves and how to solve them.

2.1. Generating the "observational" light curves with the LC

We perform a simulation for observing a contact binary system of which the period is 0.3 days in filters of VRI . The corresponding exposure times are set to 50s for V-band, 30s for R-band and 20s for I-band, respectively. Thus, there are 209 data points for each bandpass. Then, we add a random Gaussian scatter to each generated data point, obtaining a simulated observational multiple colored light curve. We consider the combinations of three typical mass ratios (0.2, 0.4 and 0.6) and inclinations (65° , 75° and 85°), with two levels of contact degree (20 % and 60 %). We emphatically focus on the situations that the light curves were affected by a third light. Meanwhile, we take into account several of observational precisions, including different photometric accuracies (0.005, 0.010 and 0.020 mag of the standard deviation) or different time resolutions (209 vs. 500 data points). All given parameters are listed in Table 1, where the values of Ω_1 and $L_1/(L_1 + L_2)$ are corresponding to different mass ratios or contact degrees.

2.2. Analyzing the simulated light curves with the DC

We use the DC to solve the simulated light curves. The adjusted parameters in the DC are: inclination (i), mass ratio (q), surface potential of star 1 (Ω_1), effective temperature of star 2 (T_2), bandpass luminosity of star 1 (L_{1V} , L_{1R} , and L_{1I}), and bandpass flux of third body (l_{3V} , l_{3R} , and l_{3I}) for $l_3 > 0$. If the radiation of third light is isotropic, then we have $L_3 = 4\pi \times l_3$ for each single bandpass. The convergence criterion is that all corrections are smaller than the standard deviations and $S_1/|S_1 - S_2| < 0.1$, where S_1 and S_2 are the residual sum of squares calculating from input and predicted parameters, respectively. The input parameters of q and Ω_1 are uniformly randomly assigned within 20 % of their true values, while i is set within $\pm 7^\circ$ of its true value (if $i > 90^\circ$, then $i = 180^\circ - i$). We also consider a uniform error for T_1 (a typical value of ± 200 K) and keep the limb coefficients

in line with the temperatures. To save the computing time, if it did not converge when the maximum number of iterations (40) is reached, a new calculation would be started.

It must be pointed out here that we did not attempt to find the best solution for each group of light curves. Once outputs reached the convergence condition, we stopped the calculation and obtained a group of solution. When enough groups of solution (e.g., $N > 3000$) were obtained, distributions of the photometric parameters would not change obviously. Thus, solutions of a certain contact binary model have been completed. Because of the independence of single solution, it is very easy to extend the number of solutions. Although the residual sum of squares did not reach a minimum for a single solution, its distribution always showed a Gaussian profile for any models as we can see in next section.

3. Results and discussions

We have made calculations for some typical models of contact binary. The parameters of these models have been listed in Table 1. For convenience of description, the short codes being corresponding to the key parameters of each simulated contact binary system are listed in Table 2. Finally, we calculated 48 models of contact binary. The results of solutions are listed in Table 3 and all corresponding distributions are shown from the appendix Figures A1 to A48 online. The numbers marked in Table 3 are corresponding to labels of the appendix figures. Each model includes four data rows, which are true values, mean values, standard deviations (σ_E) and deviations (δ_E , the mean value minus the true value), respectively. f_S and f_C both are contact degrees, but they are yielded from different method. f_S is a statistical mean value of the N numbers of contact degree which is calculated from each single solution ($f = (\Omega_1 - \Omega_{in})/(\Omega_{out} - \Omega_{in})$, where Ω_{in} and Ω_{out} are the inner and outer critical potential of Roche lobe, respectively). f_C is a directly computed value which is calculated from the mean value of Ω_1 , and the corresponding σ_E is computed thorough the error transfer formula. L_T is the total luminosity of $L_1 + L_2$ while L'_T is the total luminosity of $L_1 + L_2 + L_3$. From the results shown in Table 3, we found that

- a) if there is no third light, f_C is usually smaller than f_S , but f_C has a very large σ_E ;
- b) if the accuracies of data decrease, f_C will be larger than f_S (e.g., model 11 in Table 3);
- c) δ_E are less than σ_E in most cases;
- d) δ_E of the estimated mass ratio display a systematically positive bias in most case.

Remember that in a real solution δ_E is hard to obtained because the true value of parameter is not sure. Hence we can only use σ_E to estimate the relative errors. Fortunately,

δ_E can be ignored in most cases due to the result c). Also note that the residual sum of squares are always good Gaussian distributions, regardless of how irregular distributions of the other parameters (as shown in the online appendix figures), only except one case (model23, see section 3.2). This may be a basis for the validity of single solution. In other words, we should reject the solutions of which the residual sums of squares are out off the Gaussian distribution. This will help to improve the accuracy of the final result. An example has been shown in Section 3.2.

We also found a systematical bias of the solution parameters. For example, the estimated mass ratios are systematically larger than their true values, only except for the models38 and 39. This bias should not be caused by the adopted initial input values of q , because those values are a random uniform distribution and this has been checked. It is not caused by data accuracy either, because it can be found in different data accurate levels. The reason is not clear yet. The models38 and 39 refer to the case that the existed third light was not adjusted in the solution. The presence of third light will reduce the amplitude of light curve. Smaller amplitude can be also yielded from a lower inclination, as well as lower mass ratio. Without adjusting l_3 , the program is forced to yield lower mass ratios or inclinations for offsetting the decrease in amplitude due to the existed third light. These two models therefore displayed negative δ_E of mass ratio. The main results and discussions are shown in detail as follows.

3.1. Without a third light

This is the most common case. Figure 1 shows the photometric solution statistics of a contact binary system with a mass ratio of 0.4 and a contact degree of 20%, but without a third light (model9 in Table 3). In this figure, almost all the parameters are Gaussian distributions. The corresponding mean values and standard deviations (σ_E) of the parameters are shown in the figure. Readers can calculate δ_E by themselves or find them in Table 3. Through our method, the relative error of the mass ratio of the contact binary is less than 0.6% for this case. It is even smaller (less than 0.1%) if that were calculated with δ_E .

If the above contact binary is a partially eclipsing system (model7 in Table 3), the results of the solution are shown in Figure 2. Although the parameters still roughly conform to the Gaussian distribution, they obviously show a larger dispersion than those of the totally eclipsing system. It shows a large σ_E and δ_E . The relative error of q_{ph} also rises to 12.8% (2.9%, calculated from δ_E).

We summarize the solutions of NL3 in Figure 3. It is found that when $i = 85^\circ$, under

the observational accuracy of $\sigma = 0.005$ mag, the relative error of q_{ph} is less than 1 %. When $i = 75^\circ$, the relative error of q_{ph} is over 10 %. Even if the inclination is as low as 65° , the relative error of q_{ph} is still less than 20 % in our simulations. The contact degree will affect the relative error of q_{ph} slightly.

3.2. With a third light

It is also a common phenomenon that a contact binary contains a third body (e.g., Pribulla & Rucinski 2006; D’Angelo et al. 2006; Rucinski et al. 2007), which often contributes more or less to the total flux. Some wide field of view surveys may concentrate several objects into a few pixels, resulting in an image pollution. This situation can also be treated as the case containing a third light.

Figure 4 shows the distributions for one case of LL3 (model23 in Table 3). In this figure, most distributions have multiple peaks, even the distribution of the residual sum of squares. Fortunately, the primary peaks of these parameters are clear. After having deleted the secondary peak of the residual sum of squares (deleted the values which are greater than 3.3), we indeed obtained an amazing small δ_E (-0.00010 vs. $+0.00106$) for q_{ph} .

Figure 5 and Figure 6 show more cases of contact binaries with third light. It is no doubt that the presence of third light will bring a larger error to the light curve solutions. If there is a third light, σ_E increases significantly. On the other hand, for LL3, δ_E does not change too much (comparing Figure 3 and Figure 5). This indicates that there is no need to worry too much about the influence of image pollution on the results of the light curve solution. However, with the decreasing proportion of the third light, δ_E increases very fast (e.g. SL3, the green circles in Figure 5 or the blue squares in Figure 6). For VSL3, δ_E is over σ_E (the blue solid triangle in Figure 6). Although the presence of the third light causes a bigger error, the overall relative errors of q_{ph} still remain within 15 % (Figure 5).

As mentioned above, the distributions of many solved parameters are no longer Gaussian with the addition of third light. A correlation between mass ratio, inclination and third light may cause this phenomenon. As we known, the amplitude which is a very important characteristic of a light curve mainly depends on those three parameters. The adjusted third light produces many possible solutions of the light curve. Thus, the distribution of inclination splits in several peaks, which is no longer Gaussian. The distribution of mass ratio is also affected. However, we can still take their mean and dispersion as the corresponding value and errors, because these distributions are stable. Through a random sampling test, we found that when N is large enough (e.g. $N > 3000$), the mean and standard deviation are

almost constant.

3.3. Incorrect third light

Sometimes we are not sure whether the contact system has a third light because the brightness contribution of the third light is too small to distinguish from the data background. It will be true just like an instance that a solar type contact binary contains a third companion of which the spectral type is later than K5. So how do we determine that a contact binary contains such a third light or how can we reduce the interference of the third light in this case? We therefore consider the cases of FL3, FNVSL3, and FNLSL3 (Table 2).

Figure 7 shows the result of an instance of FL3 case (model 32 in Table 3). The photometric parameters deviate from Gaussian distribution seriously, except the residual sum of squares. Compared with the correct treatment of l_3 shown in Figure 1, the relative error of q_{ph} increased from 0.6% to 3.5%. δ_E also becomes very large (the red squares in Figure 5, and the orange square in Figure 6). If it is FNVSL3 (model 39 in Table 3), the result is the red triangle shown in Figure 6. However, if we added a correct third light, the result will be the blue triangle of which δ_E is quite large. It may be due to data noises which have covered such small a third light. For FNLSL3, the blue squares denote the correct ones while the green triangles refer to the incorrect ones (Figure 6). It is obvious that the blue squares have small δ_E . Taking the above results into consideration, to obtain more realistic parameters, we suggest that it should be fixed at zero if the suspected third light is very small (e.g., less than 1%), otherwise it should be set as an adjusted parameter during the solution. This suggestion applies to the totally eclipsing contact binaries. If it is a partially eclipsing system, the situation will become more complex (Figure 5). The residual of sum squares may be a useful criterion for distinguishing the complicated cases.

3.4. With different accuracies of the simulated data

In the actual observations we will obtain data with differently accurate levels. There are two kinds of data accuracy. One is the accuracy of the magnitude and the other is the accuracy of observational time resolution.

Figure 8 reveals the results of simulation solution with the mass ratio of 0.4 and the contact degree of 20% with the different precision of data. The results show that when the time resolutions are the same, higher accuracies of magnitude bring smaller δ_E and σ_E . δ_E and σ_E seem to be inversely proportional to the precisions of the magnitude, which is true

at least in the given example. It will inspire us to validate more such systems, because such systems could be use to infer the accurate values of the photometric parameters even if the quality of their light curves is low.

4. Conclusions

The core idea of this paper is to simulate the process of the repeat measurement in order to reduce the influence of random errors on the light curve solution. We utilized the LC program of W-D code to generate N groups of multiple-colored light curve under a given accuracy. We analyzed these N groups of light curve independently, obtaining N groups of the photometric parameters. Ideally, the distributions of these parameters should be Gaussian profiles. However, in some cases they split into two peaks or multiple peaks. Finally, we adopted the statistical mean values as the measurement values of the photometric parameters, and calculated the corresponding statistical standard deviations. Based on this method, we quantitatively give the errors of the photometric parameters under 48 cases for typical contact binary systems. Main conclusions are as follows:

1) If there is no third light, q_{ph} of a totally eclipsing contact binary are highly reliable (the relative errors are better than 1.0%). The relative errors of q_{ph} will become from 10% to 20% if the system is a partly eclipsing contact binary.

2) The presence of a third light leads to a large error to q_{ph} of a totally eclipsing contact binary. The relative errors become to several percent, but they still less than 10.0%. As for the partly eclipsing contact binary systems, such influence is slight. However, the third light obviously affects the errors of the inclinations.

3) It is not reliable that if the fraction of the third light yielded from the W-D code is very small (e.g., $L_3/L'_T < 1\%$). In that situation, if the contact binary is also a totally eclipsing system, the relative error of q_{ph} could be on the 1% level when the third light was fixed at zero.

4) For a totally eclipsing contact binary system, high time resolution observation does not obviously increase the accuracy of q_{ph} when the precision of the magnitude measurement achieve the 0.005 mag. On the contrary, the precisions of the magnitude affect q_{ph} very much. Moreover, δ_E and σ_E seem to be inversely proportional to those precisions.

5) The contact degree has an effect on the above results. For the totally eclipsing contact binaries, the bigger contact degrees mean larger errors of the solutions, whether the systems have a third light or not.

5. Future works

In this paper, we have discussed some typical cases of contact binaries, including the presence of third light. However, the existence of cool spots is also a very common in contact binaries because of the later spectral type and the rapid rotating. Cool spots models will affect the solutions seriously whereas it will take more computation time to obtain a sufficient result. We also plan to take the phase smearing effect into account. Such effect souring from the long-exposure data is a disaster for analyzing the light curves of contact binaries whose the periods are short. We want to find out the exact errors that will be brought in with this effect. If it were possible, we would apply this method to the semi-detached binaries, even to the detached binaries.

We are grateful to the anonymous referee who has given very useful suggestions to improve the paper. We also thank Dr. Nian-Ping Liu for very helpful discussions. This work is partly supported by the National Natural Science Foundation of China (Nos. 11773066, 11933008), and by the Young Academic and Technology Leaders Project of Yunnan Province (No. 2015HB098).

REFERENCES

- Chen, Xiaodian, Wang Shu, Deng Licai, de Grijs Richard, Yang Ming, and Tian Hao 2020, *ApJS*, 249, 18
- D’Angelo, C., van Kerkwijk, M. H., Rucinski, S. M. 2006, *AJ*, 132, 650
- Eggleton, P. P. 2012, *JASS*, 29, 145
- Ferreira, T., Saito, R. K., Minniti, D., Navarro, M. G., Ramos, R. C., Smith, L., Lucas, P. W. 2019, *MNRAS*, 486, 1220
- Flannery, B. P. 1976, *ApJ*, 205, 217
- Li, X.-Z., Liu, L., Zhu, L.-Y. 2020, *PASJ*, 72, 103
- Lucy, L. B. 1968a, *ApJ*, 151, 1123
- Lucy, L. B. 1968b, *ApJ*, 153, 877
- Lucy, L. B. 1976, *ApJ*, 205, 208
- Pietrukowicz, P., Soszynski, I., Udalski, A. et al. 2017, *AcA*, 67, 115

- Pribulla, T. & Rucinski, S. M. 2006, *AJ*, 131, 2986
- Pribulla, T., Kreiner, J. M., Tremko, J. 2003, *CoSka*, 33, 38
- Qian, S.-B., Zhu, L.-Y., Liu, L., Zhang, X.-D., Shi, X.-D., He, J.-J., and Zhang, J. 2020, *RAA*, 20, 163
- Robertson, J. A. & Eggleton, P. P. 1977, *MNRAS*, 179, 359
- Rucinski, S. M., Pribulla, T., van K. M. H. 2007, *AJ*, 134, 2353
- Rucinski, S. M., 1992, *AJ*, 104, 1968
- Rucinski, S. M., 2002, *AJ*, 124, 1746
- Stępień K. 2009, *MNRAS*, 397, 857
- Stępień K. 2011, *A&A*, 531, A18
- Terrell, D., & Wilson, R. E. 2005, *Ap&SS*, 296, 221
- Tylenda, R., Hajduk, M., Kaminski, T. et al. 2011, *A&A*, 528, 114
- Van Hamme, W., & Wilson, R. E. 2007, *ApJ*, 661, 1129
- Wilson, R. E., & Devinney, E. J. 1971, *ApJ*, 166, 605
- Wilson, R. E., & Van Hamme, W. 2014, *ApJ*, 780, 151
- Wilson, R. E., Van Hamme, W., & Terrell, D. 2010, *ApJ*, 723, 1469
- Wilson, R. E. 1979, *ApJ*, 234, 1054
- Wilson, R. E. 1990, *ApJ*, 356, 613
- Wilson, R. E. 2008, *ApJ*, 672, 575
- Wilson, R. E. 2012, *AJ*, 144, 73
- Zhu, Li-Ying, Zhao, Er-Gang, Zhou, Xiao 2016, *RAA*, 16, 68Z

Table 1: Given parameters of the contact binaries.

Parameter	True Value	Offset
$q = M_2/M_1$	0.2, 0.4, 0.6	$\pm 20\%$
$\Omega_1 = \Omega_2$ ($f = 20\%$)	2.2072, 2.6292, 2.9934	$\pm 20\%$
$\Omega_1 = \Omega_2$ ($f = 60\%$)	2.1562, 2.5316, 2.8528	$\pm 20\%$
i ($^\circ$)	65, 75, 85	± 7
T_1 (K)	6000	± 200
$L_1/(L_1 + L_2)$ (V) ($f = 20\%$)	0.81966, 0.71048, 0.63039	± 0
$L_1/(L_1 + L_2)$ (R) ($f = 20\%$)	0.81751, 0.70745, 0.62963	± 0
$L_1/(L_1 + L_2)$ (I) ($f = 20\%$)	0.81589, 0.70520, 0.62438	± 0
$L_1/(L_1 + L_2)$ (V) ($f = 60\%$)	0.80982, 0.69996, 0.62270	± 0
$L_1/(L_1 + L_2)$ (R) ($f = 60\%$)	0.80760, 0.69688, 0.61922	± 0
$L_1/(L_1 + L_2)$ (I) ($f = 60\%$)	0.80592, 0.69459, 0.61664	± 0
$L_3/(L_1 + L_2 + L_3)$	0.0%, 0.6%, 7.0%, 40.0%	± 0

Table 2: Short codes for the simulated contact binary systems.

Short code	Condition about the third body ($L_3 = 4\pi \times l_3$)
NL3	None third body, l_3 was fixed to zero and $L_3/L_T(\text{true}) = 0\%$
LL3	With a large third body, l_3 was adjusted and $L_3/L_T(\text{true}) \sim 40\%$
SL3	With a small third body, l_3 was adjusted and $L_3/L_T(\text{true}) \sim 7\%$
VSL3	With a very small third body, l_3 was adjusted and $L_3/L_T(\text{true}) \sim 0.6\%$
FNSL3	Fake of none third body, l_3 was fixed to zero but $L_3/L_T(\text{true}) \sim 7\%$
FNVSL3	Fake of none third body, l_3 was fixed to zero but $L_3/L_T(\text{true}) \sim 0.6\%$
FL3	Fake of third body, l_3 was adjusted but $L_3/L_T(\text{true}) = 0\%$

Table 3: Statical solution and errors in different cases.

No.	Cases	$q = \frac{M_2}{M_1}$	i ($^\circ$)	f_S (%)	f_C (%)	T_1 (K)	T_2 (K)	$\Omega_1 = \Omega_2$	$\frac{L_1}{L_T}$ (V)	$\frac{L_1}{L_T}$ (R)	$\frac{L_1}{L_T}$ (I)	$\frac{L_3}{L_T}$ (V)	$\frac{L_3}{L_T}$ (R)	$\frac{L_3}{L_T}$ (I)	$\Sigma(O - C)^2$
1	NL3	0.20000	65.000	20.04	20.04	6000	5900	2.20720	0.81966	0.81751	0.81589	0.00000	0.00000	0.00000	--
	$m_E = 0.005$	0.21342	64.709	17.84	19.82	5994	5900	2.23885	0.81142	0.80938	0.80780	0.00000	0.00000	0.00000	2.69001
	$DP = 209$	0.04101	0.835	3.51	66.44	116	112	0.09018	0.02183	0.02191	0.02196	0.00000	0.00000	0.00000	0.29378
	$N = 3819$	0.01342	-0.291	-2.16	-0.22	-6	0	0.03165	-0.00825	-0.00813	-0.00810	0.00000	0.00000	0.00000	--
2		0.20000	75.000	20.04	20.04	6000	5900	2.20720	0.81966	0.81751	0.81589	0.00000	0.00000	0.00000	--
		0.20452	74.658	19.05	20.08	6000	5898	2.21772	0.81701	0.81483	0.81313	0.00000	0.00000	0.00000	2.61267
		0.01123	0.664	1.38	20.23	115	110	0.02636	0.00605	0.00625	0.00640	0.00000	0.00000	0.00000	0.22028
	$N = 4768$	0.00452	-0.342	-0.95	0.04	0	-2	0.01052	-0.00266	-0.00269	-0.00277	0.00000	0.00000	0.00000	--
3		0.20000	85.000	20.04	20.04	6000	5900	2.20720	0.81966	0.81751	0.81589	0.00000	0.00000	0.00000	--
		0.20104	84.733	18.47	19.38	6001	5896	2.21043	0.81961	0.81740	0.81568	0.00000	0.00000	0.00000	2.52850
		0.00152	0.430	1.68	3.76	116	111	0.00482	0.00074	0.00071	0.00075	0.00000	0.00000	0.00000	0.15964
	$N = 5259$	0.00104	-0.267	-1.53	-0.66	1	-4	0.00323	-0.00005	-0.00011	-0.00022	0.00000	0.00000	0.00000	--
4		0.20000	65.000	60.04	60.04	6000	5900	2.15620	0.80982	0.80760	0.80592	0.00000	0.00000	0.00000	--
		0.21866	64.496	55.77	56.80	6003	5906	2.19961	0.79897	0.79676	0.79502	0.00000	0.00000	0.00000	2.68299
		0.03421	0.676	6.57	55.16	115	112	0.07661	0.01697	0.01733	0.01761	0.00000	0.00000	0.00000	0.24155
	$N = 4159$	0.01866	-0.504	-4.23	-3.24	3	6	0.04341	-0.01085	-0.01084	-0.01090	0.00000	0.00000	0.00000	--
5		0.20000	75.000	60.04	60.04	6000	5900	2.15620	0.80982	0.80760	0.80592	0.00000	0.00000	0.00000	--
		0.21089	74.282	58.13	59.15	6006	5901	2.18020	0.80387	0.80151	0.79966	0.00000	0.00000	0.00000	2.65434
		0.02083	0.984	2.84	33.93	113	110	0.04554	0.01030	0.01067	0.01095	0.00000	0.00000	0.00000	0.26047
	$N = 8616$	0.01089	-0.718	-1.87	-0.89	6	1	0.02400	-0.00594	-0.00609	-0.00626	0.00000	0.00000	0.00000	--
6		0.20000	85.000	60.04	60.04	6000	5900	2.15620	0.80982	0.80760	0.80592	0.00000	0.00000	0.00000	--
		0.20018	84.616	58.94	59.77	6001	5902	2.15684	0.80955	0.80741	0.80573	0.00000	0.00000	0.00000	2.50272
		0.00200	0.677	2.41	5.11	115	107	0.00653	0.00074	0.00074	0.00080	0.00000	0.00000	0.00000	0.16099
	$N = 4560$	0.00018	-0.384	-1.06	-0.27	1	2	0.00064	-0.00027	-0.00019	-0.00019	0.00000	0.00000	0.00000	--
7		0.40000	65.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.00000	0.00000	0.00000	--
		0.41150	64.951	19.45	20.21	6001	5901	2.65086	0.70596	0.70297	0.70066	0.00000	0.00000	0.00000	2.61907
		0.05110	0.350	2.05	39.50	116	113	0.09890	0.02059	0.02067	0.02073	0.00000	0.00000	0.00000	0.16748
	$N = 4251$	0.01150	-0.049	-0.55	0.17	1	1	0.02166	-0.00452	-0.00449	-0.00454	0.00000	0.00000	0.00000	--
8		0.40000	75.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.00000	0.00000	0.00000	--
		0.41334	74.858	19.30	19.93	6000	5898	2.65507	0.70515	0.70209	0.69974	0.00000	0.00000	0.00000	2.53533
		0.03715	0.556	1.40	29.51	116	111	0.07419	0.01565	0.01589	0.01607	0.00000	0.00000	0.00000	0.16271
	$N = 9633$	0.01334	-0.142	-0.70	-0.11	0	-2	0.02587	-0.00534	-0.00536	-0.00547	0.00000	0.00000	0.00000	--
9		0.40000	85.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.00000	0.00000	0.00000	--
		0.40037	84.955	19.68	20.07	6002	5901	2.62983	0.71041	0.70740	0.70509	0.00000	0.00000	0.00000	2.42194
		0.00227	0.196	0.62	1.89	114	109	0.00462	0.00089	0.00088	0.00094	0.00000	0.00000	0.00000	0.14690
	$N = 7498$	0.00037	-0.045	-0.32	0.03	2	1	0.00063	-0.00008	-0.00005	-0.00011	0.00000	0.00000	0.00000	--
10		0.40000	85.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.00000	0.00000	0.00000	--
	$m_E = 0.010$	0.40153	84.878	19.69	20.10	6001	5898	2.63198	0.71015	0.70709	0.70474	0.00000	0.00000	0.00000	9.69962
		0.00935	0.527	1.17	7.19	115	110	0.01760	0.00335	0.00346	0.00356	0.00000	0.00000	0.00000	0.75877
	$N = 4959$	0.00153	-0.122	-0.31	0.06	1	-2	0.00278	-0.00033	-0.00036	-0.00046	0.00000	0.00000	0.00000	--
11		0.40000	85.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.00000	0.00000	0.00000	--
	$m_E = 0.020$	0.40340	84.747	19.85	20.30	5999	5894	2.63508	0.70963	0.70651	0.70411	0.00000	0.00000	0.00000	38.69276
		0.01801	0.945	2.49	13.46	116	110	0.03310	0.00619	0.00633	0.00645	0.00000	0.00000	0.00000	2.59106
	$N = 8080$	0.00340	-0.253	-0.15	0.26	-1	-6	0.00588	-0.00086	-0.00095	-0.00109	0.00000	0.00000	0.00000	--

Table 3: *Continued*

No.	Cases	$q = \frac{M_2}{M_1}$	i ($^\circ$)	f_S (%)	f_C (%)	T_1 (K)	T_2 (K)	$\Omega_1 = \Omega_2$	$\frac{L_1}{L_T}$ (V)	$\frac{L_1}{L_T}$ (R)	$\frac{L_1}{L_T}$ (I)	$\frac{L_3}{L_T}$ (V)	$\frac{L_3}{L_T}$ (R)	$\frac{L_3}{L_T}$ (I)	$\Sigma(O - C)^2$
12	NL3	0.40000	65.000	60.04	60.04	6000	5900	2.53160	0.69996	0.69688	0.69459	0.00000	0.00000	0.00000	--
	$m_E = 0.005$	0.41620	64.880	58.51	58.85	6006	5904	2.56207	0.69375	0.69066	0.68826	0.00000	0.00000	0.00000	2.61083
	$DP = 209$	0.04181	0.346	4.63	32.25	115	116	0.08160	0.01510	0.01554	0.01587	0.00000	0.00000	0.00000	0.17934
	$N = 8805$	0.01620	-0.120	-1.49	-1.19	6	4	0.03047	-0.00620	-0.00623	-0.00633	0.00000	0.00000	0.00000	--
13		0.40000	75.000	60.04	60.04	6000	5900	2.53160	0.69996	0.69688	0.69459	0.00000	0.00000	0.00000	--
		0.41811	74.804	58.36	58.77	6011	5907	2.56549	0.69323	0.69008	0.68764	0.00000	0.00000	0.00000	2.47722
		0.04264	0.563	3.62	31.56	114	111	0.08018	0.01544	0.01584	0.01613	0.00000	0.00000	0.00000	0.17012
	$N = 8387$	0.01811	-0.196	-1.64	-1.27	11	7	0.03389	-0.00673	-0.00680	-0.00695	0.00000	0.00000	0.00000	--
14		0.40000	85.000	60.04	60.04	6000	5900	2.53160	0.69996	0.69688	0.69459	0.00000	0.00000	0.00000	--
		0.40129	84.892	59.43	59.77	6004	5902	2.53445	0.69946	0.69643	0.69407	0.00000	0.00000	0.00000	2.39521
		0.00340	0.272	1.42	3.34	115	110	0.00818	0.00090	0.00095	0.00103	0.00000	0.00000	0.00000	0.15502
	$N = 6348$	0.00129	-0.108	-0.61	-0.27	4	2	0.00285	-0.00050	-0.00046	-0.00052	0.00000	0.00000	0.00000	--
15		0.60000	65.000	20.04	20.04	6000	5900	2.99340	0.63039	0.62693	0.62438	0.00000	0.00000	0.00000	--
		0.63078	64.924	19.23	19.61	6014	5917	3.04760	0.61957	0.61629	0.61378	0.00000	0.00000	0.00000	2.61397
		0.04988	0.160	1.27	24.36	113	109	0.08937	0.01672	0.01672	0.01671	0.00000	0.00000	0.00000	0.17174
	$N = 5325$	0.03078	-0.076	-0.77	-0.43	14	17	0.05420	-0.01082	-0.01064	-0.01060	0.00000	0.00000	0.00000	--
16		0.60000	75.000	20.04	20.04	6000	5900	2.99340	0.63039	0.62693	0.62438	0.00000	0.00000	0.00000	--
		0.62745	74.878	19.25	19.68	6004	5903	3.04163	0.62174	0.61828	0.61564	0.00000	0.00000	0.00000	2.51097
		0.05355	0.311	1.13	26.15	114	109	0.09546	0.01802	0.01807	0.01810	0.00000	0.00000	0.00000	0.16418
	$N = 2987$	0.02745	-0.122	-0.75	-0.36	4	3	0.04823	-0.00865	-0.00865	-0.00873	0.00000	0.00000	0.00000	--
17		0.60000	85.000	20.04	20.04	6000	5900	2.99340	0.63039	0.62693	0.62438	0.00000	0.00000	0.00000	--
		0.62866	84.501	19.43	19.77	6005	5900	3.04337	0.62176	0.61816	0.61542	0.00000	0.00000	0.00000	2.48653
		0.03847	0.647	0.80	18.43	113	110	0.06741	0.01122	0.01150	0.01170	0.00000	0.00000	0.00000	0.20143
	$N = 4157$	0.02866	-0.499	-0.57	-0.27	5	0	0.04997	-0.00862	-0.00876	-0.00896	0.00000	0.00000	0.00000	--
18		0.60000	65.000	60.04	60.04	6000	5900	2.85280	0.62270	0.61922	0.61664	0.00000	0.00000	0.00000	--
		0.61446	65.011	59.20	59.42	6007	5903	2.87687	0.61932	0.61575	0.61301	0.00000	0.00000	0.00000	2.57379
		0.05740	0.159	3.67	27.76	111	112	0.09951	0.01534	0.01586	0.01623	0.00000	0.00000	0.00000	0.17322
	$N = 5553$	0.01446	0.011	-0.80	-0.62	7	3	0.02407	-0.00338	-0.00347	-0.00363	0.00000	0.00000	0.00000	--
19		0.60000	75.000	60.04	60.04	6000	5900	2.85280	0.62270	0.61922	0.61664	0.00000	0.00000	0.00000	--
		0.62097	74.904	59.27	59.52	6013	5912	2.88637	0.61663	0.61316	0.61049	0.00000	0.00000	0.00000	2.43891
		0.05745	0.270	2.93	26.58	112	110	0.09618	0.01537	0.01576	0.01604	0.00000	0.00000	0.00000	0.16408
	$N = 4208$	0.02097	-0.096	-0.73	-0.52	13	12	0.03357	-0.00606	-0.00606	-0.00615	0.00000	0.00000	0.00000	--
20		0.60000	85.000	60.04	60.04	6000	5900	2.85280	0.62270	0.61922	0.61664	0.00000	0.00000	0.00000	--
		0.63360	84.514	58.80	59.08	6014	5903	2.90707	0.61424	0.61043	0.60750	0.00000	0.00000	0.00000	2.40120
		0.04826	0.641	1.79	21.05	108	103	0.07753	0.01159	0.01209	0.01247	0.00000	0.00000	0.00000	0.19007
	$N = 4325$	0.03360	-0.486	-1.20	-0.96	14	3	0.05427	-0.00846	-0.00879	-0.00914	0.00000	0.00000	0.00000	--
21	LL3	0.40000	65.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.40056	0.42198	0.44089	--
	$m_E = 0.005$	0.41044	64.854	20.92	22.38	5998	5899	2.64340	0.70565	0.70274	0.70049	0.36523	0.38848	0.40856	2.79365
	$DP = 209$	0.04813	4.498	17.29	35.99	117	118	0.08990	0.02690	0.02625	0.02579	0.15214	0.14528	0.13940	0.21884
	$N = 8678$	0.01044	-0.146	0.92	2.34	-2	-1	0.01420	-0.00483	-0.00471	-0.00471	-0.03533	-0.03350	-0.03232	--
22		0.40000	75.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.40056	0.42198	0.44089	--
		0.41403	74.453	18.55	19.46	6000	5898	2.65755	0.70525	0.70220	0.69985	0.37925	0.40185	0.42151	2.73725
		0.04591	3.249	8.73	36.05	115	112	0.09075	0.02147	0.02139	0.02135	0.07994	0.07652	0.07361	0.18144
	$N = 5888$	0.01403	-0.547	-1.45	-0.58	0	-2	0.02835	-0.00523	-0.00525	-0.00536	-0.02131	-0.02014	-0.01938	--

Table 3: *Continued*

No.	Cases	$q = \frac{M_2}{M_1}$	i ($^\circ$)	f_S (%)	f_C (%)	T_1 (K)	T_2 (K)	$\Omega_1 = \Omega_2$	$\frac{L_1}{L_T}$ (V)	$\frac{L_1}{L_T}$ (R)	$\frac{L_1}{L_T}$ (I)	$\frac{L_3}{L_T}$ (V)	$\frac{L_3}{L_T}$ (R)	$\frac{L_3}{L_T}$ (I)	$\Sigma(O-C)^2$
23	LL3	0.40000	85.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.40056	0.42198	0.44089	--
	$m_E = 0.005$	0.40160	84.115	18.15	18.95	6000	5887	2.63494	0.71236	0.70903	0.70647	0.38058	0.40318	0.42294	2.73961
	$DP = 209$	0.03251	3.956	5.12	24.78	115	110	0.06068	0.01695	0.01669	0.01652	0.05949	0.05678	0.05442	0.30295
	$N = 11535$	0.00160	-0.885	-1.85	-1.09	0	-13	0.00574	0.00188	0.00158	0.00127	-0.01998	-0.01880	-0.01795	--
24		0.40000	85.000	60.00	60.00	6000	5900	2.53160	0.69996	0.69688	0.69459	0.39663	0.41824	0.43714	--
		0.40419	83.847	56.14	56.99	6000	5888	2.54624	0.70124	0.69790	0.69531	0.37169	0.39498	0.41494	2.70150
		0.03651	4.511	10.65	26.34	115	114	0.06489	0.01968	0.01924	0.01894	0.07598	0.07199	0.06861	0.28091
	$N = 9307$	0.00419	-1.153	-3.86	-3.01	0	-12	0.01464	0.00129	0.00101	0.00072	-0.02494	-0.02326	-0.02220	--
25	SL3	0.40000	65.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.06078	0.06804	0.07339	--
	$m_E = 0.005$	0.41917	68.401	33.78	34.92	5999	5926	2.62803	0.69426	0.69211	0.69043	0.20065	0.20578	0.20896	2.70727
	$DP = 209$	0.04724	3.249	14.13	34.68	116	116	0.08829	0.02445	0.02404	0.02374	0.12776	0.12530	0.12349	0.18196
	$N = 4376$	0.01917	3.401	13.78	14.88	-1	26	-0.00117	-0.01622	-0.01534	-0.01477	0.13987	0.13774	0.13558	--
26		0.40000	75.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.06078	0.06804	0.07339	--
		0.41504	75.905	22.35	22.96	6000	5908	2.65066	0.70211	0.69934	0.69720	0.08827	0.09557	0.10057	2.62216
		0.03946	2.170	6.05	32.02	117	114	0.08079	0.01704	0.01717	0.01727	0.05954	0.05854	0.05778	0.17991
	$N = 3673$	0.01504	0.905	2.35	2.92	0	8	0.02146	-0.00838	-0.00812	-0.00800	0.02749	0.02753	0.02718	--
27		0.40000	85.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.06078	0.06804	0.07339	--
		0.40902	85.848	20.37	20.96	5999	5898	2.64425	0.70637	0.70335	0.70103	0.07107	0.07867	0.08397	2.51548
		0.02121	1.735	2.00	14.57	115	109	0.03628	0.01114	0.01101	0.01090	0.03024	0.02992	0.02956	0.16386
	$N = 7477$	0.00902	0.848	0.33	0.92	-1	-2	0.01505	-0.00412	-0.00410	-0.00418	0.01029	0.01063	0.01058	--
28		0.40000	85.000	60.04	60.04	6000	5900	2.53160	0.69995	0.69688	0.69459	0.05665	0.06482	0.06949	--
		0.41602	86.249	61.66	62.23	6004	5909	2.55321	0.69132	0.68845	0.68622	0.07769	0.08607	0.09027	2.45585
		0.02257	1.739	2.94	12.38	115	109	0.03130	0.01187	0.01173	0.01161	0.03036	0.02970	0.02921	0.17296
	$N = 4540$	0.01602	1.249	1.66	2.19	4	9	-0.07599	-0.00864	-0.00844	-0.00837	0.02104	0.02125	0.02078	--
29	VSL3	0.40000	85.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.00522	0.00730	0.00799	--
	$m_E = 0.005$	0.41807	86.531	21.15	21.62	5994	5896	2.65981	0.70154	0.69858	0.69631	0.03034	0.03269	0.03327	2.49996
	$DP = 209$	0.01488	1.408	1.52	9.82	115	109	0.02495	0.00758	0.00751	0.00745	0.02036	0.02035	0.02017	0.16551
	$N = 4262$	0.01807	1.531	1.15	1.58	-6	-4	0.03061	-0.00894	-0.00887	-0.00889	0.02511	0.02539	0.02529	--
30	FL3	0.40000	65.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.00000	0.00000	0.00000	--
	$m_E = 0.005$	0.42124	69.247	37.10	38.34	5997	5930	2.62303	0.69148	0.68952	0.68799	0.18875	0.18726	0.18547	2.69619
	$DP = 209$	0.04814	2.887	12.85	33.15	116	116	0.08478	0.02491	0.02451	0.02421	0.11699	0.11560	0.11463	0.18131
	$N = 3105$	0.02124	4.247	17.10	18.30	-3	30	-0.00617	-0.01900	-0.01793	-0.01721	0.18875	0.18726	0.18547	--
31		0.40000	75.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.00000	0.00000	0.00000	--
		0.40365	76.973	25.22	25.88	5994	5910	2.62185	0.70507	0.70258	0.70065	0.06110	0.06103	0.06058	2.61157
		0.03200	1.852	5.56	24.98	117	115	0.06145	0.01513	0.01508	0.01506	0.05448	0.05399	0.05364	0.19540
	$N = 3602$	0.00365	1.973	5.22	5.84	-6	10	-0.00735	-0.00542	-0.00488	-0.00455	0.06110	0.06103	0.06058	--
32		0.40000	85.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.00000	0.00000	0.00000	--
		0.42037	86.727	21.36	21.82	5992	5895	2.66365	0.70033	0.69739	0.69513	0.02854	0.02888	0.02879	2.50103
		0.01396	1.374	1.48	9.12	117	110	0.02329	0.00706	0.00700	0.00696	0.01902	0.01891	0.01885	0.16745
	$N = 3411$	0.02037	1.727	1.32	1.78	-8	-5	0.03445	-0.01016	-0.01006	-0.01007	0.02854	0.02888	0.02879	--

Table 3: *Continued*

No.	Cases	$q = \frac{M_2}{M_1}$	i ($^\circ$)	f_S (%)	f_C (%)	T_1 (K)	T_2 (K)	$\Omega_1 = \Omega_2$	$\frac{L_1}{L_T}$ (V)	$\frac{L_1}{L_T}$ (R)	$\frac{L_1}{L_T}$ (I)	$\frac{L_3}{L_T}$ (V)	$\frac{L_3}{L_T}$ (R)	$\frac{L_3}{L_T}$ (I)	$\Sigma(O - C)^2$
33	FL3	0.40000	65.000	60.04	60.04	6000	5900	2.53160	0.69996	0.69688	0.69459	0.00000	0.00000	0.00000	--
	$m_E = 0.005$	0.41687	65.765	64.59	65.05	5984	5903	2.54750	0.68831	0.68585	0.68394	0.05059	0.04998	0.04882	2.63719
	$DP = 209$	0.04245	0.734	5.67	31.06	115	112	0.07869	0.01638	0.01672	0.01698	0.03931	0.03845	0.03785	0.18003
	$N = 4601$	0.01687	0.765	4.59	5.01	-16	3	0.01590	-0.01164	-0.01104	-0.01066	0.05059	0.04998	0.04882	--
34		0.40000	75.000	60.04	60.04	6000	5900	2.53160	0.69996	0.69688	0.69459	0.00000	0.00000	0.00000	--
		0.41338	75.935	63.53	64.00	5994	5906	2.54435	0.69133	0.68866	0.68659	0.03688	0.03694	0.03615	2.53879
		0.04340	1.033	5.18	32.26	114	111	0.08111	0.01657	0.01695	0.01724	0.03054	0.03001	0.02954	0.17413
	$N = 2384$	0.01338	0.935	3.53	3.96	-6	6	0.01275	-0.00863	-0.00822	-0.00800	0.03688	0.03694	0.03615	--
35		0.40000	85.000	60.04	60.04	6000	5900	2.53160	0.69996	0.69688	0.69459	0.00000	0.00000	0.00000	--
		0.42760	87.123	62.99	63.43	5992	5901	2.56941	0.68520	0.68241	0.68024	0.03912	0.03923	0.03871	2.45470
		0.01587	1.398	2.29	8.19	114	108	0.02124	0.00819	0.00809	0.00802	0.02111	0.02089	0.02056	0.17549
	$N = 3443$	0.02760	2.123	2.99	3.39	-8	1	0.03781	-0.01475	-0.01448	-0.01435	0.03912	0.03923	0.03871	--
36	FNSL3	0.40000	65.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.06078	0.06804	0.07339	--
	$m_E = 0.005$	0.43175	63.463	16.29	18.62	6026	5914	2.69348	0.70081	0.69745	0.69486	0.00000	0.00000	0.00000	2.91522
	$DP = 209$	0.08768	1.501	7.83	53.67	115	111	0.14038	0.03346	0.03338	0.03333	0.00000	0.00000	0.00000	2.02598
	$N = 2420$	0.03175	-1.537	-3.71	-1.42	26	14	0.06428	-0.00968	-0.01000	-0.01034	-0.06078	-0.06804	-0.07339	--
37		0.40000	75.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.06078	0.06804	0.07339	--
		0.40578	73.133	15.34	16.16	6020	5903	2.64991	0.71128	0.70783	0.70517	0.00000	0.00000	0.00000	2.63362
		0.04296	0.639	1.49	35.00	114	110	0.08653	0.01911	0.01924	0.01933	0.00000	0.00000	0.00000	0.16367
	$N = 6614$	0.00578	-1.867	-4.66	-3.88	20	3	0.02071	0.00080	0.00038	-0.00003	-0.06078	-0.06804	-0.07339	--
38		0.40000	85.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.06078	0.06804	0.07339	--
		0.37725	81.629	15.71	16.53	6001	5875	2.59309	0.72654	0.72288	0.72008	0.00000	0.00000	0.00000	3.32460
		0.03353	1.420	1.39	27.26	115	109	0.06304	0.01309	0.01362	0.01401	0.00000	0.00000	0.00000	1.20023
	$N = 8902$	-0.02275	-3.371	-4.29	-3.51	1	-25	-0.03611	0.01606	0.01543	0.01488	-0.06078	-0.06804	-0.07339	--
39	FNVSL3	0.40000	85.000	20.04	20.04	6000	5900	2.62920	0.71049	0.70745	0.70520	0.00522	0.00730	0.00799	--
	$m_E = 0.005$	0.39661	84.688	19.22	19.62	6001	5896	2.62367	0.71288	0.70976	0.70737	0.00000	0.00000	0.00000	2.43423
	$DP = 209$	0.00223	0.159	0.65	1.94	115	111	0.00469	0.00090	0.00089	0.00094	0.00000	0.00000	0.00000	0.15151
	$N = 8431$	-0.00339	-0.312	-0.78	-0.42	1	-4	-0.00553	0.00239	0.00231	0.00217	-0.00522	-0.00730	-0.00799	--
40	HTS-NL3	0.20000	65.000	20.04	20.04	6000	5900	2.20720	0.81966	0.81751	0.81589	0.00000	0.00000	0.00000	--
	$m_E = 0.005$	0.21131	64.775	18.02	20.17	5994	5898	2.23380	0.81286	0.81080	0.80920	0.00000	0.00000	0.00000	6.37881
	$DP = 500$	0.04095	0.778	3.20	1.49	116	112	0.09118	0.02149	0.02156	0.02161	0.00000	0.00000	0.00000	0.27268
	$N = 3103$	0.01131	-0.225	-2.02	0.13	-6	-2	0.02660	-0.00681	-0.00671	-0.00669	0.00000	0.00000	0.00000	--
41		0.20000	75.000	20.04	20.04	6000	5900	2.20720	0.81966	0.81751	0.81589	0.00000	0.00000	0.00000	--
		0.20334	74.756	19.05	20.22	5999	5905	2.21499	0.81769	0.81553	0.81385	0.00000	0.00000	0.00000	6.21266
	$DP = 500$	0.01027	0.613	1.09	28.03	115	111	0.02420	0.00555	0.00575	0.00590	0.00000	0.00000	0.00000	0.41640
	$N = 3056$	0.00334	-0.244	-0.99	0.18	-1	5	0.00779	-0.00198	-0.00198	-0.00205	0.00000	0.00000	0.00000	--

Table 3: *Continued*

No.	Cases	$q = \frac{M_2}{M_1}$	i ($^\circ$)	f_S (%)	f_C (%)	T_1 (K)	T_2 (K)	$\Omega_1 = \Omega_2$	$\frac{L_1}{L_T}$ (V)	$\frac{L_1}{L_T}$ (R)	$\frac{L_1}{L_T}$ (I)	$\frac{L_3}{L_T}$ (V)	$\frac{L_3}{L_T}$ (R)	$\frac{L_3}{L_T}$ (I)	$\Sigma(O - C)^2$
42	HTS-NL3	0.20000	85.000	20.04	20.04	6000	5900	2.20720	0.81966	0.81751	0.81589	0.00000	0.00000	0.00000	
	$m_E = 0.005$	0.20082	84.706	18.48	19.39	5996	5893	2.20990	0.81958	0.81740	0.81570	0.00000	0.00000	0.00000	6.06406
	$DP = 500$	0.00132	0.276	1.37	3.15	115	110	0.00403	0.00061	0.00061	0.00067	0.00000	0.00000	0.00000	0.24504
	$N = 3415$	0.00082	-0.294	-1.56	-0.65	-4	-7	0.00270	-0.00009	-0.00011	-0.00019	0.00000	0.00000	0.00000	-
43		0.40000	65.000	20.04	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.00000	0.00000	0.00000	
		0.41128	64.939	19.43	20.06	6008	5908	2.65079	0.70581	0.70281	0.70051	0.00000	0.00000	0.00000	6.23256
		0.04011	0.318	1.84	32.33	115	111	0.08090	0.01754	0.01764	0.01771	0.00000	0.00000	0.00000	0.25974
	$N = 4853$	0.01128	-0.061	-0.61	0.02	8	8	0.02159	-0.00468	-0.00464	-0.00469	0.00000	0.00000	0.00000	-
44		0.40000	75.000	20.00	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.00000	0.00000	0.00000	
		0.41447	74.832	19.25	19.82	6004	5901	2.65749	0.70465	0.70157	0.69920	0.00000	0.00000	0.00000	6.02068
		0.03343	0.487	1.23	26.48	114	109	0.06672	0.01402	0.01425	0.01441	0.00000	0.00000	0.00000	0.25525
	$N = 3373$	0.01447	-0.168	-0.75	-0.22	4	1	0.02829	-0.00584	-0.00588	-0.00600	0.00000	0.00000	0.00000	-
45		0.40000	85.000	20.00	20.04	6000	5900	2.62920	0.71048	0.70745	0.70520	0.00000	0.00000	0.00000	
		0.40014	84.967	19.68	20.07	5997	5896	2.62939	0.71044	0.70745	0.70514	0.00000	0.00000	0.00000	5.79105
		0.00193	0.156	0.46	1.47	116	111	0.00359	0.00071	0.00073	0.00081	0.00000	0.00000	0.00000	0.23199
	$N = 7360$	0.00014	-0.033	-0.32	0.03	-3	-4	0.00019	-0.00005	-0.00001	-0.00006	0.00000	0.00000	0.00000	-
46		0.60000	65.000	20.04	20.04	6000	5900	2.99340	0.63039	0.62693	0.62438	0.00000	0.00000	0.00000	
		0.63612	64.910	19.10	19.45	6016	5920	3.05731	0.61776	0.61447	0.61194	0.00000	0.00000	0.00000	6.21485
		0.04577	0.138	1.11	22.11	110	106	0.08172	0.01520	0.01519	0.01517	0.00000	0.00000	0.00000	0.27177
	$N = 4684$	0.03612	-0.090	-0.94	-0.59	16	20	0.06391	-0.01262	-0.01246	-0.01243	0.00000	0.00000	0.00000	-
47		0.60000	75.000	20.04	20.04	6000	5900	2.99340	0.63039	0.62693	0.62438	0.00000	0.00000	0.00000	
		0.63058	74.857	19.25	19.67	6008	5907	3.04706	0.62067	0.61721	0.61456	0.00000	0.00000	0.00000	5.96769
		0.05315	0.287	1.08	25.62	113	108	0.09394	0.01729	0.01733	0.01733	0.00000	0.00000	0.00000	0.26214
	$N = 3268$	0.03058	-0.143	-0.79	-0.37	8	7	0.05366	-0.00971	-0.00972	-0.00982	0.00000	0.00000	0.00000	-
48		0.60000	85.000	20.04	20.04	6000	5900	2.99340	0.63039	0.62693	0.62438	0.00000	0.00000	0.00000	
		0.62962	84.488	19.41	19.74	6002	5897	3.04514	0.62148	0.61787	0.61512	0.00000	0.00000	0.00000	5.92471
		0.03878	0.647	0.75	18.62	110	109	0.06821	0.01133	0.01161	0.01179	0.00000	0.00000	0.00000	0.36991
	$N = 3722$	0.02962	-0.512	-0.63	-0.30	2	-3	0.05174	-0.00891	-0.00906	-0.00925	0.00000	0.00000	0.00000	-

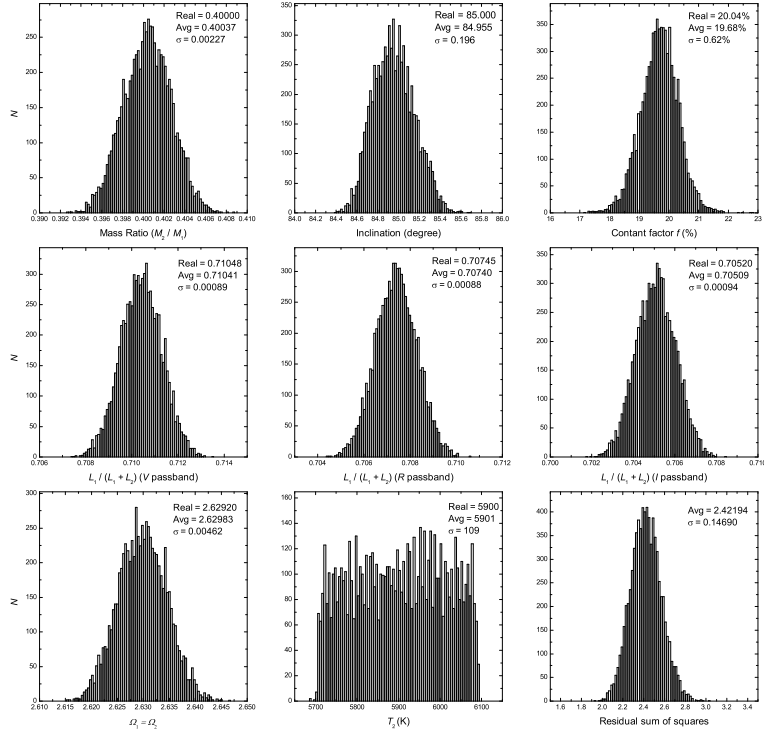


Fig. 1.— Distribution of the photometric parameters for a totally eclipsing contact binary system with $q = 0.4$, $i = 85^\circ$, $f = 20\%$ and $l_3 = 0$. The number of the solutions is 7498. NL3, model 9.

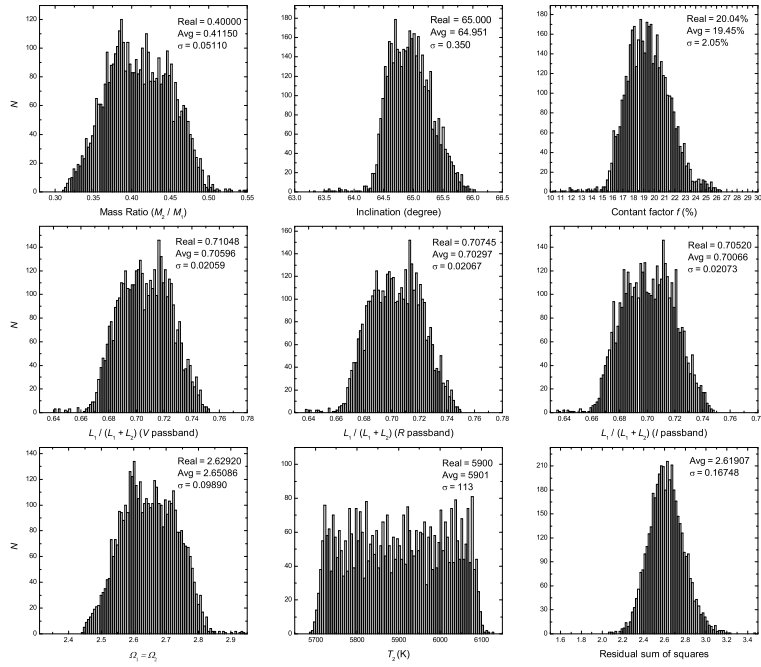


Fig. 2.— Distribution of the photometric parameters for a partly eclipsing contact binary system with $q = 0.4$, $i = 65^\circ$, $f = 20\%$ and $l_3 = 0$. The number of the solutions is 4251. NL3, model 7.

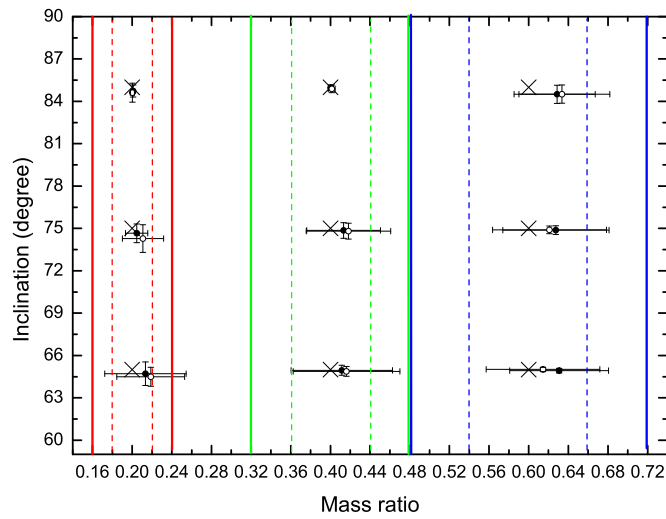


Fig. 3.— The photometric mass ratios and orbital inclinations for the contact binaries without third lights. The cross symbol refers to the truth value, and the other symbols refer to the calculated values by used of our method. The solid circles denote the contact binary systems with 20 % contact degrees, while the empty circles denote those with 60 % contact degrees. The vertical solid and dashed lines denote relative errors of 20 % and 10 %, respectively. Different colors of these lines correspond to different mass ratio truth values.

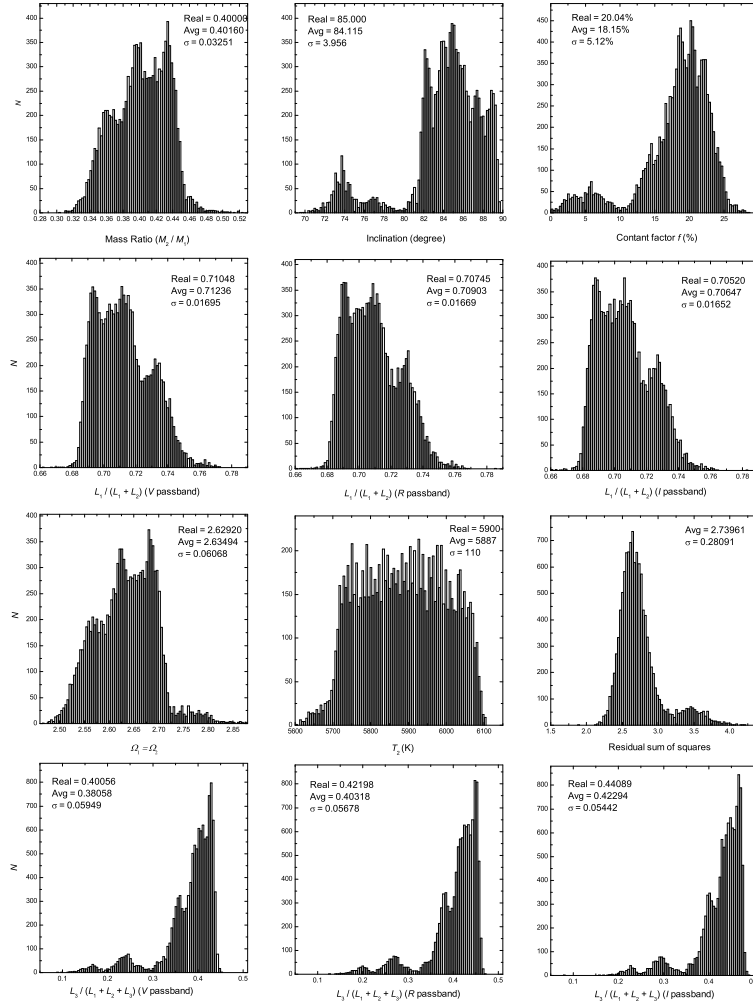


Fig. 4.— Distribution of the photometric parameters for the totally eclipsing contact binary system with $q = 0.4$, $i = 85^\circ$, $f = 20\%$ and $l_3 \sim 40\%$. The number of the solutions is 11535. LL3, model 23.

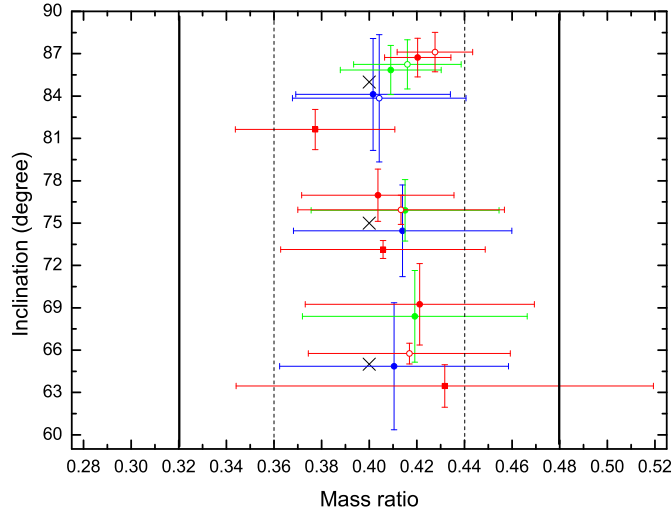


Fig. 5.— The photometric mass ratios and orbital inclinations for the contact binaries with different third lights. The solid and dotted lines, the cross symbol, the solid circle and empty circle symbols are the same as those in Figure 3. The blue symbols refer to a large third light (40%, large l_3 , the case of LL3). The green symbols refer to a small third light (7%, small l_3 , the case of SL3). Nevertheless all red symbols refer to the cases where the third lights were set incorrectly. The red circle symbols denote that there is a small third light (7%) in the system, but it is not considered in the solutions (fake none small l_3 , the case of FNSL3). The red square symbols denote that there is no third light (0%) in the system, but it is considered as an adjusted parameter in the solutions (fake l_3 , the case of FL3).

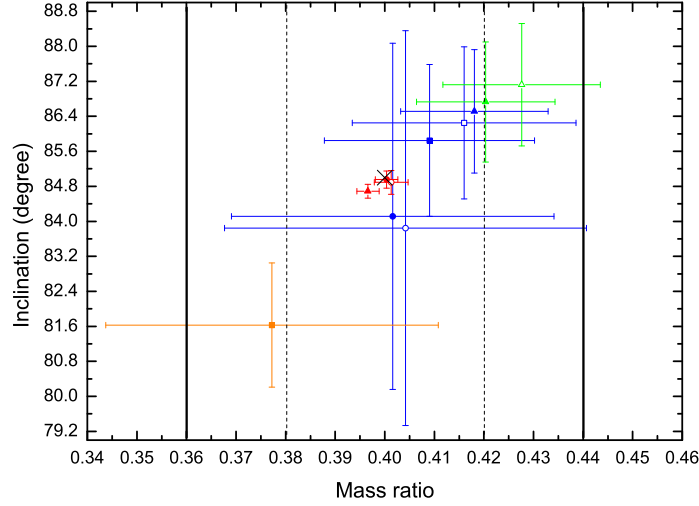


Fig. 6.— The photometric mass ratios and orbital inclinations for the totally eclipsing contact binary with different third lights. The cross symbol is the same as Figures 3 and 5. The solid symbols refer to a contact degree of 20%, while the empty symbols refer to a contact degree of 60%, which are also the same as Figures 3 and 5. The vertical solid lines refer to a 10% relative error, while the vertical dashed lines refer to a 5% relative error. The red symbols denote that none third light was considered in the solutions while the other color symbols indicate completely opposite cases. The red circles refer to the case of NL3, while the red triangles refer to the case of FNVSL3. (There is a very small third light, e.g. 0.6%, in the system, but it is not considered in the solutions.) All blue symbols denote that there is a real third light in the system, and it is also correctly considered in the solutions. The blue circles refer to case of LL3; the blue squares refer to the case of SL3; and the blue triangle refers to the case of VSL3 (0.6%). The green triangles refer to FNSL3. The orange square refers to the case of FL3.

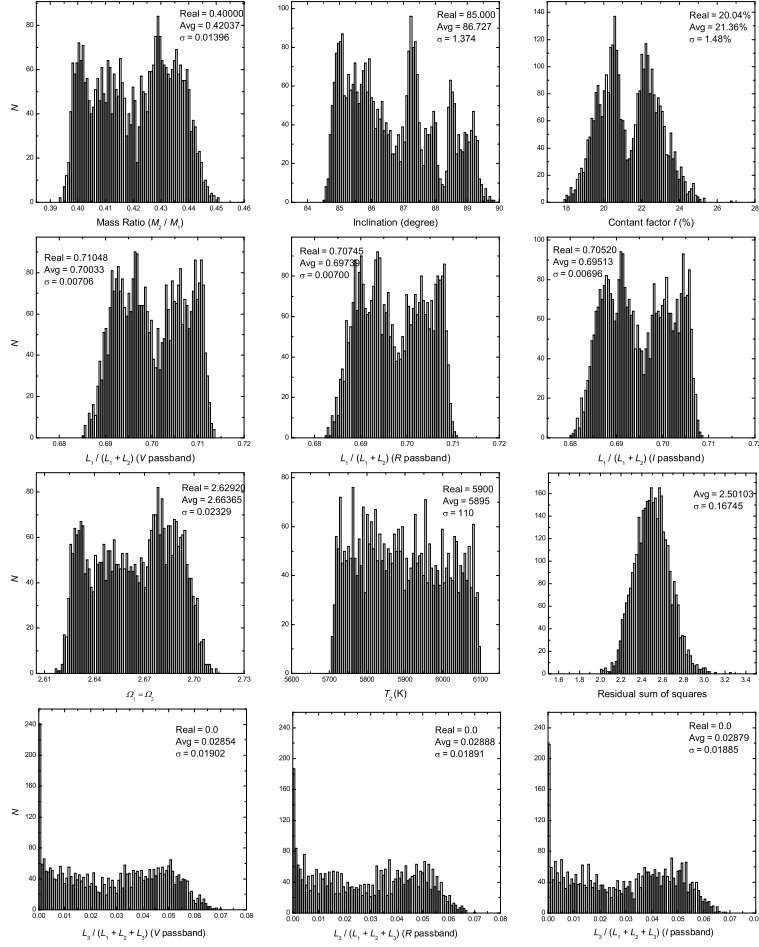


Fig. 7.— Distribution of the photometric parameters for the totally eclipsing contact binary system with $q = 0.4$, $i = 85^\circ$, $f = 20\%$ and $l_3 = 0$. However, l_3 has been adjusted during the solution. The number of the solutions is 3411. FL3, model 32.

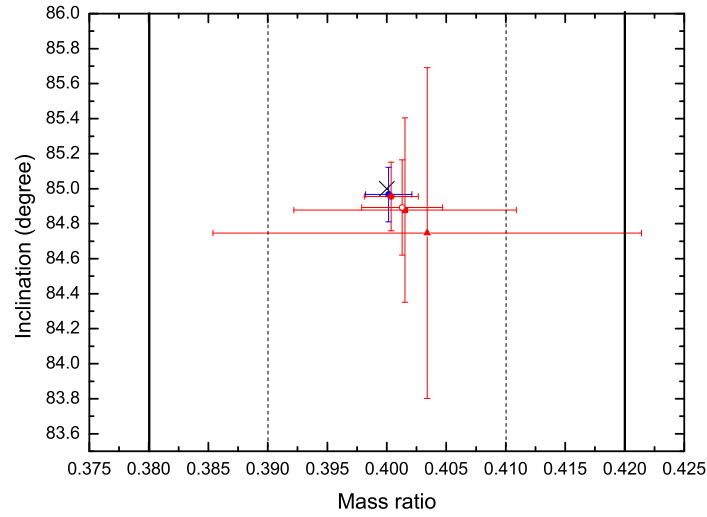


Fig. 8.— The photometric mass ratios and orbital inclinations for the totally eclipsing contact binary under different data accuracy. The main parameters of the model contact binary system are: $q = 0.4$, $i = 85^\circ$ and $f = 20\%$. The red symbols refer to a time resolution of 209 points per cycle, while the blue symbol refers to that of 500 points per cycle (model45). The circle, square and triangle symbols refer to accuracies of 0.005, 0.010 and 0.020 magnitudes, respectively. It is showed that both the deviation and standard deviation could be inversely proportional to the magnitude observation accuracy if the time resolutions of the data were the same.