

OBJECTIVE MEASUREMENT OF PITCH EXTRACTORS' RESPONSES TO FREQUENCY MODULATED SOUNDS AND TWO REFERENCE PITCH EXTRACTION METHODS FOR ANALYZING VOICE PITCH RESPONSES TO AUDITORY STIMULATION

Hideki Kawahara* K. Yatabe† K. Sakakibara‡ T. Kitamura¶ H. Banno§ M. Morise§

Wakayama University, Japan †Waseda University, Japan ‡Health Science University of Hokkaido, Japan
 ¶Konan University, Japan §Meijo University, Japan §Meiji University, Japan
 *kawahara@sys.wakayama-u.ac.jp, †k.yatabe@asagi.waseda.jp, ‡kis@hoku-iryu-u.ac.jp
 ¶t-kitamu@konan-u.ac.jp, §banno@meijo-u.ac.jp, §mmorise@meiji.ac.jp

ABSTRACT

We propose an objective measurement method for pitch extractors' responses to frequency-modulated signals. The method simultaneously measures the linear and the non-linear time-invariant responses and random and time-varying responses. It uses extended time-stretched pulses combined by binary orthogonal sequences. Our recent finding of involuntary voice pitch response to auditory stimulation while voicing motivated this proposal. The involuntary voice pitch response provides means to investigate voice chain subsystems individually and objectively. This response analysis requires reliable and precise pitch extraction. We found that existing pitch extractors failed to correctly analyze signals used for auditory stimulation by using the proposed method. Therefore, we propose two reference pitch extractors based on the instantaneous frequency analysis and multi-resolution power spectrum analysis. The proposed extractors correctly analyze the test signals. We open-sourced MATLAB codes to measure pitch extractors and codes for conducting the voice pitch response experiment on our GitHub repository.

Index Terms— Voice chain, fundamental frequency, frequency modulation, time-stretched pulse, linear time invariant system

1. INTRODUCTION

We reported that voice fundamental frequency (f_o)¹ involuntary shows compensatory response to frequency modulation of auditory stimuli applied while voicing [2]. The experiment requires to measure f_o of periodic sounds² without introducing nonlinearities and glitches for measuring voice response to auditory stimulation. This requirement led us to propose an objective measurement method³ of pitch extractors' response to frequency-modulated tones⁴. We

*This work was supported by JSPS (Japan Society for the Promotion of Science) Grants-in-Aid for Scientific Research Grant Numbers JP18K00147, JP18K10708, JP19K21618, and JP21H04900.

¹We use f_o (pronunciation "ef oh") representing the fundamental frequency [1] instead of using conventional symbols such as F0.

²Sounds without fundamental component, "missing fundamental," is difficult to extract f_o .

³The proposed pitch extractor measurement uses a new system response analysis method (CAPRICEP-based method afterward. It stands for Cascaded All-Pass filters with Randomized Center frequencies and Phase polarity [3]). The CAPRICEP-based method simultaneously measures the linear time-invariant (LTI) response, the non-linear time-invariant (non-LTI) response, and random and time-varying responses.

⁴Strictly, using "pitch" to represent f_o [4] is misleading. What we perceive is "pitch," a psychological attribute, which highly correlates with f_o . However, we do not distinguish the use of pitch and f_o in this article unless it introduces confusion.

assigned the modulation signal as input and the extracted pitch value as output and fed them to the proposed pitch extractor measurement method. We found that existing f_o extractors fail to meet this requirement. This issue motivated us to introduce reference pitch extractors.

The contributions of this article are as follows. We introduced a new objective measurement method of pitch extractors which provides useful supplemental information to existing evaluation measures. We also introduced two reference pitch extractors.

2. BACKGROUND

The first author introduced an altered auditory feedback technique⁵ and reported that our voice pitch control consists of two responses to feedback pitch modification, the voluntary and the involuntary responses a quarter-century ago [5, 6]. Despite decades of research, altered feedback still is a hot topic for investigating speech chain and underlying neural basis [7–11]. This research mainly focused on voluntary responses represented by the pitch shift paradigm and adaptation paradigm [12–14].⁶ Introduction of CAPRICEP-based method [3] and voice pitch response to auditory stimulation, which is not an altered feedback voice, opened a new possibility [2]. The combination of the method and response to non-feedback sounds solved difficulties in investigating the involuntary response [2, 15].

The experimental procedure for measuring the voice pitch response to FM test sounds consists of the following steps.

Generation of test signal: Combine orthogonal sequences made from extended time-stretched pulses followed by smoothing to yield the modulation signal. We applied frequency modulation to four types of signals. They are; *SINE*: a sinusoid, *SINES*: a sum of multiple harmonic sinusoids, *MFND*: a sum of multiple harmonic sinusoids without the fundamental component, and *MFUNDH*: a sum of multiple harmonic sinusoids without the first eight harmonic components.

Voicing with auditory stimulation: The subject keeps voicing with a constant pitch while listening to the test sound. The test system records the produced voice and the test signal for auditory stimulation simultaneously.

Response analysis: Apply pulse recovering and orthogonalization procedure to recover the stimulation pulse from the test signal

⁵We use the term "altered auditory feedback" here because it is common practice now. We used the term "transformed auditory feedback" to represent our paradigm a quarter-century ago.

⁶For detailed historical background and discussions on altered feedback research and relation to CAPRICEP-based method, refer [2, 15].

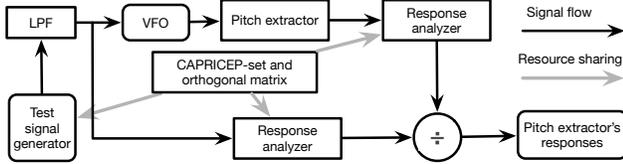


Fig. 1. Measurement Scheme of the proposed method.

recording and to calculate the LTI, the non-LTI, and random and time-varying responses of voice recording.

We applied band-pass filtering using an analytic signal to extract the f_o of the test signal and the acquired voice. The procedure usually worked fine with SINE and SINES test signals. The procedure did not work with missing fundamentals (MFUND and MFUNDH)⁷.

This paradigm allowed us to test subsystems (pitch perception system and voice pitch control system) of the speech chain individually. It also allowed us to control the intensity ratio between the natural feedback voice and the test signal. Sometimes, subjects cannot control their voice pitch when the test signal is stronger than the natural feedback voice. The produced voice pitch deviates more than a half octave from the target pitch in the worst case. Such significant deviation made pitch extraction using an analytic signal impossible. These difficulties (missing fundamental and significant deviation) let us test available pitch extractors by replacing the analytic-signal-based procedure. The objective measurement method of pitch extractors is our first contribution.

3. OBJECTIVE MEASUREMENT METHOD

Pitch extraction has long research history [16–25] and still is a hot topic in speech processing [26–30]. We propose to apply the CAPRICEP-based method [3] to measure the responses of pitch extractors. We replicated the FM-based procedure introduced to measure the voice pitch response to auditory stimulation [2, 15].

Figure 1 shows the scheme of the proposed method. The combination of elements test signal generator, response analyzer, and CAPRICEP-set and orthogonal matrix is the CAPRICEP-based method [3]. We used a Gaussian smoother⁸ for LPF and fed the output to VFO (Variable Frequency Oscillator) to modulate f_o of the test signals. We normalize the pitch extractor’s responses by the LTI response of the lower path in Fig. 1 to calculate the pitch extractor’s responses. The pitch extractor’s response should only consist of the LTI response and not introduce the non-LTI or random and time-varying responses⁹.

Figure 2 shows response examples of representative pitch extractors. The input signal is a frequency modulated synthetic male vowel /a/ with 44100 Hz sampling and 120 Hz average f_o . The modulation signal is a Gaussian smoothed mixture of three CAPRICEP-based orthogonal signals. The modulation depth (standard deviation) is a 25 musical cent. In Fig. 2, the graph with the title showing “NDF” uses modified autocorrelation with LPC-based spectral whitening [19], “CREPE120sim” uses convolutional neural network [29], and “Harvestsim” represents the dedicated pitch extractor [28] for a popular high-quality VOCODER WORLD [27].

⁷We used an ad hoc workaround.

⁸We used a sidelobe-less Gaussian window by setting the endpoint level to the machine epsilon. We use Gaussian windows throughout this paper because it simplifies discussion and derivation.

⁹Strictly, this procedure inevitably introduces the non-LTI response. It is because FM is a non-linear operation, and its sideband is not bandlimited. Note that Harvest [28] shows the non-LTI response close to the lower bound.

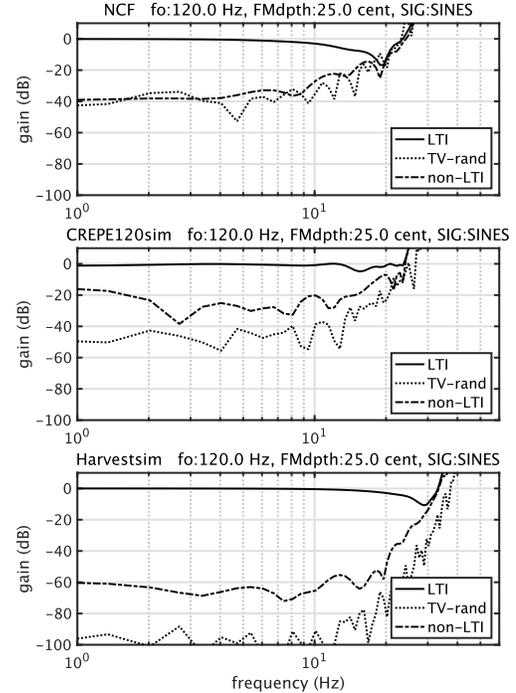


Fig. 2. Pitch extractors’ response to frequency-modulated synthetic male vowel /a/. The solid line shows the linear time-invariant response. The ash-dot line shows the nonlinear time-invariant response. The dotted line shows random and time-varying responses.

The tests, including other pitch extractors, were disappointing. The pitch extractors for WORLD [28] and legacy-STRAIGHT [24] showed the best results (the lowest non-LTI and lowest random and time-varying response levels). However, many failed to handle the original test signal (sum of multiple harmonic components with the same amplitude). We needed to shape the spectral envelope of the test signals using a Japanese vowel /a/ extracted by WORLD for tested pitch extractors to work correctly. Even with this modification, no extractor succeeded in analyzing missing fundamentals.

These results reveal that response measurement of pitch extractors using the CAPRICEP-based method provides an objective and informative means for evaluating pitch extractors in addition to commonly used performance measures (GPE, FPE, FFE, and others). This measurement method is our first contribution and motivated us to propose the second contribution, reference pitch extractors.

4. REFERENCE PITCH EXTRACTORS

We introduce two reference pitch extractors to analyze test signals and voice pitch responses correctly. The first one uses instantaneous frequency for representing and extracting the fundamental component. The second one uses periodicity on the frequency axis for representing repetition.

4.1. Instantaneous frequency-based implementation

We already know that once we find the fundamental component, the instantaneous frequency of the component provides the f_o value. We introduce an automatic mechanism to select the fundamental component without prior knowledge about the true f_o value.

The proposed instantaneous frequency-based algorithm uses filters having the same shape on the logarithmic frequency axis. When the bandpass filter covers 0 Hz to $2f_c$ Hz (where f_c is the center frequency), a filter consisting of the fundamental component has the minimum amount of total AM and FM in its output [22, 31]. In addition to the direct implementation of a filter bank, we briefly introduce another implementation using a combination of short-time DFT (defined by the lowest pitch f_L) and matrix multiplication.

4.1.1. Filter design and implementation

Let $\mathbf{x}|_{n_0}$ represent the DFT of the windowed signal segment aligned at discrete time n_0 . The following equation calculates the filter outputs ($\mathbf{y}|_{n_0}$) at a discrete time t_{n_0} from $\mathbf{x}|_{n_0}$ ¹⁰.

$$\mathbf{y}|_{n_0} = \mathbf{W}_w^\top \mathbf{x}|_{n_0}, \quad (\mathbf{W}_w)_{l,k} = \exp\left\{-\frac{4\pi^2(f_l - f_k)^2}{2(\sigma_k^2 - \sigma_L^2)}\right\}, \quad (1)$$

where k -th element of $\mathbf{y}|_{n_0}$ is the output of the k -th filter, and \mathbf{A}^\top represents transposition of matrix \mathbf{A} . The parameters σ_k^2 to define the band width of a k -th filter uniquely corresponds to the level θ_x at frequency 0 and $2f_k$ by $\sigma_k^2 = -2\pi^2 f_k^2 / \log(\theta_x)$. The parameter σ_L^2 (defined using f_L) is for the short-time DFT at each analysis frame.

4.1.2. Instantaneous frequency and representative values

Let matrix $\mathbf{X}|_{n_0}$ consists of short time DFT vector sequence $\mathbf{x}|_{n_0}, \mathbf{x}|_{n_1}, \mathbf{x}|_{n_2}, \dots, \mathbf{x}|_{n_N}$, starting from n_0 to n_N with a $1/f_s$ increment. The matrix $\mathbf{Y}|_{n_0}$ consists of the output vector sequence.

$$\mathbf{Y}|_{n_0} = \mathbf{W}_w^\top \mathbf{X}|_{n_0}. \quad (2)$$

Following equation yields matrix $\mathbf{F}_i|_{n_0}$. The element $(\mathbf{F}_i|_{n_0})_{k,m}$ is the instantaneous frequency of the k -th filter at $t_{n_{m-1}}$.

$$\mathbf{F}_i|_{n_0}^{n_{N-1}} = \frac{f_s}{2\pi} \angle \left[\mathbf{Y}|_{n_1}^{n_N} \oslash \mathbf{Y}|_{n_0}^{n_{N-1}} \right], \quad (3)$$

where function $\angle[z]$ yields the angle (argument) of a complex number z , and \oslash represents Hadamard division. A notation $\mathbf{A}|_a^b$ represents the submatrix of \mathbf{A} consisting of columns from a to b . We use the sample average $\bar{\mathbf{f}}|_{n_0}$ of $\mathbf{f}_i|_m$ for representative value of the analysis frame, where $\mathbf{f}_i|_m$ is the m -th column of the matrix $\mathbf{F}_i|_{n_0}$.

4.1.3. AM and FM deviation measure and calibration

For estimating total amount of AM and FM deviation σ_E we use sample standard deviation of the instantaneous frequency difference $\mathbf{s}_f|_{n_0}$ and that of the relative absolute value change difference $\mathbf{s}_a|_{n_0}$.

$$\sigma_E^2 = \mathbf{s}_f^2|_{n_0} + \mathbf{s}_a^2|_{n_0}, \quad (4)$$

$$\mathbf{s}_f|_{n_0} = \left(\frac{2\pi f_s}{N} \sum_{m=n_0}^{n_{N-1}} \left| \frac{\mathbf{f}_i|_m - \bar{\mathbf{f}}|_{n_0}}{\bar{\mathbf{f}}|_{n_0}} \right|^2 \right)^{\frac{1}{2}}, \quad (5)$$

$$\mathbf{s}_a|_{n_0} = \left(\frac{f_s}{N} \sum_{m=n_0}^{n_{N-1}} \left| \frac{\mathbf{a}|_m - \bar{\mathbf{a}}|_{n_0}}{\bar{\mathbf{f}}|_{n_0}} \right|^2 \right)^{\frac{1}{2}}, \quad (6)$$

$$\mathbf{A}|_{n_0}^{n_{N-1}} = f_s \left[\left| \mathbf{Y}|_{n_1}^{n_N} \right| - \left| \mathbf{Y}|_{n_0}^{n_{N-1}} \right| \right] \oslash \left[\left| \mathbf{Y}|_{n_1}^{n_N} \right| \oslash \left| \mathbf{Y}|_{n_0}^{n_{N-1}} \right| \right]^{\frac{1}{2}}, \quad (7)$$

where vector $\mathbf{a}|_m$ is m -th column of matrix $\mathbf{A}|_{n_0}^{n_{N-1}}$.

¹⁰Note that the the segment center x_{n_0} is at the beginning of the DFT buffer. The discrete time and the frequency of DFT buffer are circular. The first part of DFT buffer of f_k is $f_0, f_1, \dots, f_{L_{\text{DFT}}/2}$. The last part of f_k is $f_{-L_{\text{DFT}}/2+1}, f_{-L_{\text{DFT}}/2+2}, \dots, f_{-1}$. The discrete time t_k has the same ordering. The windowed input signal element x_{n_0} aligns at t_0 .

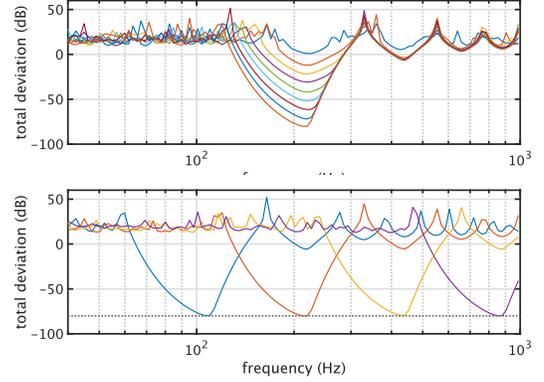


Fig. 3. The upper plot shows the SNR dependency of the deviation measure. SNR spans from 0 dB to 80 dB in a 10 dB step and $f_o = 220$ Hz. The lower plot shows f_o independence of the deviation measure for SNR 80 dB. A test signal is a periodic pulse train with added white noise. f_o values are 110, 220, 440, and 880 Hz.

Figure 3 shows the behavior of an example implementation. It uses $f_s = 44100$ Hz, $\theta_L = 10^{-6}$, and $f_L = 40$ Hz. A test signal is a periodic pulse train with added white noise. The upper plot of Fig. 3 shows that given SNR and the calculated deviation measure σ_E value (when represented in dB with a minus sign) agree without bias, in other words, calibrated¹¹. The bottom plot of Fig. 3 shows that the measure is independent of f_o . Fixed points from the filter center frequency to the instantaneous frequency of the filter output are candidates of the fundamental component. The minimum σ_E determines the fundamental component and provides its HNR (Harmonic to Noise Ratio) simultaneously.

4.2. Repetitive structure-based implementation

The instantaneous frequency-based method cannot find the fundamental component for missing fundamentals. The second algorithm, the repetitive structure-based method, can. Power spectra of periodic sounds have periodic variation. Removing envelope from a power spectrum of a voiced sound and calculating inverse Fourier transform yields a modified autocorrelation with local peaks at integer multiples of the fundamental period. This is one of common strategies of many pitch extractors [17–21]. We revisit this idea (selecting [20] and [21] for starting point) using Gaussian window and make it f_o independent self tuning method.

Let \mathbf{x} represent a signal segment. For making it self tuning, we start from a window \mathbf{w}_t having a narrower frequency resolution than half of the lowest (possible) f_o . We also use a window \mathbf{w}_τ on a lag axis¹². The following equations calculate the power spectrum \mathbf{p} and smoothed power spectrum $\tilde{\mathbf{p}}$ via smoothing by weighting the autocorrelation \mathbf{v} using the lag window \mathbf{w}_τ .

$$\mathbf{p} = |\mathcal{F}[\mathbf{w}_t \odot \mathbf{x}]|^2, \quad \mathbf{v} = \mathcal{F}^{-1}[\mathbf{p}], \quad \tilde{\mathbf{p}} = \mathcal{F}[\mathbf{w}_\tau \odot \mathbf{v}], \quad (8)$$

where \odot represents Hadamard product.

4.2.1. Recursive design and analysis

The following equations recursively define a set of (Gaussian) time windows and lag windows. Their durations (for example, defined

¹¹Note that different θ_L setting introduces bias. Lower θ_L value makes linear relation saturate in the high SNR end.

¹² \mathbf{x}, \mathbf{w}_t , and \mathbf{w}_τ are column vectors on the discrete time and lag axes.

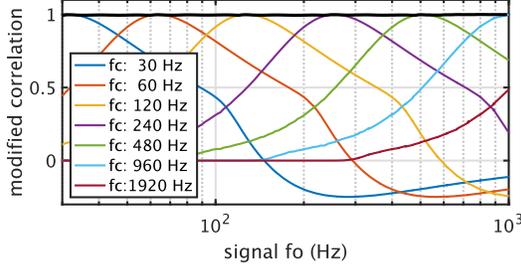


Fig. 4. Peak envelopes of modified autocorrelation $\rho_M|_k$ (colored lines) and the integrated periodicity measure ξ (thick black line).

using the second moment) are half of the previous step.

$$\mathbf{w}_t^{(k)} = \mathbf{w}_t^{(k-1)} \odot \mathbf{w}_t^{(k-1)}, \quad \mathbf{w}_\tau^{(k)} = \mathbf{w}_t^{(k)} \odot \mathbf{w}_t^{(k)}, \quad (9)$$

where k represents the step number. Let \mathbf{P} and $\tilde{\mathbf{P}}$ represent matrices of the power spectra and the smoothed power spectra, respectively. Their k -th columns are the power spectrum and the smoothed power spectrum calculated at k -th step.

Let define shape difference matrix \mathbf{P}_D and shape difference magnitude at k -th step L_k using the following equation.

$$\mathbf{P}_D = \mathbf{P} \oslash \tilde{\mathbf{P}}, \quad L_k = \|\mathbf{P}_D|_k - \overline{\mathbf{P}_D}|_k\|_2, \quad (10)$$

where $\|\mathbf{a}\|_2$ represents two norm of \mathbf{a} . L_k yields the maximum value when source of the shape difference is signal periodicity.

4.2.2. Autocorrelation smoothing and periodicity measure

Inverse Fourier transform of the k -th column of \mathbf{P}_D yields a modified autocorrelation. We introduce frequency weighting vector \mathbf{w}_F for focusing on lower frequency region and calculate a smoothed modified autocorrelation $\rho_M|_k$ ¹³. We define the periodicity measure ξ by using the following equation.

$$\rho_M|_k = \mathcal{F}^{-1}[\mathbf{w}_F \odot \mathbf{P}_D|_k], \quad \xi = \sum_k \mathbf{w}_C|_k \odot \rho_M|_k, \quad (11)$$

where \mathbf{w}_C is a calibration matrix to make the peak of the measure independent of f_o and have value 1 for periodic signals¹⁴.

Figure 4 shows behavior of an example implementation. It shows peak envelope made from the integrated periodicity measure ξ level at f_o of the input pulse train. It also shows peak envelopes made from individual autocorrelation $\rho_M|_k$ level at f_o .

Note that the integrated periodicity measure ξ is independent of f_o . Peaks of ξ are candidates, and the maximum ξ provides the fundamental period. Combining this information and instantaneous frequencies of harmonic components gives the correct f_o value for missing fundamental test signals. Pitch extraction of missing fundamentals is the task that no existing pitch extractors succeeded. These two extractors are the second contribution.

5. DISCUSSION

We found that some pitch extractors showed surprisingly poor results using our proposed test method. We placed test signals and

¹³Smoothing is essential for handling natural speech. It is not rare because vocal fold closure sometimes is not a single event [32].

¹⁴ \mathbf{w}_C is a modified raised cosine function on the logarithmic frequency axis with one-octave span. The modification is a sinusoid series with numerically optimized coefficients.

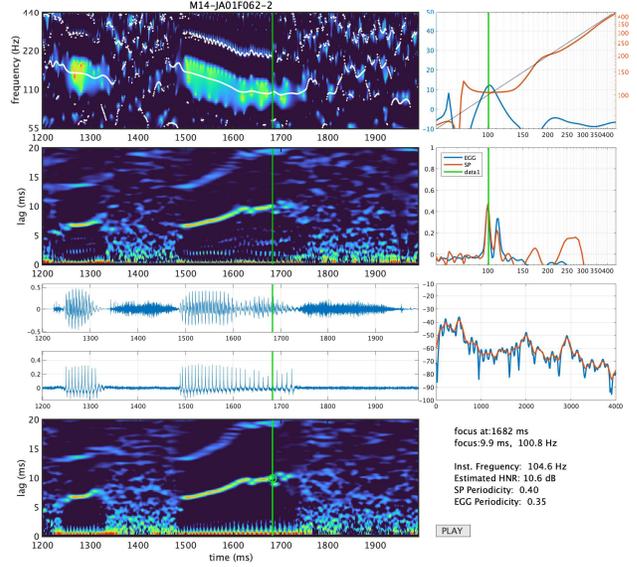


Fig. 5. Snapshot of a voice and EGG analysis tool prototype.

test codes in our GitHub repository [33] and made anyone be able to verify. These poor results are possible because they consist of pre- and post-processes specialized for their target applications and these processes are usually non-linear. Our proposed reference extractors do not have such processes and leave that specialized processing for users' customization. To illustrate example cases of applying the measurement method and the reference pitch extractors, we prototyped an interactive and real-time tool for visualizing vocal tract shapes using the simplified versions of the reference pitch extractors. Our proposed test method was beneficial for implementing these simplified extractors.

Our approach using Gaussian windows without sidelobes is inefficient because of its excessive window length. Using windows without sidelobes (effectively) and have more compact support [34–36] for the short time DFT at the first stage provides the answer. However, we leave substantiation of this solution for further research.

Figure 5 shows a snapshot of an EGG (Electroglottograph) database inspector under development. We made heat maps of the AM and FM total deviation measure and the periodicity measure. With heat maps and interactive visualization, they were informative for detailed inspection. For example, around the green cursor line, it shows that the pitch period alternates short and long in each cycle.

6. CONCLUSION

We proposed an objective and informative measurement method of pitch extractors' response to frequency-modulated tones. It uses a measurement procedure based on a new member of time-stretched pulses and simultaneously yields the LTI, the non-LTI, and random and time-varying responses. Unexpectedly poor existing pitch extractors' performance motivated us to introduce two reference pitch extractors, one uses instantaneous frequency, and the other uses frequency domain periodicity. We placed the code and the data on our GitHub repository [33] and made it open-sourced.

7. REFERENCES

- [1] Ingo R. Titze, R. J. Baken, and K. W. Bozeman *et al.*, "Toward a consensus on symbolic notation of harmonics, resonances, and formants in vocalization," *J. Acoust. Soc. Am.*, vol. 137, no. 5, pp. 3005–3007, 2015.

- [2] Hideki Kawahara, T. Matsui, K. Yatabe, and K. Sakakibara *et al.*, “Mixture of orthogonal sequences made from extended time-stretched pulses enables measurement of involuntary voice fundamental frequency response to pitch perturbation,” in *Proc. Interspeech 2021*, Aug. 2021, pp. 3206–3210.
- [3] Hideki Kawahara and K. Yatabe, “Cascaded all-pass filters with randomized center frequencies and phase polarity for acoustic and speech measurement and data augmentation,” *Proc. ICASSP2021*, pp. 306–310, 2021.
- [4] Christopher J. Plack, A. J. Oxenham, and R. R. Fay, *Pitch: neural coding and perception*, vol. 24, Springer Science & Business Media, 2006.
- [5] Hideki Kawahara, “Interactions between speech production and perception under auditory feedback perturbations on fundamental frequencies,” *J. Acoust. Soc. Jpn. (E)*, vol. 15, no. 3, pp. 201–202, 1994.
- [6] Hideki Kawahara, H. Kato, and J. C. Williams, “Effects of auditory feedback on F0 trajectory generation,” in *Proc. ICSLP*, 1996, vol. 1, pp. 287–290.
- [7] Roozbeh Behroozmand, R. Shebek, and D. R. Hansen *et al.*, “Sensory–motor networks involved in speech production and motor control: An fMRI study,” *NeuroImage*, vol. 109, pp. 418–428, 2015.
- [8] Sona Patel, A. Lodhavia, and S. Frankford *et al.*, “Vocal and neural responses to unexpected changes in voice pitch auditory feedback during register transitions,” *J. Voice*, vol. 30, no. 6, pp. 772.e33–772.e40, 2016.
- [9] Charles R. Larson and D. A. Robin, “Sensory processing: Advances in understanding structure and function of pitch-shifted auditory feedback in voice control,” *AIMS Neurosci.*, vol. 3, no. 1, pp. 22–39, 2016.
- [10] Roozbeh Behroozmand, K. Johari, and K. Bridwell *et al.*, “Modulation of vocal pitch control through high-definition transcranial direct current stimulation of the left ventral motor cortex,” *Exp. Brain Res.*, vol. 238, pp. 1525–1535, 2020.
- [11] Danhua Peng, Q. Lin, and Yichen Chang *et al.*, “A causal role of the cerebellum in auditory feedback control of vocal production,” *Cerebellum*, pp. 1–12, 2021.
- [12] Mahalakshmi Sivasankar, J. J. Bauer, T. Babu, and C. R. Larson, “Voice responses to changes in pitch of voice or tone auditory feedback,” *J. Acoust. Soc. Am.*, vol. 117, no. 2, pp. 850–857, 2005.
- [13] Jason A. Tourville, K. J. Reilly, and F. H. Guenther, “Neural mechanisms underlying auditory feedback control of speech,” *NeuroImage*, vol. 39, no. 3, pp. 1429–1443, 2008.
- [14] Edward F. Chang, C. A. Niziolek, R. T. Knight, S. S. Nagarajan, and J. F. Houde, “Human cortical sensorimotor network underlying feedback control of vocal pitch,” *Proc. Natl. Acad. Sci. U.S.A.*, vol. 110, no. 7, pp. 2653–2658, 2013.
- [15] Hideki Kawahara, T. Matsui, K. Yatabe, and K. Sakakibara *et al.*, “Implementation of interactive tools for investigating fundamental frequency response of voiced sounds to auditory stimulation,” in *Proc. APSIPA ASC*, Tokyo, Dec. 2021, (Accepted: draft:arXiv:arXiv:2109.11594).
- [16] Wolfgang Hess, *Pitch determination of speech signals: algorithms and devices*, vol. 3, Springer Science & Business Media, 2012, (original version: 1983).
- [17] A. Michael Noll, “Cepstrum pitch determination,” *J. Acoust. Soc. Am.*, vol. 41, no. 2, pp. 293–309, 1967.
- [18] Fumitada Itakura and S. Saito, “Analysis-synthesis telephony based on maximum likelihood method,” in *Proc. Int. Cong. Acoust.*, Tokyo, 1968, vol. C-5-5, pp. C-18–C-20.
- [19] Bishnu S Atal, “Automatic speaker recognition based on pitch contours,” *J. Acoust. Soc. Am.*, vol. 52, no. 6B, pp. 1687–1697, 1972.
- [20] Hiroya Fujisaki and Y. Tanabe, “A time-domain technique for pitch extraction of speech,” *J. Acoust. Soc. Jpn.*, vol. 29, no. 7, pp. 418–419, 1973.
- [21] Shigeki Sagayama and S. Furui, “Pitch extraction using the lag-window method,” in *In Proc. General Conference of IEICE Japan*, 1978, pp. 5–263, (In Japanese).
- [22] Hideki Kawahara, I. Masuda-Katsuse, and A. de Cheveigné, “Restructuring speech representations using a pitch-adaptive time-frequency smoothing and an instantaneous-frequency-based F0 extraction,” *Speech Communication*, vol. 27, no. 3-4, pp. 187–207, 1999.
- [23] Alain de Cheveigné and H. Kawahara, “YIN, a fundamental frequency estimator for speech and music,” *J. Acoust. Soc. Am.*, vol. 111, no. 4, pp. 1917–1930, 2002.
- [24] Hideki Kawahara, A. de Cheveigné, H. Banno, T. Takahashi, and T. Irino, “Nearly defect-free F0 trajectory extraction for expressive speech modifications based on STRAIGHT,” in *Proc. Interspeech 2005*, 2005, pp. 537–540.
- [25] Thomas Drugman and A. Alwan, “Joint robust voicing detection and pitch estimation based on residual harmonics,” in *Proc. Interspeech 2011*, 2011, pp. 1973–1976.
- [26] Gilles Degottex, J. Kane, T. Drugman, T. Raitio, and S. Scherer, “COVAREP—A collaborative voice analysis repository for speech technologies,” in *Proc. ICASSP 2014*, 2014, pp. 960–964.
- [27] Masanori Morise, F. Yokomori, and K. Ozawa, “WORLD: A vocoder-based high-quality speech synthesis system for real-time applications,” *IEICE Trans. Information and Systems*, vol. 99, no. 7, pp. 1877–1884, 2016.
- [28] Masanori Morise, “Harvest: A high-performance fundamental frequency estimator from speech signals,” in *Proc. Interspeech 2017*, 2017, pp. 2321–2325.
- [29] Jong Wook Kim, J. Salamon, P. Li, and J. P. Bello, “CREPE: A convolutional representation for pitch estimation,” in *Proc. ICASSP 2018*, 2018, pp. 161–165.
- [30] Beat Gfeller, C. Frank, D. Roblek, and M. Sharifi *et al.*, “SPICE: Self-supervised pitch estimation,” *IEEE/ACM Trans. ASLP*, vol. 28, pp. 1118–1128, 2020.
- [31] Hideki Kawahara, H. Katayose, A. de Cheveigné, and R. D. Patterson, “Fixed point analysis of frequency to instantaneous frequency mapping for accurate estimation of F0 and periodicity,” in *Proc. EUROSPEECH’99*, 1999, pp. 2781–2784.
- [32] Nathalie Henrich, C. d’ Alessandro, B. Doval, and M. Castellido, “On the use of the derivative of electroglottographic signals for characterization of nonpathological phonation,” *J. Acoust. Soc. Am.*, vol. 115, no. 3, pp. 1321–1332, 2004.
- [33] Hideki Kawahara, “GitHub repository for speech and hearing research/education tools,” <https://github.com/HidekiKawahara>, (retrieved 06 Oct. 2021).
- [34] David Slepian and H. O. Pollak, “Prolate spheroidal wave functions, Fourier analysis and uncertainty-I,” *Bell System Technical Journal*, vol. 40, no. 1, pp. 43–63, 1961.
- [35] James F. Kaiser and R. W. Schafer, “On the use of the I_0 -sinh window for spectrum analysis,” *IEEE Trans. ASSP*, vol. 28, no. 1, pp. 105–107, 1980.
- [36] Tsubasa Kusano, K. Yatabe, and Y. Oikawa, “Maximally energy-concentrated differential window for phase-aware signal processing using instantaneous frequency,” in *Proc. ICASSP 2020*, 2020, pp. 5825–5829.