

SERPENS: A High Bandwidth Memory Based Accelerator for General-Purpose Sparse Matrix-Vector Multiplication

Linghao Song, Yuze Chi, Licheng Guo, and Jason Cong
University of California, Los Angeles
 {linghaosong,chiyuze,lcguo,cong}@cs.ucla.edu

ABSTRACT

Sparse matrix-vector multiplication (SpMV) multiplies a sparse matrix with a dense vector. SpMV plays a crucial role in many applications, from graph analytics to deep learning. The random memory accesses of the sparse matrix make accelerator design challenging. However, high bandwidth memory (HBM) based FPGAs are a good fit for designing accelerators for SpMV. In this paper, we present SERPENS, an HBM based accelerator for general-purpose SpMV. SERPENS features (1) a general-purpose design, (2) memory-centric processing engines, and (3) index coalescing to support the efficient processing of arbitrary SpMVs. From the evaluation of twelve large-size matrices, SERPENS is 1.91 \times and 1.76 \times better in terms of geomean throughput than the latest accelerators GraphLiLy and Sextans, respectively. We also evaluate 2,519 SuiteSparse matrices, and SERPENS achieves 2.10 \times higher throughput than a K80 GPU. For the energy/bandwidth efficiency, SERPENS is 1.71 \times /1.99 \times , 1.90 \times /2.69 \times , and 6.25 \times /4.06 \times better compared with GraphLiLy, Sextans, and K80, respectively. After scaling up to 24 HBM channels, SERPENS achieves up to 30,204 MTEPS and up to 3.79 \times over GraphLiLy.

1 INTRODUCTION

SpMV performs the computation of $\vec{y} = \alpha \cdot \mathbf{A} \times \vec{x} + \beta \cdot \vec{y}$ where \vec{x} and \vec{y} are two dense vectors, \mathbf{A} is a sparse matrix, and α, β are two scalar constants. SpMV is the core computation routine in a wide range of applications, such as linear systems solvers [22] in scientific computing, the processing model [17] in graph analytics, and inference of sparse neural networks [14]. In the acceleration of dense algebra, the tensor size determines the data movement and thus researchers can use an analytic model to coordinate the computation to achieve very high performance [27]. However, it is difficult to accelerate SpMV because:

- The vector \vec{x} has only one element at each index that significantly prevents reuse in computation. Thus, it is hard to achieve a high computation throughout.
- The irregular distribution of non-zeros in the sparse matrix \mathbf{A} leads to random memory accessing. The memory hierarchy faces high pressure from the random accessing. If we do not properly design the accelerator’s memory, the performance will be even lower.

High bandwidth memory (HBM) [3] exposes more memory channels to users than conventional DDR memory. HBM-based FPGAs enable accelerator design and evaluation with high memory bandwidth. It is an opportunity to accelerate memory-intensive applications including SpMV with HBM FPGAs. GraphLiLy [16] and

Sextans [24] are two of the latest accelerators leveraging HBM FPGAs for sparse workloads. GraphLiLy is an FPGA overlay to support graph applications which can be described by an SpMV BLAS processing model. Sextans is an accelerator for sparse matrix-matrix multiplication (SpMM). However, there are a few limitations in existing works for SpMV acceleration:

- GraphLiLy overlay deploys extra hardware resource to support generalized operations, but many of the hardware-ized operations are idle in SpMV. So the FPGA hardware is not fully customized for SpMV acceleration.
- Sextans has to allocate memory channels to one sparse matrix and two dense matrices in SpMM processing. However, for SpMV acceleration, we can save some memory channels for dense matrices because the dense vector size is smaller than the dense matrix size. Thus, we can allocate more memory channels to speed up the processing of the sparse matrix.
- There lacks a modern FPGA-based accelerator for general-purpose SpMV as we treat FPGAs as a competitive candidate to GPUs for computing in data center.

We present SERPENS, a high bandwidth memory-based FPGA accelerator for general-purpose SpMV acceleration. Our features include:

- SERPENS is an HBM FPGA accelerator for general-purpose SpMV. SERPENS supports arbitrary sparse matrices and achieves competitive performance to GPUs.
- The memory-centric processing engines (PEs) of SERPENS enable efficient streaming of sparse matrices. We partition the input dense vector into segments and accumulate output dense vector on chip to process in an output stationary [26] manner. Thus, we limit the random memory to on-chip BRAMs/URAMs to avoid the high latency of random off-chip memory accessing. The memory-centric PEs also make SERPENS a scalable architecture.
- SERPENS uses an index coalescing to fully utilize on-chip FPGA URAMs to support large-size problems. Similar to prior works [16, 24, 25], we preprocess the sparse elements into accelerator-efficient storage.
- We conduct comprehensive evaluations. We evaluate on 12 million-level matrices, SERPENS surpasses GraphLiLy by 1.91 \times and Sextans by 1.76 \times in terms of geomean throughput. In terms of energy efficiency, SERPENS is 1.71 \times better than GraphLiLy and 1.90 \times better than Sextans. We evaluate on 2,519 SuiteSparse [10] matrices, SERPENS is 2.10 \times in terms of throughput, 6.25 \times in terms of and energy efficiency, and 4.06 \times in terms of bandwidth efficiency better than a K80 GPU.

After scaling up to 24 HBM channels, SERPENS achieves up to 30,204 MTEPS and up to 3.79 \times over GraphLily.

2 BACKGROUND AND MOTIVATION

2.1 High Bandwidth Memory

Conventional DDR memory provides limited memory bandwidth. For example, the DDR4 memory of a Xilinx Alveo U250 [1] provides four channels and a total bandwidth of 77 GB/s. Accelerators for computation-intensive applications such as deep learning accelerators [27] are able to achieve high performance with DDR memory. However, in SpMV and graph applications the data reuse is low and there are a large amount of random memory accesses. Such applications are memory-intensive and require the support of high memory bandwidth. HBM based accelerator Xilinx Alveo U280 [2] provides 32 channels and a total memory bandwidth of 460 GB/s, which is a good opportunity for the acceleration of memory-intensive applications. However, it is non-trivial to achieve efficient HBM channel interconnection [7, 8]. Accelerator architects need to customize their accelerators to fit the HBM channels to fully reap the bandwidth benefit.

2.2 SpMV Accelerators on HBM FPGAs

GraphLily [16] and Sextans [24] are two of the latest accelerators related to SERPENS. They are both accelerators based on HBM FPGAs. Although they are not specialized for SpMV, they are able to support SpMV processing.

GraphLily [16] uses a BLAS-based processing model [17] which represents graph applications in a generalized SpMV to design an FPGA overlay as a general accelerator for graph processing. To run different graph applications, GraphLily configures the data type, the generalized binary multiplication, and the generalized reduction. For example, to support a floating-point SpMV, GraphLily sets the data type to float and maps the generalized binary multiplication to arithmetic multiplication and the reduction to arithmetic addition. SpMV never uses the other hardware instances of the generalized operations. Moreover, GraphLily deploys an arbiter vector unit to load data from off-chip memory and supply it to processing engines which have no bank conflicts. The arbiter vector unit is flexible in BFS and SSSP. However, for SpMV processing, we know the vector accessing sequence in advance. Thus, GraphLily does not fully customize the vector handling for SpMV. Nevertheless, the overlay makes GraphLily support a wide spectrum of graph applications including BFS, SSSP, and PageRank besides SpMV.

For SpMM acceleration, Sextans [24] needs to balance the allocation of memory channels to one sparse and two dense matrices, because SpMM needs to stream on three large matrices and the matrix sizes are comparable. Specifically, Sextans allocates 8 channels for the sparse matrix and 20 channels for the two dense matrices. Besides, to achieve a high computation throughput, Sextans shares a sparse elements to eight dense matrix elements. The sharing consumes FPGA logic resource and on-chip BRAMs. However, the dense vectors in SpMV is quite a bit smaller than the dense matrices in SpMM. To support an SpMV run, Sextans configures $N = 8$ to run an SpMM and retires the first column vector of the SpMM output as the result of SpMV. Thus, we can allocate less channels for the vector and more channels for the sparse matrix. Moreover, an

SpMV accelerator can save the on-chip logic and memory resource previously used for the SpMM sharing.

2.3 Other Related Works

SpaceA [28] is a hybrid memory cube-based accelerator architecture for SpMV. Tensaurus [25] is an HBM based accelerator for sparse-dense linear algebra. GraphR [23] utilizes an SpMV processing model for graph acceleration. However, the three accelerators are evaluated by simulation rather than real execution. Fowers et al. [11] designed an FPGA accelerator for SpMV, but it is on DDR memory and the performance is poor. HitGraph [29] and ThuderGP [5] are FPGA accelerators for graph processing, but they utilize DDR memory and are no specialized for SpMV.

Data format/layout reorganization is a common technique for boosting systems performance. For example, CSR5 [20] and HiCOO [19] are data formats to accelerate SpMV and sparse tensor processing on multi-core CPUs and GPUs. TensorFlow [4] stores data in TFRecord format for fast processing. For accelerators, [11, 16, 24], and [25] all reorganize data format/layout to be accelerator friendly.

2.4 Motivation


The lack of modern HBM-FPGA-based accelerators for SpMV motivates us to present SERPENS. SERPENS utilizes massive HBM memory channels for high-throughput processing of sparse matrices. We customize the storing and sharing of dense vectors for the need of SpMV to fully utilize FPGA resource. We architect SERPENS as a general-purpose accelerator to deliver competitive SpMV performance to GPUs for data-center computing.

3 SERPENS ACCELERATOR

3.1 Accelerator Architecture

3.1.1 HBM Channel Allocation. Figure 1 (a) shows the overall architecture of the SERPENS accelerator. For the off-chip memory accessing in SpMV, SERPENS needs to (1) stream in the sparse A matrix, (2) stream in the dense \vec{x} vector, and (3) stream in the dense \vec{y} vector and write the result \vec{x} vector. The dense vector size is much smaller than the sparse matrix size. For example, the matrix hollywood is 1.25 GB while the corresponding dense vector is 4 MB. Thus, we allocate one HBM channel for each dense vector, i.e., \vec{x} , input \vec{y} , and output \vec{y} , and sixteen HBM channels for the sparse A matrix. In total, SERPENS occupies 19 HBM channels and the accumulative memory bandwidth is 273 GB/s.

3.1.2 SERPENS Modules. We deploy a read (Rd) or write (Wr) module for each HBM channel. The Rd/Wr modules performs streaming memory accessing to off-chip HBM. The bitwidth of the Rd/Wr modules is 512. For the dense vector Rd/Wr modules, we coalesce 16 floating-point values into a 512-bit segment. For one sparse element, each of the row index, column index, and float attribute occupies 32 bits. Because we partition the vectors and matrices in SpMV processing (Sec.3.2), the indices are limited in a range at each iteration. Thus, we reduce the index bits and compress a row-column index pair into 32 bits to save memory bandwidth. We encode a sparse element with 64 bits. As a result, for the sparse matrix read module, we coalesce eight sparse elements into a 512-bit segment. SERPENS deliver the sparse elements from one HBM channel to 8 processing

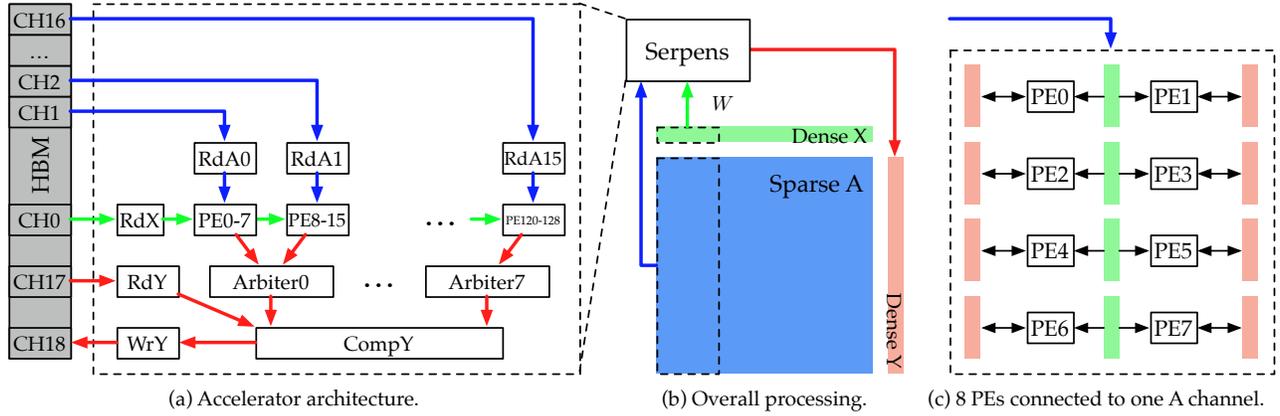
Figure 1: SERPENS accelerator architecture and matrix-vector processing.

engines (PEs). One PE performs part of the matrix-vector multiplication $A \times \vec{x}$. We use one arbiter to select computation results from 16 PEs and send the result to a CompY module. The CompY module performs the element-wise (α, β) multiplications to obtain final SpMV results.

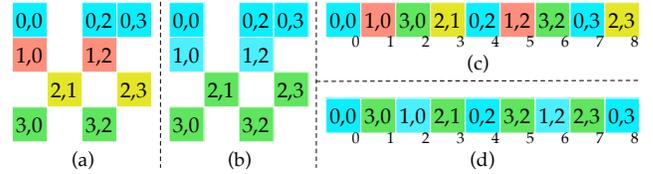
3.2 SpMV Processing Order

Figure 1 (b) shows the overall processing order in SERPENS. We partition the dense vector \vec{x} into segments. The segment length $W = 8192$. In the processing, we stream in one \vec{x} segment and store it in BRAMs. Then we stream in sparse A elements associated to the \vec{x} segment. For the accumulation of $A \times \vec{x}$, we use URAMs as accumulation buffers. After we finish the processing on one \vec{x} segment, we iterate on next segment. With the partition and SpMV processing order, the benefits include:

- SERPENS does not issue any random access to off-chip memory. All the off-chip memory accessing is sequential. Thus, SERPENS can fully utilize the off-chip memory bandwidth and amortise the latency of off-chip memory accessing.
- There are two kind of random accesses in SpMV: (1) reading dense vector \vec{x} and (2) accumulating on vector \vec{y} . Now, SERPENS limits the two random accessing on chip. With the optimization of $\Pi=1$ pipeline, we can achieve a high processing throughput.
- SERPENS will read/write any of the vectors and the sparse matrix only once without any duplicate reading/writing. Thus, SERPENS minimizes the off-chip communication.

3.3 Memory-Centric Processing Engines

HBM provides massive memory channels to users. However, the switching/crossing between HBM channels requires special handling to achieve high memory throughput [8]. SERPENS avoid one module to access cross multiple HBM channels by the memory-centric processing engines as shown in Figure 1 (c). SERPENS dispatches the sparse elements from one channel to 8 PEs. We implement the broadcasting of the dense vector segment by PE relay in a chain topology [9] to achieve a higher frequency [12]. There are four copies of the the dense vector \vec{x} segment stored in BRAMs. Since each BRAM has the two ports, we share one BRAM with two PEs


Figure 2: An example of "coloring" and reordering in Sextans [24]: (a), (c), and SERPENS: (b), (d).

to save half of the BRAM usage. There is no bank conflict when the 8 PEs fetch dense elements from different BRAM addresses. We make URAM address for each PE disjoint to avoid the URAM bank conflict caused by the accessing from multiple PEs.

The memory-centric PEs also enable rapid scalability. Users can easily customize SERPENS according to their need on various memory channels and bandwidths. We show the performance of SERPENS when we scale up channel allocation for the sparse matrix from 16 to 24 in Sec. 4.4.

3.4 Index Coalescing & Non-Zero Reordering

Index coalescing is a micro-architecture level optimization we apply to improve URAM utilization. The minimum bit width of a URAM configuration is 72. It is a waste to store a 32-bit float (FP32) value to one URAM address. Thus, we coalesce two values whose destination row indices are consecutive into one same URAM address. In the reordering of non-zeros (sparse elements), besides read-after-write (RAW) conflict [24], we also need to handle the URAM access conflicts caused by coalesced indices.

Figure 2 compares the non-zero reordering in Sextans [24] and in SERPENS. We assume the latency T of DSP accumulation on a float is 2 cycles. We view the recording in Sextans [24] as a process of two steps – coloring and reordering. The coloring step colors elements in the same row with the same color shown in Figure 2 (a). In the recording step, we ensure none of the same color elements are in any of the T -cycle windows (Figure 2 (c)). After we applied the index coalescing, we store two elements of consecutive row indices to the same URAM address. To avoid URAM address conflicts, we only need to color elements of two consecutive rows with the same color shown in Figure 2 (b) and then apply the same reordering

Table 1: The specification of the evaluated accelerators.

	Sextans [24]	GraphLily [16]	SERPENS	Tesla K80
Frequency	197 MHz	166 MHz	223 MHz	562 MHz
Bandwidth	&417 GB/s	&285 GB/s	&273 GB/s	#480 GB/s
Power	52 W	43 W	48 W	130 W

& Utilized bandwidth, # maximum bandwidth.

Table 2: The specification of evaluated matrices.

Twelve Large Matrices/Graphs			
ID	Matrix	#Vertices	#Edges
G1	googleplus [18]	108 K	13.7 M
G2	crankseg_2 [10]	63.8 K	14.1 M
G3	Si41Ge41H72 [10]	186 K	15.0 M
G4	TSOPF_RS_b2383 [10]	38.1 K	16.2 M
G5	ML_Laplace [10]	377 K	27.6 M
G6	mouse_gene [10]	45.1 K	29.0 M
G7	soc_pokec [18]	1.63 M	30.6 M
G8	coPapersCiteseer [10]	434 K	21.1 M
G9	PFlow_742 [10]	743 K	37.1 M
G10	ogbl_ppa [15]	576 K	42.5 M
G11	hollywood [18]	1.07 M	113 M
G12	ogbn_products [15]	2.45 M	124 M

SuiteSparse [10] Matrices			
Number of Matrices	2,519	NNZ	1,000 – 89,306,020
Row/column	24 – 2,999,349	Density	8.75E-7 – 1

rule for SERPENS. Figure 2 (d) illustrates the reordered non-zeros taking both RAW and index coalescing conflicts into consideration.

3.5 Resource & Performance Analysis

We estimate SERPENS BRAM/URAM consumption and cycle count when achieving an II=1 pipeline.

3.5.1 BRAM Consumption. When streaming in the dense vector and storing the vector to BRAMs, one 512-bit block contains 16 FP32 values. The bitwidth of a BRAM18K is 18, so we need 2 BRAM18Ks to store one FP32. For the whole 512 bits, we require 32 BRAM18Ks. Since one BRAM18K has two ports, we reduce the BRAM18K number to 16. When streaming in sparse elements, for each memory channel, we dispatch 8 sparse elements to 8 PEs per cycle. Thus we need $16 \times 8 = 128$ BRAM18Ks. Because we share one BRAM with two PEs in SERPENS, the actual number of BRAM18Ks per channel is 64. We assume there are H_A HBM memory channels allocated to the sparse matrix A . In total, we require $64 \cdot H_A$ BRAM18Ks. One BRAM contains two BRAM18Ks on Xilinx FPGAs. Thus, the number of BRAMs is:

$$\#BRAMs = 32 \cdot H_A. \quad (1)$$

3.5.2 URAM Consumption. Assuming that we assign U URAMs to each PE. There are $8 \cdot H_A$ PEs in total, because URAMs are disjoint for different PEs, the total number of URAMs is:

$$\#URAMs = 8 \cdot H_A \cdot U. \quad (2)$$

Assuming the depth of a URAM configured by a width of 72 bits is D , with the index coalescing in SERPENS, the on-chip accumulation row depth is:

$$\#Row\ Depth = 16 \cdot H_A \cdot U \cdot D. \quad (3)$$

3.5.3 Cycle Count. We assume the row number, column number, and number of non-zeros (sparse elements) of the sparse matrix is M , K , and NNZ, respectively.

Because we allocate one memory channel to the dense vector \vec{x} , the cycle count of streaming in vector \vec{x} is $K/16$. SERPENS performs the streaming in the dense input vector \vec{y} and the streaming the out dense output vector \vec{y} in parallel, thus the cycle count on the two dense \vec{y} vectors is $M/16$.

In the computation, at each cycle, one PE processes 8 sparse elements. Because there are $8 \cdot H_A$ PEs in total, the cycle count for processing the sparse elements is $NNZ/(8 \cdot H_A)$.

We add up the streaming and computation cycle counts to obtain the overall cycle count:

$$\#Cycle = (M + K)/16 + NNZ/(8 \cdot H_A). \quad (4)$$

4 EVALUATION

4.1 Evaluation Setup

4.1.1 The Evaluated Accelerators. We evaluate the SpMV routine on SERPENS and two FPGA-related accelerators – Sextans [24], GraphLily [16], and an Nvidia Tesla K80 GPU. Table 1 lists the frequency, memory bandwidth and power of the four evaluated accelerators.

We describe SERPENS accelerator in Xilinx high level synthesis (HLS) C++ and prototype with Vitis 2020.2. For Sextans, we utilize the open-sourced code and prototype with Vitis 2020.2. For GraphLily, we obtain the open-sourced bitstream (.xclbin). We run the three FPGA accelerators on a Xilinx Alveo U280 FPGA board then measure the execution time by Xilinx Run Time and the power consumption by xbutil. To perform SpMV on GPU, we use CuSPARSE [21] routine csrmm with CUDA 10.1. We measure the GPU execution time by cudaEventElapsedTime and power consumption by nvidia-smi. We amortize all the execution time by 100 runs.

GraphLily employs 19 HBM channels and 1 DDR4 channel, translating to 285 GB/s memory bandwidth. Sextans uses 29 HBM channels and the bandwidth is 417 GB/s. SERPENS uses 19 HBM channels for a bandwidth of 273 GB/s.

4.1.2 The Evaluated Matrices. For the comparison of SERPENS with Sextans and GraphLily, we evaluate them on 12 large matrices/graphs which are selected from SNAP [18], OGB [15], and SuiteSparse [10]. The number of vertices (rows) ranges from 45K to 2.45M and the number of edges (non-zeros) can be as high as 124M. For the comparison of SERPENS with K80, we evaluate on 2,519 sparse matrices whose number of non-zeros (NNZ) is greater than 1,000 and less than 100M from SuiteSparse. The geometric density of the evaluated SuiteSparse matrices is $1.4E-3$. Table 2 shows the specifications of the evaluated matrices. We evaluate single floating-point SpMV. We compare the execution time (ms), throughput in million traversed edges per second (MTEPS), bandwidth efficiency defined as (throughput)/(memory bandwidth), and energy efficiency defined as (throughput)/(power consumption) of the three FPGA accelerators. We set $N=8$ (the minimal supported N) for Sextans [24] to obtain SpMV results. We run GraphLily [16] on SpMV mode.

Table 3: Performance of Sextans [24], GraphLily [16], and SERPENS on twelve large matrices/graphs. The improvement is the ratio of a performance metric of SERPENS compared to that of GraphLily.

		G1	G2	G3	G4	G5	G6	G7	G8	G9	G10	G11	G12	GMN
Execution Time: ms	Sextans	3.06	1.38	1.64	1.36	2.73	2.72	–	3.58	–	–	–	–	2.20
	GraphLily	1.73	1.47	1.85	1.57	2.96	2.80	7.04	3.63	4.52	4.59	12.4	18.6	3.74
	SERPENS	1.87	0.930	0.853	0.730	1.37	1.37	4.52	2.09	2.05	2.04	6.20	6.32	1.96
Throughput: MTEPS	Sextans	4,470	10,255	9,162	11,878	10,099	10,651	–	8,951	–	–	–	–	9,005
	GraphLily	7,920	9,639	8,117	10,296	9,305	10,331	4,352	8,828	8,212	9,243	9,094	6,668	8,310
	SERPENS	7,300	15,214	17,594	22,144	20,099	21,098	6,782	15,324	18,142	20,847	18,176	19,565	15,876
	Improvement	0.922×	1.58×	2.17×	2.15×	2.16×	2.04×	1.56×	1.74×	2.21×	2.26×	2.00×	2.93×	1.91×
Bandwidth Efficiency: MTEPS/(GB/s)	Sextans	10.7	24.6	22.0	28.5	24.2	25.5	–	21.5	–	–	–	–	21.6
	GraphLily	27.8	33.8	28.5	36.1	32.7	36.2	15.3	31.0	28.8	32.4	31.9	23.4	29.2
	SERPENS	26.7	55.7	64.4	81.1	73.6	77.3	24.8	56.1	66.5	76.4	66.6	71.7	58.2
	Improvement	0.922×	1.65×	2.26×	2.25×	2.25×	2.13×	1.63×	1.81×	2.31×	2.35×	2.09×	3.06×	1.99×
Energy Efficiency: MTEPS/W	Sextans	86.0	197	176	228	194	205	–	172	–	–	–	–	173
	GraphLily	184	224	189	239	216	240	101	205	191	215	211	155	193
	SERPENS	152	317	367	461	419	440	141	319	378	434	379	408	331
	Improvement	0.826×	1.41×	1.94×	1.93×	1.94×	1.83×	1.40×	1.56×	1.98×	2.02×	1.79×	2.63×	1.71×

4.2 Comparison with FPGA Accelerators

Table 3 shows the execution time, throughput, bandwidth and energy efficiency of the three FPGA accelerators.

4.2.1 Execution Time. Sextans is not able to support Matrix G7 and G9 – G12 directly on the hardware. For the other matrices, the execution time of SERPENS is less than the execution time of Sextans. Sextans leverages sharing on the dense **B** matrix to boost performance, but in SpMV the **B** matrix degenerates to a vector. Sextans runs an SpMM@N=8 and retires the first column vector from the result matrix as the result of an SpMV run. However, there is no sharing opportunity on the vector. Thus, the logic and memory resource for sharing on Sextans is a waste for SpMV run. The hardware resource for sharing is saved for better optimization on the sparse processing and the support for a larger problem size by SpMV accelerator. That is why SERPENS is faster than Sextans. For the comparison with GraphLily, SERPENS is slightly slower (1.87 ms v.s. 1.73 ms) on G1 but faster than GraphLily on the other 11 matrices. GraphLily is an FPGA overlay which is able to support a few graph kernels that can be executed in a BLAS processing model. GraphLily supports generalized multiplication and generalized reduction. For example, GraphLily can configure a generalized multiplication as one of (1) algebraic multiplication, (2) algebraic addition, (3) logic AND, and (4) zero output. In the processing of SpMV where GraphLily configures a generalized multiplication as an algebraic multiplication, the hardware resource for the other two operations is idle. Thus, GraphLily lacks deeper specialization for SpMV and the SpMV execution time of GraphLily is larger than the execution time of SERPENS.

4.2.2 Throughput. We use (NNZ)/(execution time) to calculate the throughput (MTEPS). The throughput directly corresponds to the execution time. A shorter execution time leads to a higher throughput. The maximum throughput achieved by GraphLily is 10,331 MTEPS while the maximum throughput achieved by SERPENS is 22,144 MTEPS. For the geometric throughput, GraphLily and SERPENS achieve a geometric throughput of 8,310 MTEPS and 15,876 MTEPS respectively, leading to a 1.91× throughput improvement of SERPENS over GraphLily.

Table 4: Resource utilization of Sextans, GraphLily, and SERPENS on a Xilinx U280 FPGA board.

	LUT	FF	DSP	BRAM	URAM
Sextans	331K(29%)	594K(25%)	3233(36%)	1238(68%)	768(80%)
GraphLily	390K(35%)	493K(21%)	723(8%)	417(24%)	512(53%)
SERPENS	173K(15%)	327K(14%)	720(8%)	655(36%)	384(40%)

4.2.3 Bandwidth Efficiency. On the same graph/matrix, the bandwidth efficiency is determined by the execution time and the accelerator’s memory bandwidth. GraphLily’s bandwidth is higher than SERPENS’ bandwidth (285 GB/s v.s. 273 GB/s). With a faster execution time, SERPENS achieves a geometric bandwidth efficiency of 58.2 MTEPS / (GB/s), 1.99× compared with GraphLily’s bandwidth efficiency. The highest bandwidth efficiency achieved by SERPENS is 81.1 MTEPS / (GB/s) on G4.

4.2.4 Energy Efficiency. Some hardware resource of GraphLily overlay may be idle when performing one specific graph kernel, so the power consumption of GraphLily is lower than that of SERPENS (43 W v.s. 48 W). However, SERPENS is 1.91× faster than GraphLily, leading to a 1.71× energy efficiency improvement.

4.2.5 Resource Utilization. Table 4 lists the FPGA resource utilization of the three accelerators on the same U280 board. Sextans requires the highest resource utilization because Sextans needs to compute on the dense **B** matrix which is larger than the \vec{x} vector in SpMV. In contrast to GraphLily, SERPENS consumes less LUT, FF, DSP, and URAM. Because SERPENS is customized specifically for SpMV, it does not need the extra FPGA resource that GraphLily requires for its generalized operations. However, SERPENS consumes more BRAMs than GraphLily, because SERPENS explicitly deploys more BRAMs to access on-chip memory in parallel.

4.3 Comparison with K80 GPU

We compare SERPENS with K80 GPU on a wide range of 2,519 sparse matrices from SuiteSparse [10] to demonstrate the performance of SERPENS as a general-purpose accelerator in a data center. K80 is a

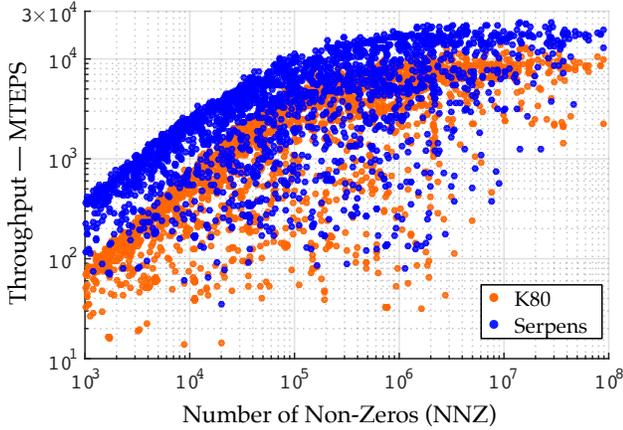


Figure 3: SpMV throughput (in MTEPS) of K80 and SERPENS plotted with increasing NNZ.

Table 5: The SpMV throughput (MTEPS) of the 24 HBM channel version SERPENS and improvement over GraphLily.

	G1	G2	G3	G4	G5	G6
SERPENS-v24	7,606	17,943	22,262	30,204	25,796	28,937
Improvement	0.960×	1.86×	2.74×	2.93×	2.77×	2.80×
	G7	G8	G9	G10	G11	G12
SERPENS-v24	8,708	17,990	22,969	27,680	22,330	25,278
Improvement	2.00×	2.04×	2.80×	3.00×	2.46×	3.79×

more powerful accelerator than SERPENS in terms of frequency and bandwidth as shown in Table 1.

We plot the SpMV throughputs of K80 and SERPENS in Figure 3. SERPENS achieves higher throughput on almost all matrices than K80. The maximum throughputs of K80 and SERPENS are 14,521 MTEPS and 23,158 MTEPS respectively, and the geomean throughputs of K80 and SERPENS are 1,008 MTEPS and 2,325 MTEPS respectively. SERPENS is 2.31× better than K80 in geomean throughput.

For the geomean bandwidth efficiency, K80 achieves 2.10 MTEPS/(GB/s). With a geomean bandwidth efficiency of 8.52 MTEPS/(GB/s), SERPENS outperforms K80 by 4.06×. For the geomean energy efficiency, K80 achieves 7.75 MTEPS/W. SERPENS which has a geomean energy efficiency of 48.4 MTEPS/W is 6.25× better.

4.4 Scalability

We scale up HBM channel allocation from 16 to 24 to further boost performance. Vanilla Vitis failed place and route because of the congestion caused by heavy HBM channel usage. With the aid of TAPA [6] and Autobridge [13], we successfully place and route the 24 HBM channel version, resulting in 270 MHz frequency. We compare SERPENS-v24 with GraphLily [16] in Table 5. SERPENS-v24 achieves up to 30,204 MTEPS and a throughput of up to 3.79× improvement over GraphLily.

5 CONCLUSION

We present SERPENS, an HBM based accelerator for SpMV acceleration. SERPENS is a general-purpose design which supports an

arbitrary SpMV. We design memory-centric processing engines in SERPENS for full utilization of memory bandwidth and the scalability with memory channels. We improve URAM utilization for vector storage by index coalescing, and the index coalescing is integrated with non-zero recording. In the evaluation, we compare SERPENS with two related FPGA accelerators Sextans [24] and GraphLily [16]. SERPENS outperforms the latest accelerators GraphLily and Sextans by 1.91× and 1.76×, respectively, in terms of geomean throughput. For the comparison of SERPENS with K80 GPU on SuiteSparse [10], SERPENS achieves 2.10× higher throughput. We scale up SERPENS to support 24 HBM channels for the spares matrix. After scaling up to 24 HBM channels, SERPENS achieves a throughput of up to 30,204 MTEPS and up to 3.79× improvement over GraphLily.

REFERENCES

- [1] [n.d.]. Alveo U200 and U250 Data Center Accelerator Cards Data Sheet. <https://www.xilinx.com/products/boards-and-kits/alveo/u250.html>.
- [2] [n.d.]. Alveo U280 Data Center Accelerator Card Data Sheet. <https://www.xilinx.com/products/boards-and-kits/alveo/u280.html>.
- [3] [n.d.]. HIGH BANDWIDTH MEMORY (HBM) DRAM. <https://www.jedec.org/standards-documents/docs/jesd235a>.
- [4] Martin Abadi et al. 2016. TensorFlow: A System for Large-Scale Machine Learning. In *OSDI*.
- [5] Xinyu Chen et al. 2021. ThunderGP: HLS-based Graph Processing Framework on FPGAs. In *FPGA*.
- [6] Yuze Chi et al. 2021. Extending High-Level Synthesis for Task-Parallel Programs. In *FCCM*.
- [7] Young-kyu Choi et al. 2020. When HLS Meets FPGA HBM: Benchmarking and Bandwidth Optimization. *arXiv preprint* (2020).
- [8] Young-kyu Choi et al. 2021. HBM Connect: High-Performance HLS Interconnect for FPGA HBM. In *FPGA*.
- [9] Jason Cong et al. 2018. Latte: Locality Aware Transformation for High-Level Synthesis. In *FCCM*.
- [10] Timothy A. Davis and Yifan Hu. 2011. The University of Florida Sparse Matrix Collection. *ACM TOMS* (2011).
- [11] Jeremy Fowers et al. 2014. A High Memory Bandwidth FPGA Accelerator for Sparse Matrix-Vector Multiplication. In *FCCM*.
- [12] Licheng Guo et al. 2020. Analysis and Optimization of the Implicit Broadcasts in FPGA HLS to Improve Maximum Frequency. In *DAC*.
- [13] Licheng Guo et al. 2021. AutoBridge: Coupling Coarse-Grained Floorplanning and Pipelining for High-Frequency HLS Design on Multi-Die FPGAs. In *FPGA*.
- [14] Song Han et al. 2015. Learning both Weights and Connections for Efficient Neural Networks. In *NIPS*.
- [15] Weihua Hu et al. 2020. Open Graph Benchmark: Datasets for Machine Learning on Graphs. *arXiv preprint* (2020).
- [16] Yuwei Hu et al. 2021. GraphLily: Accelerating Graph Linear Algebra on HBM-Equipped FPGAs. In *ICCAD*.
- [17] Jeremy Kepner et al. 2016. Mathematical Foundations of the GraphBLAS. In *HPEC*.
- [18] Jure Leskovec and Andrej Krevl. 2014. SNAP Datasets: Stanford Large Network Dataset Collection. <http://snap.stanford.edu/data>.
- [19] Jiajia Li et al. 2018. HiCOO: Hierarchical Storage of Sparse Tensors. In *SC*.
- [20] Weifeng Liu and Brian Vinter. 2015. CSR5: An Efficient Storage Format for Cross-Platform Sparse Matrix-Vector Multiplication. In *ICS*.
- [21] Maxim Naumov et al. 2010. CUSPARSE Library. In *GPU Tech. Conf.*
- [22] Yousef Saad. 2003. *Iterative Methods for Sparse Linear Systems*. SIAM.
- [23] Linghao Song et al. 2018. GraphR: Accelerating Graph Processing Using ReRAM. In *HPCA*.
- [24] Linghao Song et al. 2021. Sextans: A Streaming Accelerator for General-Purpose Sparse-Matrix Dense-Matrix Multiplication. *arXiv preprint* (2021).
- [25] Nitish Srivastava et al. 2020. Tensaurus: A Versatile Accelerator for Mixed Sparse-Dense Tensor Computations. In *HPCA*.
- [26] Vivienne Sze et al. 2017. Efficient Processing of Deep Neural Networks: A Tutorial and Survey. *Proc. IEEE* (2017).
- [27] Jie Wang et al. 2021. AutoSA: A Polyhedral Compiler for High-Performance Systolic Arrays on FPGA. In *FPGA*.
- [28] Xinfeng Xie et al. 2021. SpaceA: Sparse Matrix Vector Multiplication on Processing-in-Memory Accelerator. In *HPCA*.
- [29] Shijie Zhou et al. 2019. HitGraph: High-throughput Graph Processing Framework on FPGA. *IEEE TPDS* (2019).