

Simulation of Crowd Egress with Environmental Stressors

Peng Wang Xiaoda Wang Timo Korhonen Peter Luh

This article presents a modeling framework to characterize evacuees' response to environmental stimuli during emergency egress, especially in fire and smoke condition. The model is developed in consistency with stress theory, which explains how an organism reacts to environmental stressors. We integrate the theory into the well-known social-force model and apply the method to simulate crowd evacuation behavior in building emergency egress. The algorithm has been tested in FDS+EVAC.

1. Social Force Model and Stress Theory

In physiological or biological study, stress refers to an organism's reaction to a condition perceived as a threat, challenge or physical and psychological barrier (Selye, 1975). For human beings stress is normally perceived when we think the demand being placed on us exceed our ability to cope with, and it can be external and related to the environment, and it becomes effective by internal perception. This paper will integrate the stress theory into the well-known social force model (Helbing et. al., 2002 and 2005), which has been widely used in simulation of crowd evacuation in the past two decades. The motivation level are the result of human perception, and are adapted to the environmental stressors. As a result, it is feasible to extend social-force model to characterize individuals' response to their surroundings. As below we present a diagram to describe the interplay between individuals and their surroundings based on the extended social-force model.

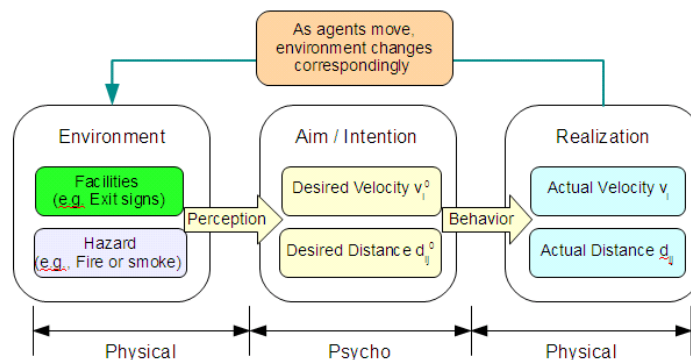


Figure 1. Perception and Behavior in a Feedback Loop: The motivation level v_i^0 and d_{ij}^0 in social force model are the result of human perception, and are adapted to the environmental stressors such as fire and smoke, and v_i^0 and d_{ij}^0 could vary both temporally and spatially, and they lead to behavior change in v_i and d_{ij} . The social-force model is extended to characterize the interplay between individuals and their surroundings.

In the above diagram the stressors include egress facilities (e.g., alarm, guidance) and hazard (e.g., fire and smoke), and evacuees' motion is a response to such environmental stressors. In particular we have explained the psychological background of the model (Wang, 2016) and modified the key concept of social force in consistency of both physical laws and psychological principles. In our modified model crowd motion and interaction are motivated by desired moving velocity v_i^0 and desired interpersonal distance d_{ij}^0 , and they lead to behavior change in actual velocity v_i and actual interpersonal distance d_{ij} . In a sense v_i^0 and d_{ij}^0 are non-physics entities because they exist in people's opinion, not in the physical world.

In a psychological sense stress is the result of mismatch between psychological demand and realistic situation (Staal,

2004), and we summarize such mismatch in terms of velocity and distance in Table 1: the psychological demand is represented by desired velocity v_i^0 and distance d_{ij}^0 while the physical reality is described by the physical velocity v_i and distance d_{ij} . The difference of two variables measures how much people feel stressed, by which people are motivated into certain behavior. Such behavior is formulated as the driving force and social force as shown in Table 1.

There are two types of stress listed in Table 1. The first type refers to time-related stress which is commonly known as time-pressure, and it is measured by the difference of desired velocity and actual velocity, i.e., $v_i^0 - v_i$. The second type indicates space-related stress, which refers to proxemics and social norms, and is represented by the gap of desired interpersonal distance and actual interpersonal distance, i.e., $d_{ij}^0 - d_{ij}$.

Table 1 On Conception of Stress in Extended Social-Force Model

	<i>Opinion (Psychological Characteristics)</i>	<i>Behavior (Physic-Based Characteristics)</i>	<i>Difference between subjective opinion and objective reality</i>	<i>Forced-Based Term for Newton Second Law</i>
Time-Related Stress: Velocity	desired velocities v_i^0	actual velocities v_i	Time-Related Stress: Velocity $v_i^0 - v_i$ or $ v_i / v_i^0 $	Driving Force $f_i^{drv} = m_i(v_i^0 - v_i)/\tau$
Space-related Stress: Distance	desired distance d_{ij}^0	actual distance d_{ij}	Space-related Stress: Distance $d_{ij}^0 - d_{ij}$ or d_{ij}/d_{ij}^0	Social Force $f_{ij}^{soc} = A_i \exp((d_{ij}^0 - d_{ij})/B_i) n_{ij}$

Usually emergency egress is a stressful situation. When people hear the fire alarm and confirm any kind of threat in their surroundings, they normally begin to escape, and this process is called movement phase in crowd egress. Each individual evacuee's motion is governed by physics laws, and the motion equation of individual i is specified as below.

$$m_i \frac{d v_i(t)}{dt} = f_i^{drv} + \sum_{j(\neq i)} f_{ij} + \sum_w f_{iw} + \sum_h f_{ih} . \quad (1)$$

The mass of an individual is denoted by m_i . The change of the instantaneous velocity $v_i(t)$ of individual i is determined by the total force. Here the total force consists of a driving force f_i^{drv} , interaction force f_{ij} as well as boundary wall force f_{iw} . The hazard impact is also abstracted as a kind of force f_{ih} .

The driving force represents an energy source that drives people to move to a target exit, and it is commonly specified by $f_i^{drv} = F^{drv}(v_i^0 - v_i)$, where $F^{drv}(\cdot)$ is generally a monotonically increasing function. The interaction force f_{ij} describes the social-psychological tendency of two individuals to keep proper distance (as called the social-force), and if people have physical contact with each other, physical forces are also taken into account, i.e., $f_{ij} = f_{ij}^{soc} + f_{ij}^{phy}$. In this article we mainly focus on the social force term. In Helbing et. al., 2002 and 2005 this term is given in an exponential form, and we will integrate a new concept of desired distance d_{ij}^0 into this force term. In a general sense we specify this force term by $f_{ij}^{soc} = F^{soc}(d_{ij}^0 - d_{ij})$. The interaction of an individual with obstacles like walls is treated analogously, and denoted by $f_{iw} = f_{iw}^{soc} + f_{iw}^{phy}$, and this force specifies boundary of people's motion. The hazard force is a special term we take into account for emergency egress and we will discuss it in detail in Section 2.

Next we will emphasize that f_i^{drv} , f_{ij}^{soc} , f_{iw}^{soc} and f_{ih} are all subjective entities coming from people's opinions, and they are generated intentionally by people through foot-ground friction on physics basis. These forces essentially describe how an individual perceive and react to the outside environmental stimuli. Because f_{iw}^{soc} can be formulated in analog of f_{ij}^{soc} , we will not further discuss f_{iw}^{soc} in this article. In the following section we will formulate f_i^{drv} , f_{ij}^{soc} and f_{ih} in the background of evacuation study. Our focus is applying the above model in simulation of crowd egress, especially in modeling how perception of hazard (fire and smoke) and guidance (e.g., exit signs) influence evacuees' escape behavior. The method has been partly tested in FDS+Evac, a well-known open-source evacuation simulator (Korhonen, 2017; Forney 2017; McGrattan, 2018; Hostikka et. al., 2007).

Last but not least, an evacuation process is commonly divided into two phases: pre-movement phase and movement phase. In the pre-movement phase evacuees are inclined to collect information rather than actually move to any exit. The pre-movement behavior will not be discussed in this article, and we will focus on using the above model in the movement phase, in which evacuees select an exit and move toward it.

2. Fight-or-Flight Response and Hazard Effect

When the fire/smoke spread towards people, people normally desire moving faster to escape from danger (Proulx , 1993; Ozel, 2001; Kuligowski, 2009). Thus, we suggest that the desired velocity v^0 increase when people perceive such danger, and this means increase of arousal, resulting in fight-or-flight response in psychological theory (Cannon, 1932). If people decide to flee, the driving force is increased, and people are motivated to respond and move to the safety. This process suggests that people transfer their internal energy into kinetic form in order to realize desired motion. Such driving force increases with $v_i^0 - v_i$.

A widely-used formula of the driving force is given in linear form $f_i^{drv} = m_i(v_i^0 - v_i)/\tau$, and it describes an individual

tries to move with a desired velocity v_i^0 and expects to adapt the actual velocity v_i to the desired velocity v_i^0 within a certain time interval. In specific v_i^0 is the target velocity existing in one's opinion while v_i is the physical velocity being achieved in the reality. Thus, $v_i^0 - v_i$ implies the difference between the human subjective wish and realistic situation, and it is scaled by a time parameter τ_i to formulate an acceleration term, making the physical velocity v_i approaching towards desired velocity v_i^0 . If v_i^0 changes with time, v_i will approach to v_i^0 with a time delay. This mathematical description of driving force was initially used for vehicle traffic flow problem (Payne, 1971; Whitham, 1974), and it was also applied to pedestrian traffic problem in Helbing et. al., 2002 and 2005.

Interestingly, velocity is a time-related concept in physics and thus $v_i^0 - v_i$ reflects a kind of time-related stress. Such stress usually relates to a time-critical situation, or so-called “emergency.” This may explains why the model is suitable for simulation of emergency evacuation in the past twenty years. Consequently the driving force is a function of $v_i^0 - v_i$, which motivate people to move to a destination exit.

However, there is possibility that people may slow down when passing through a hazard-filled area (e.g., smoke-filled corridors), and this effect is described by a resistance force which increases with hazard intensity (e.g., smoke density). This hazard force describes how hazardous condition impedes people's motion.

Recall Equation (1), resistance from hazard is taken into account and denoted by f_{ih} . In the following discussion we usually take smoke for example and f_{ih} is supposed to be a function of smoke density. Other hazard characteristics can also be considered such as gas temperature. In a sense Equation (1) indicates that the hazard condition (e.g., smoke) is a kind of “spreading walls” that impede people's motion. The force from solid walls are expressed by f_{iw} while force from hazardous condition are denoted by f_{ih} . An individual is able to go through such “spreading walls” if the smoke is not thick. As smoke density increase, people are impeded and cannot get into that area (See Figure 2).

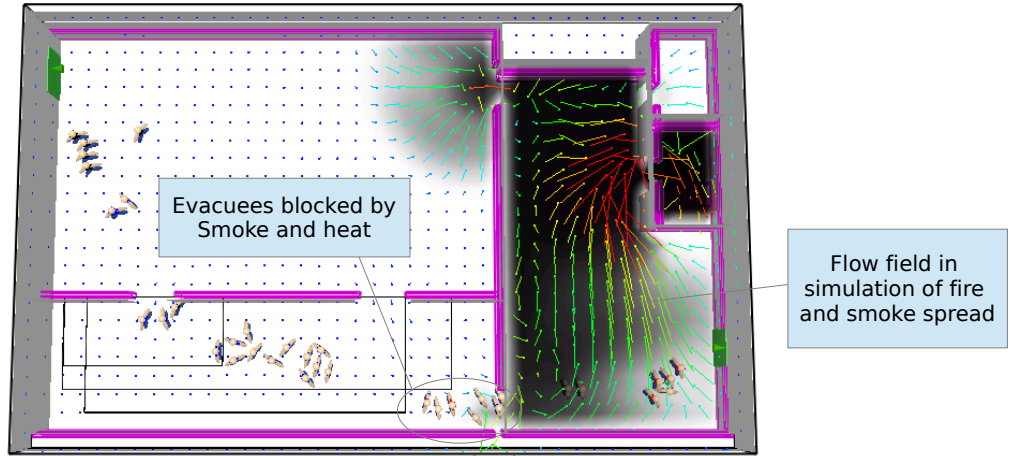


Figure 2. Simulation of Crowd Evacuation with Smoke: Smoke spreads and it is like “moving walls” which block evacuees' movement, and evacuees are not able to pass through such “moving walls” if the smoke is thick.

How to select the direction of f_{ih} is an interesting topic, and it mainly depends on characteristics of hazard. The physics law of smoke transport is not the same as that of heat transfer. A common method is assuming f_{ih} always impedes an evacuee's movement in any direction, and thus f_{ih} is always opposite to the direction of moving velocity v_i . In FDS+Evac we use $(-HR\%U, -HR\%V)$ as a major component of f_{ih} , especially for resistance of smoke. Another option is using gradient of hazard intensity. This gradient is useful to represent the direction of heat flux. The gradient points in the direction of the greatest increasing rate of hazard intensity. For example the hazard intensity is described by gas temperature $TMP_G(x, y)$ in a 2-dimensional plane at people's average height, and thus the direction of f_{ih} is opposite to the gradient of $TMP_G(x, y)$, which points in the direction of the greatest decreasing rate of hazard intensity.

$$\text{direction}(f_{ih}) = - \text{direction}(v_i) \quad \text{direction}(f_{ih}) = - \nabla TMP_G(x, y) \quad \nabla TMP_G(x, y) = \frac{\partial TMP_G}{\partial x} i + \frac{\partial TMP_G}{\partial y} j \quad (2)$$

In sum the driving force and hazard force are conflicting factors, and they function together to give a whole picture of the model. The driving force motivates people to escape, describing how people are motivated into escape motion. In contrast the hazard force is used to describe if the outside condition permits such change or not. The following plot exemplifies the increasing curve of the driving force and smoke resistance when the smoke density increases. When the smoke density increases initially, people are able to speed up in smokiness. As the smoke density keeps increasing, the resistance from smoke is predominant and people have to slow down. As real-world fire drills or experiments have suggested, such motion is mainly due to poor visibility on the path (Fridolf et. al., 2013; Was, 2018) or reduced percentage of oxygen.

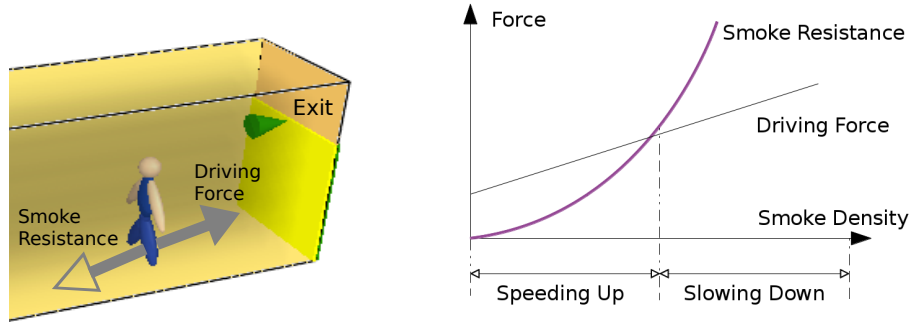


Figure 3. Walking Behavior in Smoke Condition: When the smoke density increases initially, the smoke is not thick so that people are able to speed up. As the smoke density keeps increasing, the resistance from smoke is predominant and people have to slow down even if they desire moving fast in escape.

In sum, whether people can move fast critically depends on hazard intensity. In thin smoke people are able to speed up while heavy smokiness impede their motion significantly. In other words, the hazard condition plays an important role. An example is that f_{ih} increases in a square form of smoke density while the driving force increases in a linear form of smoke density (See Figure 3).

$$|f^{drv}| = |m_i(v_i^0 - v_i)/\tau| + K_2 * SOOT_DENS \quad |f_{ih}| = K_1 * SOOT_DENS^2 \quad (3)$$

Here the formula of hazard force is selected mainly due to Stevens's power function on human perception of stimuli (Stevens, 1971), where $SOOT_DENS$ represents the physics measure of smoke density, and human perception of smoke is described by $K_1 * SOOT_DENS^2$. In a general sense $|f_{ih}|$ is denoted by high-order power function of $SOOT_DENS$ or other hazard intensity, and this formula tells that people become sensitive to hazard intensity if it exceeds a certain threshold. In contrast the driving force f^{drv} increases with $SOOT_DENS$ in a linear fashion. An alternative method is considering the linear component of $SOOT_DENS$ as a part of v_i^0 (See Appendix). As a result, v_i^0 is a function of smoke density, and the time-related stress also increases with $SOOT_DENS$ in a linear rate. Other mathematical description of f^{drv} will be explored in the future.

The difficulty of the above method exists in quantitative analysis. It is not easy to quantify how fast evacuees desire moving or how they perceive threat from smoke or heat. Especially, the hazard force is not commonly a physics-based force, but a subjective entity which is closely related to human perception and cognition. In other words this force does not only depends on the hazard intensity itself, but also how people perceive it. For example, some people are sensitive to smoke inhaled while others may tolerate much. This effect may be inferred from certain clinical database, and theory in psychophysics could contribute valuable viewpoint (Stevens, 1971), but still not easy to measure the effect into "force."

However, simulation is still a useful tool for risk analysis of building egress. It is relatively easy to adjust parameters and observe different scenarios. For instance, from the above simulation we learn how smoke affects people's escape behavior. There are standard examples of FDS+Evac to test walking speed of evacuees in smoke condition. Please refer to the section of supplementary data for details.

3. Adapting Desired Distance To Environmental Stressors: Proximics and Social Norms

In social psychology social norms are "representations of appropriate behavior" in a certain situation or environment, and it partly refers to a theory of how people use their personal space to interact with surrounding people. In Hall, 1963 the theory was named by proxemics, and it suggests that we surround ourselves with a "bubble" of personal space, which protects us from too much arousal and helps us keep comfortable when we interact with others. People normally feel stressed if such space is compressed. This theory justifies the repulsive social force in Helbing et. al., 2002 and 2005, where the force describes a potential field, and it reflects social repulsion of interacting individuals.

From the perspective of crowd modeling, the proxemics is represented by desired interpersonal distance d_{ij}^0 in our model, and $d_{ij}^0 - d_{ij}$ indicates a kind of space-related stress as shown in Table 1. Usually d_{ij}^0 changes with locations. For example, in elevators, entrance or narrow corridors, people usually accept smaller proximal distance, implying that desired interpersonal distance d_{ij}^0 is accepted to be small in these places. In sum adaption of d_{ij}^0 to different locations is a representation of social norms which are common rules in people's social life.

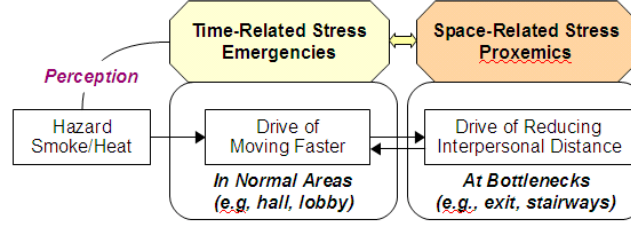


Figure 4. Two Types of Stress Transforming Mutually: The sense of emergencies creates a kind of time-related stress which drives people to move fast in escape. At bottlenecks (e.g., narrow doorways) people cannot speed up as desired, and thus time-related stress is transformed into space-related interpersonal stress in order to pass through the bottleneck quickly.

In emergencies the social norm is commonly adjusted and competitive behavior may emerge, and the model is thus applied to simulation of jamming and stampede at narrow passageways. Such narrowings are commonly identified as bottlenecks for crowd egress. Especially, the sense of emergency initially produces time-related stress that drive people to move fast. At bottlenecks such motion cannot be realized as desired, and the time-related stress is transferred to the space-related stress (See Figure 4). The desired interpersonal distance at bottlenecks is thus reduced, and people would like to “compress” their personal space in order to pass through the bottleneck quickly. This effect actually exhibits a kind of collective intelligence to increase transport efficiency at the bottleneck. The social norm is thus modified such that d_{ij}^0 is scaled down at bottlenecks. The parameter of A_i may also be scaled down so that the social force as a whole is reduced in such an occasion (Korhonen, 2017).

To testify the above effect we slightly modify the source program of FDS+Evac and the desired interpersonal distance is implemented. The social force is modified as below (Wang, 2016).

$$\mathbf{f}_{ij}^{soc} = A_i \exp\left[\frac{(d_{ij}^0 - d_{ij})}{B_i}\right] \mathbf{n}_{ij} \quad \text{or} \quad \mathbf{f}_{ij}^{soc} = \left(\lambda_i + (1 - \lambda_i) \frac{1 + \cos \phi_{ij}}{2}\right) A_i \exp\left[\frac{(d_{ij}^0 - d_{ij})}{B_i}\right] \mathbf{n}_{ij} \quad (4)$$

Here A_i and B_i are positive constants, which affect the strength and effective range about how two individuals are repulsive to each other. The distance of individual i and j is denoted by d_{ij} . \mathbf{n}_{ij} is the normalized vector which points from individual j to i . The gap of d_{ij}^0 and d_{ij} implies the difference between the subjective wish in one's mind and objective feature in the reality, and it is an indication of interpersonal stress related to the social space, and it fits well in the social force $\mathbf{f}_{ij}^{soc} = \mathbf{F}^{soc}(d_{ij}^0 - d_{ij})$ in a general sense.

The geometric features of two individuals are illustrated in Figure 5. Moreover, an anisotropic formula is widely used where Equation (3) is scaled by a function of λ_i . The angle ϕ_{ij} is the angle between \mathbf{v}_i and \mathbf{n}_{ji} . If $\lambda_i = 1$, the social force is isotropic and $0 < \lambda_i < 1$ implies that the force is larger in front of an individual than behind.

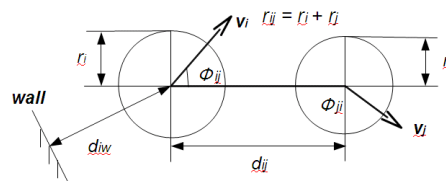


Figure 5. A Schematic View of Two Individual Evacuees (See Equation 3).

Below is the simulation result by using FDS+Evac, and the example is based on IMO door flow test (IMO, 2007), where the door width is $1m$, and it is also the door width used in Helbing et. al., 2002 and 2005. Let r_{ij} denote the sum of the radii of individual i and j , namely, $r_{ij} = r_i + r_j$. The left diagram corresponds to large d_{ij}^0 , where we specify $d_{ij}^0 = 3 \cdot r_{ij}$, while the middle diagram corresponds to relatively small d_{ij}^0 , where $d_{ij}^0 = 2 \cdot r_{ij}$ is used. The comparative results suggest that decreasing desired distance d_{ij}^0 moderately will increase the egress flow rate at the bottleneck. This result explains why people tend to reduce their interpersonal distance at the entrance or exit because such behavior increases the egress flow rate and thus reduce egress time.

By introducing desired distance d_{ij}^0 we suggest that two types of stressors could transform as shown in Figure 4. The emergencies creates a kind of time-pressure which motivates one to move fast. Such time-related stress is transformed to space-related stress at bottlenecks. In current version of FDS+Evac such transformation happens to be modeled by tuning parameter A_i , where $A_i = 2000 \max(0.5, |\mathbf{v}_i|/|\mathbf{v}_i^0|)$ is a function of $|\mathbf{v}_i|/|\mathbf{v}_i^0|$. This method reduces the strength of social force if $|\mathbf{v}_i| < |\mathbf{v}_i^0|$. As a result, people will get closer to each other if $|\mathbf{v}_i| < |\mathbf{v}_i^0|$, indicating that the time-related stress is transformed into a space-related issue. Here the ratio of actual speed and desired speed partly indicates time-related

stress, and it is analogous to the difference $v_i^0 - v_i$ in term of only speed, and the direction of velocity is ignored. In a similar manner we bring another formula by tuning d_{ij}^0 as below $d_{ij}^0 = d_{ij}^{0\text{-preset}} \max(0.2, |v_i|/|v_i^0|)$, where $d_{ij}^{0\text{-preset}}$ is the desired interpersonal distance in normal situation and 0.2 is the lower bound factor. As a result d_{ij}^0 is a function of $|v_i|/|v_i^0|$, and it decreases if $|v_i| < |v_i^0|$, implying that the time-related stress also impacts the desired distance d_{ij}^0 and the social force. As a result, the social force decreases at bottlenecks. However, the tradeoff of reducing d_{ij}^0 at bottlenecks is increase of possibility of physical interaction among people, which is the major cause of crowd disasters such as stampede.

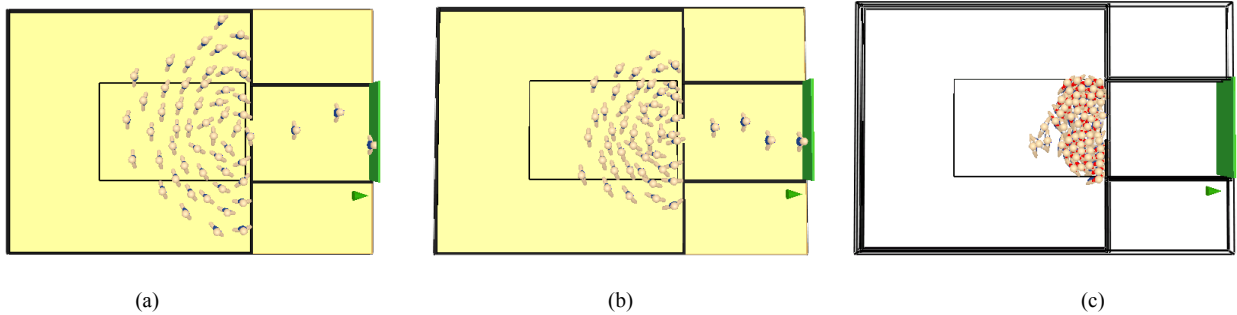


Figure 6 Social Force and Blocking Effect: (a) Use large d_{ij}^0 in normal situation such that people obey social norm of large interpersonal distance. The result is decrease of flow rate and less chance of physical interaction. (b) Use small d_{ij}^0 in emergency egress such that people follow the social norm of small interpersonal distance. Flow rate thus increases and physical interaction increase in a stochastic sense. (c) As d_{ij}^0 continues to decrease, the physical interaction causes someone to fall down, and the doorway is thus blocked by those falling-down people.

In fact scaling down d_{ij}^0 at bottleneck implies a sort of competitive behavior among people. In other words reducing d_{ij}^0 motivates people to reduce their physical distance d_{ij} , and this trend leads to high-density crowd, where the physical force might become effective and people may have more physical interaction. If physical force is intensified, someone may fall down. The falling-down people further impedes surrounding ones and slow down the egress flow significantly, and they may cause others to fall down again and stampede becomes a possible result. In sum the social force model with d_{ij}^0 is useful to study crowd behavior when jointly used with a falling-down model. As below FDS+Evac is used to simulate a falling-down event where evacuees fall down when the physical force exceeds a threshold (See Figure 5(c) and Figure 7).

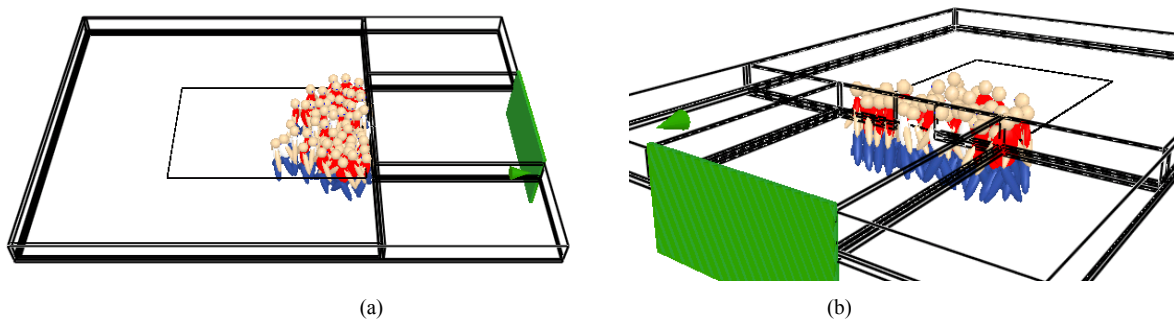


Figure 7. Crowd Escape at Bottleneck with Falling-Down Model: The white agents are falling down people who cannot move and are considered as obstacle to other agents. They fall down because the physical force exceeds a given threshold. The red agents are moving toward exit, and they have to get over the white ones to reach the door and the egress flow rate is thus significantly decreased.

In the above simulation d_{ij}^0 is manually changed to compare different scenarios. In fact d_{ij}^0 can be better adapted to a computational fluid model, where d_{ij}^0 is in inverse ratio of flow density. This setup requires a compressible fluid model where flow density varies with locations. At bottlenecks flow density increases and flow speed may increase also, and this effect corresponds to the phenomenon that people compress their interpersonal space so as to pass through the bottleneck quickly. Thus, a compressible fluid model is more suitable to automatically guide variation of d_{ij}^0 , and we have presented such a fluid dynamics in Wang and Luh, 2017. In a psychological sense such a flow field can be better understood as a kind of social field (Helbing et. al., 2005; Lewin, 1951), which is used to adapt interpersonal distance in emergency egress.

4. Adapting Desired Velocity To Environmental Stressors: Way-Finding Activities

Way finding refers to how people orientate themselves towards exits within a multi-compartment building, and there are two major stressors that influence their decision making in way-finding activities. A major stressor is the guidance information received such as exit signs or any information acquired from surrounding people or facilities. Usually such information has positive effect on crowd egress and helps to reduce the safe egress time. Another stressor is perception of hazard threat as discussed in previous sections. For example, if evacuees perceive smoke or heat on their ways to an exit, they probably will change their escape route or move to another exit.

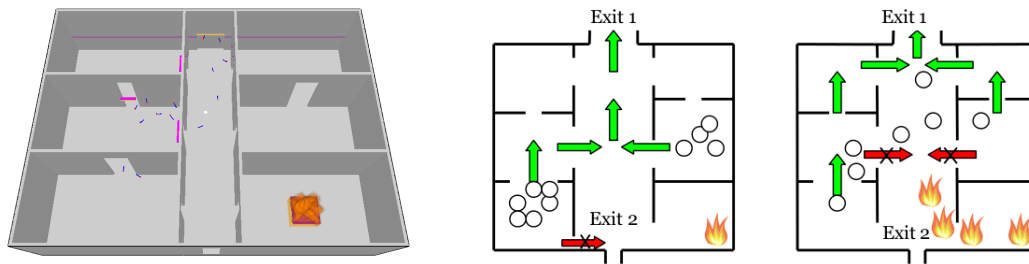


Figure 8. Way-Finding Activities and Exit-Selection Behavior: In this case the exit and route are dynamically updated in the time line of evacuation process, and the route is recalculated when the fire and smoke spread into the corridor area.

Mathematically, it is reasonable to use a probabilistic model to describe such way-finding activities by integrating all the information available for evacuees (Wang et. al., 2008, Zheng et. al., 2015). Take the above figure for example, and there are two choices, and each evacuee is assigned with probability $[p_1, p_2]$ to select either exit 1 or exit 2. The prior probability distribution $[p_1, p_2]$ is given as the normal usage of the exits in case of no emergency, and it can be given as $[0.5, 0.5]$ if we assume the two exits are equally used in normal life. In principle the prior indicates the historical usage frequency of different ways on daily basis and it reflects a kind of way-selection habit of people. For emergency egress the prior probability distribution carries the information that people are inclined to use the familiar exits rather than unfamiliar ones (Proulx, 1993). Fire drills or other training events may also be integrated in this prior.

In the simulation process the prior probability distribution of using multiple exits will be dynamically updated when new information received. In Figure 8, when the evacuees observe that the fire and smoke spread into the corridor, it will be reasonable to update the probability distribution, for example, to be $[0.9, 0.1]$ so that exit 1 is mainly used for safe egress. Consequently, it is feasible to build up a probabilistic graph model to link different factors in a statistical sense (Wang et. al., 2008). Also, if evacuees find an exit sign at any intersections, they will balance it with their own knowledge or habit, and choose to follow the sign or not. In sum the probabilistic model is useful to describe psychological findings on people's way-finding behavior, and the following graph illustrates a structure to describe people's way-finding behavior.

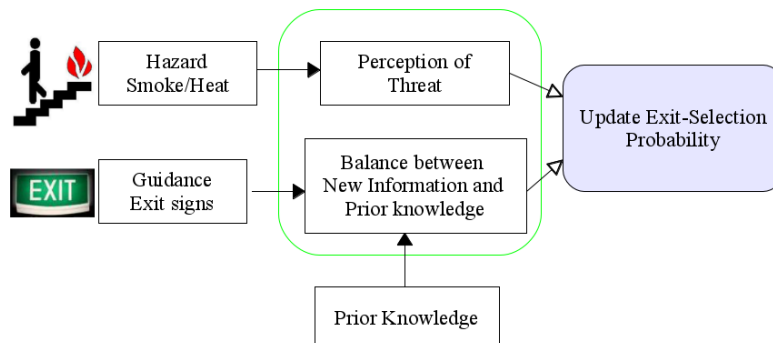


Figure 9. Probabilistic Graphic Model of Way-Finding Activities: The exit-selection probability integrates various information including people's prior knowledge on building structure and location of exits. The probability distribution is updated if new guidance received or smoke detected.

The way-finding activities mainly affect desired velocity v_i^0 in our model, and it is specified as shown in Figure 10. There are normally two steps involved: exit selection and route calculation.

The first step is to select an exit known by evacuees. This step is based on a probability model as mentioned above, integrating various information available for evacuees, including exit-selection habit as well as the guidance received and hazard perceived in emergency egress. In FDS+Evac all the exits are classified in two types: known exits and unknown exits. It is natural to assign each unknown exit with zero probability, which means that people never select an exit that they do not know. However, a known exit can also be assigned with zero probability, implying that people are told there is an exit, but they never use it previously. This case usually fits in any special passageway for fire egress or emergency use. Usually, people will not first select such an exit unless receive clear guidance to update the probability of using it. In FDS+Evac some agents are able to acquire new exits by exchanging information with others, and some agents directly follow surrounding people's target exit. Please refer to FDS+Evac manual for more details.

The second step is to generate the evacuation route based on the exit selected. There are a number of methods used in existing egress simulators. However, some algorithms were learned from route planning of autonomous robots, and they do not differentiate living bodies with conscious mind from non-living things like robots, and this is a major flaw. In FDS+Evac the route is calculated by a two-dimensional flow solver. The computation result is a 2D flow field that guides evacuees to the exit selected. As mentioned in Section 3, the flow field can be better explained as a social field related to social norms or other behavioral characteristics (Helbing et. al., 2005; Lewin, 1951), and we could interpret such a social field existing in human conscious mind. In this algorithm each exit is a sink point, and solver calculates the route as the crowd flow move to the sink (Korhonen, 2018; Korhonen and Hostikka, 2010; Korhonen et. al., 2008). The detailed discussion of the flow solver will not be included in this article, but we emphasize that this method is more suitable to describe human collective behavior on the background of social science and psychological theory.

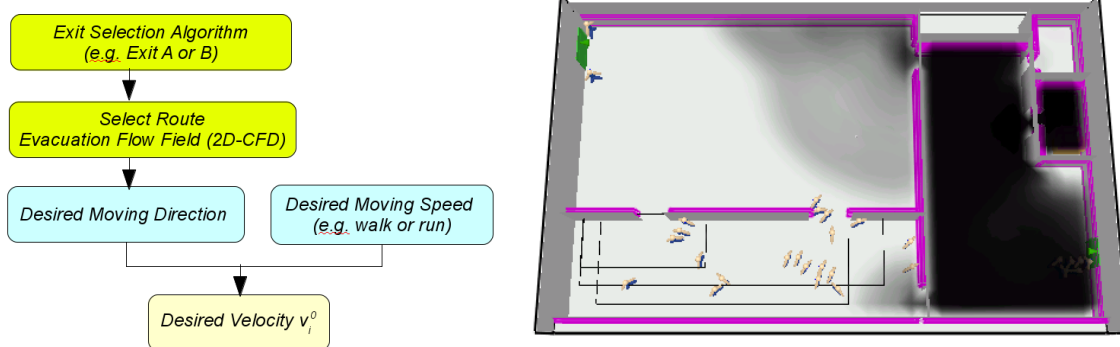


Figure 10. Simulation of Crowd Evacuation with Smoke: Evacuees change their destination exit and head for the left exit. Here the desired velocity of each agent is determined by exit-selection algorithm first and their escape routes are calculated by using a 2D-computational fluid solver in FDS+Evac.

When the target exit and route are both determined, evacuees start to move to the exit. In this process the exit and route may also be updated when new information received. For example smoke may block certain ways, and if such smoke is detected by evacuee agents, they may choose to update v_i^0 to bypass smoke or select another exit or route. In case of heavy smokiness agents may directly select another exit among all the known exits and recalculate the route. A simple logic is given as below.

If Hazard_Intensity > Threshold, target exit is reselected and egress routes is recalculated.

If evacuees choose to bypass the smoke-filled area, the hazard intensity may play a major role, which is abstracted as the hazard force as mentioned in Section 2, and it determines whether people are able to move fast in smokiness. Both of the driving force and smoke resistance are increased. If the driving force is larger than the resistance, evacuees will accelerate, otherwise people have to slow down (See Figure 3). This algorithm has been tested in FDS+Evac, and please refer to the appendix for more details.

CONCLUSION

The social-force model was a physic-based model, and it was essentially developed to model either many particles or pedestrian crowd. This article aims at renewing and reexplaining the model to establish a solid foundation of using this model in evacuation studies. We introduce new concepts such as desired interpersonal distance and hazard force. The model is thus extended in consistency of the stress theory in a psychological sense, essentially characterizing how two types of environmental stressors (i.e., guidance and perception of hazard) impact evacuees' behavior in the movement phase of emergency egress. Such behavior mainly includes walking behavior at bottlenecks and smoke-filled areas as well as way-finding activities. This simulation-based approach provides a useful tool to observe various scenarios in crowd egress, and thus helpful to identify potential risk in emergency evacuation.

APPENDIX

In the original setting of FDS+Evac an evacuation process is stimulated by using a pedestrian model extended from social-force model, where the psychological desire of motion is described by desired velocity v^0 . The desired velocity v^0 is next coupled with the fire/smoke condition: In a non-smoke area v^0 is equal to a preset value called the unimpeded walking speed, which is human walking speed in normal situation (e.g., 0.8m/s - 1.6m/s). If smoke density increases, v^0 will increase based on our argument in this article, i.e., $v_i^0(t) = v_i^{0\text{-preset}}(t) + K_3 * \text{SOOT_DENS}$. As a result, larger v^0 is specified for motion such that people desire moving faster in smoke areas. In contrast the hazard force is specified as below to impede their physical motion even if they desire moving faster.

HR%FX_Hazard and HR%FY_Hazard are the force elements added to HUMAN_TYPE. SMOKE_BLK_FAC is a damping coefficient which slows down agents' movement when agents walk in smoke condition. HEAT_GRAD_FAC is a parameter which tunes smoke resistance with respect to gradient of gas temperature TMP_G.

$$\text{HR\%FX_Hazard} = \frac{-\text{HEAT_GRAD_FAC} * (\text{HUMAN_GRID}(\text{II}, \text{JJ}) \% \text{TMP_G} - \text{HUMAN_GRID}(\text{II}-1, \text{JJ}) \% \text{TMP_G}) * \text{HUMAN_GRID}(\text{II}, \text{JJ}) \% \text{TMP_G}^{**2}}{\text{SMOKE_BLK_FAC} * \text{HR\%U} * \text{HUMAN_GRID}(\text{II}, \text{JJ}) \% \text{SOOT_DENS}^{**2} / \text{SQRT}(\text{HR\%U}^{**2} + \text{HR\%V}^{**2})}$$

$$\text{HR\%FY_Hazard} = \frac{-\text{HEAT_GRAD_FAC} * (\text{HUMAN_GRID}(\text{II}, \text{JJ}) \% \text{TMP_G} - \text{HUMAN_GRID}(\text{II}, \text{JJ}-1) \% \text{TMP_G}) * \text{HUMAN_GRID}(\text{II}, \text{JJ}) \% \text{TMP_G}^{**2}}{\text{SMOKE_BLK_FAC} * \text{HR\%V} * \text{HUMAN_GRID}(\text{II}, \text{JJ}) \% \text{SOOT_DENS}^{**2} / \text{SQRT}(\text{HR\%U}^{**2} + \text{HR\%V}^{**2})}$$

$$\text{HR\%FX_Hazard} = \min(\text{HR\%FX_Hazard}, \text{HR\%Mass} * 2.0_EB) \quad ! \text{ Give a lower bound of hazard force}$$

$$\text{HR\%FY_Hazard} = \min(\text{HR\%FY_Hazard}, \text{HR\%Mass} * 2.0_EB) \quad ! \text{ Give a lower bound of hazard force}$$

SUPPLEMENTARY DATA

The supplementary data to this article are available online at <https://github.com/godisreal/test-crowd-dynamics>. The output data of FDS+Evac is uploaded in the repository. If you have any comment or inquiry about the testing result, please feel free to contact me at wp2204@gmail.com or start an issue on the repository.

ACKNOWLEDGMENTS

The author is thankful to Peter Luh and Kerry Marsh for helpful comments on earlier work in University of Connecticut. The author appreciates the research program funded by NSF Grant # CMMI-1000495 (NSF Program Name: Building Emergency Evacuation - Innovative Modeling and Optimization).

REFERENCES

- [1] W. B. Cannon, *Wisdom of the Body*. United States: W.W. Norton & Company, 1932.
- [2] G. P. Forney, "Smokeview, A Tool for Visualizing Fire Dynamics Simulation Data, Volume I: User's Guide", NIST Special Publication 1017-1 6th Edition, National Institute of Standards and Technology, Gaithersburg, MA, 2017, 212 p.
- [3] K. Fridolf, E. Ronchi, D. Nilsson, H. Frantzich, Movement speed and exit choice in smoke-filled rail tunnels, *Fire Safety Journal*, Vol. 59, pp. 8-21, 2013.
- [4] E. T. Hall. "A System for the Notation of Proxemic Behavior," *American Anthropologist*. Vol. 65, No. 5, pp. 1003–1026, 1963.
- [5] D. Helbing, L. Buzna, A. Johansson, and T. Werner, "Self-organized pedestrian crowd dynamics: Experiments, simulations, and design solutions." *Transportation Science*, 39(1): 1-24, 2005.
- [6] D. Helbing, I. Farkas, P. Molnar, T. Vicsek, "Simulation of pedestrian crowds in normal and evacuation situations," in: Schreckenberg, M., Sharma, S.D. (Eds.), *Pedestrian and Evacuation Dynamics*, pp. 21–58. 2002.
- [7] S. Hostikka, T. Korhonen, T. Paloposki, T. Rinne, S. Heliovaara and K. Matikainen, "Development and Validation of FDS+Evac for Evacuation Simulations, Project Summary Report." VTT Research Notes 2421, VTT Technical Research Centre of Finland, 2007, 64 p..
- [8] IMO, "Guidelines for Evacuation Analyses for New and Existing Passenger Ships", MSC/Circ.1238, International Maritime Organization, London, UK, 30 October 2007.
- [9] T. Korhonen, "Technical Reference and User's Guide for Fire Dynamics Simulator with Evacuation," (FDS+Evac, FDS 6.5.3, Evac 2.5.2), VTT Technical Research Center of Finland, 2018.
- [10] T. Korhonen, S. Hostikka, "Technical Reference and User's Guide for Fire Dynamics Simulator with Evacuation," (FDS+Evac, FDS 5.5.0, Evac 2.2.1), VTT Technical Research Center of Finland, 2010.
- [11] T. Korhonen, S. Hostikka, S. Heliovaara, H. Ehtamo, "FDS+Evac: Modelling Social Interactions in Fire Evacuation," *Proceedings of the 4th International Conference on Pedestrian and Evacuation Dynamics*, February 27-29m 2008, Wuppertal, Germany.
- [12] K. Lewin, *Field Theory in Social Science*, New York, Harper, 1951.
- [13] K. McGrattan, S. Hostikka, R. McDermott, J. Floyd, C. Weinschenk and K. Overholt, "Fire Dynamics Simulator, User's Guide", NIST Special Publication 1019 6th Ed., National Institute of Standards and Technology, Gaithersburg, MA, 2018, 367 p.
- [14] F. Ozel, "Time Pressure and Stress as a Factor During Emergency Egress," *Safety Science*, Vol. 38, pp. 95-107, 2001.
- [15] H. J. Payne, Models of freeway traffic and control, in *Mathematical Models of Public Systems*, Vol. 1 of Simulation Councils Proc. Ser., pp. 51-60, 1971.
- [16] G. Proulx, "A Stress Model for People Facing a Fire," *Journal of Environmental Psychology*, Vol. 13, No. 2, pp. 137-147, 1993.
- [17] E. D. Kuligowski, "The Process of Human Behavior in Fires," National Institute of Standards and Technology Technical Note 1632, 2009.
- [18] H. Selye. "Confusion and controversy in the stress field". *Journal of Human Stress*. Vol. 1, No. 2, pp. 37–44, 1975.
- [19] M. A. Staal, "Stress, Cognition, and Human Performance: A Literature Review and Conceptual Framework (NASA/TM – 204-212824)," August 2004, Hanover, MD: NASA Scientific and Technical Information Program Office.
- [20] S. S. Stevens, Issues in psychophysical measurement. *Psychological Review*. Vol. 78, pp. 426-450, 1971.
- [21] P. Wang, "Understanding Social Force Model in Psychological Principle of Collective Behavior," [arXiv:1605.05146v10](https://arxiv.org/abs/1605.05146v10), Master Thesis, 2016.
- [22] P. Wang, P. B. Luh, "Fluid-Based Analysis of Pedestrian Crowd at Bottlenecks," Technical Report, 2017.
- [23] P. Wang, P. B. Luh, S. C. Chang and J. Sun, "Modeling and Optimization of Crowd Guidance for Building Emergency Evacuation," *Proceedings of the 2008 IEEE International Conference on Automation Science and Engineering (CASE 2008)*, Washington, D.C., pp. 328 – 334, August 2008.
- [24] J. Wąs, J. Porzycki1, N. Schmidt-Polończyk2, Grouping behaviour and decision making in road tunnels on evacuation in smoke conditions, Experimental approach *Proceedings from the 9th International Conference on Pedestrian and Evacuation Dynamics (PED2018)*, Lund, Sweden – August 21-23, 2018.
- [25] G. B. Whitham, *Linear and nonlinear waves*, John Wiley and Sons, New York, 1974.
- [26] X. Zheng, H. Li, L. Meng, X. Xu, C. Xu, "Improved social force model based on exit selection for microscopic pedestrian simulation in subway station," *Journal of Central South University*, Vol. 22, 2015.