

Resilient distributed resource allocation algorithm under false data injection attacks

Xin Cai, Xinyuan Nan, Binpeng Gao

Abstract—A resilient distributed algorithm is proposed to solve the distributed resource allocation problem of a first-order nonlinear multi-agent system who is subject to false data injection (FDI) attacks. An intelligent attacker injects false data into agents' actuators and sensors such that agents execute the algorithm according to the compromised control inputs and interactive information. The goal of the attacker is to make the multi-agent system to be unstable and to cause the deviance of agents' decisions from the optimal resource allocation. At first, we analyze the robustness of a distributed resource allocation algorithm under FDI attacks. Then, the unknown nonlinear term and the false data injected in agents are considered as extended states which can be estimated by extended state observers. The estimation was used in the feedback control to suppress the effect of the FDI attacks. A resilient distributed resource allocation algorithm based on the extended state observer is proposed to ensure that it can converge to the optimal allocation without requiring any information about the nature of the attacker. An example is given to illustrate the results.

Index Terms—distributed algorithm, nonlinear dynamics, false data injection attack, resource allocation, resilient algorithm.

I. INTRODUCTION

As a special distributed constrained optimization problem, distributed resource allocation problem has attracted a lot of researchers' attention in various engineering applications, such as the economic dispatch in power systems [1]–[3], the congestion control in data or traffic networks [4], [5], and the power optimization in sensor networks [6], [7]. During the past decade, many continuous-time distributed algorithms have been designed for agents to obtain the optimal allocation only by local information.

Generally speaking, the computation and the communication have been two important components in the distributed optimization algorithms for solving the resource allocation problem. In recent years, the results of asymptotic and exponential convergence of distributed resource allocation algorithms have been obtained for agents communicating on undirected graphs [1], [8]. And the related results were also extended to weight-balanced directed graphs (digraphs) [9]–[11]. Furthermore, a distributed algorithm was designed for agents communicating on weight-unbalanced digraphs [10]. In addition to the asymptotic and exponential convergence results, recent work

dealt with finite-time and predefined-time convergence of distributed algorithms [12]. To cope with the more general cases, such as nonsmooth cost functions and heterogeneous local constraints, distributed optimization algorithms combined with differential inclusions and projection dynamics were proposed in [13]. Additionally, a robust distributed resource allocation algorithm was designed to deal with the case of uncertain allocation parameters [14]. Considering the problem with unknown cost functions, distributed algorithms based on the extremum seeking control were designed in [3], [15]. The communication delays, which may exist in networks, were also considered in the implementation of distributed algorithms [16]. To reduce the communication load, a distributed event-triggered algorithm was proposed in [17]. Recently, time-varying graphs incurred by persistent cyber attacks were considered in the resource allocation problem [18]. The abovementioned literatures focus on the problem with a fixed optimal allocation. Wang *et al.* studied the problem with time-varying cost functions and designed distributed algorithms based on the prediction-correction method and nonsmooth consensus idea to converge to the time-varying optimal allocation [18], [19]. In addition, Deng *et al.* studied the problem with the double-integrator and the multi-integrator agents and designed distributed algorithms based on the state feedback [13], [17], [20], [21]. From the above observation, there is still much to be studied in the problem of distributed resource allocation, such as packet loss and cyber attacks in communication networks, and agents with nonlinear or more complex dynamics.

Note that most of the existing algorithms were designed under the setup of reliable communication networks. However, there may exist attackers who are latent in cyber systems to transmit false information in the network to destroy the control target of the multi-agent system. This type of cyber attacks is called false data injection (FDI) attacks. Besides, the denial of service (DoS) attacks, as another type of cyber attacks, also have attracted much attention in the field of cyber-physical systems. Recently, the stability of a distributed resource allocation algorithm under DoS attacks was explored by the method of switched algorithm modeled as a hybrid system [22]. To the best of our knowledge, there is little work on the robustness of distributed resource allocation algorithms under FDI attacks. Here, we consider that an intelligent attacker lurks in a multi-agent system who aims to execute the designed algorithm to obtain the optimal allocation. The attacker injects false data into agents' actuators and sensors to manipulate the data in control inputs and the information

This work was supported by the National Natural Science Foundation of China (NSFC, Grant No. 52065064) and by the Natural Science Foundation of Xinjiang Province (Grant No. 2019D01C079). (Corresponding author: Xin Cai.)

X. Cai, X. Nan and B. Gao are with the School of Electrical Engineering, Xinjiang University, Urumqi 830047, China (emails: xincai@xju.edu.cn; xynan@xju.edu.cn; gbp_xd@sina.com).

obtained from communication networks. His purpose is to make the important data of physical systems wrong such that agents fail to obtain the optimal resource allocation. It is obvious that the attacker can easily succeed if no protective measurements are taken. To prevent the attacker to destroy the performance of the distributed algorithm, a resilient distributed resource allocation algorithm is designed based on the extended state observers. In summary, the main contributions of this paper are given below.

1) A distributed resource allocation problem under FDI attacks is formulated in this paper. The FDI attacks incur the failure of the distributed resource allocation algorithm by injecting false data into agents' actuators and sensors. Moreover, the attacks considered here are not detected and removed by identification.

2) The robustness of the distributed resource allocation algorithm for a multi-agent system with first-order nonlinear dynamics under FDI attacks is analyzed. The convergent condition is given to ensure that agents' decisions can be steered to a neighborhood of the optimal allocation only if agents suffer from weak FDI attacks.

3) A resilient distributed resource allocation algorithm is proposed for agents to obtain the optimal allocation under FDI attacks. We consider the nonlinear term in agents' dynamics and false data injected in the actuators and sensors as extended states. Extended state observers are used to restrain the influence of FDI attacks on the designed algorithm. Moreover, the designed resilient algorithm can deal with both FDI attacks and nonlinear (or uncertainties) existing in agents' dynamics.

The rest of this paper is organized as follows. In Section II, the problem formulation is given. In Section III, the robustness of a continuous-time distributed resource allocation algorithm is analyzed. A resilient distributed algorithm is designed in Section IV. A simulation example is provided in Section V. Finally, some conclusions and future topics are stated in Section VI.

Notations: \mathbb{R} and $\mathbb{R}_{\geq 0}$ denote the set of real and non-negative real numbers, respectively. \mathbb{R}^n is the n -dimensional real vector space. $\mathbb{R}^{n \times m}$ denotes the set of $n \times m$ real matrices. Given a vector $x \in \mathbb{R}^n$, $\|x\|$ is the Euclidean norm. A^T and $\|A\|$ are the transpose and the spectral norm of matrix $A \in \mathbb{R}^{n \times n}$, respectively. For matrices A and B , $A \otimes B$ denotes their Kronecker product. Let $\text{col}(x_1, \dots, x_n) = [x_1^T, \dots, x_n^T]^T$. Given matrices A_1, \dots, A_n , $\text{blk}\{A_1, \dots, A_n\}$ denotes the block diagonal matrix with A_i on the diagonal. 1_n and 0_n are n -dimensional column vectors with all elements being ones and zeros, respectively. I_n denotes an $n \times n$ identity matrix.

II. PROBLEM FORMULATION

In this section, the basic problem of distributed resource allocation, a distributed resource allocation algorithm under reliable communication network, the model of FDI attacks and the algorithm under FDI attacks are given.

A. Resource Allocation Problem

A network of agents indexed in the set $\mathcal{I} = \{1, \dots, N\}$ cooperates with each other to obtain an optimal allocation

of the limited network resource, which can be formulated as following problem (1).

$$\begin{aligned} \min f(X) &= \sum_{i=1}^N f_i(x_i) \\ \text{s.t. } \sum_{i=1}^N x_i &= \sum_{i=1}^N d_i. \end{aligned} \quad (1)$$

In (1), $x_i \in \mathbb{R}^n$, $f_i(x_i) : \mathbb{R}^n \rightarrow \mathbb{R}$, and $d_i \in \mathbb{R}^n$ are the decision variable, cost function and accessible resource data of agent i , respectively. $X = \text{col}(x_1, \dots, x_N)$ is the resource allocation vector of the whole network. Distributed resource allocation problem is that agents in the network cooperatively find an optimal allocation according to their local information including costs, resource data and shared information with neighbors.

In the following, some basic assumptions are given and they are widely used in [1], [8], [10], [20], [21].

Assumption 1. For each $i \in \mathcal{I}$, $f_i(x_i)$ is a continuously differential and strongly convex function with l -Lipschitz continuous gradient.

Assumption 2. There exists a finite optimal allocation X^* for problem (1).

B. Agent's Dynamics

We consider that each agent in the network has inherent dynamics, which are modeled by the following first-order nonlinear system

$$\dot{x}_i = g(x_i) + u_i, \quad i \in \mathcal{I}. \quad (2)$$

In (2), $x_i \in \mathbb{R}^n$ and $u_i \in \mathbb{R}^n$ are the decision and control input of agent i , respectively. $g_i(x_i) : \mathbb{R}^n \rightarrow \mathbb{R}^n$ is a nonlinear function. The explicit expression of g_i may be unknown. For agent i , its control input is designed to steer its decision x_i to reach the optimal allocation x_i^* belonging to X^* .

To realize a distributed setting, each agent needs to share some information with its neighbors on a fixed undirected and connected graph, which is denoted by $\mathcal{G} = (\mathcal{I}, \mathcal{E})$. \mathcal{I} is the set of nodes corresponding to agents in the multi-agent system and \mathcal{E} is the set of edges corresponding to communication links between neighboring agents. The Laplacian matrix of graph \mathcal{G} is denoted by $L = [l_{ij}] \in \mathbb{R}^{N \times N}$, where $l_{ii} = \sum_{j=1}^N a_{ij}$ and $l_{ij} = -a_{ij}$, $i \neq j$ with the weight a_{ij} on edge $(i, j) \in \mathcal{E}$. The eigenvalues of L can be denoted by $0 = \rho_1 < \rho_2 \leq \dots \leq \rho_N$. For agent i , the set composed by its neighbors is denoted by \mathcal{N}_i . The property of L is that $1_N^T L = L 1_N = 0_N$ [23].

C. Distributed Resource Allocation Algorithm

For agent i with the known nonlinear term $g_i(x_i)$, the control input u_i in (2) is designed to steer its strategy x_i to the optimal allocation. Thus,

$$u_i = -g(x_i) - \nabla f_i(x_i) - \lambda_i, \quad \forall i \in \mathcal{I}, \quad (3)$$

where $\nabla f_i(x_i)$ is the gradient of f_i with respect to x_i , and $\lambda_i \in \mathbb{R}^n$ is the estimation of the Lagrange multiplier associated

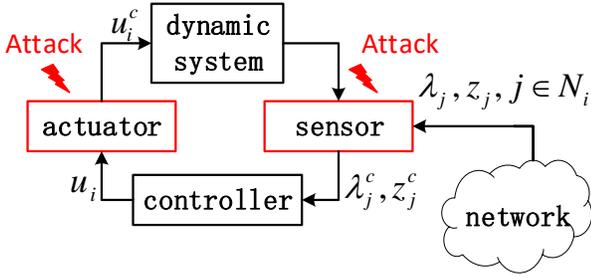


Fig. 1. False data injection attacks on agent $i \in \mathcal{I}$ in a multi-agent system

with equality constraint $\sum_{j=1}^N x_j = \sum_{j=1}^N d_j$. In (3), λ_i is regulated by the following dynamics,

$$\begin{aligned} \dot{\lambda}_i &= -\sum_{j=1}^N a_{ij}(\lambda_i - \lambda_j) - \sum_{j=1}^N a_{ij}(z_i - z_j) + x_i - d_i, \\ \dot{z}_i &= \sum_{i=1}^N a_{ij}(\lambda_i - \lambda_j), \end{aligned} \quad (4)$$

where $z_i \in \mathbb{R}^n$ is the auxiliary state that facilitate λ_i to reach consensus.

D. Attack Model

In this paper, an intelligent attacker injects false data into agents' actuators and sensors to prevent the multi-agent systems to find the optimal allocation of problem (1). As shown in Fig. 1, for agent i , the compromised input $u_i^c(t)$ received by the actuator can be modeled by

$$u_i^c(t) = u_i(t) + u_i^a(t), \quad (5)$$

where $u_i(t)$ is the uncompromised control input given in (3), $u_i^a(t)$ is the unknown attack signal. The information sensed from neighboring agent j ($j \in \mathcal{N}_i$) can be modeled by

$$\lambda_j^c(t) = \lambda_j(t) + \lambda_j^a(t), \quad (6)$$

$$z_j^c(t) = z_j(t) + z_j^a(t), \quad (7)$$

where $\lambda_j(t)$ and $z_j(t)$ are the uncompromised information transmitted to agent i , $\lambda_j^a(t)$ and $z_j^a(t)$ are unknown attacks on the sensor of agent i , and $\lambda_j^c(t)$ and $z_j^c(t)$ are the compromised information sensed by agent i .

E. Distributed Resource Allocation Algorithm under FDI Attacks

For agent i under FDI attacks modeled by (5)-(7), the compromised distributed resource allocation algorithm is given by

$$\begin{aligned} \dot{x}_i &= u_i^c, \\ \dot{\lambda}_i &= -\sum_{j=1}^N a_{ij}(\lambda_i^c - \lambda_j^c) - \sum_{j=1}^N a_{ij}(z_i^c - z_j^c) + x_i - d_i, \\ \dot{z}_i &= \sum_{i=1}^N a_{ij}(\lambda_i^c - \lambda_j^c). \end{aligned} \quad (8)$$

Sometime t is omitted for simplicity. In the following development, for notational convenience, let $\kappa_{i1} = u_i^a$, $\kappa_{i2} = -\sum_{j=1}^N a_{ij}(\lambda_i^a - \lambda_j^a) - \sum_{j=1}^N a_{ij}(z_i^a - z_j^a)$, and $\kappa_{i3} = \sum_{j=1}^N a_{ij}(\lambda_i^a - \lambda_j^a)$. The distributed resource allocation algorithm under FDI attacks can be rewritten as follows.

$$\begin{aligned} \dot{x}_i &= -\nabla f_i(x_i) - \lambda_i + \kappa_{i1}, \\ \dot{\lambda}_i &= -\sum_{j=1}^N a_{ij}(\lambda_i - \lambda_j) - \sum_{j=1}^N a_{ij}(z_i - z_j) + x_i - d_i + \kappa_{i2}, \\ \dot{z}_i &= \sum_{i=1}^N a_{ij}(\lambda_i - \lambda_j) + \kappa_{i3}. \end{aligned} \quad (9)$$

Here, we only consider that the attacker has limited power. So, the boundedness of FDI attacks is assumed below.

Assumption 3. The FDI attacks $u_i^a(t)$, $\lambda_i^a(t)$, and $z_i^a(t)$ are bounded for all $i \in \mathcal{I}$. And $\dot{u}_i^a(t)$, $\dot{\lambda}_i^a(t)$, and $\dot{z}_i^a(t)$ are also bounded.

Remark 1. The boundedness of attacks indicates not only the stealthy property but also limited ability to falsify data. To the best of our knowledge, the FDI attacks satisfying Assumption 3 include uniformly bounded attacks [24]–[26], attacks generated by exogenous systems [27]–[30], state-dependent attacks [24], [25], [31], [32], and so on.

III. ROBUSTNESS OF DISTRIBUTED RESOURCE ALLOCATION ALGORITHM

In this section, the convergence of distributed resource allocation algorithm (2)-(4) is given. Then, the robustness of distributed algorithm (2)-(4) against FDI attacks is analyzed.

A. Convergence

Here, we consider that the communication network is secure and reliable. The convergence of distributed algorithm (2)-(4) is analyzed by studying the stability of the closed-loop system which is given by

$$\begin{aligned} \dot{x}_i &= -\nabla f_i(x_i) - \lambda_i, \\ \dot{\lambda}_i &= -\sum_{j=1}^N a_{ij}(\lambda_i - \lambda_j) - \sum_{j=1}^N a_{ij}(z_i - z_j) + x_i - d_i, \\ \dot{z}_i &= \sum_{i=1}^N a_{ij}(\lambda_i - \lambda_j). \end{aligned} \quad (10)$$

System (10) is similar to the differentiated projected algorithm without considering the local convex constraints proposed in [1]. The relationship between the optimal allocation and the equilibrium of dynamic system (10) is given in the following Lemma 1. Let $X = \text{col}(x_1, \dots, x_N)$, $\Lambda = \text{col}(\lambda_1, \dots, \lambda_N)$, $Z = \text{col}(z_1, \dots, z_N)$, and $d = \text{col}(d_1, \dots, d_N)$. The overall system composed of N agents with algorithm (10) is described by

$$\begin{aligned} \dot{X} &= -F(X) - \Lambda, \\ \dot{\Lambda} &= -(L \otimes I_n)\Lambda - (L \otimes I_n)Z + X - d, \\ \dot{Z} &= (L \otimes I_n)\Lambda. \end{aligned} \quad (11)$$

Lemma 1. *Under Assumptions 1-2, X^* is the optimal allocation of problem (1) if and only if there exist $1_N \otimes \lambda^*$ and Z^* such that $(X^*, 1_N \otimes \lambda^*, Z^*)$ is the equilibrium point of system (11).*

Proof: If (X^*, Λ^*, Z^*) with $\Lambda^* = 1_N \otimes \lambda^*$ is the equilibrium point of system (11), we have that

$$0_{Nn} = -F(X^*) - \Lambda^*, \quad (12a)$$

$$0_{Nn} = -(L \otimes I_n)\Lambda^* - (L \otimes I_n)Z^* + X^* - d, \quad (12b)$$

$$0_{Nn} = (L \otimes I_n)\Lambda^*. \quad (12c)$$

For an undirected and connected graph \mathcal{G} , it follows from (12c) that $\lambda_i^* = \lambda_j^* = \lambda^*$. Left-multiplying (12b) by $(1_N^T \otimes I_n)$, we have that

$$\sum_{i=1}^N x_i^* - \sum_{i=1}^N d_i = 0_n. \quad (13)$$

Furthermore, it follows from (12a) that

$$\nabla f_i(x_i^*) = \nabla f_j(x_j^*) = -\lambda^*, \quad \forall i, j \in \mathcal{I}. \quad (14)$$

Under Assumptions 1-2, resource allocation problem (1) has a unique primal-dual solution (x_i^*, λ^*) satisfying the following KKT conditions [33].

$$\nabla f_i(x_i^*) + \lambda^* = 0, \quad (15)$$

and

$$\sum_{j=1}^N x_j^* - \sum_{j=1}^N d_j = 0. \quad (16)$$

It follows from (13),(14),(15), and (16) that the equilibrium point of system (11) is the optimal allocation of problem (1), and vice versa. ■

The following lemma gives the result of the convergence of algorithm (10), which has been analyzed in [1]. We omit the proof of Lemma 2 for the limited space.

Lemma 2 ([1, Theorem 4.3]). *Suppose that Assumptions 1-2 hold. The distributed resource allocation algorithm (10) can exponentially converge to the optimal allocation X^* of problem (1).*

B. Robustness

Next, the robustness of distributed algorithm (10) under FDI attacks is given in the following Theorem 1.

Theorem 1. *Suppose that Assumptions 1-3 hold. The distributed resource allocation algorithm (10) under FDI attacks can converge to a neighborhood of the optimal allocation X^* of problem (1). The size of the neighborhood depends on the upper bound of the FDI attacks.*

Proof: Distributed algorithm (10) under FDI attacks can be described by (9). The robustness of (10) against the attacks is analyzed by studying the convergence of (9). Denote $\tilde{X} = X - X^*$, $\tilde{\Lambda} = \Lambda - \Lambda^*$, $\tilde{Z} = Z - Z^*$, $\kappa_1 = \text{col}(\kappa_{11}, \dots, \kappa_{N1})$,

$\kappa_2 = \text{col}(\kappa_{12}, \dots, \kappa_{N2})$, and $\kappa_3 = \text{col}(\kappa_{13}, \dots, \kappa_{N3})$. The error system is

$$\begin{aligned} \dot{\tilde{X}} &= -(F(X) - F(X^*)) - \tilde{\Lambda} + \kappa_1, \\ \dot{\tilde{\Lambda}} &= -(L \otimes I_N)\tilde{\Lambda} - (L \otimes I_N)\tilde{Z} + \tilde{X} + \kappa_2, \\ \dot{\tilde{Z}} &= (L \otimes I_N)\tilde{\Lambda} + \kappa_3. \end{aligned} \quad (17)$$

Let $\Theta = \text{col}(\tilde{X}, \tilde{\Lambda}, \tilde{Z})$, $\nu(t) = \text{col}(\kappa_1, \kappa_2, \kappa_3)$, and

$$\Gamma(\Theta) = \begin{bmatrix} -(F(X) - F(X^*)) - \tilde{\Lambda} \\ -(L \otimes I_N)\tilde{\Lambda} - (L \otimes I_N)\tilde{Z} + \tilde{X} \\ (L \otimes I_N)\tilde{\Lambda} \end{bmatrix}.$$

Then, system (17) can be rewritten as

$$\dot{\Theta} = \Gamma(\Theta) + \nu(t), \quad (18)$$

which is a perturbed system with the nonvanishing perturbation $\nu(t)$. It follows from Lemma 2 that $\Theta^* = 0_{3Nn}$ is an exponentially stable equilibrium point of the nominal system $\dot{\Theta} = \Gamma(\Theta)$. By the converse Lyapunov Theorem in [34, Theorem 4.14], there is a continuous differential function $V : \mathbb{R}^{3Nn} \rightarrow \mathbb{R}$ that satisfies the inequalities

$$\begin{aligned} c_1 \|\Theta\|^2 &\leq V \leq c_2 \|\Theta\|^2, \\ \frac{\partial V}{\partial \Theta} \Gamma(\Theta) &\leq -c_3 \|\Theta\|^2, \\ \left\| \frac{\partial V}{\partial \Theta} \right\| &\leq c_4 \|\Theta\| \end{aligned}$$

for some positive constants c_1 , c_2 , c_3 , and c_4 . Then, the derivative of V along the trajectories of perturbed system (18) satisfies

$$\begin{aligned} \dot{V} &\leq -c_3 \|\Theta\|^2 + \left\| \frac{\partial V}{\partial \Theta} \right\| \|\nu(t)\|, \\ &\leq -c_3 \|\Theta\|^2 + c_4 D \|\Theta\| \\ &\leq (1 - \epsilon) \|\Theta\|^2, \quad \forall \|\Theta\| \geq c_4 D / \epsilon c_3, \end{aligned}$$

where $0 < \epsilon < 1$, the second inequality comes from the boundedness of the FDI attacks, that is, $\|\nu(t)\| \leq D$ for some $D > 0$. It further yields that $\lim_{t \rightarrow \infty} \|\Theta(t)\| < \sqrt{\frac{c_2 c_4 D}{c_1 c_3 \epsilon}}$. It indicates that the distributed algorithm (3) in the case of the communication network in the presence of FDI attacks converges to a neighborhood of the optimal allocation X^* of problem (1). The size of the neighborhood depends on the upper bound of FDI attacks. ■

Remark 2. *The convergence of distributed algorithm (10) under the FDI attacks is guaranteed only if the upper bound of the FDI attacks is within an appropriate range. It is easily seen that the strength of FDI attacks may be too large to destroy the stability of system (9). That is, the distributed algorithm (10) can not converge to the optimal allocation if the FDI attacks are strong (see Figs. 2-3 in Section V).*

IV. RESILIENT DISTRIBUTED RESOURCE ALLOCATION ALGORITHM

In this section, the nonlinear term $g_i(x_i)$ is assumed to be unknown in dynamics (2) for each agent $i \in \mathcal{I}$. Assume that

dg_i/dt exists and is bounded. An extended state observer is designed for agent i to estimate the nonlinear term $g_i(x_i)$ and the influence of FDI attacks according to the measurements of x_i , λ_i , and z_i .

Let $\gamma_i = \text{col}(x_i, \lambda_i, z_i)$ and $\kappa_i = \text{col}(\kappa_{i1} + g_i, \kappa_{i2}, \kappa_{i3})$. The estimations of γ_i and κ_i are obtained by the following observer.

$$\begin{aligned}\dot{\hat{\gamma}}_i &= \hat{\kappa}_i + u_{i0} + a_1 h_1(\gamma_i - \hat{\gamma}_i), \\ \dot{\hat{\kappa}}_i &= a_2 h_2(\gamma_i - \hat{\gamma}_i),\end{aligned}\quad (19)$$

where $\hat{\gamma}_i = \text{col}(\hat{x}_i, \hat{\lambda}_i, \hat{z}_i)$, $\hat{\kappa}_i = \text{col}(\hat{\kappa}_{i1} + \hat{g}_i, \hat{\kappa}_{i2}, \hat{\kappa}_{i3})$, \hat{g}_i is the estimation of g_i , $a_1, a_2 > 0$, h_1 and h_2 are linear or nonlinear functions to be designed, and

$$u_{i0} = \begin{bmatrix} -\nabla f_i(x_i) - \lambda_i - \hat{\kappa}_{i1} - \hat{g}_i \\ -\sum_{j=1}^N a_{ij}(\lambda_i - \lambda_j) - \sum_{j=1}^N a_{ij}(z_i - z_j) + x_i - d_i - \hat{\kappa}_{i2} \\ \sum_{j=1}^N a_{ij}(\lambda_i - \lambda_j) - \hat{\kappa}_{i3} \end{bmatrix}.$$

The resilient distributed resource allocation algorithm is designed by

$$\begin{aligned}\dot{x}_i &= g_i(x_i) - \nabla f_i(x_i) - \lambda_i + \kappa_{i1} - \hat{\kappa}_{i1} - \hat{g}_i(x_i), \\ \dot{\lambda}_i &= -\sum_{j=1}^N a_{ij}(\lambda_i - \lambda_j) - \sum_{j=1}^N a_{ij}(z_i - z_j) + x_i - d_i + \kappa_{i2} - \hat{\kappa}_{i2}, \\ \dot{z}_i &= \sum_{j=1}^N a_{ij}(\lambda_i - \lambda_j) + \kappa_{i3} - \hat{\kappa}_{i3}.\end{aligned}\quad (20)$$

A. Linear ESO Based Resilient Distributed Algorithm

The functions h_1 and h_2 are chosen by linear functions, that is, $h_1(\gamma_i - \hat{\gamma}_i) = w_0(\gamma_i - \hat{\gamma}_i)$ and $h_2(\gamma_i - \hat{\gamma}_i) = w_0^2(\gamma_i - \hat{\gamma}_i)$ with a positive constant w_0 . The result on the convergence of linear ESO (19) is given in the Lemma 3.

Lemma 3. *Suppose that Assumption 3 holds. Then, linear ESO (19) with linear functions $h_1(\gamma_i - \hat{\gamma}_i) = w_0(\gamma_i - \hat{\gamma}_i)$ and $h_2(\gamma_i - \hat{\gamma}_i) = w_0^2(\gamma_i - \hat{\gamma}_i)$ has an arbitrary small observation error, as $w_0 \rightarrow \infty$. That is,*

$$\begin{aligned}\limsup_{t \rightarrow \infty} \|\gamma_i(t) - \hat{\gamma}_i(t)\| &\leq O\left(\left(\frac{1}{w_0}\right)^2\right), \\ \limsup_{t \rightarrow \infty} \|\kappa_i(t) - \hat{\kappa}_i(t)\| &\leq O\left(\frac{1}{w_0}\right), \quad \forall i \in \mathcal{I}.\end{aligned}$$

Proof: To analyze the convergence of linear observer (19), let $\eta_{i1} = \gamma_i - \hat{\gamma}_i$ and $\eta_{i2} = \frac{1}{w_0}(\kappa_i - \hat{\kappa}_i)$. Denote that $\eta_i = \text{col}(\eta_{i1}, \eta_{i2})$, $\mathbf{A} = \mathbf{A} \otimes I_{3n}$ with $\mathbf{A} = \begin{bmatrix} -a_1 & 1 \\ -a_2 & 0 \end{bmatrix}$ and $\mathbf{B} = \mathbf{B} \otimes I_{3n}$ with $\mathbf{B} = \begin{bmatrix} 0 \\ 1 \end{bmatrix}$. It follows from (19) that

$$\dot{\eta}_i = w_0 \mathbf{A} \eta_i + \frac{1}{w_0^2} \mathbf{B} \dot{\kappa}_i. \quad (21)$$

Select $a_1 = 2$ and $a_2 = 1$ in (19) such that matrix \mathbf{A} is Hurwitz. Solving (21), we have

$$\eta_i(t) = e^{w_0 \mathbf{A} t} (\eta_i(0) + \frac{\delta}{w_0^2} \mathbf{A}^{-1} \mathbf{B}) - \frac{\delta}{w_0^2} \mathbf{A}^{-1} \mathbf{B},$$

where $\|\hat{\kappa}_i\| \leq \delta$ by Assumption 3. Then, there exists a class \mathcal{KL} function β_1 such that

$$\|\eta_i(t)\| \leq \beta_1(\|\eta_i(0)\|, t) + O\left(\left(\frac{1}{w_0}\right)^2\right). \quad (22)$$

Recall the definition of η_{i1} and η_{i2} . We have that

$$\begin{aligned}\limsup_{t \rightarrow \infty} \|\gamma_i(t) - \hat{\gamma}_i\| &\leq O\left(\left(\frac{1}{w_0}\right)^2\right), \\ \limsup_{t \rightarrow \infty} \|\kappa_i(t) - \hat{\kappa}_i\| &\leq O\left(\frac{1}{w_0}\right).\end{aligned}$$

Thus, we have the conclusion in Lemma 3. \blacksquare

Theorem 2. *Suppose that Assumptions 1-3 hold. The resilient distributed resource allocation algorithm (20) with linear ESO (19) can converge to a small neighborhood of optimal allocation X^* of problem (1). That is,*

$$\limsup_{t \rightarrow \infty} \|X - X^*\| = O\left(\frac{1}{w_0}\right).$$

Proof: According to the definitions of κ_i and $\hat{\kappa}_i$, we know that $\eta_{i2} = \text{col}(\eta_{i21}, \eta_{i22}, \eta_{i23})$ with $\eta_{i21} = \frac{1}{w_0}(\kappa_{i1} - \hat{\kappa}_{i1} + g_i - \hat{g}_i)$, $\eta_{i22} = \frac{1}{w_0}(\kappa_{i2} - \hat{\kappa}_{i2})$, and $\eta_{i23} = \frac{1}{w_0}(\kappa_{i3} - \hat{\kappa}_{i3})$. Let $\eta_{21} = \text{col}(\eta_{121}, \dots, \eta_{N21})$, $\eta_{22} = \text{col}(\eta_{122}, \dots, \eta_{N22})$, and $\eta_{23} = \text{col}(\eta_{123}, \dots, \eta_{N23})$. The compact form of (20) is given by

$$\begin{aligned}\dot{\tilde{X}} &= -(F(X) - F(X^*)) - \tilde{\Lambda} + w_0 \eta_{21}, \\ \dot{\tilde{\Lambda}} &= -(L \otimes I_N) \tilde{\Lambda} - (L \otimes I_N) \tilde{Z} + \tilde{X} + w_0 \eta_{22}, \\ \dot{\tilde{Z}} &= (L \otimes I_N) \tilde{\Lambda} + w_0 \eta_{23}.\end{aligned}\quad (23)$$

Denote $\nu'(t) = \text{col}(\eta_{21}, \eta_{22}, \eta_{23})$. System (23) can be rewritten as

$$\dot{\Theta} = \Gamma \Theta + w_0 \nu'(t), \quad (24)$$

which is a perturbed system with nonvanishing perturbation $\nu'(t)$. Similar to the analysis of system (18), the derivative of V along the trajectories of perturbed system (24) satisfies

$$\begin{aligned}\dot{V} &\leq -c_3 \|\Theta\|^2 + w_0 \left\| \frac{\partial V}{\partial \Theta} \right\| \|\nu'(t)\|, \\ &\leq -c_3 \|\Theta\|^2 + w_0 c_4 \|\Theta\| \|\nu'\|.\end{aligned}$$

It follows from Lemma 3 and the input-to-state stability [34] that there exist a class \mathcal{KL} function σ_1 and a constant ζ such that

$$\Theta_1(t) \leq \sigma_1(\Theta_1(0), t) + \zeta \sup_{0 \leq \tau \leq t} \|\nu'(\tau)\|.$$

Denote $\Theta_2 = \text{col}(X - X^*, \Lambda - \Lambda^*, Z - Z^*, \eta)$. According to (22) and the proof of Lemma 4.7 in [34], it yields that

$$\Theta_2(t) \leq \sigma_2(\Theta(0), t) + O\left(\frac{1}{w_0}\right).$$

Thus, we have that $\limsup_{t \rightarrow \infty} \|X - X^*\| = O\left(\frac{1}{w_0}\right)$. It indicates that the designed resilient algorithm can converge to a small neighborhood of optimal allocation X^* of problem (1) even if agents are subject to the FDI attacks. \blacksquare

B. Nonlinear ESO Based Resilient Distributed Algorithm

Since linear ESOs may cause overshoot in the transient process of system (20) [35], nonlinear ESOs can be used to overcome this weakness by selecting appropriate nonlinear function h_1 and h_2 in (19). Here, h_1 and h_2 are need to satisfy Assumption 4, and can be selected by the sign function [36], [37], or the piecewise function designed in [38].

Assumption 4. *There exist constants $l_i (i = 1, 2, 3, 4, 5)$ and positive definite, continuous differentiable functions $V_1, W_1 : \mathbb{R}^{6n} \rightarrow \mathbb{R}$ such that*

- 1) $l_1 \|\eta_i\|^2 \leq V_1(\eta_i) \leq l_2 \|\eta_i\|^2, \quad l_3 \|\eta_i\|^2 \leq W_1(\eta_i) \leq l_4 \|\eta_i\|^2,$
- 2) $\frac{\partial V_1}{\partial \eta_{i2}}(\eta_{i2} - h_1(\eta_{i1})) - \frac{\partial V_2}{\partial \eta_{i2}} h_2(\eta_{i1}) \leq -W_1(\eta_i),$
- 3) $|\frac{\partial V_1}{\partial \eta_{i2}}| \leq l_5 \|\eta_i\|,$

where $\eta_i = \text{col}(\eta_{i1}, \eta_{i2})$ defined in (21).

Lemma 4. *Suppose that Assumptions 3-4 hold. Let $a_1 = w_0$ and $a_2 = w_0^2$. Then, the nonlinear ESO (19) has an arbitrarily small observation error, as $w_0 \rightarrow \infty$. That is,*

$$\limsup_{t \rightarrow \infty} \|\gamma_i(t) - \hat{\gamma}_i(t)\| \leq O\left(\left(\frac{1}{w_0}\right)^2\right),$$

$$\limsup_{t \rightarrow \infty} \|\kappa_i(t) - \hat{\kappa}_i(t)\| \leq O\left(\frac{1}{w_0}\right), \quad \forall i \in \mathcal{I}.$$

Proof: According to the definition of η_i in (21), it follows from (19) that

$$\dot{\eta}_{i1} = w_0(\eta_{i2} - h_1(\eta_{i1})),$$

$$\dot{\eta}_{i2} = -w_0 h_2(\eta_{i1}) + \frac{1}{w_0} \dot{\kappa}_i,$$

where $a_1 = w_0$ and $a_2 = w_0^2$. Under Assumption 4, we have that

$$\begin{aligned} \dot{V}_1(\eta_i) &= \frac{\partial V_1}{\partial \eta_{i1}}(w_0(\eta_{i2} - h_1(\eta_{i1}))) \\ &\quad + \frac{\partial V_1}{\partial \eta_{i2}}(-w_0 h_2(\eta_{i1}) + \frac{1}{w_0} \dot{\kappa}_i) \\ &\leq -w_0 W_1(\eta_i) + \frac{\partial V_1}{\partial \eta_{i2}} \frac{1}{w_0} \dot{\kappa}_i. \end{aligned}$$

According to Assumption 4 and the definition of κ_i , we know that $\dot{\kappa}_i$ is bounded, that is, $\|\dot{\kappa}_i\| \leq \delta$. It is further deduced that

$$\begin{aligned} \dot{V}_1 &\leq -w_0 W_1(\eta_i) + \frac{l_5 \delta}{w_0} \|\eta_i\| \\ &\leq -\frac{w_0 l_3}{l_2} V_1(\eta_i) + \frac{l_5 \delta \sqrt{l_1}}{l_1 w_0} \sqrt{V_1(\eta_i)}. \end{aligned}$$

Thus, it yields that

$$\begin{aligned} \|\eta_i\| &\leq \frac{\sqrt{l_1}}{l_1} \sqrt{V_1} \\ &\leq \frac{\sqrt{l_1 V_1(0)}}{l_1} e^{-\frac{w_0 l_3}{2l_2} t} + \frac{l_5 \delta}{2l_1 w_0} \int_0^t e^{-\frac{w_0 l_3}{2l_2} (t-\tau)} d\tau \\ &\leq \frac{\sqrt{l_1 V_1(0)}}{l_1} e^{-\frac{w_0 l_3}{2l_2} t} + \frac{l_5 \delta l_2}{l_1 l_3 w_0^2} (1 - e^{-\frac{w_0 l_3}{2l_2} t}). \end{aligned}$$

Then, $\limsup_{t \rightarrow \infty} \|\eta_i(t)\| \leq O\left(\frac{1}{w_0^2}\right)$. It follows from the definition of η_i that

$$\limsup_{t \rightarrow \infty} \|\gamma_i(t) - \hat{\gamma}_i\| \leq O\left(\left(\frac{1}{w_0}\right)^2\right),$$

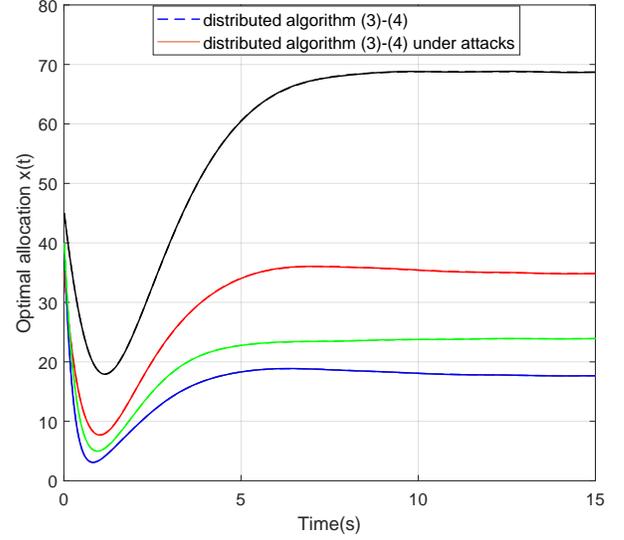


Fig. 2. The optimal resource allocation under attacks with $u_i^a(t) = 0.1 \cos(2t)$, $\lambda^{j^a}(t) = 0.2 \cos(2t)$, and $z^{j^a} = 0.1 \cos(2t)$ $i \in \mathcal{I}, j \in \mathcal{N}_i$

$$\limsup_{t \rightarrow \infty} \|\kappa_i(t) - \hat{\kappa}_i\| \leq O\left(\frac{1}{w_0}\right).$$

Thus, the conclusion in Lemma 4 is obtained. \blacksquare

Remark 3. *It follows from Lemmas 3-4 that linear ESOs and nonlinear ESOs have the similar property of convergence. Whereas, compared with linear ESOs, nonlinear ESOs can make the transient process of the closed-loop system be with a smaller overshoot by the feedback control (see Figs. 4-5 in Section V).*

Theorem 3. *Suppose that Assumptions 1-4 hold. The designed resilient distributed resource allocation algorithm (20) with the nonlinear ESO (19) can converge to a small neighborhood of the optimal allocation X^* of problem (1). That is,*

$$\limsup_{t \rightarrow \infty} \|X - X^*\| = O\left(\frac{1}{w_0}\right).$$

The proof is similar to the proof of Theorem 2 and is omitted for the limited space.

V. AN EXAMPLE

In this section, we give an example of the economic dispatch problem of a power system with four generators to illustrate the obtained results. Each generator is considered as an agent and communicates with its neighbors on a line graph. For agent i , the nonlinear term in its dynamics (2) is $g(x_i) = \sin(x_i)$, and the cost function is described by

$$J_i(x_i, x_{-i}) = a_i + b_i x_i + c_i x_i^2, \quad \forall i \in \mathcal{I}.$$

Parameters in cost functions are given by $a = [a_1, \dots, a_4]^T = [0.5, 1.5, 3.0, 1.0]^T$, $b = [b_1, \dots, b_4]^T = [3, 4, 5, 2]^T$ and $c = [c_1, \dots, c_4]^T = [2, 1, 0.5, 1.5]^T$. The total demand of this power system is $d = 145$, which is allocated by $[d_1, \dots, d_4]^T = [30, 40, 40, 35]^T$. It is calculated that the optimal allocation is $X^* = [17.65, 34.85, 68.70, 23.8]^T$. The initial state is $X(0) = [x_1(0), \dots, x_4(0)]^T = [40, 35, 45, 40]^T$.

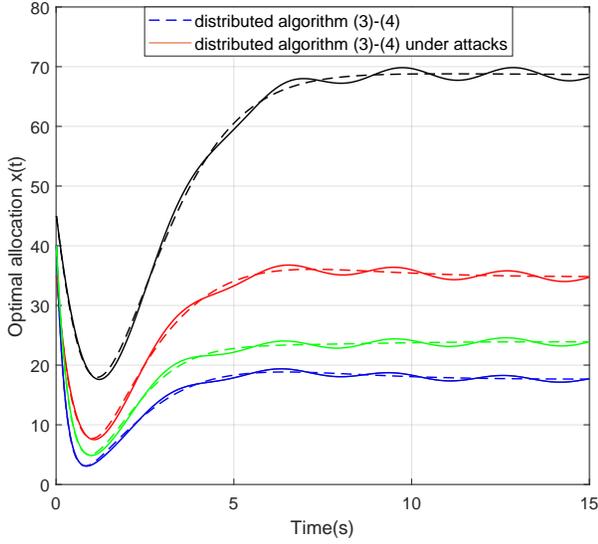


Fig. 3. The optimal resource allocation under attacks with $u_i^a(t) = 2 \cos(2t)$, $\lambda^{ja}(t) = 1.5 \cos(2t)$, and $z^{ja} = \cos(2t)$ $i \in \mathcal{I}, j \in \mathcal{N}_i$

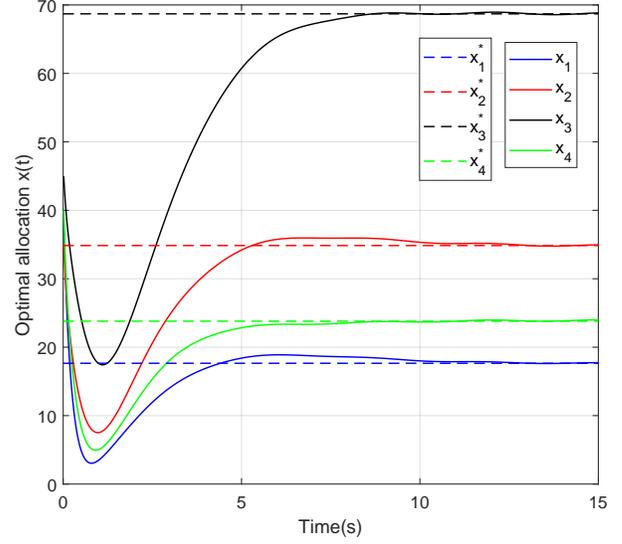


Fig. 5. The optimal resource allocation obtained by the resilient distributed algorithm (20) based on nonlinear ESO

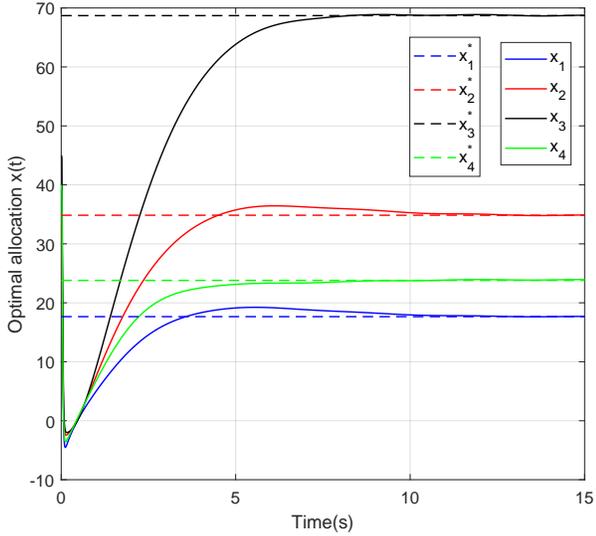


Fig. 4. The optimal resource allocation obtained by the resilient distributed algorithm (20) based on linear ESO

In Fig. 2, the FDI attacks are selected by $u_i^a(t) = 0.1 \cos(2t)$, $\lambda^{ja}(t) = 0.2 \cos(2t)$, and $z^{ja} = 0.1 \cos(2t)$. We can see that all agents' decisions reach the optimal resource allocation by the distributed algorithm (2)-(4). When this multi-agent system is subject to the FDI attacks with $u_i^a(t) = \cos(2t)$, $\lambda^{ja}(t) = 1.5 \cos(2t)$, and $z^{ja} = \cos(2t)$ by increasing amplitudes of the attacks. The optimal allocation obtained by the algorithm (2)-(4) under the attacks is shown in Fig. 3. It is seen that all agents' decisions oscillate around the optimal allocation. From the comparison of Figs. 2-3, it indicates that the distributed algorithm (2)-(4) is robust to the attacks with the smaller amplitudes.

In the resilient distributed resource allocation algorithm (20), we select $w = 50$ in linear ESO (19). The optimal allocation obtained by the linear ESO based resilient algorithm (20) is shown in Fig. 4. It is seen that the strategies converge

to optimal allocation X^* . However, the overshoot phenomenon appears in the regulation process of strategies. Therefore, we apply the nonlinear ESO to replace the linear ESO by selecting $h_2 = fal(\gamma_i - \hat{\gamma}_i, 0.125, 0.5)$ in (19). The nonlinear function $fal(e, \alpha, \delta)$ defined by

$$fal(e, \alpha, \delta) = \begin{cases} \frac{e}{\delta^{\alpha-1}} & |e| \leq \delta \\ |e|^\alpha sign(e) & |e| > \delta \end{cases}$$

The optimal allocation obtained by the resilient algorithm (20) based on the nonlinear ESO is shown in Fig. 5. Compared with Fig. 4, the transient process with the smaller overshoot is shown in Fig. 5.

VI. CONCLUSIONS

In this paper, the robustness of a continuous-time distributed resource allocation under FDI attacks has been analyzed for a multi-agent system with first-order nonlinear dynamics. Then, to suppress the effect of the attacker's behavior, a resilient distributed algorithm was proposed based on the extended state observer, which was used to estimate the FDI attacks on agents. The sufficient condition for the convergence of the designed resilient algorithm was given by the Lyapunov stability theory and the stability of perturbed systems. In the future, it may be an interesting problem to design a resilient distributed resource allocation algorithm for a multi-agent system under DoS attacks.

REFERENCES

- [1] P. Yi, Y. Hong, and F. Liu, "Initialization-free distributed algorithms for optimal resource allocation with feasibility constraints and application to economic dispatch of power systems," *Automatica*, vol. 74, pp. 259–269, 2016.
- [2] M. Pesaran H.A, P. D. Huy, and V. K. Ramachandaramurthy, "A review of the optimal allocation of distributed generation: Objectives, constraints, methods, and algorithms," *Renewable and sustainable energy reviews*, vol. 75, pp. 293–312, 2017.

- [3] D. Wang, M. Chen, and W. Wang, "Distributed extremum seeking for optimal resource allocation and its application to economic dispatch in smart grids," *IEEE Transactions on Neural Networks and Learning Systems*, vol. 30, no. 10, pp. 3161–3171, Oct 2019.
- [4] S. H. Low and D. E. Lapsley, "Optimization flow control. I. basic algorithm and convergence," *IEEE/ACM Transactions on Networking*, vol. 7, no. 6, pp. 861–874, Dec 1999.
- [5] F. Farhadi, S. J. Golestani, and D. Teneketzis, "A surrogate optimization-based mechanism for resource allocation and routing in networks with strategic agents," *IEEE Transactions on Automatic Control*, vol. 64, no. 2, pp. 464–479, Feb 2019.
- [6] X. Lin and N. B. Shroff, "Utility maximization for communication networks with multipath routing," *IEEE Transactions on Automatic Control*, vol. 51, no. 5, pp. 766–781, May 2006.
- [7] A. N. Bishop, B. Fidan, B. D. O. Anderson, K. Dogancay, and P. N. Pathirana, "Optimality analysis of sensor-target localization geometries," *Automatica*, vol. 46, no. 3, pp. 479–492, 2010.
- [8] R. Li, "Distributed algorithm design for optimal resource allocation problems via incremental passivity theory," *Systems & Control Letters*, vol. 138, no. 104650, 2020.
- [9] S. Liang, X. Zeng, and Y. Hong, "Distributed sub-optimal resource allocation over weight-balanced graph via singular perturbation," *Automatica*, vol. 95, pp. 222–228, 2018.
- [10] Y. Zhu, W. Yu, G. Wen, and D. Chen, "Continuous-time algorithm for distributed resource allocation over a weight-unbalanced digraph," in *31th Chinese Control and Decision Conference*, 2019, pp. 56–59.
- [11] G. Chen and Z. Li, "Distributed optimal resource allocation over strongly connected digraphs: a surplus-based approach," *Automatica*, vol. 125, no. 109459, 2021.
- [12] Z. Guo and G. Chen, "Predefined-time distributed optimal allocation resources: A time-based generator scheme," *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, 2020.
- [13] Z. Deng, X. Nian, and C. Hu, "Distributed algorithm design for nonsmooth resource allocation problems," *IEEE Transactions on Cybernetics*, vol. 50, no. 7, pp. 3208–3217, Jul 2020.
- [14] X. Zeng, P. Yi, and Y. Hong, "Distributed algorithm for robust resource allocation with polyhedral uncertain allocation parameters," *Journal of System Science*, vol. 31, pp. 103–119, 2018.
- [15] J. Ogwuru and M. Guay, "Distributed extremum seeking control of multi-agent systems with unknown dynamics for optimal resource allocation," *Neurocomputing*, vol. 381, pp. 217–226, 2020.
- [16] X. F. Wang, Y. Hong, X. M. Sun, and K. Z. Liu, "Distributed optimization for resource allocation problems under large delays," *IEEE Transactions on Industrial Electronics*, vol. 66, no. 12, pp. 9448–9457, Dec 2019.
- [17] Z. Deng and L. Wang, "Distributed event-triggered algorithm for optimal resource allocation of second-order multi-agent systems," *IET Control Theory & Applications*, vol. 14, pp. 1937–1946, 2020.
- [18] B. Wang, S. Sun, and W. Ren, "Distributed continuous-time algorithms for optimal resource allocation with time-varying quadratic cost functions," *IEEE Transactions on Control of Network Systems*, 2020.
- [19] B. Wang, Q. Fei, and Q. Wu, "Distributed time-varying resource allocation optimization based on finite-time consensus approach," *IEEE Control Systems Letters*, vol. 5, no. 2, Apr 2021.
- [20] M. Meng, G. Xiao, and B. Li, "Adaptive consensus for heterogeneous multi-agent systems under sensor and actuator attacks," *Automatica*, vol. 122, no. 109242, pp. 1–7, 2020.
- [20] Z. Deng, S. Liang, and W. Yu, "Distributed optimal resource allocation of second-order multiagent systems," *International Journal of Robust and Nonlinear Control*, vol. 28, pp. 4246–4260, 2018.
- [21] Z. Deng, "Distributed algorithm design for resource allocation problems of high-order multi-agent systems," *IEEE Transactions on Control of Network Systems*, 2020.
- [22] G. Shao, R. Wang, X. F. Wang, and K. Z. Liu, "Distributed algorithm for resource allocation problems under persistent attacks," *Journal of the Franklin Institute*, vol. 357, pp. 6241–6256, 2020.
- [23] C. Godsil and G. Royle, *Algebraic Graph Theory (Graduate Texts in Mathematics)*. New York, USA: Springer, 2001.
- [24] X. Jin, W. M. Haddad, and T. Yucelen, "An adaptive control architecture for mitigating sensor and actuator attacks in cyber-physical systems," *IEEE Transactions on Automatic Control*, vol. 62, no. 11, pp. 6058–6064, 2017.
- [25] T. Yucelen, W. M. Haddad, and E. M. Feron, "Adaptive control architecture for mitigating sensor attacks in cyber-physical systems," in *2016 American Control Conference*, 2016, pp. 1165–1170.
- [27] A. Gusrialdi, Z. Qu, and M. A. Simaan, "Robust design of cooperative systems against attacks," in *2014 American Control Conference*, 2014, pp. 1456–1462.
- [28] A. Gusrialdi, Z. Qu, and M. Simaan, "Competitive interaction design of cooperative systems against attacks," *IEEE Transactions on Automatic Control*, vol. 63, no. 9, pp. 3159–3166, Sep 2018.
- [29] A. Mustafa, H. Modares, and R. Moghadam, "Resilient synchronization of distributed multi-agent systems under attacks," *Automatica*, vol. 115, no. 108869, pp. 1–14, 2020.
- [30] X. Huang and J. Dong, "A robust dynamic compensation approach for cyber-physical systems against multiple types of actuator attacks," *Applied Mathematics and Computation*, vol. 380, no. 125284, pp. 1–9, 2020.
- [31] Y. Dong, N. Gupta, and N. Chopra, "False data injection attacks in bilateral teleoperation systems," *IEEE Transactions on Control Systems Technology*, vol. 28, no. 3, pp. 1168–1176, 2020.
- [32] H. Modares, B. Kiumarsi, F. L. Lewis, F. Ferrese, and A. Davoudi, "Resilient and robust synchronization of multiagent systems under attacks on sensors and actuators," *IEEE Transactions on Cybernetics*, vol. 50, no. 3, pp. 1240–1250, 2020.
- [33] L. Xiao and S. Boyd, "Optimal scaling of a gradient method for distributed resource allocation," *Journal of Optimization Theory and Applications*, vol. 129, no. 3, pp. 469–488.
- [34] H. Khalil, *Nonlinear Systems*, 3rd ed. USA: Prentice-Hall, 2002.
- [35] H. K. Khalil, "High-gain observers in feedback control: Application to permanent magnet synchronous motors," *IEEE Control System Magazine*, vol. 37, no. 3, pp. 25–41, 2017.
- [36] B. Z. Guo and Z. L. Zhao, "On the convergence of an extended state observer for nonlinear systems with uncertainty," *Systems & Control Letters*, vol. 60, no. 6, pp. 420–430, 2011.
- [37] C. Ren, X. Li, X. Yang, and S. Ma, "Extended state observer-based sliding model control of an omnidirectional mobile robot with friction compensation," *IEEE Transactions on Industrial Electronics*, vol. 66, no. 12, pp. 9480–9489, Dec 2019.
- [38] J. Han, "From PID to active disturbance rejection control," *IEEE Transactions on Industrial Electronics*, vol. 64, no. 3, pp. 900–906, Mar 2009.