

Robust artificial neural networks and outlier detection.

Technical report

Gleb Beliakov¹, Andrei Kelarev¹ and John Yearwood²

¹School of Information Technology
Deakin University, 221 Burwood Hwy, Burwood 3125, Australia
{gleb, andrei}@deakin.edu.au

²School of Science, Information Technology and Engineering
University of Ballarat, P.O. Box 663, Ballarat, Victoria 3353, Australia
j.yearwood@ballarat.edu.au

Abstract

Large outliers break down linear and nonlinear regression models. Robust regression methods allow one to filter out the outliers when building a model. By replacing the traditional least squares criterion with the least trimmed squares criterion, in which half of data is treated as potential outliers, one can fit accurate regression models to strongly contaminated data. High-breakdown methods have become very well established in linear regression, but have started being applied for non-linear regression only recently. In this work, we examine the problem of fitting artificial neural networks to contaminated data using least trimmed squares criterion. We introduce a penalized least trimmed squares criterion which prevents unnecessary removal of valid data. Training of ANNs leads to a challenging non-smooth global optimization problem. We compare the efficiency of several derivative-free optimization methods in solving it, and show that our approach identifies the outliers correctly when ANNs are used for nonlinear regression.

Keywords Global optimization; Non-smooth optimization; Robust regression; Neural networks, Least trimmed squares.

1 Introduction

We consider the problem of function approximation with artificial neural networks (ANNs). This generic task has many applications in science and engineering, such as signal processing, pattern recognition, and control. The goal is to model an unknown nonlinear function based on observed input-output pairs. ANNs are universal function approximators [19], and usually they deliver good performance in applications.

Error-free data are rarely provided in applications. First, the data are usually contaminated by noise, which reflects inaccuracies in observations and stochastic nature of the underlying process. ANNs and other function approximators deal with such noise quite efficiently, by minimising the sum of squared differences between the observed and predicted values, or a more sophisticated fitting criterion, such as Huber-type functions, which are the basis of M-estimators in statistics [20].

The second type of data contamination has to do with either gross observation errors (e.g., equipment malfunction, or notorious replacing missing values with zeroes, wrong decimal points and other blunders), or the data reflecting a mixture of different phenomena. These data, which usually take aberrant values, are called *outliers*. It has been noted that typically the occurrence of outliers in routine data ranges from 1% to 10%. When fitting a model to the data, outliers need to be identified and eliminated, or, alternatively, examined closely, as they may be of the main interest themselves. Notable examples are intrusion and cyberattack detection, detection of harmful chemicals and cancerous cells.

The methods of function approximation based on the least squares (or, more generally, maximum likelihood principle) are not robust against outliers. In fact just one aberrant value can make the model’s bias infinite (it is said that the method breaks down). This phenomenon is well known in linear regression [30, 47], where a number of robust high-breakdown methods have been developed. The popular methods of least median of squares (LMS) and least trimmed squares (LTS) [46] discard half of the data as potential outliers and fit a model to the remaining half. These methods determine numerically which half of the data should be discarded in order to obtain the smallest value of the respective objectives. That way, up to half of the data can be outliers but they do not break down the method. It is said that their (asymptotic) breakdown point is $\frac{1}{2}$. The outliers themselves can be identified by their large residuals, something that cannot be achieved when using the least squares estimators, or maximum likelihood estimators (called M-estimators), because of the masking effect (i.e., the outliers affect the fitted model so much that their residuals do not stand out).

Much less work has been devoted to non-linear high-breakdown regression. There are very few papers dealing with the LTS method applied to ANNs, see for example, [57]. More recently, Liano [26] used M-estimators to study the mechanism by which outliers affect the resulting ANNs. Chen and et. al [8] also used M-estimators as a robust estimator in the presence of outliers. The Least Trimmed Squares estimator was discussed in [23, 49, 50]. A robust LTS backpropagation algorithm based on simulated annealing was considered in [50].

It is known that fitting the LTS or LMS criterion is an NP-hard problem even in linear

regression. The objective has a large number of local minima and is non-smooth. The problem becomes even more complicated for ANNs, because

- (a) the dimensionality of the problem increases even further with the number of hidden neurons used, and
- (b) the ANN training is an NP-hard problem even when using the traditional least squares criterion.

Training ANNs with LTS or LMS criterion is very challenging because of a much higher number of local minima as well as non-applicability of the traditional fast backpropagation algorithm because of non-smoothness of the objective.

In this article we advance the methods for robust fitting of ANNs using LTS and related fitting criteria. Our first contribution is to design a hybrid algorithm, which combines a derivative free optimisation method for initial training of ANN, removal of the detected outliers, and then fine tuning of ANN weights using clean data and backpropagation. The second contribution is the design of an improved fitting criterion, called Penalised CLTS (PCLTS), which prevents unnecessary removal of valid data. The LTS and LMS criteria have this undesirable effect, illustrated in our experiments. The PCLTS criterion prevents unnecessary removals by imposing a penalty on removal of every datum.

This article is structured as follows. In Section 2, we introduce the problem of robust regression, recall the definitions and the main features of several existing high-breakdown estimators, and discuss the associated optimization problem. In Section 3 we introduce the PCLTS criterion for ANN fitting. In Section 4, we outline the existing approaches to solution of the related optimization problem and present three new methods we use in this study. Section 5 is devoted to a comparative numerical study of the optimization methods using several data sets. Section 6 concludes the article.

2 High-breakdown robust estimators

In this section, we briefly introduce a statistical problem which is in the origin of the non-smooth global optimization problem treated in this paper. We start the discussion with high-breakdown linear regression, which will be followed by nonlinear regression.

2.1 Robust linear regression

Consider the standard multiple linear regression model

$$y_i = x_{i1}\theta_1 + \dots + x_{ip}\theta_p + \varepsilon_i, \quad \text{for } i = 1, \dots, n, \quad (1)$$

where $x_{ip} = 1$ for regression with an intercept term. Here $\{x_{ij}\} = X \in \mathbb{R}^{n \times p}$ is the matrix of explanatory variables of full column rank, and ε is a n -vector of independent and identically distributed random errors with zero mean and (unknown) variance σ^2 . The goal is to determine the vector of unknown parameters $\theta \in \mathbb{R}^p$. The goodness of fit is expressed in terms of

the residuals $r_i(\theta) = \theta^t \mathbf{x}_i - \mathbf{y}_i$, namely the sum $\sum_{i=1}^n r_i^2$ for the ordinary least squares (OLS) and $\sum_{i=1}^n |r_i|$ for the least absolute deviations (LAD) methods.

As we mentioned in the introduction, the OLS and LAD are very sensitive to large outliers in the data. Just one grossly atypical datum can affect the model. A *breakdown point* of a regression estimator is the smallest proportion of contaminated data that can make the estimator's bias arbitrarily large (see [16], [47], p.10). The breakdown point of the OLS and LAD methods tends to zero as $\frac{1}{n}$ with the increasing sample size n , and is said to be 0%.

To overcome the lack of robustness of OLS and LAD estimators, Rousseeuw [46] introduced the least median of squares and least trimmed squares estimators. The methods of the least trimmed absolute deviations (LTA) and the maximum trimmed likelihood (MTL) were advocated in [14, 17, 56]. These methods are robust to leverage points, and allow up to a half of the data to be contaminated without affecting the regression model. Atypical data are then detected by their large residuals. For recent accounts of the state-of-the-art in high-breakdown robust regression, see [30, 47].

Essentially, the LTS, LTA and MTL methods work in the following way. Half of the sample is discarded, and a regression model is built using the other half. The sum of the residuals is then evaluated. The objective is to find the optimal partition of the data into two halves, so that the sum of the (squared or absolute) residuals is the smallest. This is a combinatorial formulation of the problem. Evidently the solution is feasible only for small data sets.

The same problem can be formulated as a continuous non-smooth optimization problem:

$$\text{Minimize } F(\theta) = \sum_{i=1}^h (r_{(i)}(\theta))^2, \quad (2)$$

where the residuals are ordered in the increasing order $|r_{(1)}| \leq |r_{(2)}| \leq \dots \leq |r_{(n)}|$, and $h = \lfloor (n + p + 1)/2 \rfloor$, where $\lfloor \cdot \rfloor$ is the floor function. The variables in this model are the regression coefficients θ . For small to moderate dimension but large data sets this model offers significant numerical advantages. It is the basis of fast heuristic algorithms in high-breakdown regression [48]. Several recent methods based on this formulation, including evolutionary and semidefinite programming, were presented in [3, 7, 34, 35, 51].

The four methods mentioned above achieve the highest attainable asymptotic breakdown point of 1/2, which means that up to a half of the data can be contaminated without affecting the estimator. Consequently, the outliers can be easily detected by their large residuals, and either eliminated, or alternatively, examined more closely in the cases where the outliers themselves are of the main interest.

It is shown in [5] that computation of the high-breakdown estimators is an NP-hard problem. Indeed, the objective F in the methods mentioned above has multiple local minima. Consider, for instance, the LTS estimator. The problem (2) can be written as

$$\min_{\theta} \left(\min_{\pi} \sum_{i=1}^h r_{\pi(i)}^2(\theta) \right),$$

where π is a permutation of the vector $(1, 2, \dots, n)$. Subsequently we write it as

$$\min_{\pi} \left(\min_{\theta} \sum_{i=1}^h r_{\pi(i)}^2(\theta) \right).$$

The inner optimization problem is convex, and has a unique minimum (potentially, multiple minimizers). Then problem (2) will potentially have as many as $\binom{n}{h}$ local minima (the number of permutations π which result in distinct sums for any fixed θ).

In addition to determining the breakdown point of an estimator, it is also essential to investigate its efficiency. It is customary to evaluate the efficiency by comparing it to that of the OLS estimator. A fully efficient estimator should deliver the same accuracy as the maximum likelihood based estimator (which is OLS when the noise is Gaussian) when the data set contains no outliers. The relative efficiency of the LMS, LTS and LTA methods for normally distributed data is low [30, 47]. However, fully efficient high-breakdown estimators exist. The reweighted least squares estimator (REWLSE) is one such estimator presented in [13].

To improve the efficiency, while preserving the breakdown point, Gervini and Yohai [13] use a two-step process: an initial high-breakdown estimator (like LMS, or LTS) provides a robust estimate of scale s used to re-weigh the data. The weights are given by the formula

$$w_i = \begin{cases} 1 & \text{if } |r_i| < t_n, \\ 0 & \text{otherwise,} \end{cases} \quad (3)$$

where t_n is the adaptive cutoff value beyond which the sample proportion of absolute residuals exceeds the theoretical proportion. The weights w_i given by (3) effectively remove all outliers. The adaptive estimate REWLSE is then computed as a weighted OLS: $\theta = (X^t W X)^{-1} X^t W Y$ with $W = \text{diag}(w_1, \dots, w_n)$.

The two-step process in REWLSE computes fully efficient estimators when the data are normally distributed, as no data are unnecessarily removed. REWLSE inherits the breakdown point of the initial estimator and combines it with full efficiency of the final LS estimator.

2.2 Nonlinear robust regression

We now consider a nonlinear regression model

$$y_i = f(\mathbf{x}_i; \theta) + \varepsilon_i, \quad \text{for } i = 1, \dots, n, \quad (4)$$

where f is an arbitrary (nonlinear) function, θ is a set of parameters (it may vary depending on the particular specification of a class of regression models), $\mathbf{x}_i \in \mathbb{R}^{p-1}$ are the fixed data points or inputs and y_i are the outputs. Regression neural networks give us examples of such functions. For instance, each neural network with one hidden layer and one output defines a function of the form

$$f(\mathbf{x}, \theta) = \sum_{j=1}^{m_h} \theta_j^h \cdot g \left(\sum_{k=1}^p \theta_{jk}^i x_k \right),$$

where $\theta^h \in \mathbb{R}^{m_h}$ (and $\theta^i \in \mathbb{R}^{m_h \times p}$) are the hidden (respectively, input) layer weights, m_h is the size of the hidden layer, p is the number of inputs plus one (the bias term), and g is a transfer function. Altogether, f has $(p+1) \times m_h$ parameters represented by $\theta = (\theta^h, \theta^i)$.

For regression ANNs, the OLS fitting criterion is typically used, i.e., the weights are found by minimising

$$F(\theta) = \sum_{i=1}^n (r_i(\theta))^2, \quad (5)$$

with the residuals $r_i(\theta) = f(\mathbf{x}_i; \theta) - y_i$. Backpropagation is usually the algorithm of choice for minimising F , although Levenberg Marquardt is also used [15, 31]. In both cases, a randomly chosen initial weighting vector θ_0 is needed, and often both methods are combined with random start heuristic, because F has multiple local minima. The number of local minima of F grows exponentially with the length of θ .

As in the case of linear regression, the OLS criterion is not robust against outliers. This can be clearly demonstrated by replacing one or more data with very large or very small values, see examples in Section 5. Unlike in the case of linear regression, where the whole regression model is shifted towards the abnormal value, models provided by regression ANNs exhibit wild oscillations at the abnormal datum, which significantly affect the rest of the data.

There have been attempts to use more robust Huber-type criterion (which is used in M-estimators) [8, 26]. Here the squared residuals in (5) are replaced with $h(|r_i|)$, where h is a non-negative monotone increasing function with $h(0) = 0$, whose growth decreases with the size of the argument. This way very large residuals have a limited effect on the objective F . The objective itself becomes more complex, as even in linear regression, when r_i depend on θ linearly, F is the sum of quasi-convex terms, which is not quasi-convex itself. Huber-type functions h also have another problem. The scale of their argument has to be either determined a priori, or be data-dependent. In the former case the estimator is not scale invariant, whereas in the latter case a robust estimation of the scale parameter s is needed. When estimation of the scale s is not robust (for example, taking s as the mean of the absolute residuals and evaluating $h(\frac{|r_i|}{s})$), the M-estimator will not be robust.

The LTS criterion (2) was also used in ANN training [49]. It allows one to discard up to half of the data as potential outliers, and therefore make ANN model robust against largely abnormal data. Unlike in the case of linear regression, however, the LTS criterion may also discard good data together with the outliers. When there are no outliers in the data, it treats good data as outliers, and builds wrong regression models. We illustrate this on several examples in Section 5.

3 A new high-breakdown criterion for ANNs

In this section, we introduce a new fitting criterion, which has allowed us to overcome the deficiencies of the M-type and LTS criteria mentioned in the previous section. We propose this new criterion, called Penalised CLTS (PCLTS), with the following aims in mind

(A1) We need to discard data with unusually large residuals as outliers.

- (A2) We need to penalise unnecessary removal of data.
- (A3) We need to keep all data with residuals which are comparatively small.
- (A4) For the purposes of optimising the criterion, we need it to be based on a Lipschitz-continuous function.

PCLTS is based on the CLTS criterion [3], in which the data are discarded if their absolute residuals are C times larger than the median residual. The choice of $C = 1$ corresponds to the LTS criterion, but values of C larger than one lead to better efficiency of the estimator compared to OLS in the absence of outliers.

We propose the following objective, which addresses the aims (A1) to (A4) indicated above:

$$F(\theta) = \sum_{i=1}^n G(r_{(i)}(\theta)), \quad (6)$$

where $r_i(\theta) = f(\mathbf{x}_i; \theta) - y_i$, s is the median of absolute residuals $|r_1|, \dots, |r_n|$, and

$$G(t) = \begin{cases} t^2 & \text{if } |t| \leq Cs, \\ B & \text{if } |t| \geq Cs(1+a), \\ (|t| - Cs) \frac{B - (Cs)^2}{Csa} + (Cs)^2 & \text{otherwise,} \end{cases} \quad (7)$$

where $C \geq 1$ is a constant factor, a is a small positive number, and $B \in [0, (Cs)^2]$ is a parameter controlling the penalty for removal of data with large residuals. Since

$$y = (x - Cs) \frac{B - (Cs)^2}{Csa} + (Cs)^2 = (Cs)^2 \frac{x - Cs(1+a)}{Cs - Cs(1+a)} + B \frac{x - Cs}{Cs(1+a) - Cs}$$

is a linear interpolation between the points $(Cs, (Cs)^2)$ and $(Cs(1+a), B)$, it is clear that the function G is Lipschitz-continuous. When $C = 1$, $B = 0$ and $a \rightarrow 0$, we obtain a function which coincides with the LTS criterion almost everywhere. When $B = (Cs)^2$, we obtain a Huber-type function, which is properly scaled, because the median s is a robust estimator of the scale of the residuals (i.e., it is not affected by very large residuals).

We will discuss the consequences of one or another choice of the parameters B and C when we discuss numerical experiments in Section 5. Before that, we address the issue of numerical minimisation of (6).

4 Optimization methods

First, we will make a few general observations about the objective in (6). This function is non-convex and non-smooth, although it is Lipschitz-continuous. Compared to the LTS criterion (2), it has equally complex structure, although our experiments with the CLTS criterion in linear regression [3] indicated that the landscape of CLTS is less rugged compared to that of LTS. While the OLS criterion leads to a complex objective when training the standard ANNs

(multiple local minima), backpropagation seems to be quite efficient in locating local minima of the OLS (5). Neither backpropagation nor Levenberg Marquardt will work with the new objective (6) directly. Therefore we studied several alternative minimisation methods.

Specifically, we focused on the following derivative free optimisation methods, which have shown good potential when applied to robust linear regression [3].

- NEWUOA method of [40], combined with random start.
- derivative free bundle method (DFBM) [1, 4], combined with random start.
- a derivative free method based on dynamical systems (DSO) [28, 29].

Powell’s NEWUOA is a derivative free method for smooth functions, based on quadratic model of the objective, obtained by interpolation of function values at a subset of m previous trial points. While our objective is non-smooth (although it is piecewise smooth), we applied NEWUOA because this method is faster than proper non-smooth optimisation [27] methods like DFBM. Multiple local minima of the objective mean that we have to make several starts of the algorithm from different starting points, where speed becomes an issue. DSO was chosen because in previous studies [28, 29, 59] it delivered good performance when the objectives had a large number of variables. We also tried other derivative free methods (Nelder-Mead simplex method, pattern search APPSPACK [32, 33, 44]), but they were not competitive and were discarded in favour of those mentioned above.

All mentioned methods could detect the outliers effectively, but they were not numerically efficient nor sufficiently accurate when building regression models. We explain this by a relatively large number of variables – the weights of the ANN. Therefore we decided to design a hybrid method by combining detection and removal of outliers by using PCLTS objective, and subsequent training by backpropagation using cleaned data. This approach is in line with Gervini and Yohai’s REWLSE method for linear regression [13], in which an initial high-breakdown estimator is improved by fully efficient OLS on cleaned data. This proved to deliver accurate predictions for all data sets we have considered.

Thus our ANN training algorithm has the following steps.

- I. Use one of the mentioned optimisation methods with PCLTS objective (6).
- II. Clean the data by removing the data with the residuals larger than Cs .
- III. Use standard backpropagation with the OLS objective to train ANN on clean data.

The most time consuming step here is Step I. It requires multiple evaluations of the objective at a large number of points (typically of order of 100,000 in our experiments). Step III is standard in ANN training, and it was executed using standard ANN training library with default parameters (in our studies we used *nnet* package in *R* software [45]). It took negligible CPU time compared to Step I. Step II is trivial.

We used implementations of NEWUOA, DFBM and DSO in C++ language (DFBM and DSO taken from GANSO library [4], and a translation of NEWUOA from Fortran to C).

All methods have few overheads, and the main complexity was in evaluating the objective. In order to achieve competitive CPU time, we parallelised calculation of the objective and offloaded it to a graphics processing unit (GPU), NVIDIA’s Tesla C2050 [36, 37]. General Purpose GPUs have recently become a valuable alternative to traditional CPUs and CPU clusters. Tesla C2050 has 448 GPU cores and 3 GB of RAM, and can execute thousands of threads at a time. GPUs have limitations too, in particular it is Single Instruction Multiple Threads (SIMT) paradigm, which means that instructions in different threads (of the same thread block) need to be almost identical. For parallel calculation of the residuals this is not an issue, as this task is trivially parallel, and is executed using *for_all* primitive [18, 52]. Calculation of the median s is done in parallel using either GPU parallel sorting [6, 54], or a specific GPU selection algorithm [2]. Summation is performed in parallel using GPU reduction [18, 38, 52].

5 Numerical experiments

5.1 Data sets

We generated several artificial data sets using test functions considered in several previous papers on robust ANNs, and also used several real world data sets to which we introduced outliers. The artificial data sets are described below in Data Sets 1 through to 10. In all of these examples, the independent variables \mathbf{x} were considered in \mathbb{R}^m , where the dimension $m = p - 1$ took on the values $m = 1, 2, 3, 5, 10$. The values of \mathbf{x} were chosen uniformly at random in the segment $[\min_x, \max_x]$ indicated below in describing each data set of the corresponding example. The target variable was determined using the formula

$$y = h(\mathbf{x}) + \varepsilon, \quad (8)$$

where $\varepsilon \sim N(0, \text{noiselevel})$. In all data sets, the noise level adopted the values 0, 0.1, 0.2. The sizes n of the samples in each data set were taken as $n \in \{100, 500, 5000\}$. Then we replaced a proportion δ of the points with five subsets of outliers. The outliers were divided into 5 subsets of equal size. Each subset was centered at a point with the first m coordinates chosen uniformly at random in the same segment as the explanatory variables, and with the last coordinate equal to $10,000 + N(0, 0.01)$. For Data Sets 1 to 10 indicated below, we examined all combinations of the dimension $n = 1, 2, 3, 5, 10$, proportion of outliers $\delta = 0, 0.1, 0.2$, and noise level $\varepsilon = 0, 0.1, 0.2$.

Data Set 1 uses the model (8) with the function h given by the equation

$$h(\mathbf{x}) = \|\mathbf{x}\|^{2/3}, \quad (9)$$

where $\|\mathbf{x}\|$ stands for the Euclidean norm of \mathbf{x} and where the explanatory variables are again chosen uniformly at random in the segment $[\min_x, \max_x] = [-2, 2]$. Earlier, the robustness of ANN for this function and data with outliers was investigated in [9], [53] and [12] in the case where $m = 1$ and $n = 501$.

Data Set 2 deals with the model (8) using the function h given by the equation

$$h(\mathbf{x}) = x_1 e^{||\mathbf{x}||}, \quad (10)$$

where the explanatory variables are again chosen uniformly at random in the segment $[\min_x, \max_x] = [-2, 2]$. This function was earlier considered in [12].

Data Set 3 is defined by the model (8) using the function h given by the formula

$$\text{sinc}(\mathbf{x}) = \frac{\sin(||\mathbf{x}||)}{||\mathbf{x}||}, \quad (11)$$

where the explanatory variables are again chosen uniformly at random in the segment $[\min_x, \max_x] = [-10, 10]$. The function (11) was considered in numerous articles. For example, it was investigated in [8], [9] and [55].

Data Set 4 uses the model (8) with the function h given by equation

$$h(\mathbf{x}) = \sin\left(\frac{5}{m} \sum_{i=1}^m x_i\right) \arccos\left(\frac{1}{m} \sum_{i=1}^m x_i\right) \cos\left(\frac{3}{m} \sum_{i=1}^m x_i - 2/n\right), \quad (12)$$

where $\mathbf{x} \in [-1, 1]^m$ and n is the sample size. Earlier, the robustness of ANN for this function was investigated in [10] and [11].

Data Set 5 is given by the model (8) with the following function

$$h(\mathbf{x}) = \sin(10\pi||\mathbf{x}||) + \sin(20\pi||\mathbf{x}||), \quad (13)$$

where the explanatory variables are uniformly chosen in the segment $[\min_x, \max_x] = [0, 0.3]$. This function was investigated in [11], [24] and [39].

Data Set 6 deals with the model (8) given by the following function

$$h(\mathbf{x}) = (x_1^2 - x_2^2 + x_3^2 - x_4^2 + \dots) \sin(0.5(x_1 + x_3 + \dots)), \quad (14)$$

where the explanatory variables are uniformly chosen in the segment $[\min_x, \max_x] = [-2, 2]$. This function was investigated in [24] and [11].

Data Set 7 is defined by the model (8) with the function h given by the formula

$$h(\mathbf{x}) = \frac{\sin(x_1 + x_3 + \dots)}{x_1 + x_3 + \dots} \frac{\sin(x_2 + x_4 + \dots)}{x_2 + x_4 + \dots}, \quad (15)$$

where $\mathbf{x} \in [-5, 5]^m$. Earlier, this function was considered in [11], for only one value of $m = 2$.

Data Set 8 is given by the model (8) with the function h defined by the equation

$$h(\mathbf{x}) = 0.2(x_1 x_2 \dots x_m) + 1.2 \sin(||\mathbf{x}||^2), \quad (16)$$

where $\mathbf{x} \in [-1, 3]^m$. Earlier, this function was investigated in [11].

Data Set 9 uses the function h for the model (8) defined by the equation

$$h(\mathbf{x}) = \max\{\exp(-10x_1^2), \exp(-50x_2^2), 1.25 \exp(-5(||\mathbf{x}||^2))\}, \quad (17)$$

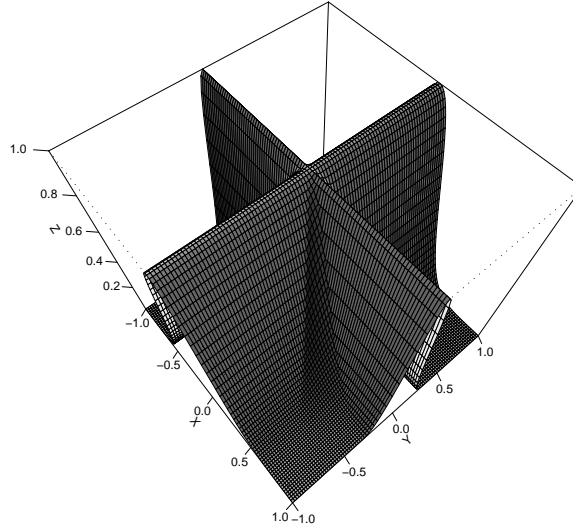


Figure 1: Plot of the surface of the function h used in Data set 9.

where $\mathbf{x} \in [-2, 2]^m$.

This function has an interesting surface plot in two variables, illustrated in Figure 1.

Data Set 10 is defined by the model (8) with the following function

$$h(\mathbf{x}) = 0.5\|\mathbf{x}\| \sin(\|\mathbf{x}\|) + \cos^2(\|\mathbf{x}\|), \quad (18)$$

where $\mathbf{x} \in [-6, 6]^m$. It was considered in [25].

Data Set 11 is a real world data set from the standardized benchmark collection for neural networks PROBEN 1 publicly available from [43]. PROBEN 1 was considered in many articles, for example, [21, 22, 41, 42, 58]. The Data Set 11 is the set ‘building’ with 4208 instances, where the value of hourly electricity consumption is regarded as a function of 14 input variables and has to be predicted. Outliers have been introduced by replacing several values of the dependent variable with very large values (10,000).

Data Set 12 is also a real world data set from PROBEN 1. It uses the values of output variable ‘cold water consumption’ viewed as a function of 14 input variables, see [41, 43].

Data Set 13 is a real world data set from PROBEN 1 using the values of output variable ‘hot water consumption’ viewed as a function of 14 input variables, see [41, 43].

Data Set 14 is a real world data set ‘hearta’ from PROBEN 1, see [41, 43].

5.2 Parameters of the algorithms

We varied two parameters of the PCLTS objective: C and B . We took $C \in \{1, 8\}$. The value $C = 1$ (with $B = 0$) corresponds to the LTS criterion, and it was interesting to observe the difference larger values of C made. The value of the second parameter B were chosen in

$\{0, 1, 8\}$. Here we studied the influence of the penalty for removing the data when cleaning the data set.

As far as the parameters of optimisation algorithms are concerned, we fixed them in order to give each method approximately the same CPU budget as the others. We fixed the number of random starts of NEWUOA and DFBM at 200. DFBM ran with the maximum number of iterations set to 1000.

We used *nnet* package in *R* to perform the final stage of ANN training with cleaned data with default parameters.

5.3 Benchmarking criteria

As it is customary in data analysis literature, we used the Root Mean Squared Error (RMSE) to measure the quality of approximation. The data were split into training and test subsets. The training subset contained noisy data with or without outliers. The test subset contained noiseless data, i.e. the accurate values of the test functions h at uniformly distributed data within the domain of each function we considered. The size of each test sample was equal to that of the corresponding training sample. The test data set was generated separately and was not provided to the training algorithm. We report the RMSE on the test data set, which is the most important characteristic, reflecting ANN’s generalisation ability.

We also report the average CPU time taken by the PCLTS and the *nnet* procedures. The CPU time did not depend much on the test function, nor the Gaussian noise level or proportion of outliers, but rather on the dimension of the problem. Therefore we averaged the CPU time over different experiments.

5.4 Results and discussion

In the Appendix we presented detailed results for each of the test function we considered. In Tables 1–10 we compare RMSE values for PCLTS and standard backpropagation (*nnet*). The values in bold indicate the cases the method broke down.

Two facts are apparent from these tables. First, it is the failure of the traditional ANN training to predict the test data sets. This can be viewed in Figure 2, top row, where the predictions are not even close to the majority of the train data, nor the test data. Similar pictures were obtained for other data sets, e.g. Figure 10,c). This is reflected in very large RMSE in the tables, which is consistent across the tables. Second, it is the ability of our method based on the PCLTS objective to filter out the outliers. We note that the RMSE are practically the same as RMSE of backpropagation *in the absence of outliers* (the values in *nnet* column not in boldface). This indicates that all outliers were filtered out, and only few, if any, good data were removed. So our method achieves the same accuracy when using contaminated data, as *nnet* when using only clean data, as if the outliers were not there. This is repeated across all data sets we used.

Furthermore, when there are no outliers in the data, our method delivers the same RMSE as backpropagation, which means that no (or almost no) data were unnecessarily removed.

Table 15 show the CPU time of PCLTS and backpropagation. We see that PCLTS takes 1,000-10,000 times longer to train the ANN, compared to backpropagation. We do not observe a clear pattern of rising CPU cost with the increased size of the data set. This can be explained, on one hand, by a smaller number of iterations of the optimisation algorithm for larger data, as the objective becomes less rough, and by the use of GPU to offload calculation of the residuals. We have used 448 cores for these calculations, and for 5000 data GPU calculations did not reach the saturation point. While as expected, PCLTS takes much longer, this time is compensated by the quality of the result. On the other hand, the CPU appears not to be excessive.

Tables 11–14 contain RMSE and CPU time for the real world data sets we considered. Again, we observe that standard backpropagation breaks down, while our method based on PCLTS objective provides a very good fit, comparable to backpropagation in the absence of outliers. CPU times are consistent with those reached in the examples with artificial data sets.

Let us now look at the figures. As we mentioned, Figures 2 illustrate the inability of the standard ANNs to predict the correct model, and the ability of the robust training based on LTS and PCLTS to remove the outliers. Figures 3 and 5 (see also Figures 11 and 12) illustrate the difference between the LTS and PCLTS criteria. Note that using LTS (top row), the cusp of the graph of the model function near the origin is lost. The reason is that LTS criterion treated the data near the cusp as outliers. This is of course undesirable. The modified criterion PCLTS (bottom row) gave a much better (in fact, nearly perfect) prediction. Hence PCLTS achieved its aim to block unnecessary removal of data, by imposing a penalty for every removal. In Figures 11, 12 the same effect is visible at both ends of the domain of the data. Thus we conclude that the addition of the penalty term in PCLTS criterion was justified.

As far as the optimisation methods are concerned, we noticed that the method DSO reliably detected the outliers, and its CPU was significantly smaller than that of the other two methods. CPU of random start with NEWUOA was on average six times higher, and CPU of random start with DFBM was twelve to fifteen times higher than that of DSO. On a few occasions random start with NEWUOA or DFBM have failed to deliver a model that identified the outliers correctly. Therefore we concluded that for our objective, DSO was the most suitable method among the alternatives we studied, and we concentrated on studying this method in greater detail. The tables in the Appendix give CPU and RMSE for the DSO method.

6 Conclusion

In this paper we investigated robust training of ANNs and detection of outliers in the data from two perspectives. First, we illustrated the inability of the classical least squares criterion to produce regression models not sensitive to outliers in the data. We investigated the use of the least trimmed criterion and found that it delivered robust regression models. We benchmarked various derivative free optimisation algorithms for optimising the LTS criterion and found that the method based on dynamical systems optimisation (DSO) was superior to several alternative methods. A contributing factor here is relatively large number of variables, which ranged from ten to one hundred. We produced a hybrid algorithm, combining detection of outliers by optimising the LTS criterion, their removal and subsequent fine tuning of the ANN by backpropagation.

Second, we investigated an undesirable feature of the LTS criterion, unjustified removal of valid data, and subsequent loss of accuracy. We introduced a new criterion, called Penalised CLTS, which imposes a penalty for removing the data. By optimising PCLTS criterion, we achieved a high degree of accuracy of the resulting regression model. Our method pinpoints and filters out the outliers reliably, and its computational cost is reasonable.

References

- [1] A. Bagirov. A method for minimization of quasidifferentiable functions. *Optimization Methods and Software*, 17:31–60, 2002.
- [2] G. Beliakov. Parallel calculation of the median and order statistics on GPUs with application to robust regression. Technical report, arxiv :1104.2732, 2011.
- [3] G. Beliakov and A. Kelarev. Global non-smooth optimization in robust multivariate regression. *Optimization Methods and Software*, page to appear, 2012.
- [4] G. Beliakov and J. Ugon. Implementation of novel methods of global and non-smooth optimization: GANSO programming library. *Optimization*, 56:543–546, 2007.
- [5] T. Bernholt. Robust estimators are hard to compute. Technical Report http://www.statistik.tu-dortmund.de/fileadmin/user_upload/Lehrstuehle/MSind/SFB_475/2005/tr52-05.pdf, University of Dortmund, 2005.
- [6] D. Cederman and P. Tsigas. GPU-Quicksort: A practical quicksort algorithm for graphics processors. *ACM Journal of Experimental Algorithmics*, 14:1.4.1–1.4.24, 2009.
- [7] A. Cerioli. Multivariate outlier detection with high-breakdown estimators. *Journal of the American Statistical Association*, 105:147–156, 2010.
- [8] D.S. Chen and R.C. Jain. A robust back-propagation learning algorithm for function approximation. *IEEE Trans. Neural Networks*, 5:467–479, 1994.

- [9] C.-C. Chuang, J.-T. Jeng, and P.-T. Lin. Annealing robust radial basis function networks for function approximation with outliers. *Neurocomputing*, 56:123–139, 2004.
- [10] C.C. Chuang, S.F. Su, and C.C. Hsiao. The annealing robust backpropagation (ARBP) learning algorithm. *IEEE Trans. Neural Networks*, 11:1067–1077, 2000.
- [11] C.C. Chuong and J.T. Jeng. CPBUM neural network for modeling with outliers and noise. *Applied Soft Computing*, 7:957–967, 2007.
- [12] M. El-Melegy, M. Essai, and A. Ali. Robust training of artificial feedforward neural networks. In A. Hassanien, A. Abraham, A. Vasilakos, and W. Pedrycz, editors, *Foundations of Computational Intelligence*, volume 201 of *Studies in Computational Intelligence*, pages 217–242. Springer Berlin / Heidelberg, 2009.
- [13] D. Gervini and V.J. Yohai. A class of robust and fully efficient regression estimators. *Ann. Statist.*, 30:583–616, 2002.
- [14] A.S. Hadi and A. Luceño. Maximum trimmed likelihood estimators: a unified approach, examples, and algorithms. *Computational Statistics and Data Analysis*, 25:251–272, 1997.
- [15] M.T. Hagan and M.B. Menhaj. Training feedforward networks with the Marquardt algorithm. *IEEE Trans. on Neural Networks*, 5:989–993, 1994.
- [16] F.R. Hampel. A general qualitative definition of robustness. *Annals of Math. Statistics*, 42:1887–1896, 1971.
- [17] D.M. Hawkins and D.J. Olive. Applications and algorithms for least trimmed sum of absolute deviations regression. *Computational Statistics and Data Analysis*, 32:119–134, 1999.
- [18] J. Hoberock and N. Bell. Thrust: A parallel template library, <http://www.meganewtons.com/>, 2010.
- [19] K. Hornik, M. Stinchcombe, and H. White. Multilayer feedforward networks are universal approximators. *Neural Networks*, 2:359–366, 1989.
- [20] P.J. Huber. *Robust Statistics*. Wiley, New York, 2003.
- [21] C. Igel and M. Hüsken. Empirical evaluation of the improved Rprop learning algorithms. *Neurocomputing*, 50:105–123, 2003.
- [22] J. Ilonen, J.-K. Kamarainen, and J. Lampinen. Differential evolution training algorithm for Feed-Forward Neural Networks. *Neural Processing Letters*, 17:93–105, 2003.
- [23] J.-T. Jeng, C.-T. Chuang, and C.-C. Chuang. Least trimmed squares based CPBUM neural networks. In *International Conference on System Science and Engineering*, pages 187–192. IEEE, 2011.

- [24] J.T. Jeng and T.T. Lee. Control of magnetic bearing systems via the Chebyshev polynomial-based unified model (CPBUM) neural network. *IEEE Trans. Man Cybernetics, Part B: Cybernet.*, 30:85–92, 2000.
- [25] C.-C. Lee, P.-C. Chung, J.-R. Tsai, and C.-I. Chang. Robust radial basis function neural networks. *IEEE Trans. Systems, Man, Cybernetics. Part B: Cybernetics*, 29:674–685, 1999.
- [26] K. Liano. Robust error measure for supervised neural network learning with outliers. *IEEE Trans. on Neural Networks*, 7:246–250, 1996.
- [27] M.M. Makela and P. Neittaanmaki. *Nonsmooth Optimization: Analysis and Algorithms With Applications to Optimal Control*. World Scientific, River Edge, NJ, 1992.
- [28] M. Mammadov, A. Rubinov, and J. Yearwood. The study of drug-reaction relationships using global optimization techniques. *Optimization Methods and Software*, 22:99–126, 2007.
- [29] M.A. Mammadov, A. Rubinov, and J. Yearwood. Dynamical systems described by relational elasticities with applications to global optimization. In A. Rubinov and V. Jeyakumar, editors, *Continuous Optimisation: Current Trends and Modern Applications*, pages 365–385. Springer, New York, 2005.
- [30] R. Maronna, R. Martin, and V. Yohai. *Robust Statistics: Theory and Methods*. Wiley, New York, 2006.
- [31] T. Masters. *Advanced algorithms for neural networks: a C++ sourcebook*. Wiley, New York, 1995.
- [32] J.J. Moré and S.M. Wild. Benchmarking derivative-free optimization algorithms. *SIAM J. Optim.*, 20:172–191, 2009.
- [33] J. A. Nelder and R. Mead. A simplex method for function minimization. *Computer Journal*, 7:308–313, 1965.
- [34] T.D. Nguyen and R. Welsch. Outlier detection and least trimmed squares approximation using semi-definite programming. *Computational Statistics and Data Analysis*, 12:3212–3226, 2010.
- [35] R. Nunkesser and O. Morell. An evolutionary algorithm for robust regression. *Computational Statistics and Data Analysis*, 54:3242–3248, 2010.
- [36] NVIDIA. http://developer.nvidia.com/object/cuda_4_0_rc_downloads.html, accessed 20 March, 2011.

- [37] NVIDIA. Tesla datasheet, http://www.nvidia.com/docs/io/43395/nv_ds_tesla_psc_us_nov08_lowres.pdf, accessed 1 December, 2010, accessed 1 July 2011.
- [38] NVIDIA. http://developer.download.nvidia.com/compute/cuda/1.1/website/data-parallel_algorithms.html, accessed 1 june, 2010, accessed 1 June 2011.
- [39] Y.C. Pati and P.S. Krishnaprasad. Analysis and synthesis of feedforward neural networks using discrete affine wavelet transformations. *IEEE Trans. Neural Networks*, 4:72–85, 1993.
- [40] M.J.D. Powell. The NEWUOA software for unconstrained optimization without derivatives. In *Large-Scale Nonlinear Optimization*, Nonconvex Optimization and Its Applications, pages 255–297. Springer US, 2006.
- [41] L. Prechelt. PROBEN 1 - a set of benchmarks and benchmarking rules for neural network training algorithms. Technical report, Technical Report 21/94, Universität Karlsruhe, D-76128 Jarlsruhem Germany, September 1994, <http://digbib.ubka.uni-karlsruhe.de/eva/ira/1994/21>, 1994.
- [42] L. Prechelt. Automatic early stopping using cross validation: quantifying the criteria. *Neural Networks*, 11:761–767, 1998.
- [43] L. Prechelt. PROBEN 1 – a standardized benchmark collection for neural network algorithms, 1994, available from <ftp://ftp.ira.uka.de/pub/neuron/proben1.tar.gz>, 2010.
- [44] A.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery. *Numerical Recipes in C: The Art of Scientific Computing*. Cambridge University Press, New York, 2002.
- [45] R software. <http://www.r-project.org/>, 2012.
- [46] P.J. Rousseeuw. Least median of squares regression. *J. Amer. Statist. Assoc.*, 79:871–880, 1984.
- [47] P.J. Rousseeuw and A.M. Leroy. *Robust Regression and Outlier Detection*. Wiley, New York, 2003.
- [48] P.J. Rousseeuw and K. Van Driessen. Computing LTS regression for large data sets. *Data Mining and Knowledge Discovery*, 12:29–45, 2006.
- [49] A. Rusiecki. Robust LTS backpropagation learning algorithm. In F. Sandoval, A. Prieto, J. Cabestany, and M. Graña, editors, *Computational and Ambient Intelligence*, volume 4507 of *Lecture Notes in Computer Science*, pages 102–109. Springer Berlin / Heidelberg, 2007.

- [50] A. Rusiecki. Robust MCD-based backpropagation learning algorithm. In L. Rutkowski, R. Tadeusiewicz, L. Zadeh, and J. Zurada, editors, *Artificial Intelligence and Soft Computing, ICAISC 2008*, volume 5097 of *Lecture Notes in Computer Science*, pages 154–163. Springer Berlin / Heidelberg, 2008.
- [51] M. Schyns, G. Haesbroeck, and F. Critchley. RelaxMCD: Smooth optimisation for the minimum covariance determinant estimator. *Comput. Stat. Data Anal.*, 54:843–857, 2010.
- [52] S. Sengupta, M. Harris, Y. Zhang, and J. D. Owens. Scan primitives for GPU computing. *Graphics Hardware*, pages 97–106, 2007.
- [53] H.-L. Shieh, Y.-K. Yang, P.-L. Chang, and J.-T. Jeng. Robust neural-fuzzy method for function approximation. *Expert Systems with Applications*, 36:6903–6913, 2009.
- [54] E. Sintorn and U. Assarsson. Fast parallel GPU-sorting using a hybrid algorithm. *J. of Parallel and Distributed Computing*, 68:1381–1388, 2008.
- [55] A.J. Smola and B. Schölkopf. From regularization operators to support vector kernels. *Neural Inf. Process. Syst.*, 10:343–349, 1998.
- [56] A.J. Stromberg, O. Hossjer, and D.M. Hawkins. The least trimmed differences regression estimator and alternatives. *J. Amer. Statist. Assoc.*, 95:853–864, 2000.
- [57] A.J. Stromberg and D. Ruppert. Breakdown in nonlinear regression. *J. of the American Statistical Association*, 87:991–997, 1992.
- [58] D. Tomandl and A. Schober. A Modified General Regression Neural Network (MGRNN) with new, efficient training algorithms as a robust black box-tool for data analysis. *Neural Networks*, 14:1023–1034, 2001.
- [59] M. Zukerman, M. Mammadov, L. Tan, I. Ouveysi, and Lachlan A.L. To be fair or efficient or a bit of both. *Computers and Operations Research*, 35:3787–3806, 2008.

Appendix

Table 1: Data Set 1, RMSE scores for test function $h(\mathbf{x}) = \|\mathbf{x}\|^{2/3}$. Values in bold indicate breakdown of the method.

Input dimension	Proportion of outliers	Size of the data set n	Noise level =0 pclts	nnet	Noise level=0.1 pclts	nnet	Noise level=0.2 pclts	nnet
1	0	100	0.021	0.020	0.035	0.035	0.071	0.071
1	0	500	0.011	0.011	0.016	0.016	0.042	0.042
1	0	5000	0.006	0.006	0.008	0.008	0.010	0.009
1	0.2	100	0.013	1109.050	0.035	2151.400	0.076	2221.849
1	0.2	500	0.012	1626.452	0.018	1447.013	0.044	1018.946
1	0.2	5000	0.007	1020.319	0.419	1742.355	0.014	1545.335
1	0.4	100	0.027	3246.146	0.067	3041.953	0.110	2585.175
1	0.4	500	0.013	2937.150	0.022	2982.020	0.028	2406.259
1	0.4	5000	0.007	1203.257	0.013	2622.065	0.015	1243.061
1	0.5	100	0.029	4843.302	0.073	2844.756	0.102	4410.803
1	0.5	500	0.015	3671.261	0.029	2880.355	0.044	1776.429
1	0.5	5000	0.008	4831.715	0.009	3736.112	0.017	3299.489
2	0	100	0.024	0.024	0.136	0.139	0.208	0.234
2	0	500	0.020	0.019	0.036	0.040	0.072	0.067
2	0	5000	0.019	0.019	0.023	0.026	0.028	0.029
2	0.2	100	0.023	2992.371	0.109	3760.125	0.270	2715.137
2	0.2	500	0.025	1474.736	0.046	1845.146	0.080	2013.107
2	0.2	5000	0.021	1785.524	0.024	2207.706	0.032	1555.451
2	0.4	100	0.029	4212.044	0.086	3437.521	0.240	5209.511
2	0.4	500	0.029	1983.814	0.042	3162.076	0.094	2498.807
2	0.4	5000	0.018	3016.362	0.024	2795.595	0.037	2039.607
2	0.5	100	0.047	3479.871	0.272	4305.459	0.215	4167.711
2	0.5	500	0.025	3865.850	0.054	2350.706	0.092	2995.097
2	0.5	5000	0.018	2628.596	0.025	2670.277	0.034	3380.372
3	0	100	0.070	0.095	0.171	0.133	0.284	0.269
3	0	500	0.027	0.026	0.052	0.051	0.073	0.078
3	0	5000	0.024	0.035	0.031	0.028	0.037	0.036
3	0.2	100	0.063	3424.539	0.163	3456.296	0.461	2754.772
3	0.2	500	0.025	1876.883	0.055	2126.971	0.101	2288.269
3	0.2	5000	0.024	437.679	0.027	2458.412	0.048	913.914
3	0.4	100	0.096	3626.761	0.278	3593.988	0.437	4328.172
3	0.4	500	0.026	3051.583	0.060	2778.413	0.123	3218.664
3	0.4	5000	0.026	1952.740	0.039	2583.106	0.046	3696.025
3	0.5	100	0.127	3307.094	0.382	3786.831	0.591	3711.280
3	0.5	500	0.037	3240.812	0.061	2787.930	0.125	3445.775
3	0.5	5000	0.029	3042.017	0.034	2916.196	0.048	1602.479
5	0	100	0.081	0.078	0.260	0.147	0.499	0.401
5	0	500	0.057	0.052	0.079	0.080	0.110	0.119
5	0	5000	0.041	0.041	0.045	0.043	0.051	0.050
5	0.2	100	0.094	3891.054	0.308	3232.645	0.469	3732.648
5	0.2	500	0.050	2265.408	0.092	2270.477	0.150	2258.718
5	0.2	5000	0.040	1692.358	0.043	307.011	0.057	2128.485
5	0.4	100	0.171	3787.225	0.294	4359.977	0.534	3681.744
5	0.4	500	0.054	2397.568	0.096	1838.333	0.155	2902.272
5	0.4	5000	0.040	1614.782	0.046	1545.807	0.273	1990.707
5	0.5	100	0.280	4795.451	0.275	3706.393	0.421	4067.282
5	0.5	500	0.069	2573.188	0.098	2675.592	0.179	2648.058
5	0.5	5000	0.042	2844.733	0.046	2809.447	0.063	2857.316
10	0	100	0.306	0.299	0.270	0.314	0.329	0.361
10	0	500	0.159	0.115	0.254	0.178	0.296	0.290
10	0	5000	0.109	0.108	0.132	0.135	0.137	0.121
10	0.2	100	0.277	3236.948	0.315	4121.937	0.326	2894.181
10	0.2	500	0.113	1617.721	0.184	1895.575	0.278	2504.313
10	0.2	5000	0.231	1265.473	0.084	1572.269	0.231	1780.300
10	0.4	100	0.289	4101.092	0.308	4113.396	0.382	4037.487
10	0.4	500	0.260	1507.686	0.251	1854.632	0.345	2078.722
10	0.4	5000	0.082	1918.855	0.231	1971.229	0.231	2159.798
10	0.5	100	0.290	4977.258	0.264	3979.261	0.352	3930.745
10	0.5	500	0.274	3068.391	0.296	3154.727	0.427	2949.967
10	0.5	5000	0.135	1899.810	0.116	2224.139	0.127	1190.993

Table 2: Data Set 2, RMSE scores for test function $h(\mathbf{x}) = x_1 e^{\|\mathbf{x}\|}$. Values in bold indicate breakdown of the method.

Input dimension	Proportion of outliers	Size of the data set n	Noise level =0		Noise level=0.1		Noise level=0.2	
			pcfts	nnet	pcfts	nnet	pcfts	nnet
1	0	100	0.013	0.012	0.048	0.034	0.061	0.061
1	0	500	0.001	0.002	0.016	0.014	0.030	0.030
1	0	5000	0.000	0.000	0.005	0.005	0.011	0.010
1	0.2	100	0.010	2148.754	0.033	2.417	0.080	2400.194
1	0.2	500	0.001	2602.706	0.020	2604.085	0.031	2276.562
1	0.2	5000	0.000	2334.587	0.006	2887.469	0.013	2337.995
1	0.4	100	0.011	2596.561	0.042	1599.617	0.123	2828.158
1	0.4	500	0.001	3578.435	0.005	2605.814	0.042	2673.687
1	0.4	5000	0.000	2687.385	0.005	2832.465	0.007	2847.874
1	0.5	100	0.011	5176.776	0.049	2482.051	0.166	4171.906
1	0.5	500	0.001	2380.363	0.029	2499.944	0.033	4288.795
1	0.5	5000	0.000	3951.128	0.006	3039.429	0.017	2806.767
2	0	100	0.009	0.009	0.069	0.059	0.253	0.134
2	0	500	0.006	0.006	0.035	0.033	0.060	0.062
2	0	5000	0.005	0.003	0.011	0.011	0.018	0.020
2	0.2	100	0.011	2668.408	0.129	3288.958	0.241	2467.441
2	0.2	500	0.005	1914.969	0.034	1589.997	0.071	2400.486
2	0.2	5000	0.007	2234.668	0.010	2160.805	0.019	1422.155
2	0.4	100	0.040	2864.933	0.262	3479.801	0.280	4933.606
2	0.4	500	0.006	3074.300	0.033	2467.063	0.081	2423.949
2	0.4	5000	0.005	3090.935	0.013	2469.559	0.026	1853.020
2	0.5	100	0.069	7185.250	0.154	2.134	0.360	5569.739
2	0.5	500	0.007	4942.917	0.041	2364.485	0.113	4999.988
2	0.5	5000	0.004	2479.056	0.015	3596.367	0.031	3080.130
3	0	100	0.044	0.037	0.227	0.098	0.268	0.226
3	0	500	0.031	0.032	0.056	0.047	0.104	0.083
3	0	5000	0.023	0.028	0.029	0.027	0.037	0.030
3	0.2	100	0.063	2626.567	0.177	1834.107	0.309	3995.105
3	0.2	500	0.033	1661.228	0.060	1446.461	0.141	2012.120
3	0.2	5000	0.024	1703.977	0.027	1352.354	0.040	1199.587
3	0.4	100	0.084	3809.952	0.199	2427.211	0.343	3210.537
3	0.4	500	0.031	2513.025	0.068	3769.689	0.116	3696.497
3	0.4	5000	0.027	1294.315	0.031	1629.493	0.041	2063.066
3	0.5	100	0.177	4845.271	0.365	3040.607	0.654	3017.996
3	0.5	500	0.034	2605.272	0.083	1065.010	0.132	1689.498
3	0.5	5000	0.030	2077.777	0.031	1191.266	0.045	3005.893
5	0	100	0.031	0.030	0.205	0.085	0.305	0.354
5	0	500	0.018	0.018	0.060	0.054	0.118	0.125
5	0	5000	0.018	0.019	0.025	0.025	0.038	0.040
5	0.2	100	0.064	3564.496	0.212	1673.425	0.567	2573.004
5	0.2	500	0.026	1820.677	0.072	2316.268	0.122	2358.980
5	0.2	5000	0.019	1929.773	0.029	955.324	0.042	1275.134
5	0.4	100	0.029	4086.133	0.243	2086.533	0.718	3580.618
5	0.4	500	0.025	2382.771	0.075	1338.828	0.173	3114.589
5	0.4	5000	0.020	2748.883	0.033	770.710	0.052	1182.186
5	0.5	100	0.086	3790.846	0.293	1010.225	0.369	4958.779
5	0.5	500	0.027	2907.051	0.077	1990.227	0.196	3573.141
5	0.5	5000	0.019	2045.978	0.031	1345.384	0.056	2574.422
10	0	100	0.001	0.000	0.179	0.096	0.341	0.314
10	0	500	0.002	0.002	0.072	0.065	0.178	0.163
10	0	5000	0.001	0.001	0.025	0.025	0.057	0.056
10	0.2	100	0.001	3768.071	0.124	1333.593	0.235	3366.499
10	0.2	500	0.001	1593.702	0.097	1391.395	0.197	1733.066
10	0.2	5000	0.002	1023.063	0.027	468.724	0.062	1024.444
10	0.4	100	0.001	5155.331	0.151	1383.604	0.258	4460.762
10	0.4	500	0.002	2485.255	0.121	957.925	0.252	1898.246
10	0.4	5000	0.001	1958.776	0.034	1480.955	0.067	2200.060
10	0.5	100	0.001	4896.077	0.108	1447.494	0.247	4022.098
10	0.5	500	0.001	2489.607	0.133	748.545	0.235	2685.403
10	0.5	5000	0.001	1657.014	0.037	1481.272	0.069	1545.069

Table 3: Data Set 3, RMSE scores for test function $h(\mathbf{x}) = \sin(\|\mathbf{x}\|)/\|\mathbf{x}\|$. Values in bold indicate breakdown of the method.

Input dimension	Proportion of outliers	Size of the data set n	Noise level =0		Noise level=0.1		Noise level=0.2	
			pclts	nnet	pclts	nnet	pclts	nnet
1	0	100	0.004	0.004	0.024	0.024	0.087	0.087
1	0	500	0.002	0.002	0.019	0.021	0.041	0.042
1	0	5000	0.002	0.002	0.007	0.007	0.011	0.011
1	0.2	100	0.005	2350.122	0.049	2621.706	0.147	3816.212
1	0.2	500	0.003	2331.880	0.019	2326.221	0.044	1604.963
1	0.2	5000	0.002	2341.197	0.007	1742.731	0.012	1800.171
1	0.4	100	0.005	3597.764	0.037	3944.581	0.128	4194.846
1	0.4	500	0.003	4163.724	0.021	2782.759	0.074	3177.079
1	0.4	5000	0.002	3098.375	0.007	3013.109	0.014	2580.344
1	0.5	100	0.006	3529.499	0.057	4373.620	0.105	4765.754
1	0.5	500	0.003	4624.554	0.020	4061.011	0.043	3433.221
1	0.5	5000	0.002	3929.220	0.007	3459.508	0.022	2633.235
2	0	100	0.213	0.235	0.194	0.192	0.306	0.299
2	0	500	0.113	0.124	0.137	0.111	0.155	0.156
2	0	5000	0.137	0.120	0.125	0.106	0.116	0.126
2	0.2	100	0.153	2228.151	0.182	2832.608	0.251	2789.265
2	0.2	500	0.129	2642.140	0.121	2600.507	0.149	2240.002
2	0.2	5000	0.101	1893.284	0.104	1739.531	0.103	1105.706
2	0.4	100	0.242	4119.934	0.153	2703.814	0.526	2607.311
2	0.4	500	0.104	3329.441	0.157	1819.683	0.147	3477.685
2	0.4	5000	0.124	1929.861	0.124	2637.915	0.124	2188.142
2	0.5	100	0.374	5241.557	0.586	4483.093	0.686	5173.547
2	0.5	500	0.121	4163.781	0.140	4309.859	0.248	3575.090
2	0.5	5000	0.102	3816.314	0.117	3355.438	0.123	3505.115
3	0	100	0.141	0.157	0.226	0.252	0.373	0.308
3	0	500	0.090	0.097	0.122	0.118	0.144	0.152
3	0	5000	0.097	0.098	0.097	0.096	0.101	0.100
3	0.2	100	0.165	2639.393	0.253	3277.018	0.278	3293.440
3	0.2	500	0.096	2203.427	0.118	2349.472	0.145	2490.728
3	0.2	5000	0.099	2014.125	0.096	1175.255	0.102	2337.995
3	0.4	100	0.191	3651.088	0.316	5745.046	0.890	5678.132
3	0.4	500	0.138	3493.979	0.136	4131.168	0.165	3744.782
3	0.4	5000	0.095	3160.637	0.103	2465.031	0.109	2335.938
3	0.5	100	0.249	4320.711	0.463	5487.510	0.393	4463.659
3	0.5	500	0.204	4163.605	0.155	3222.509	0.185	3841.434
3	0.5	5000	0.097	2823.495	0.099	2639.243	0.106	2852.204
5	0	100	0.170	0.190	0.199	0.253	0.283	0.374
5	0	500	0.071	0.067	0.096	0.094	0.136	0.129
5	0	5000	0.062	0.062	0.065	0.066	0.071	0.072
5	0.2	100	0.158	3729.847	0.188	4256.721	0.427	3468.235
5	0.2	500	0.076	2454.542	0.104	2685.809	0.163	2798.478
5	0.2	5000	0.063	2249.592	0.067	1812.338	0.076	2452.946
5	0.4	100	0.272	4857.011	0.271	4332.243	0.447	4287.117
5	0.4	500	0.079	3119.092	0.113	3492.228	0.215	3114.469
5	0.4	5000	0.063	2598.163	0.068	2194.720	0.078	2898.332
5	0.5	100	0.128	6815.194	0.197	5605.187	0.350	4941.879
5	0.5	500	0.076	3687.907	0.144	3850.660	0.190	3004.257
5	0.5	5000	0.065	2154.409	0.068	2644.636	0.082	2407.882
10	0	100	0.087	0.090	0.171	0.153	0.223	0.251
10	0	500	0.055	0.055	0.098	0.102	0.184	0.182
10	0	5000	0.042	0.042	0.049	0.051	0.066	0.069
10	0.2	100	0.067	3501.659	0.132	2868.290	0.253	4808.624
10	0.2	500	0.059	2483.304	0.106	2536.081	0.176	2663.667
10	0.2	5000	0.042	2165.896	0.052	2108.236	0.072	2317.155
10	0.4	100	0.072	4120.702	0.105	4050.738	0.180	4108.175
10	0.4	500	0.066	3529.293	0.111	3495.990	0.211	3028.767
10	0.4	5000	0.042	2087.143	0.056	2467.652	0.078	3474.176
10	0.5	100	0.074	4311.713	0.123	5123.136	0.194	5716.768
10	0.5	500	0.070	3970.424	0.144	4147.082	0.216	3956.990
10	0.5	5000	0.043	3940.671	0.057	3887.353	0.091	3131.611

Table 4: Data Set 4, RMSE scores for test function $h(\mathbf{x}) = \sin(\frac{5}{m} \sum_{i=1}^m x_i) \cos(\frac{1}{m} \sum_{i=1}^m x_i) \cos(\frac{3}{m} \sum_{i=1}^m x_i - 2/n)$. Values in bold indicate break-down of the method.

Input dimension	Proportion of outliers	Size of the data set n	Noise level = 0		Noise level = 0.1		Noise level = 0.2	
			pclts	nnet	pclts	nnet	pclts	nnet
1	0	100	0.018	0.018	0.039	0.039	0.051	0.051
1	0	500	0.009	0.010	0.021	0.020	0.040	0.043
1	0	5000	0.004	0.004	0.005	0.005	0.007	0.007
1	0.2	100	0.029	2536.255	0.051	2281.526	0.102	2113.818
1	0.2	500	0.011	2349.493	0.022	2460.206	0.023	2480.789
1	0.2	5000	0.005	2392.121	0.008	2311.305	0.015	2314.949
1	0.4	100	0.030	4239.727	0.064	4106.509	0.126	4000.216
1	0.4	500	0.018	3530.495	0.032	3052.685	0.044	3297.092
1	0.4	5000	0.006	3176.655	0.010	3735.902	0.014	3269.429
1	0.5	100	0.028	4263.198	0.054	5049.940	0.092	4746.733
1	0.5	500	0.016	2580.103	0.032	2569.031	0.042	2647.607
1	0.5	5000	0.006	3551.199	0.011	4125.981	0.012	4018.541
2	0	100	0.034	0.012	0.106	0.068	0.277	0.126
2	0	500	0.021	0.004	0.027	0.028	0.077	0.062
2	0	5000	0.007	0.004	0.020	0.009	0.050	0.015
2	0.2	100	0.026	2079.406	0.106	2766.112	0.305	1647.538
2	0.2	500	0.013	2392.766	0.036	2230.080	0.078	2035.472
2	0.2	5000	0.004	1516.034	0.011	2012.758	0.019	2222.601
2	0.4	100	0.217	3776.502	0.166	3623.230	0.218	3357.269
2	0.4	500	0.013	3487.636	0.038	3904.750	0.077	3819.065
2	0.4	5000	0.011	3875.903	0.013	3236.840	0.026	3041.187
2	0.5	100	0.032	4903.982	0.177	4857.142	0.392	4316.709
2	0.5	500	0.025	3163.898	0.042	4069.601	0.106	3667.355
2	0.5	5000	0.004	3237.522	0.011	2907.177	0.023	2974.508
3	0	100	0.342	0.010	0.374	0.104	0.352	0.326
3	0	500	0.090	0.010	0.122	0.044	0.113	0.065
3	0	5000	0.033	0.002	0.030	0.010	0.040	0.023
3	0.2	100	0.012	3067.202	0.114	3447.140	0.212	2831.374
3	0.2	500	0.009	2400.870	0.049	2364.360	0.101	2842.156
3	0.2	5000	0.001	1758.720	0.025	1789.520	0.031	955.202
3	0.4	100	0.068	3865.061	0.328	3973.309	0.586	4215.913
3	0.4	500	0.004	1357.572	0.048	2916.741	0.115	2578.019
3	0.4	5000	0.002	2789.135	0.020	2175.677	0.031	3921.980
3	0.5	100	0.135	4766.508	0.336	4434.943	0.673	5798.994
3	0.5	500	0.014	4538.512	0.051	2313.418	0.148	2139.502
3	0.5	5000	0.002	5000.027	0.017	3813.185	0.033	1967.654
5	0	100	0.012	0.012	0.194	0.219	0.540	0.376
5	0	500	0.046	0.020	0.091	0.075	0.131	0.115
5	0	5000	0.013	0.001	0.029	0.013	0.051	0.027
5	0.2	100	0.108	3277.295	0.267	2904.899	0.683	3171.092
5	0.2	500	0.021	2495.375	0.061	2276.714	0.176	2815.507
5	0.2	5000	0.001	1205.789	0.015	1280.940	0.032	1291.738
5	0.4	100	0.080	4332.911	0.374	4125.551	0.483	3805.763
5	0.4	500	0.014	2790.017	0.106	2868.925	0.208	2844.327
5	0.4	5000	0.002	3515.828	0.018	3309.866	0.037	3484.278
5	0.5	100	0.281	2816.417	0.382	4602.732	0.460	4259.719
5	0.5	500	0.015	2104.453	0.083	3811.765	0.191	3906.009
5	0.5	5000	0.003	2894.022	0.020	3040.731	0.045	4454.273
10	0	100	0.076	0.073	0.163	0.190	0.282	0.382
10	0	500	0.006	0.005	0.092	0.090	0.175	0.177
10	0	5000	0.008	0.002	0.064	0.021	0.062	0.045
10	0.2	100	0.096	2479.386	0.247	3074.441	0.333	2769.212
10	0.2	500	0.032	2149.944	0.111	2020.406	0.275	1628.117
10	0.2	5000	0.018	1188.203	0.050	1418.530	0.064	1124.796
10	0.4	100	0.142	4294.269	0.320	4584.641	0.380	5419.008
10	0.4	500	0.008	2687.737	0.128	2747.985	0.233	2280.057
10	0.4	5000	0.012	1435.511	0.032	1796.314	0.053	1084.804
10	0.5	100	0.131	5618.802	0.218	5878.293	0.352	3522.455
10	0.5	500	0.011	2305.005	0.146	1813.095	0.309	2832.694
10	0.5	5000	0.005	2462.356	0.034	1895.321	0.064	3647.127

Table 5: Data Set 5, RMSE scores for test function $h(\mathbf{x}) = \sin(10\pi||\mathbf{x}||) + \sin(20\pi||\mathbf{x}||)$. Values in bold indicate breakdown of the method.

Input dimension	Proportion of outliers	Size of the data set n	Noise level =0		Noise level=0.1		Noise level=0.2	
			pcfts	nnet	pcfts	nnet	pcfts	nnet
1	0	100	0.114	0.109	0.075	0.056	0.148	0.146
1	0	500	0.012	0.012	0.014	0.027	0.040	0.037
1	0	5000	0.007	0.007	0.008	0.012	0.011	0.011
1	0.2	100	0.129	2324.811	0.133	2504.451	0.178	1986.435
1	0.2	500	0.015	2376.646	0.027	2306.402	0.042	2510.584
1	0.2	5000	0.007	2139.114	0.008	2391.442	0.017	2139.109
1	0.4	100	0.152	3651.923	0.100	3999.753	0.768	3853.757
1	0.4	500	0.057	3999.893	0.026	3777.028	0.027	3850.540
1	0.4	5000	0.007	3924.929	0.014	3758.631	0.019	4042.885
1	0.5	100	0.990	4999.880	0.990	4940.837	0.159	4692.107
1	0.5	500	0.024	4800.461	0.020	4715.383	0.062	4999.829
1	0.5	5000	0.007	4394.916	0.014	4781.846	0.014	4444.855
2	0	100	0.512	0.545	0.503	0.461	0.546	0.492
2	0	500	0.382	0.273	0.271	0.313	0.482	0.272
2	0	5000	0.360	0.237	0.433	0.430	0.262	0.286
2	0.2	100	1.035	2550.246	0.867	3749.684	0.702	3782.985
2	0.2	500	0.278	2299.506	0.343	2517.519	0.274	2756.165
2	0.2	5000	0.369	2000.004	0.287	1999.960	0.257	1999.971
2	0.4	100	1.026	3999.961	0.492	5108.289	0.985	4009.890
2	0.4	500	0.367	3410.284	0.399	3419.954	0.245	4137.776
2	0.4	5000	0.187	3999.981	0.245	3999.979	0.314	3999.975
2	0.5	100	1.107	4939.112	1.019	5352.378	1.198	4672.057
2	0.5	500	0.467	5000.044	0.321	4806.901	0.377	4625.523
2	0.5	5000	0.427	4592.563	0.239	5000.005	0.327	4172.253
3	0	100	0.923	0.899	0.914	0.896	0.836	0.872
3	0	500	0.537	0.538	0.621	0.532	0.576	0.508
3	0	5000	0.532	0.569	0.618	0.606	0.518	0.571
3	0.2	100	1.112	3685.097	1.078	3289.962	0.948	3511.934
3	0.2	500	0.610	2670.319	0.813	2151.187	0.604	2310.767
3	0.2	5000	0.619	2444.609	0.594	2401.731	0.968	2407.185
3	0.4	100	1.879	3616.500	2.217	3999.951	1.818	4000.008
3	0.4	500	0.688	3804.583	0.705	4073.334	0.647	3611.136
3	0.4	5000	0.536	3632.560	0.588	3018.323	0.544	3355.282
3	0.5	100	1.397	4549.170	1.960	5318.391	2.206	4640.306
3	0.5	500	0.969	5000.056	0.712	4149.362	0.733	4883.820
3	0.5	5000	0.627	3770.222	0.553	5000.095	0.542	4101.688
5	0	100	2.937	1.470	2.353	1.346	1.302	1.587
5	0	500	0.843	0.895	0.877	0.759	0.799	0.758
5	0	5000	0.756	0.680	0.726	0.625	0.657	0.708
5	0.2	100	1.553	3379.579	1.388	2908.166	1.797	2591.612
5	0.2	500	0.820	2614.763	1.079	2503.772	0.839	2289.500
5	0.2	5000	0.738	2364.317	0.655	2321.339	0.785	2069.539
5	0.4	100	3.402	3592.035	3.272	4186.407	2.596	3999.992
5	0.4	500	1.008	2898.579	0.868	3530.747	0.895	3552.943
5	0.4	5000	0.617	2111.821	0.745	2664.957	0.684	3646.537
5	0.5	100	1.737	4921.612	1.433	3565.847	1.640	4081.125
5	0.5	500	0.881	4999.977	1.007	4295.574	0.941	4055.324
5	0.5	5000	0.672	5000.007	0.680	4999.978	0.691	2703.705
10	0	100	2.166	2.433	2.290	2.257	1.891	1.990
10	0	500	1.024	1.005	1.162	0.963	1.157	1.646
10	0	5000	0.794	0.749	0.739	0.752	0.748	0.732
10	0.2	100	1.539	2894.798	1.579	2000.302	1.588	3023.632
10	0.2	500	1.066	2033.224	1.079	2447.593	1.061	2386.692
10	0.2	5000	0.737	1684.153	0.766	1899.151	0.705	2151.272
10	0.4	100	1.661	4012.751	1.607	3727.007	1.646	3553.068
10	0.4	500	1.225	4000.000	1.615	4000.019	1.066	4000.013
10	0.4	5000	0.846	3271.505	0.763	4000.034	0.773	2552.102
10	0.5	100	1.989	4120.718	2.008	4003.421	1.865	5000.024
10	0.5	500	1.387	4999.992	1.631	3008.089	1.395	2166.410
10	0.5	5000	0.825	5000.025	0.800	3568.897	0.801	3801.738

Table 6: Data Set 6, RMSE scores for $h(\mathbf{x}) = (x_1^2 - x_2^2 + x_3^2 - x_4^2 + \dots) \sin(0.5(x_1 + x_3 + \dots))$. Values in bold indicate breakdown of the method.

Input dimension	Proportion of outliers	Size of the data set n	Noise level=0		Noise level=0.1		Noise level=0.2	
			pclts	nnet	pclts	nnet	pclts	nnet
1	0	100	0.011	0.011	0.032	0.031	0.116	0.129
1	0	500	0.033	0.004	0.047	0.013	0.032	0.029
1	0	5000	0.012	0.001	0.049	0.005	0.016	0.013
1	0.2	100	0.086	1428.515	0.205	1244.780	0.139	2210.010
1	0.2	500	0.004	2050.179	0.020	2343.837	0.041	2274.445
1	0.2	5000	0.001	2131.853	0.007	1964.621	0.011	1938.302
1	0.4	100	0.006	3071.073	0.055	2601.291	0.112	2573.349
1	0.4	500	0.005	3175.624	0.016	3928.369	0.039	2944.073
1	0.4	5000	0.001	3518.383	0.006	2769.465	0.022	4001.567
1	0.5	100	0.010	4480.236	0.067	3453.947	0.094	4059.283
1	0.5	500	0.005	3400.442	0.019	3038.613	0.045	2985.368
1	0.5	5000	0.002	3771.652	0.007	4254.330	0.019	3896.209
2	0	100	0.041	0.032	0.063	0.069	0.185	0.207
2	0	500	0.019	0.013	0.034	0.031	0.069	0.066
2	0	5000	0.008	0.006	0.010	0.010	0.014	0.016
2	0.2	100	0.036	2727.134	0.115	3232.341	0.341	3343.561
2	0.2	500	0.013	2347.874	0.040	2106.149	0.070	1871.573
2	0.2	5000	0.006	1733.387	0.013	1684.584	0.021	1835.099
2	0.4	100	0.065	4100.837	0.280	3534.314	0.304	2983.691
2	0.4	500	0.022	1424.309	0.047	2387.109	0.093	2216.498
2	0.4	5000	0.009	1962.566	0.014	2761.497	0.027	2200.297
2	0.5	100	0.060	4457.908	0.167	4871.504	0.521	4488.219
2	0.5	500	0.023	3960.387	0.046	3739.904	0.130	3238.984
2	0.5	5000	0.009	2236.145	0.015	2715.766	0.029	3676.229
3	0	100	0.485	0.055	0.423	0.164	1.025	0.253
3	0	500	0.220	0.025	0.249	0.052	0.264	0.077
3	0	5000	0.123	0.010	0.140	0.022	0.240	0.026
3	0.2	100	1.129	3717.613	1.395	2779.470	2.981	2989.171
3	0.2	500	0.036	2028.797	0.091	1600.051	0.115	2268.236
3	0.2	5000	0.028	1058.039	0.024	1527.461	0.035	1587.201
3	0.4	100	0.314	4793.372	0.363	4047.600	0.532	4194.754
3	0.4	500	0.097	3610.365	0.141	2508.087	0.131	3132.982
3	0.4	5000	0.020	2033.151	0.053	1966.833	0.041	2651.994
3	0.5	100	2.137	4825.086	1.099	4296.795	0.831	5327.959
3	0.5	500	0.028	3375.964	0.065	3420.456	0.176	3534.288
3	0.5	5000	0.012	2710.242	0.023	2105.679	0.037	2188.200
5	0	100	1.408	0.839	4.929	4.684	4.230	1.005
5	0	500	0.363	0.195	0.536	0.296	0.625	0.238
5	0	5000	0.156	0.078	0.214	0.104	0.207	2.488
5	0.2	100	3.461	2913.071	4.988	3044.410	5.467	2610.414
5	0.2	500	0.365	2134.386	0.256	2426.132	0.274	1557.945
5	0.2	5000	0.302	916.923	0.448	1953.074	0.282	1825.487
5	0.4	100	7.364	4303.066	2.038	4712.548	3.855	3613.974
5	0.4	500	0.201	2389.376	0.243	1608.493	0.297	2897.463
5	0.4	5000	2.472	1535.051	0.409	982.122	0.186	2710.593
5	0.5	100	2.620	5777.409	2.659	3981.915	3.004	4552.276
5	0.5	500	0.334	2959.721	0.386	3587.578	0.387	3820.604
5	0.5	5000	0.083	1486.899	0.339	1860.152	0.110	3650.581
10	0	100	7.693	18.996	14.509	14.780	9.206	19.782
10	0	500	3.459	3.393	3.518	1.502	1.458	2.586
10	0	5000	1.454	3.134	1.342	1.166	1.853	0.877
10	0.2	100	11.088	4958.813	11.139	3430.718	12.938	3779.233
10	0.2	500	7.437	2102.617	5.793	2146.722	8.225	1560.623
10	0.2	5000	1.361	914.675	1.373	1440.426	1.529	1741.527
10	0.4	100	9.915	3334.080	9.532	5060.621	10.702	3418.132
10	0.4	500	9.291	2923.122	11.039	2665.132	12.791	2930.661
10	0.4	5000	1.348	1230.987	3.820	1214.258	3.818	2165.092
10	0.5	100	10.992	4883.367	10.502	5012.351	11.335	4846.822
10	0.5	500	4.795	2404.714	8.024	3607.545	10.387	2444.654
10	0.5	5000	2.268	2333.182	3.807	2318.265	1.090	1417.052

Table 7: Data Set 7, RMSE scores for test function $h(\mathbf{x}) = \frac{\sin(x_1+x_3+\dots)}{x_1+x_3+\dots} \frac{\sin(x_2+x_4+\dots)}{x_2+x_4+\dots}$. Values in bold indicate breakdown of the method.

Input dimension	Proportion of outliers	Size of the data set n	Noise level =0 pclts	nnet	Noise level=0.1 pclts	nnet	Noise level=0.2 pclts	nnet
1	0	100	0.009	0.009	0.054	0.054	0.106	0.113
1	0	500	0.002	0.002	0.016	0.016	0.049	0.047
1	0	5000	0.000	0.000	0.005	0.005	0.013	0.013
1	0.2	100	0.008	1765.182	0.050	1758.972	0.055	2102.820
1	0.2	500	0.002	2188.202	0.016	2113.608	0.042	2097.431
1	0.2	5000	0.001	1826.183	0.004	1980.115	0.010	2050.203
1	0.4	100	0.010	3364.341	0.063	4039.035	0.089	3449.219
1	0.4	500	0.003	2817.924	0.018	3713.575	0.046	3421.399
1	0.4	5000	0.001	1480.301	0.010	2625.622	0.009	1438.434
1	0.5	100	0.014	2993.168	0.062	5208.375	0.238	4399.353
1	0.5	500	0.003	3157.996	0.027	3659.850	0.052	3452.964
1	0.5	5000	0.001	3970.096	0.005	1666.382	0.020	2975.661
2	0	100	0.028	0.022	0.100	0.094	0.188	0.219
2	0	500	0.011	0.012	0.033	0.032	0.078	0.072
2	0	5000	0.011	0.026	0.015	0.039	0.042	0.021
2	0.2	100	0.023	2420.006	0.134	2812.395	0.246	2563.617
2	0.2	500	0.011	2279.412	0.036	1869.458	0.074	2704.868
2	0.2	5000	0.008	2101.774	0.017	1884.560	0.040	1319.015
2	0.4	100	0.037	4207.650	0.192	4193.981	0.602	3981.419
2	0.4	500	0.012	2908.053	0.057	2746.133	0.110	2929.497
2	0.4	5000	0.011	1270.255	0.015	1463.656	0.023	1338.211
2	0.5	100	0.101	5677.245	0.159	3707.418	0.435	4976.179
2	0.5	500	0.014	3565.570	0.038	5092.360	0.143	4226.929
2	0.5	5000	0.030	2515.610	0.017	2195.271	0.047	3655.635
3	0	100	0.400	0.034	0.201	0.193	0.303	0.360
3	0	500	0.029	0.038	0.069	0.067	0.108	0.135
3	0	5000	0.023	0.022	0.033	0.029	0.050	0.036
3	0.2	100	0.113	3211.998	0.214	3061.432	0.293	3109.383
3	0.2	500	0.037	2442.978	0.047	2294.771	0.117	2199.221
3	0.2	5000	0.022	2015.321	0.045	2229.473	0.044	1978.711
3	0.4	100	0.078	4477.740	0.367	3743.564	0.600	5265.777
3	0.4	500	0.049	3725.876	0.069	3263.236	0.158	2967.931
3	0.4	5000	0.037	2042.914	0.030	1572.561	0.051	948.232
3	0.5	100	0.164	5217.680	0.438	4772.684	0.772	4567.295
3	0.5	500	0.033	3214.542	0.070	3286.198	0.149	3396.359
3	0.5	5000	0.037	997.293	0.029	4078.636	0.052	1340.076
5	0	100	0.359	0.471	0.553	0.352	0.394	0.439
5	0	500	0.137	0.082	0.163	0.139	0.201	0.161
5	0	5000	0.075	0.080	0.069	0.104	0.115	0.092
5	0.2	100	0.411	3425.099	0.448	3407.395	0.623	4213.772
5	0.2	500	0.217	2268.813	0.169	1844.163	0.246	2005.357
5	0.2	5000	0.077	1159.222	0.083	1698.785	0.133	1493.518
5	0.4	100	0.472	4529.235	0.527	2493.730	0.784	3896.168
5	0.4	500	0.161	3279.181	0.215	3656.944	0.287	3632.136
5	0.4	5000	0.081	2594.180	0.094	2558.796	0.105	2527.323
5	0.5	100	0.463	4272.932	0.593	4192.088	0.531	4263.360
5	0.5	500	0.170	3430.565	0.326	3359.898	0.355	3421.224
5	0.5	5000	0.091	2877.599	0.084	2401.704	0.154	3382.486
10	0	100	0.215	0.299	0.258	0.306	0.354	0.359
10	0	500	0.238	0.249	0.227	0.246	0.279	0.289
10	0	5000	0.099	0.103	0.185	0.117	0.173	0.142
10	0.2	100	0.260	3753.222	0.293	3359.206	0.392	3168.373
10	0.2	500	0.241	2233.665	0.266	2590.100	0.283	2683.247
10	0.2	5000	0.103	2213.302	0.132	2205.644	0.136	966.199
10	0.4	100	0.250	4099.838	0.268	4691.776	0.276	4583.842
10	0.4	500	0.228	3347.419	0.293	3198.435	0.327	3662.368
10	0.4	5000	0.102	1783.281	0.139	2331.094	0.173	1012.611
10	0.5	100	0.357	5374.843	0.325	4782.975	0.355	5266.989
10	0.5	500	0.274	3648.297	0.349	3722.761	0.374	3047.895
10	0.5	5000	0.163	1609.686	0.142	1109.243	0.177	2243.199

Table 8: Data Set 8, RMSE scores for test function $h(\mathbf{x}) = 0.2(x_1x_2 \cdots x_m) + 1.2 \sin(\|\mathbf{x}\|^2)$. Values in bold indicate breakdown of the method.

Input dimension	Proportion of outliers	Size of the data set n	Noise level=0		Noise level=0.1		Noise level=0.2	
			pclts	nnet	pclts	nnet	pclts	nnet
1	0	100	0.041	0.012	0.095	0.042	0.057	0.048
1	0	500	0.004	0.004	0.013	0.013	0.038	0.038
1	0	5000	0.001	0.001	0.007	0.004	0.012	0.012
1	0.2	100	0.014	3128.316	0.044	3952.802	0.076	3533.059
1	0.2	500	0.009	2259.867	0.031	2258.475	0.070	2098.067
1	0.2	5000	0.001	2187.879	0.006	2303.391	0.017	2237.420
1	0.4	100	0.036	4001.311	0.049	4302.778	0.084	3703.276
1	0.4	500	0.009	3075.499	0.016	2973.959	0.040	4080.353
1	0.4	5000	0.002	2638.407	0.008	2706.752	0.019	3233.509
1	0.5	100	0.136	4452.552	0.139	4693.292	0.188	4552.690
1	0.5	500	0.008	3955.118	0.020	4754.951	0.046	3402.606
1	0.5	5000	0.002	4194.380	0.011	4864.122	0.018	4988.893
2	0	100	0.603	1.005	0.737	0.789	0.906	0.860
2	0	500	0.504	0.410	0.489	0.513	0.503	0.437
2	0	5000	0.478	0.351	0.406	0.426	0.322	0.283
2	0.2	100	0.625	2105.492	0.678	2485.237	0.628	2928.959
2	0.2	500	0.477	2454.516	0.337	1793.007	0.448	2225.536
2	0.2	5000	0.412	1938.913	0.314	2026.322	0.410	1772.382
2	0.4	100	0.722	4325.889	1.444	3492.209	1.239	3540.848
2	0.4	500	0.491	1937.007	0.491	3197.496	0.509	2796.427
2	0.4	5000	0.359	3034.412	0.274	3670.032	0.300	3345.920
2	0.5	100	1.310	4471.116	1.417	2965.294	0.868	4842.782
2	0.5	500	0.511	3877.878	0.269	3574.512	0.535	2647.934
2	0.5	5000	0.321	3563.717	0.397	3365.565	0.268	2555.748
3	0	100	1.816	1.678	1.430	1.432	1.119	1.068
3	0	500	0.876	0.855	0.860	0.795	0.857	0.851
3	0	5000	0.742	0.742	0.741	0.743	0.734	0.740
3	0.2	100	1.147	2903.258	1.260	3268.886	1.558	3084.920
3	0.2	500	0.875	2247.053	0.803	2008.515	0.840	2367.498
3	0.2	5000	0.740	1806.993	0.741	1865.464	0.750	1755.061
3	0.4	100	2.094	3715.733	1.491	4618.206	4.317	5149.712
3	0.4	500	0.931	2745.697	0.965	3138.338	0.869	3148.451
3	0.4	5000	0.754	1517.785	0.764	4049.413	0.746	3902.094
3	0.5	100	1.905	4156.388	2.119	3726.369	1.672	4457.779
3	0.5	500	0.900	3291.714	0.945	3235.183	0.900	3233.359
3	0.5	5000	0.752	3167.287	0.782	2556.040	0.757	2625.226
5	0	100	2.327	4.354	2.229	2.903	2.498	2.362
5	0	500	1.256	1.092	1.350	1.259	1.263	1.123
5	0	5000	1.158	0.934	1.020	0.925	1.125	1.034
5	0.2	100	2.508	3370.282	4.402	3272.868	3.352	3293.710
5	0.2	500	1.576	2624.077	1.879	2287.972	1.523	2005.299
5	0.2	5000	0.985	1363.233	1.069	1700.153	1.104	1500.418
5	0.4	100	2.609	2376.302	2.722	4719.392	2.998	4296.714
5	0.4	500	1.600	3298.061	1.950	2755.280	1.552	2734.976
5	0.4	5000	1.244	2186.003	1.147	2300.633	1.174	2494.250
5	0.5	100	2.260	4572.099	2.095	3937.779	2.313	6210.142
5	0.5	500	1.605	4154.586	1.654	3985.983	2.198	3712.740
5	0.5	5000	1.066	2379.514	1.109	4216.597	1.145	2891.174
10	0	100	3.431	30.677	3.402	29.481	3.726	26.218
10	0	500	5.330	20.715	5.331	18.529	5.434	12.301
10	0	5000	9.711	19.120	9.716	27.106	9.725	20.595
10	0.2	100	3.438	2103.487	3.469	2422.936	3.235	2541.422
10	0.2	500	28.322	2379.359	28.208	2178.642	28.050	2371.511
10	0.2	5000	12.196	1656.961	12.206	2150.155	12.181	2194.532
10	0.4	100	6.600	4033.845	6.707	3833.060	6.687	3614.784
10	0.4	500	8.013	4065.840	8.485	3327.940	8.058	3236.766
10	0.4	5000	9.129	1971.718	9.584	2675.514	9.125	1981.605
10	0.5	100	18.697	5522.735	27.254	5035.991	25.144	5697.319
10	0.5	500	23.896	2966.468	24.798	3637.792	33.345	3050.778
10	0.5	5000	24.806	4373.678	15.785	3541.430	22.328	1935.512

Table 9: Data Set 9, RMSE scores for test function $h(\mathbf{x}) = \max\{\exp(-10x_1^2), \exp(-50x_2^2), 1.25 \exp(-5(\|\mathbf{x}\|^2))\}$. Values in bold indicate breakdown of the method.

Input dimension	Proportion of outliers	Size of the data set n	Noise level =0		Noise level=0.1		Noise level=0.2	
			pclts	nnet	pclts	nnet	pclts	nnet
2	0	100	0.184	0.141	0.206	0.153	0.308	0.309
	0	500	0.079	0.075	0.099	0.088	0.106	0.102
	0	5000	0.059	0.059	0.064	0.065	0.067	0.066
2	0.2	100	0.184	5173.392	0.250	2889.054	0.306	3264.975
	0.2	500	0.062	2448.795	0.078	2744.082	0.111	2458.956
	0.2	5000	0.059	2224.556	0.056	2061.706	0.059	2159.524
2	0.4	100	0.223	5522.572	0.410	4744.327	0.417	4810.072
	0.4	500	0.063	3344.664	0.071	3479.662	0.121	2916.421
	0.4	5000	0.060	3246.705	0.061	3055.672	0.068	3624.289
2	0.5	100	0.298	6098.084	0.276	4586.137	0.402	4962.610
	0.5	500	0.085	3977.607	0.077	4047.496	0.127	3827.140
	0.5	5000	0.058	3114.126	0.063	3952.664	0.067	4174.148
3	0	100	0.274	0.193	0.348	0.253	0.399	0.431
	0	500	0.092	0.080	0.098	0.101	0.134	0.135
	0	5000	0.050	0.050	0.058	0.053	0.060	0.054
3	0.2	100	0.191	3237.365	0.267	3331.339	0.409	3287.101
	0.2	500	0.081	2606.747	0.091	2494.617	0.107	2640.660
	0.2	5000	0.316	2135.419	0.236	2226.862	0.064	2269.600
3	0.4	100	0.209	3628.007	0.352	4067.800	0.464	4241.109
	0.4	500	0.055	3065.077	0.089	3374.726	0.123	3433.499
	0.4	5000	0.054	2915.229	0.054	2448.904	0.063	2472.716
3	0.5	100	0.240	4303.358	0.411	4564.768	1.171	5417.045
	0.5	500	0.086	3788.398	0.096	3592.718	0.140	3446.580
	0.5	5000	0.049	4098.207	0.059	3511.454	0.071	3085.472
5	0	100	0.302	0.410	0.598	0.533	0.861	0.488
	0	500	0.079	0.088	0.100	0.107	0.143	0.159
	0	5000	0.056	0.320	0.076	0.051	0.076	0.066
5	0.2	100	0.489	2628.943	0.546	2637.739	0.645	2939.368
	0.2	500	0.081	2610.714	0.097	2502.602	0.151	2458.578
	0.2	5000	0.050	1862.374	0.058	1951.289	0.071	1742.820
5	0.4	100	0.513	3876.289	0.685	3999.593	0.695	3841.999
	0.4	500	0.113	3512.653	0.108	3516.847	0.280	3112.941
	0.4	5000	0.050	1986.295	0.063	2003.099	0.069	2237.499
5	0.5	100	0.532	6825.306	0.598	4621.246	0.499	5277.060
	0.5	500	0.230	2969.271	0.138	3904.036	0.195	3674.711
	0.5	5000	0.048	2622.676	0.056	2697.989	0.079	2371.459
10	0	100	0.601	0.612	0.688	0.580	0.689	0.531
	0	500	0.213	0.081	0.225	0.113	0.384	0.153
	0	5000	0.058	0.051	0.077	0.073	0.085	0.077
10	0.2	100	0.437	3304.800	0.404	3284.997	0.514	2462.769
	0.2	500	0.148	2025.589	0.459	1828.131	0.404	2256.382
	0.2	5000	0.049	952.233	0.067	1245.635	0.081	1111.282
10	0.4	100	0.466	4375.740	0.487	3656.216	0.549	3452.429
	0.4	500	0.125	2219.042	0.273	2863.943	0.359	1983.010
	0.4	5000	0.063	1869.179	0.067	2293.267	0.080	1561.319
10	0.5	100	0.344	4331.622	0.366	5260.219	0.445	6372.200
	0.5	500	0.255	3316.410	0.366	4269.048	0.615	3163.424
	0.5	5000	0.054	2455.298	0.075	1975.485	0.086	1716.108

Table 10: Data Set 10, RMSE scores for test function $h(\mathbf{x}) = 0.5\|\mathbf{x}\| \sin(\|\mathbf{x}\|) + \cos^2(\|\mathbf{x}\|)$. Values in bold indicate breakdown of the method.

Input dimension	Proportion of outliers	Size of the data set n	Noise level = 0		Noise level = 0.1		Noise level = 0.2	
			pclts	nnet	pclts	nnet	pclts	nnet
1	0	100	0.012	0.012	0.038	0.037	0.115	0.116
1	0	500	0.011	0.011	0.020	0.020	0.042	0.041
1	0	5000	0.008	0.008	0.015	0.011	0.015	0.014
1	0.2	100	0.014	3057.407	0.043	3137.274	0.116	3190.071
1	0.2	500	0.010	1692.090	0.028	1778.629	0.035	1845.963
1	0.2	5000	0.008	2209.299	0.009	1780.260	0.015	2128.146
1	0.4	100	0.016	4214.475	0.048	3809.047	0.090	4023.262
1	0.4	500	0.010	3226.848	0.024	3914.094	0.071	1938.845
1	0.4	5000	0.007	2311.221	0.012	2738.071	0.017	2271.089
1	0.5	100	0.295	4855.493	0.296	3648.157	0.384	5182.786
1	0.5	500	0.012	3523.806	0.034	3792.007	0.083	2484.452
1	0.5	5000	0.004	3989.730	0.010	3803.877	0.023	3939.139
2	0	100	0.717	0.615	0.779	0.800	0.759	0.777
2	0	500	0.309	0.272	0.307	0.443	0.310	0.314
2	0	5000	0.343	0.265	0.306	0.302	0.341	0.283
2	0.2	100	0.765	3356.822	0.596	3551.735	0.593	2410.704
2	0.2	500	0.479	2463.582	0.475	2074.612	0.471	2198.350
2	0.2	5000	0.299	1028.126	0.299	2000.821	0.258	1371.590
2	0.4	100	0.733	4901.444	0.867	3967.714	1.113	4333.710
2	0.4	500	0.369	3023.394	0.379	2635.918	0.391	2768.392
2	0.4	5000	0.247	2186.250	0.292	2263.502	0.358	1384.693
2	0.5	100	0.898	4533.296	1.293	4612.707	0.789	4389.214
2	0.5	500	0.386	1835.460	0.509	3755.613	0.532	2615.821
2	0.5	5000	0.343	2253.406	0.307	2391.966	0.315	2674.018
3	0	100	0.629	0.714	0.652	0.694	0.836	0.822
3	0	500	0.506	0.493	0.476	0.462	0.485	0.497
3	0	5000	0.431	0.434	0.434	0.421	0.431	0.432
3	0.2	100	0.894	3139.435	0.785	2557.127	0.912	2923.005
3	0.2	500	0.530	2194.874	0.496	2465.010	0.547	2327.221
3	0.2	5000	0.420	2194.511	0.427	948.379	0.433	2211.486
3	0.4	100	1.005	4518.251	1.505	4041.242	1.262	3647.697
3	0.4	500	0.484	3693.526	0.542	3248.081	0.562	3728.895
3	0.4	5000	0.426	1184.629	0.426	2002.320	0.448	1514.614
3	0.5	100	0.945	5039.629	1.624	4243.318	1.389	5883.431
3	0.5	500	0.607	2709.167	0.605	4142.209	0.611	3564.658
3	0.5	5000	0.428	2948.527	0.453	2907.613	0.450	2536.418
5	0	100	0.686	0.597	0.619	0.835	0.748	0.690
5	0	500	0.457	0.453	0.444	0.456	0.459	0.519
5	0	5000	0.392	0.387	0.388	0.396	0.382	0.392
5	0.2	100	0.680	2479.383	0.714	3603.539	1.065	3122.433
5	0.2	500	0.453	2337.403	0.470	2495.671	0.459	1769.668
5	0.2	5000	0.392	1617.184	0.388	764.356	0.400	2465.697
5	0.4	100	1.040	4346.746	1.102	8319.678	1.023	4830.529
5	0.4	500	0.488	3437.132	0.514	3010.520	0.523	3273.332
5	0.4	5000	0.380	2818.046	0.390	1235.740	0.387	2241.562
5	0.5	100	0.825	4928.127	0.849	4882.507	0.897	4702.862
5	0.5	500	0.509	3712.826	0.482	3895.769	0.674	3958.261
5	0.5	5000	0.405	3010.444	0.392	2892.701	0.405	1852.784
10	0	100	0.868	1.083	1.052	1.051	1.033	1.007
10	0	500	0.652	0.737	0.742	0.686	0.676	0.699
10	0	5000	0.568	0.571	0.571	0.571	0.572	0.569
10	0.2	100	0.738	3386.943	0.834	3620.002	0.838	3401.362
10	0.2	500	0.685	2677.360	0.772	2486.131	0.726	2526.168
10	0.2	5000	0.575	1332.530	0.578	1201.073	0.581	2044.280
10	0.4	100	0.725	3959.357	0.764	4931.136	0.847	5034.038
10	0.4	500	0.822	4001.358	0.804	3485.438	0.832	3625.378
10	0.4	5000	0.579	3132.103	0.572	2007.521	0.581	1807.688
10	0.5	100	0.733	5216.339	0.772	4298.688	0.716	4926.729
10	0.5	500	0.779	4319.615	0.794	3700.061	0.847	3946.746
10	0.5	5000	0.581	2521.998	0.589	3513.817	0.587	1931.765

Table 11: Data Set 11, RMSE scores for prediction of the electricity consumption. Values in bold indicate breakdown of the method.

Proportion of outliers	PCLTS train	PCLTS test	nnet train	nnet test	CPU PCLTS	CPU nnet
0	0.07377254	0.07669042	0.07662421	0.07942267	732.852	4.9196
0.2	0.0732535	0.0768083	1721.716	1071.685	1313.783	5.0199
0.4	0.07328527	0.07779184	3395.867	2798.297	800.7642	1.9977
0.5	0.07314826	0.07771504	3726.083	3783.546	1585.115	1.3546

Table 12: Data Sets 12, RMSE scores for prediction of the cold water consumption. Values in bold indicate breakdown of the method.

Proportion of outliers	PCLTS train	PCLTS test	nnet train	nnet test	CPU PCLTS	CPU nnet
0	0.03352069	0.03799872	0.04224156	0.04277332	1551.998	5.5072
0.2	0.03314315	0.03812518	1504.155	736.1127	879.4155	3.6342
0.4	0.03574897	0.03810132	3112.657	2725.164	676.9802	2.4515
0.5	0.03614024	0.03821851	3522.750	3630.974	960.6753	1.6193

Table 13: Data Sets 13, RMSE scores for prediction of the hot water consumption. Values in bold indicate breakdown of the method.

Proportion of outliers	PCLTS train	PCLTS test	nnet train	nnet test	CPU PCLTS	CPU nnet
0	0.05732137	0.05889331	0.05732247	0.05874144	582.1506	5.6062
0.2	0.05633721	0.05898911	1966.307	1136.745	1025.413	4.9611
0.4	0.055599	0.05912662	3335.348	2747.096	604.2534	3.0936
0.5	0.05553557	0.05952139	1685.271	1570.897	1657.796	6.5511

Table 14: Data Sets 14, RMSE scores for prediction of heart disease. Values in bold indicate breakdown of the method.

Proportion of outliers	PCLTS train	PCLTS test	nnet train	nnet test	CPU PCLTS	CPU nnet
0	0.2139786	0.2517887	0.2118541	0.2665598	922.7474	0.9273
0.2	0.2190235	0.2697414	2651.938	1682.814	1284.666	0.4501
0.4	0.2071636	0.292656	2926.835	2752.914	636.9798	0.371
0.5	0.2002703	0.3038773	2934.247	3429.113	448.0119	0.7827

Table 15: CPU times for PCLTS and standard ANN training using nnet, in seconds.

Dim	Out- liers	Size	Data set 1		Data set 2		Data set 3		Data set 4		Data set 5		Data set 6		Data set 7		Data set 8		Data set 9		Data set 10	
			PCLTS	nnet	PCLTS	nnet	PCLTS	nnet	PCLTS	nnet	PCLTS	nnet	PCLTS	nnet	PCLTS	nnet	PCLTS	nnet	PCLTS	nnet	PCLTS	nnet
1	0	100	496.75	0.04	219.32	0.04	252.36	0.07	250.17	0.07	135.70	0.10	212.33	0.05	392.40	0.07	1455.44	0.09			304.92	0.08
1	0	500	679.66	0.21	242.90	0.30	308.30	0.43	192.44	0.38	173.20	0.55	154.51	0.23	246.51	0.38	57.93	0.40			231.32	0.41
1	0	5000	898.40	4.26	702.94	2.66	511.65	3.42	242.22	4.29	535.68	7.37	96.90	2.85	578.60	3.19	275.26	4.70			213.27	5.55
1	0.2	100	2034.51	0.04	224.57	0.03	352.25	0.07	132.74	0.04	129.44	0.07	155.90	0.04	2035.75	0.04	365.34	0.07			2567.31	0.07
1	0.2	500	321.40	0.18	137.18	0.18	301.95	0.26	199.56	0.24	94.57	0.40	298.49	0.28	832.34	0.26	431.11	0.30			1230.57	0.37
1	0.2	5000	84.55	2.64	276.78	2.55	41.44	2.72	238.21	4.04	40.72	5.00	295.15	3.21	204.76	3.05	1130.11	4.28			435.72	5.36
1	0.4	100	285.64	0.02	299.08	0.03	523.99	0.06	214.12	0.03	138.93	0.06	357.91	0.03	289.11	0.03	274.10	0.05			551.48	0.06
1	0.4	500	98.66	0.22	357.07	0.14	748.60	0.27	164.57	0.20	29.09	0.22	96.85	0.17	274.20	0.15	211.31	0.21			305.79	0.28
1	0.4	5000	230.00	3.26	91.97	1.60	754.08	2.02	239.76	3.20	41.82	4.30	223.28	2.82	106.37	2.12	156.27	2.79			483.86	3.56
1	0.5	100	101.90	0.03	248.73	0.02	1444.12	0.04	427.61	0.03	77.07	0.02	1459.09	0.02	241.20	0.05	146.64	0.03			288.88	0.04
1	0.5	500	68.67	0.16	201.84	0.12	1628.66	0.19	146.05	0.13	86.54	0.27	108.41	0.12	105.26	0.22	127.66	0.15			456.14	0.17
1	0.5	5000	173.49	1.29	270.08	1.96	129.77	2.06	189.34	2.11	99.70	3.42	164.30	1.96	124.92	1.54	238.84	2.13			370.20	2.60
2	0	100	547.53	0.08	412.31	0.06	427.92	0.04	132.38	0.07	221.30	0.13	80.43	0.08	620.42	0.07	2200.18	0.06	112.95	0.05	449.78	0.04
2	0	500	79.05	0.37	264.78	0.33	364.42	0.37	690.49	0.44	316.23	0.66	488.03	0.44	438.66	0.51	419.43	0.45	61.14	0.30	517.92	0.44
2	0	5000	562.98	4.62	355.03	3.97	275.83	2.27	269.44	7.13	174.75	4.99	424.71	7.66	693.21	6.33	393.48	7.59	100.49	3.11	770.06	4.28
2	0.2	100	475.15	0.08	747.54	0.07	215.25	0.04	1096.95	0.06	87.32	0.12	423.30	0.09	583.42	0.05	1029.96	0.07	1245.96	0.04	374.18	0.04
2	0.2	500	389.48	0.39	544.45	0.37	226.29	0.19	876.37	0.41	53.82	0.49	1633.23	0.45	519.59	0.33	1292.09	0.36	124.16	0.19	381.84	0.24
2	0.2	5000	336.52	4.99	479.05	3.46	300.22	3.14	344.91	4.91	58.31	5.20	780.18	5.60	570.18	3.87	380.49	5.73	91.68	2.76	247.78	3.81
2	0.4	100	335.69	0.06	222.57	0.04	714.58	0.04	378.30	0.05	257.28	0.07	725.68	0.04	311.52	0.04	809.63	0.04	306.61	0.04	456.34	0.04
2	0.4	500	195.75	0.29	540.35	0.24	787.95	0.16	409.78	0.27	152.62	0.42	549.01	0.33	456.96	0.24	410.08	0.25	446.09	0.19	187.06	0.24
2	0.4	5000	177.14	2.51	320.08	2.69	76.12	1.16	1217.63	4.27	66.60	6.02	697.88	4.34	501.40	3.02	373.52	4.39	570.35	2.10	325.98	2.24
2	0.5	100	31.61	0.04	33.41	0.04	1032.92	0.03	33.72	0.04	30.98	0.05	31.05	0.05	33.62	0.04	31.61	0.04	31.28	0.05	24.40	0.04
2	0.5	500	32.02	0.21	35.95	0.20	1160.10	0.12	35.92	0.20	33.82	0.34	36.77	0.19	36.35	0.16	36.12	0.21	36.50	0.13	35.32	0.17
2	0.5	5000	39.86	2.22	42.74	2.09	1215.49	1.83	40.80	3.70	41.78	3.21	42.36	2.88	42.91	2.17	36.56	3.37	41.03	1.58	41.27	1.93
3	0	100	1318.37	0.07	392.70	0.07	195.01	0.06	912.20	0.09	350.33	0.13	91.23	0.08	126.94	0.04	117.87	0.05	41.68	0.05	739.10	0.05
3	0	500	194.17	0.40	583.70	0.36	138.41	0.21	786.80	0.43	305.35	0.51	304.91	0.92	104.59	0.35	379.41	0.37	96.02	0.35	722.90	0.31
3	0	5000	529.31	5.82	461.61	4.78	20.66	3.85	211.56	7.38	246.76	6.01	261.91	8.09	237.43	5.00	415.79	5.12	132.59	2.83	839.92	4.67
3	0.2	100	793.12	0.07	1050.84	0.07	255.37	0.05	740.36	0.07	982.26	0.09	500.63	0.07	770.20	0.05	907.44	0.05	1608.91	0.05	422.54	0.05
3	0.2	500	1065.14	0.35	1254.05	0.28	453.35	0.21	1553.27	0.36	239.91	0.53	482.26	0.40	1071.81	0.26	763.10	0.28	873.80	0.23	403.16	0.18
3	0.2	5000	421.41	4.51	498.22	4.46	206.14	2.52	568.44	5.20	94.76	2.26	355.08	6.57	630.81	4.41	734.31	3.82	228.76	2.86	267.18	2.63
3	0.4	100	468.57	0.05	570.71	0.06	652.32	0.04	653.88	0.06	553.02	0.08	636.94	0.10	803.92	0.05	504.09	0.04	500.96	0.08	467.94	0.05
3	0.4	500	451.09	0.28	626.09	0.19	722.05	0.17	415.71	0.31	1208.96	0.28	501.07	0.35	611.85	0.14	454.96	0.17	622.12	0.18	411.77	0.17
3	0.4	5000	428.67	4.25	1136.44	2.92	650.55	1.69	607.85	5.04	946.19	2.86	588.62	5.09	256.92	2.27	621.70	2.73	378.00	2.65	350.33	3.66
3	0.5	100	44.66	0.06	50.29	0.08	1454.08	0.05	46.91	0.05	48.04	0.08	50.77	0.05	51.69	0.03	45.41	0.04	37.79	0.05	57.23	0.04
3	0.5	500	53.94	0.19	54.31	0.13	1266.73	0.16	54.70	0.29	53.96	0.18	50.72	0.23	53.27	0.16	53.91	0.14	54.77	0.15	53.21	0.11
3	0.5	5000	62.21	2.20	51.09	3.07	1429.54	1.46	64.06	3.21	63.55	2.79	61.65	4.83	65.36	2.16	64.41	2.48	64.99	1.88	65.35	1.63
5	0	100	950.31	0.10	601.42	0.12	351.57	0.07	571.34	0.13	304.94	0.13	831.21	0.08	123.34	0.07	1752.19	0.06	706.40	0.07	412.43	0.06
5	0	500	1263.60	0.49	500.25	0.37	933.98	0.37	641.15	0.51	331.82	0.48	346.82	1.13	888.89	0.35	259.11	0.34	199.08	0.36	1012.63	0.18
5	0	5000	1466.39	7.52	148.12	5.08	514.01	2.98	732.56	8.63	369.66	5.60	276.46	15.78	232.57	5.77	364.63	7.52	422.92	3.82	1125.25	5.05
5	0.2	100	1335.14	0.10	4147.40	0.10	347.67	0.07	423.78	0.09	2887.74	0.12	888.39	0.08	783.25	0.06	803.19	0.11	726.47	0.09	860.12	0.05
5	0.2	500	1085.54	0.35	1477.85	0.29	301.62	0.18	996.00	0.50	3563.79	0.44	1052.70	0.64	1031.60	0.23	1082.71	0.40	1662.99	0.39	823.96	0.18
5	0.2	5000	608.99	6.11	196.59	2.78	44.11	3.54	1001.02	5.73	228.28	6.58	805.67	7.14	2823.58	3.52	724.28	6.16	580.61	4.20	657.57	3.66
5	0.4	100	914.85	0.13	1247.45	0.07	758.12	0.13	718.13	0.09	1253.16	0.11	771.06	0.13	937.43	0.12	853.46	0.10	717.50	0.09	799.58	0.15
5	0.4	500	1536.03	0.31	3057.03	0.23	778.53	0.16	880.26	0.37	170.57	0.25	769.97	0.64	1001.51	0.19	513.09	0.22	676.37	0.22	665.52	0.13
5	0.4	5000	1166.16	2.49	2278.71	2.09	910.46	1.65	706.08	5.11	151.84	3.57	1061.37	5.73	709.54	2.50	427.18	2.67	682.45	2.76	382.72	2.47
5	0.5	100	87.57	0.12	77.93	0.14	1514.40	0.11	76.39	0.11	87.78	0.14	80.79	0.16	85.70	0.16	89.51	0.16	87.77	0.14	117.76	0.14
5	0.5	500	91.37	0.22	87.67	0.20	1499.13	0.15	92.04	0.29	92.31	0.22	90.37	0.43	88.81	0.15	91.63	0.17	84.36	0.20	92.60	0.11
5	0.5	5000	110.58	2.70	104.39	1.73	164.34	1.34	113.49	4.12	105.37	3.17	110.37	7.23	115.36	2.12	112.16	2.84	108.93	2.27	109.26	2.79
10	0	100	2757.84	0.35	4326.25	0.25	107.44	0.40	1183.30	0.36	639.67	0.38	1071.85	0.46	3277.33	0.38	3625.45	0.42	2152.67	0.44	1855.01	0.46
10	0	500	2590.14	0.71	1095.09	0.36	206.05	0.31	1080.42	0.90	967.88	0.69	1363.92	0.98	759.82	0.38	1186.38	0.37	641.53	0.38	1384.22	0.29
10	0	5000	3645.12	13.33	309.22	4.99	272.86	3.35	1139.06	10.41	1026.37	8.65	2049.83	12.09	724.34	5.54	797.15	3.46	627.56	7.13	1261.36	3.81
10	0.2	100	923.73	0.35	708.45	0.22	515.29	0.38	1298.31	0.30	5686.52	0.34	1460.27	0.41	934.70	0.37	1381.85	0.35	1149.68	0.27	1483.71	0.40
10	0.2	500	1026.55	0.72	471.09	0.19	967.80	0.26	1101.19	0.68	726.47	0.48	1396.33	0.45	829.65	0.28						

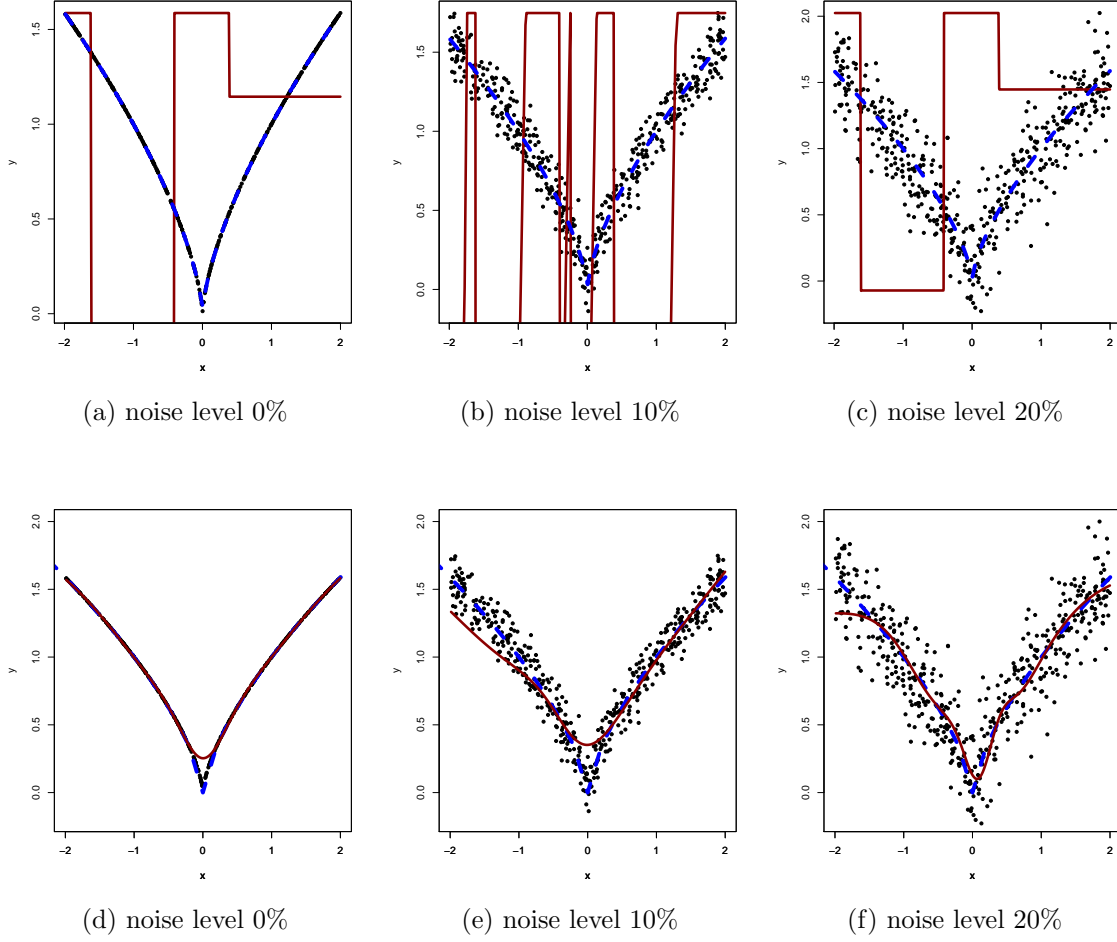


Figure 2: Data set 1, standard ANN (above) versus LTS (below). The proportion of outliers is $\delta = 0.2$, and $n = 500$. Gaussian noise in the data is 0, 0.1 and 0.2 respectively. Red solid curve is the ANN prediction, the blue dashed curve is the (noiseless) test data, and black dots are training data. The outliers are not shown.

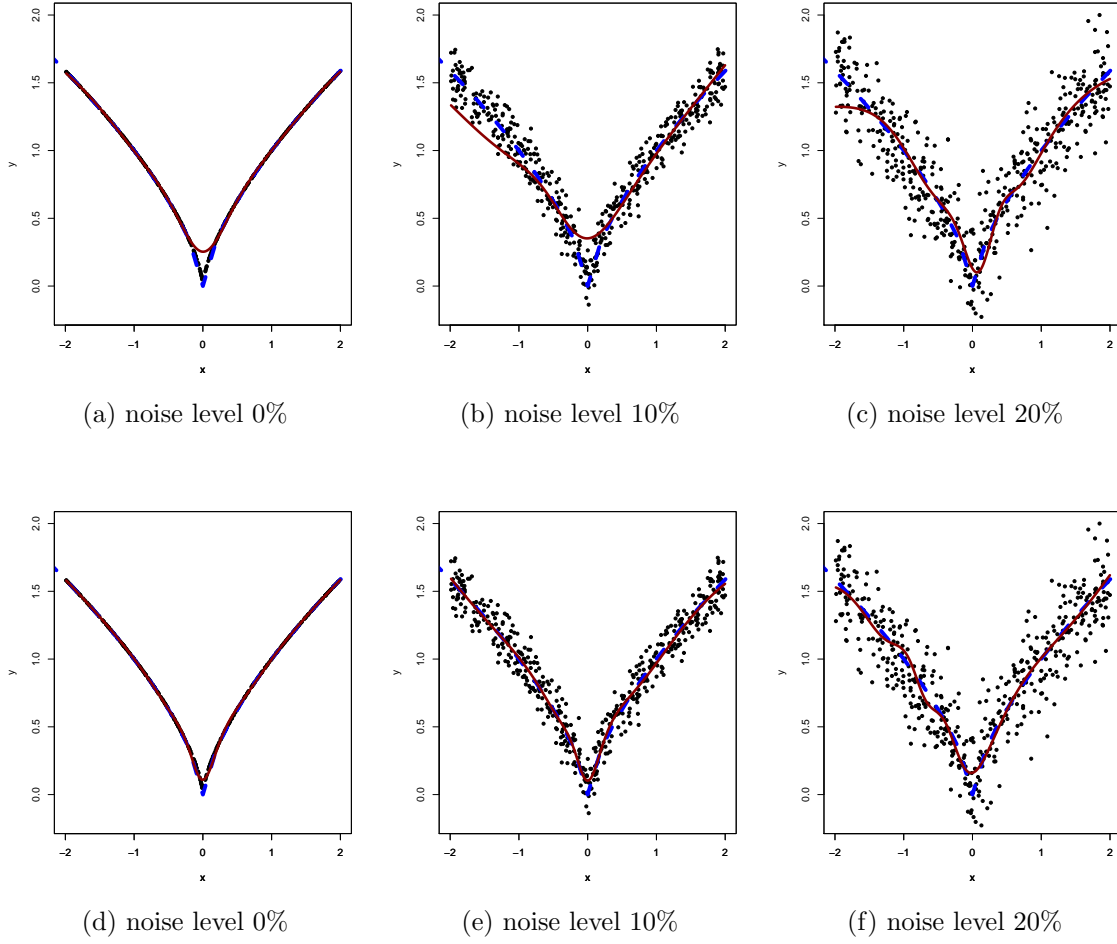


Figure 3: Data set 1, The effect of using PCLTS objective with parameters $C = 8$ and $B = 8$ (below) versus LTS objective (above). The proportion of outliers is $\delta = 0.2$, and $n = 500$. With the LTS objective, some data are unnecessarily removed as outliers, and the ANN model is fitted incorrectly in these regions, whereas PCLTS objective avoids this.

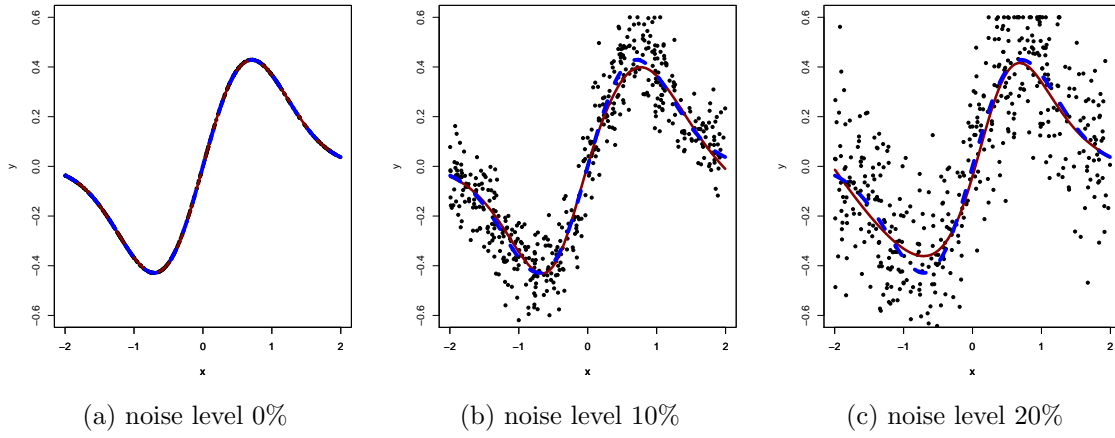


Figure 4: Data set 2. The proportion of outliers is $\delta = 0.2$, and $n = 500$. Gaussian noise in the data is 0, 0.1 and 0.2 respectively. Red solid curve is the PCLTS prediction, the blue dashed curve is the (noiseless) test data, and black dots are training data. The outliers are not shown.

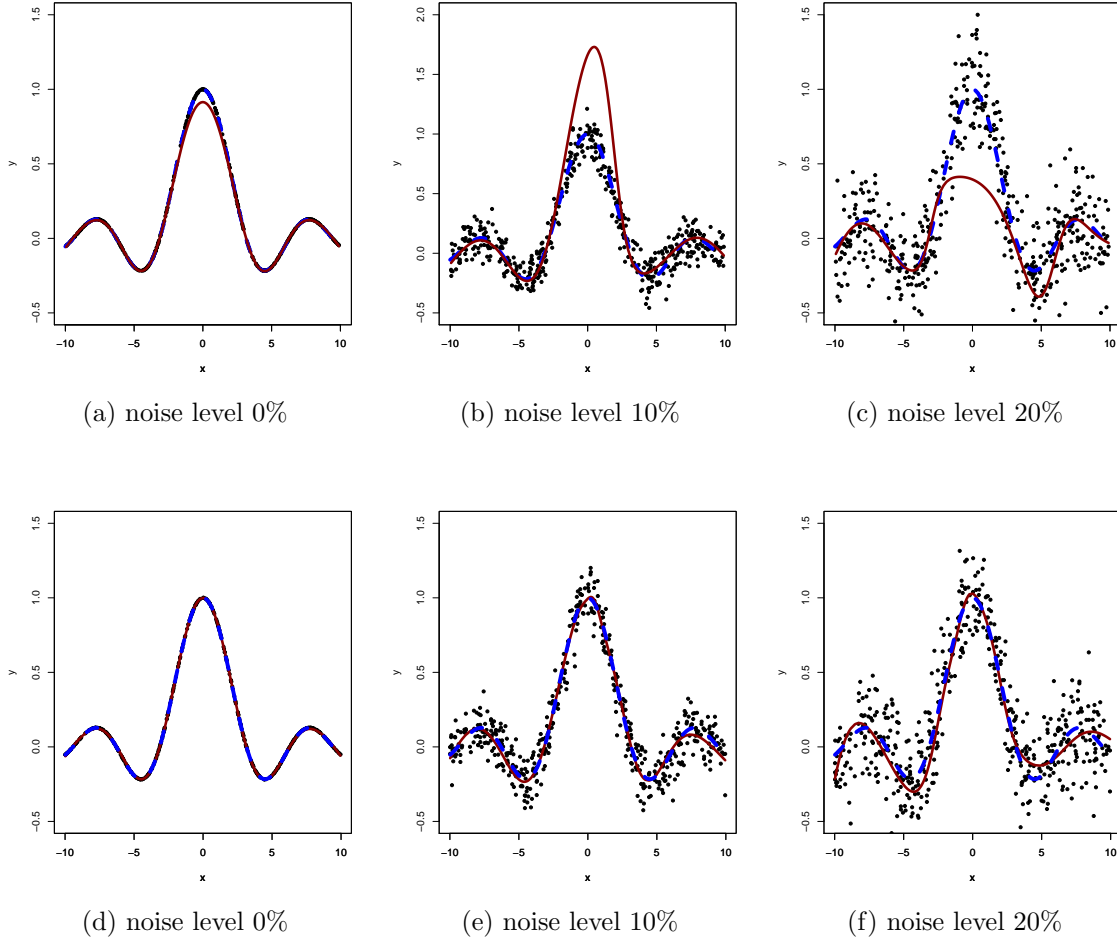


Figure 5: Data set 3, training with PCLTS with $C = 1$, $B = 0$ (LTS criterion, top) and $C = 8$, $B = 8$ (bottom). The proportion of outliers is $\delta = 0.2$, and $n = 500$. Red solid curve is the ANN prediction, the blue dashed curve is the (noiseless) test data, and black dots are training data. The outliers are not shown. We observe that LTS treats some valid data as outliers (near the center of the graph).

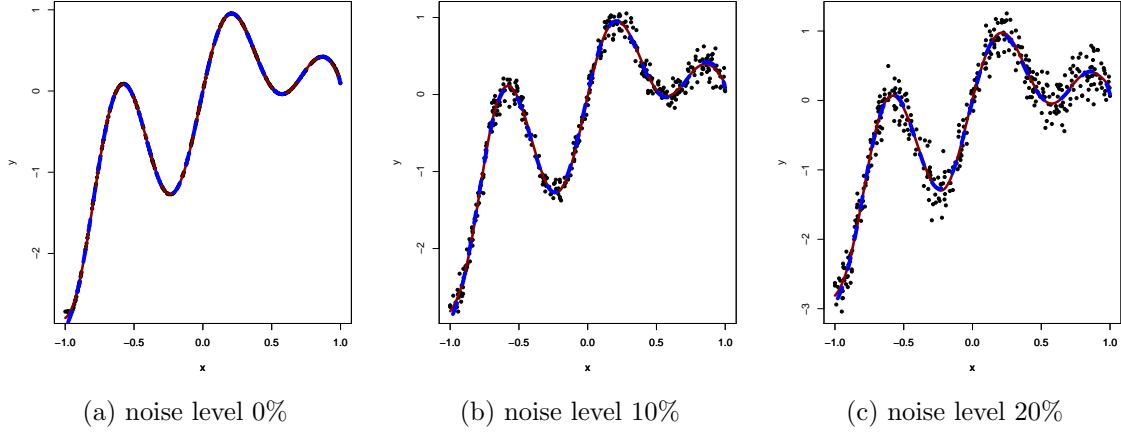


Figure 6: Data set 4, $\delta = 0.2$, $n = 500$. PCLTS ($C = 8$, $B = 8$) correctly predicts the model.

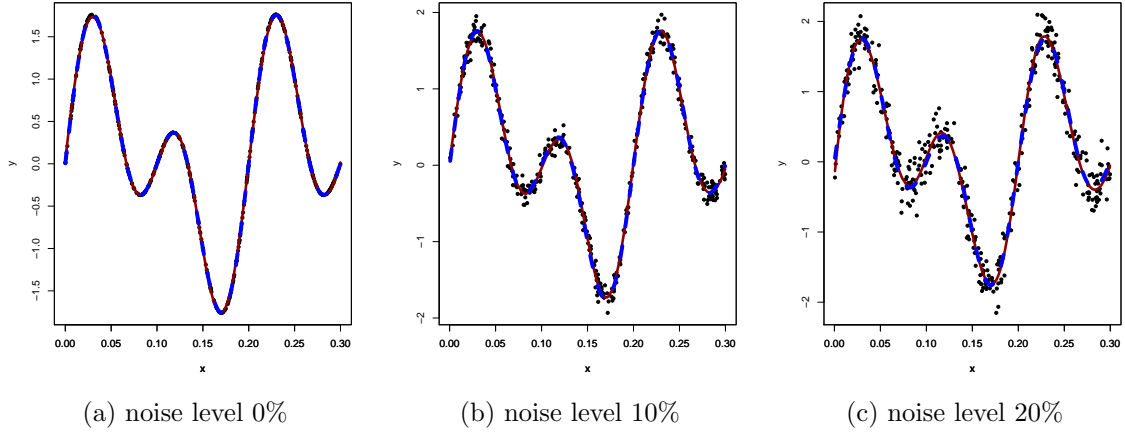


Figure 7: Data set 5, $\delta = 0.2$, $n = 500$. PCLTS ($C = 8$, $B = 8$) correctly predicts the model.

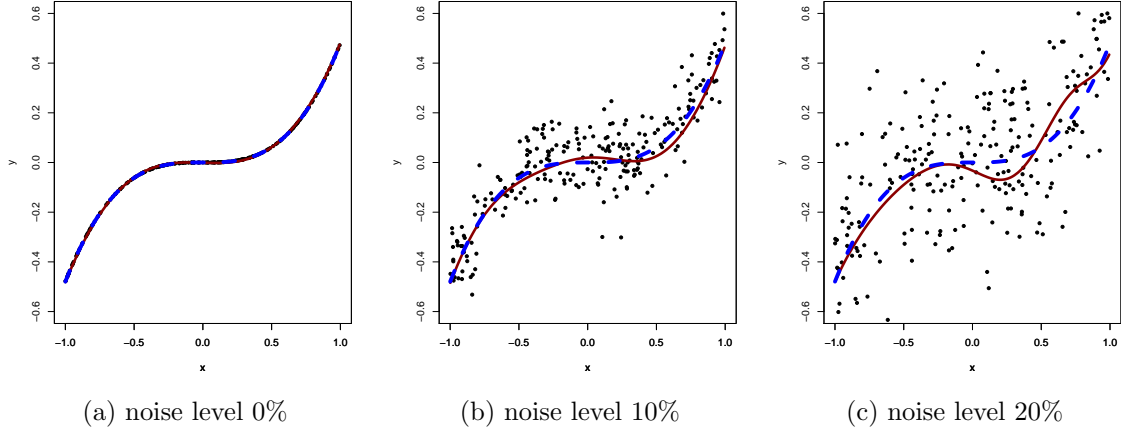


Figure 8: Data set 6, $\delta = 0.2$, $n = 500$. PCLTS ($C = 8$, $B = 8$) correctly predicts the model.

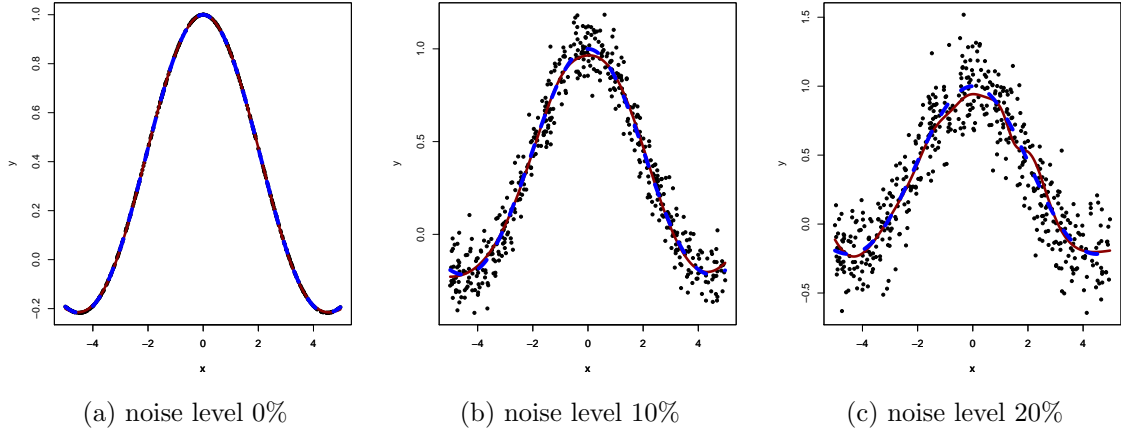


Figure 9: Data set 7, $\delta = 0.2$, $n = 500$. PCLTS ($C = 8$, $B = 8$) correctly predicts the model.

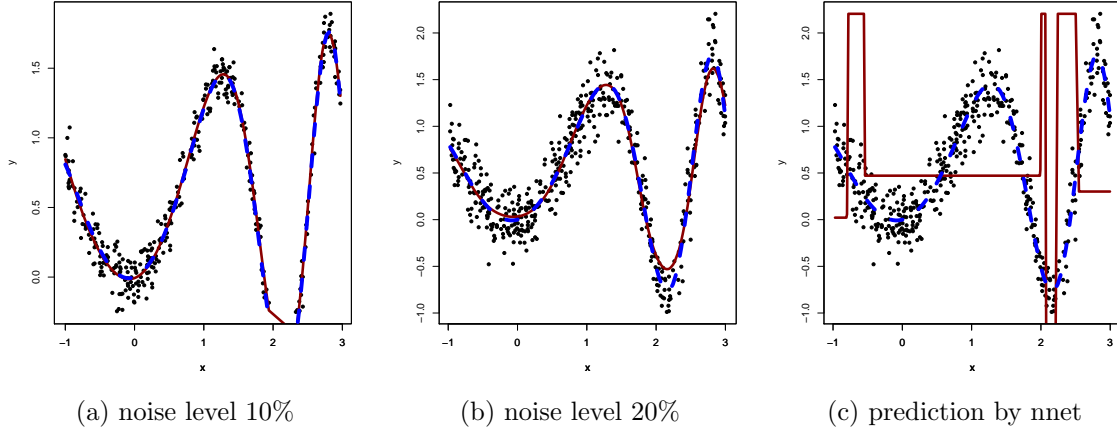


Figure 10: Data set 8, $\delta = 0.2$, $n = 500$. PCLTS ($C = 8$, $B = 8$) correctly predicts the model, but backpropagation fails.

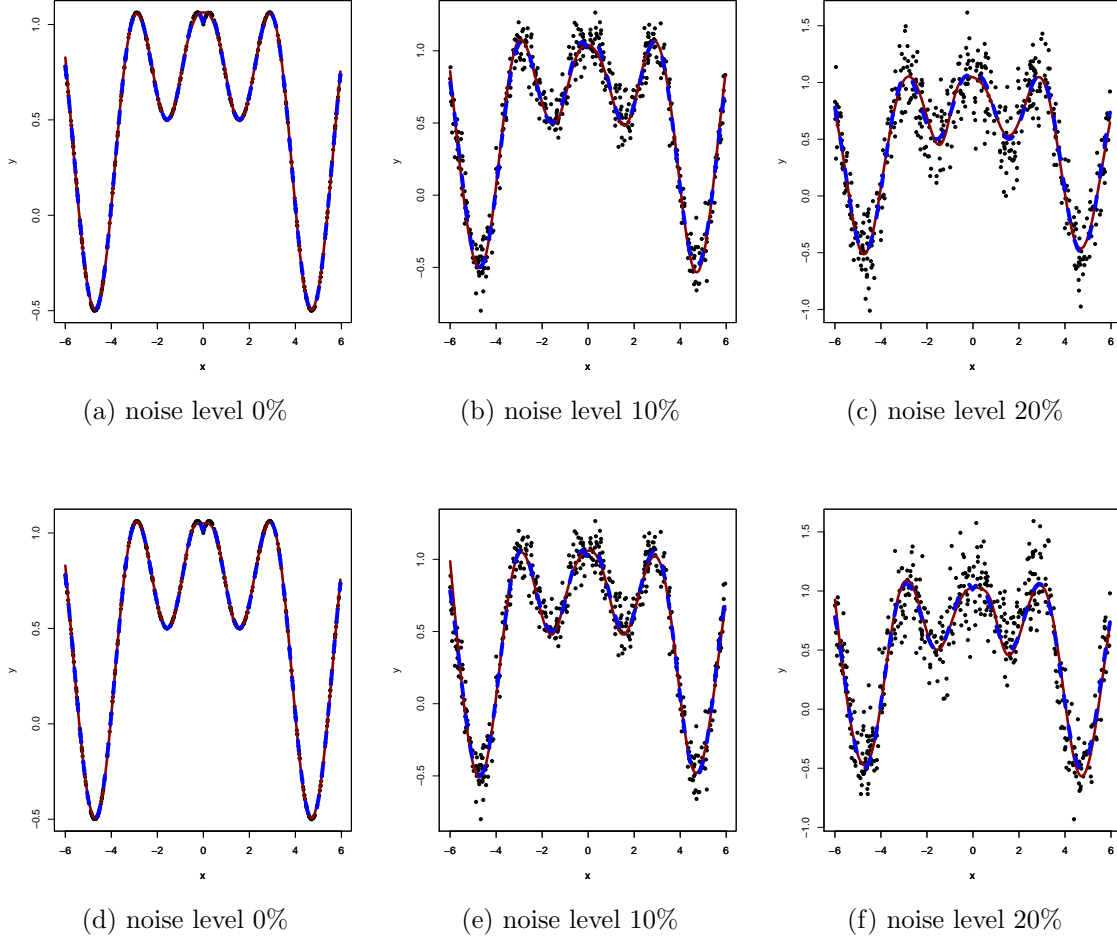


Figure 11: Data set 10, $\delta = 0.2$, $n = 500$. PCLTS ($C = 8$, $B = 8$) correctly predicts the model, using 10 (top row) and 5 (bottom row) hidden neurons.

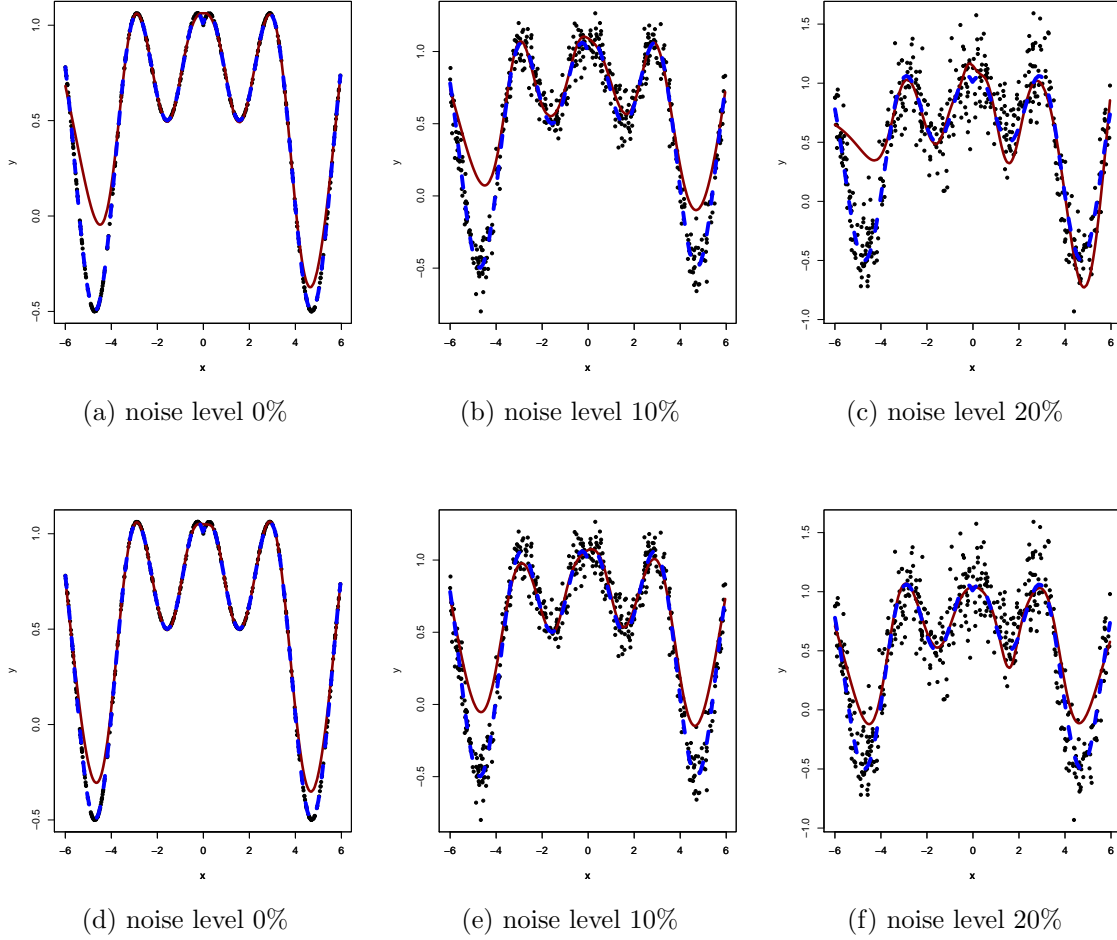


Figure 12: Data set 10, $\delta = 0.2$, $n = 500$. LTS ($C = 1$, $B = 0$, 10 hidden neurons (top), and 5 hidden neurons (bottom)) removed valid data near the two lowest minima of the model function, and hence did not achieve good accuracy.