

Co-Evolution of Friendship and Publishing in Online Blogging Social Networks

D. Zinoviev[†] and S. Llewelyn⁺

[†]Mathematics and Computer Science Department, Suffolk University
Boston, MA 02114, USA
dzinoviev@suffolk.edu

⁺Department of Computer Science, Stony Brook University
Stony Brook, NY 11794, USA
sllewelyn@cs.stonybrook.edu

ABSTRACT

In the past decade, blogging web sites have become more sophisticated and influential than ever. Much of this sophistication and influence follows from their network organization. Blogging social networks (BSNs) allow individual bloggers to form contact lists, subscribe to other blogs, comment on blog posts, declare interests, and participate in collective blogs. Thus, a BSN is a bimodal venue, where users can engage in publishing (post) as well as in social (make friends) activities. In this paper, we study the co-evolution of both activities. We observed a significant positive correlation between blogging and socializing. In addition, we identified a number of user archetypes that correspond to “mainly bloggers,” “mainly socializers,” etc. We analyzed a BSN at the level of individual posts and changes in contact lists and at the level of trajectories in the friendship-publishing space. Both approaches produced consistent results: the majority of BSN users are passive readers; publishing is the dominant active behavior in a BSN; and social activities complement blogging, rather than compete with it.

1. INTRODUCTION AND PRIOR WORK

In the past decade, blogging web sites such as Blogger [3], DreamWidth [10], LiveJournal [10], and Tumblr [13] have become more widespread, more technologically sophisticated, and more socially influential than ever. Much of this sophistication and influence stems from their network organization. Blogging social networks (BSNs) allow individual bloggers to form contact (“friend”) lists, subscribe to their friends’ blogs, comment on selected blog posts, declare and share common interests, and participate in communities, or collective blogs. Thus, a BSN is a socio-semantic network [17]—a bimodal venue where users engage in publishing (write blog posts) and social (make friends) activities.

Proper networking aspects of massive online social networks (MOSNs), including BSNs, have been extensively researched in the past ten years. MOSN static organization and macroscopic dynamics at the level of

nodes and links: scale-free degree distribution, shrinking diameter, and densification—have been discussed in [1, 5, 9, 12, 16] and other papers. Analysis of microscopic behavior at the level of individual member-to-member messages and message flows can be found in [6, 11, 19], etc.

Similarly rich literature exists on blogging topics, patterns, and behaviors [7, 8, 15, 20]. It covers information diffusion (including epidemic diffusion), social and personal motivation for blogging, and bloggers’ anthropology.

In a recent study, Both and Cointet [17] propose that the social and semantic dimensions are co-determined. However, they do not look at the dynamics of individual friendships and posts.

In this paper, we explore the co-evolution of social and publishing activities in LiveJournal [4, 18]. LiveJournal was started in 1999 by American programmer Brad Fitzpatrick and sold to Russian media company SUP Media in 2007. At the time of writing, LiveJournal hosts approximately 40 million individual blogging accounts and communities.

Given the limited amount of time that users spend browsing social and blogging networks, it is interesting to find out the distribution of networking (social) and publishing (blogging) activities from the point of view of an individual member of a BSN, as well as the evolution of this distribution over time.

The rest of the paper is organized as follows: in Section 2, we explain the data acquisition methods and present some descriptive statistics of the acquired data; Sections 3 and 4 contain the microscopic and macroscopic data analyses, respectively. Section 5 compares the results of both studies. In Section 6, we conclude.

2. DATA COLLECTION

LiveJournal positions itself as an open blogging platform with a public application programming interface

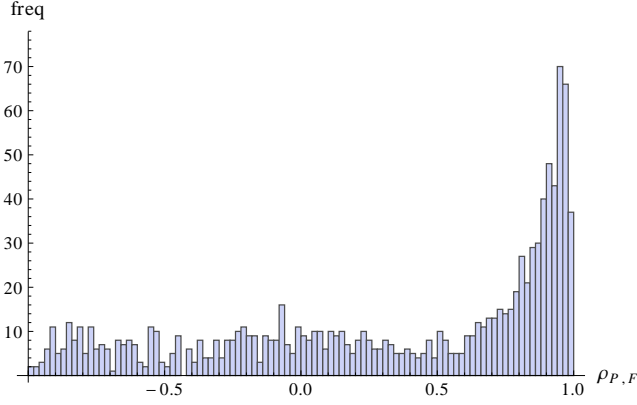


Figure 1: Distribution of correlations $\rho_{P,F}$ for all trajectories T .

(API)¹. The LiveJournal administration encourages retrieval of publicly available data for the purpose of research, provided that researchers follow certain guidelines (for example, applications should make no more than 5 requests per second to the LiveJournal servers).

We have collected longitudinal publishing and friendship data of approximately 2,000 randomly chosen LiveJournal users over the period of 140 days, starting in August 2011. Sixty-one of these accounts later turned out to be abandoned by their owners, leaving us with 1,836 live accounts. For each user U and for each day t_i , we recorded the total number of posts over the lifetime of the blog P_i^U and the number of friends F_i^U . (We will omit the upper index whenever it can be inferred from the context.) Thus, all tuples $\{t_i, P_i, F_i\}$ pertaining to the user U form a trajectory T^U of the user’s blog in the 3-dimensional space $\{t, P, F\}$.

The changes of the numbers P and F along a trajectory represent the publishing and social activities of the user, respectively:

$$p(t) = P'(t)|_{t=t_i} \approx \frac{P_{i+1} - P_i}{t_{i+1} - t_i} \quad (1)$$

$$f(t) = F'(t)|_{t=t_i} \approx \frac{F_{i+1} - F_i}{t_{i+1} - t_i}, \quad (2)$$

where $P(t)$ and $F(t)$ are the continuous (interpolated) versions of P_i and F_i . In general, $p(t) \geq 0$, unless the blogger decides to delete already published posts (a rare but possible condition). There are no restrictions on $f(t)$. We will refer to $P(t)$ or $F(t)$ as $G(t)$ whenever the corresponding formulæ are equally applicable to both of them.

¹In fact, LiveJournal provides several APIs, including RSS XML and Atom XML for the most recent posts and FOAF XML and plain text interface for contact lists. It is also possible to download profile pages in HTML and parse them directly.

Several trajectories in our collection had unusually large differences between consecutive values ($|G_{i+1} - G_i| \gg 1$) or unusually large overall ranges ($G_{\max} - G_{\min} \gg 1$) in one or both dimensions. When designing the study, we included only the trajectories with all differences and ranges in the lower 98th percentile, the total of 1,761 trajectories² and excluded the rest. Under the assumption that the observed processes were stationary, we translated each remaining trajectory T to the origin by subtracting $\{t_1^U, P_1^U, F_1^U\}$ from each tuple in $T^U \in T$.

The trajectories retained in the data set demonstrate a remarkable positive correlation between blogging and socializing: active bloggers tend to acquire new friends at a faster rate than silent network members (Figure 1). This means that publishing and social activities in LiveJournal, when present, are highly synchronized. The details of this synchronization will be discussed in the next two sections.

3. MICROSCOPIC ANALYSIS

At the microscopic level, we treat individual trajectories as timed sequences of events $e \in E = \{\Pi^+, \Phi^+, \Phi^-, \Pi\Phi\}$, where symbols Π , Φ , and $\Pi\Phi$ represent the changes in the number of posts, friends, and posts and friends together, and the sign in the superscript represents the direction of changes (but not the magnitude). Since 97% of Π events constitute an addition of ≤ 2 posts and 97% of Φ events constitute an addition or removal of ≤ 7 friends, we choose to see these events as binary—either occurring or not occurring—because the extent of variation is not significant given how minuscule it is relative to the time scope considered. The compound events $\Pi\Phi = \{\Pi^\pm\Phi^\pm\}$ are rare. We treat them as non-directional.

The delays between consecutive events for all trajectories are distributed exponentially with the average rates of 0.45 day^{-1} for publishing events and 0.2 day^{-1} for social events.

For each trajectory T and for each pair of event types $\{e_i, e_j\} \in E \times E$, we calculate $\psi_{ij}^T = \psi^T(e_j|e_i)$, the probability of an event e_j immediately following event e_i along a certain trajectory T^U ; in other words, the conditional probability of e_j given e_i . Thus, $\psi^T = \{\psi_{\Pi^+\Pi^+}^T, \psi_{\Pi^+\Pi^-}^T, \dots, \psi_{\Pi\Phi\Pi\Phi}^T\}$ is a vector in a 16-dimensional metric space Ψ . We call this vector the signature of the trajectory. The proximity of trajectories $T_1, T_2 \in \Psi$, defined as the Euclidean distance $\Delta T = \|T_1 - T_2\|$ between their signatures, corresponds to the similarity of the BSN users’ social and publishing behaviors.

We use the distance ΔT to group the trajectories and the corresponding BSN users into twelve disjoint micro clusters $\mu_k = \{T\}$ with 74 to 398 trajectories per cluster (Table 1). Each directory belongs exactly to one cluster.

²The “rough” trajectories need to be analyzed differently.

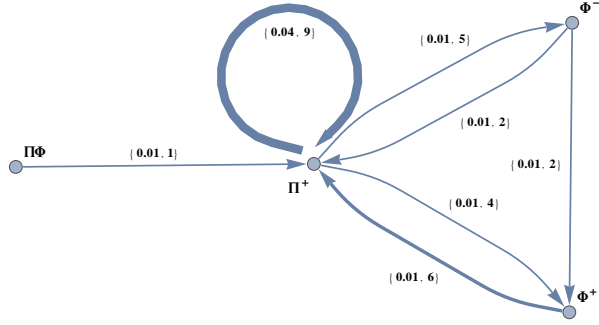


Figure 2: Micro cluster μ_7 as a Markov chain. The edge labels show transition frequencies (in days^{-1}) and transition durations (in days).

The number of micro clusters was chosen to match the number of the most significant macro clusters described in the next section. In our case, this clustering method gives acceptably good results and is substantially simpler than similar methods proposed, e.g., in [2, 14]. For each cluster μ_k , we calculate its mean trajectory $T^{(k)}$ with the signature $\psi^{(k)} = \{\psi^T | T \in \mu_k\}$.

To understand the collective behavior of cluster members, we model each cluster as a Markov chain with social and publishing events representing states, and pairs of consecutive events representing transitions. Thus, e.g., events Φ^- and Π^+ immediately following one another represent a transition between the states Φ^- and Π^+ . The probability of this transition in cluster μ_k is $\psi_{\Pi^+\Phi^-}^{(k)}$.

Based on $\psi^{(k)}$, we identified four user archetypes associated with each cluster (Table 1): “mainly bloggers” (frequent publishing events), “mainly socializers” (frequent social events), “bloggers-socializers” (both pub-

Id	S	Dominant Transitions	Archetype
μ_1	398	none	“Reader”
μ_2	191	none	“Reader”
μ_3	187	$\Pi^+\Pi^+/3$, $\Pi^+\Pi\Phi/3$, $\Pi\Phi\Pi^+/2$	“B.-Soc.”
μ_4	183	$\Phi^+\Phi^+/10$	“Socializer”
μ_5	158	none	“Reader”
μ_6	148	$\Pi^+\Pi^+/5$	“Blogger”
μ_7	123	$\Pi^+\Pi^+/9$	“Blogger”
μ_8	110	$\Phi^+\Phi^-/4$, $\Phi^-\Phi^-/8$, $\Phi^-\Phi^+/7$	“Socializer”
μ_9	99	$\Phi^+\Pi^+/3$, $\Pi^+\Phi^+/3$, $\Pi^+\Pi^+/3$	“B.-Soc.”
μ_{10}	90	$\Pi^+\Pi^+/2$, $\Pi^+\Pi\Phi/1$, $\Pi\Phi\Pi^+/3$	“B.-Soc.”
μ_{11}	78	none	“Reader”
μ_{12}	74	$\Phi^+\Phi^+/5$	“Socializer”

Table 1: Trajectory clusters, their sizes, dominant transitions (with transition durations, in days), and archetypes.

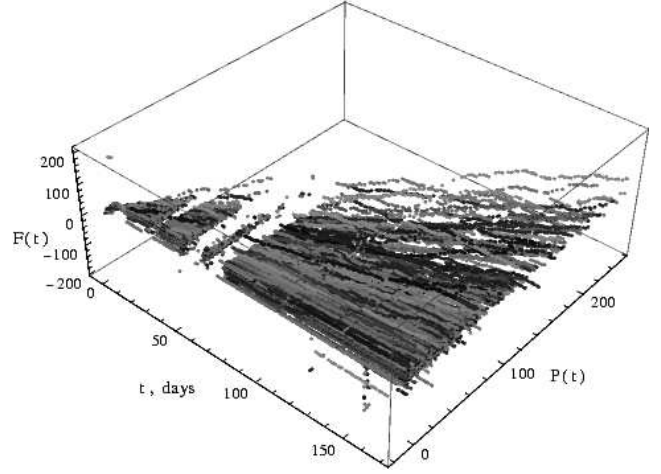


Figure 3: All user trajectories, translated to the origin. The gap around day 47 has been caused by networking problems.

lishing and social events), and “readers” (no events; the passive network members create blogging accounts simply to read other people’s blogs or leave comments).

As an example, consider clusters μ_{10} , μ_3 , μ_6 , and μ_7 . They have 90, 187, 148, and 123 trajectories, respectively, with the dominant transition $\Pi^+\Pi^+$, “(add a post) followed by another (add a post)”. For the different clusters, this transition takes 2, 3, 5 or 9 days. These models correspond to more or less rigorous “mainly bloggers.”

The Markov chain for the cluster μ_7 is shown in Figure 2. Transitions between the states Φ^+ , Φ^- , and $\Pi\Phi$ in the cluster are very rare: they happen with the frequency of 0.01 days^{-1} . The self-loop around Π^+ is more frequent, which is reflected by the thickness of the arc.

According to the microscopic analysis, 45% of all users included in the study are “readers,” 20% are “bloggers-socializers,” 20% are “mainly socializers,” and 15% are “mainly bloggers.”

4. MACROSCOPIC ANALYSIS

At the macroscopic level, a unit of analysis is a blog trajectory $\{t, P(t), F(t)\}$ in the time-friendship-publishing space, representing the user’s social and blogging activities over time (Figure 3). The translated trajectories radiate from the origin approximately in the same direction. This is not very surprising, given that friends are rarely unfriended [1] and posts, once published, are rarely deleted. However, the angle between the most extreme trajectories is still large. We will use clustering again to identify similarly behaving users.

The trajectories in Figure 3 are remarkably smooth. For each component of each trajectory, we calculate the best-fit quadratic approximation $G(t) = a_0 + a_1t + a_2t^2$. If $|a_2/a_1| < 0.0085$, then we replace the quadratic model

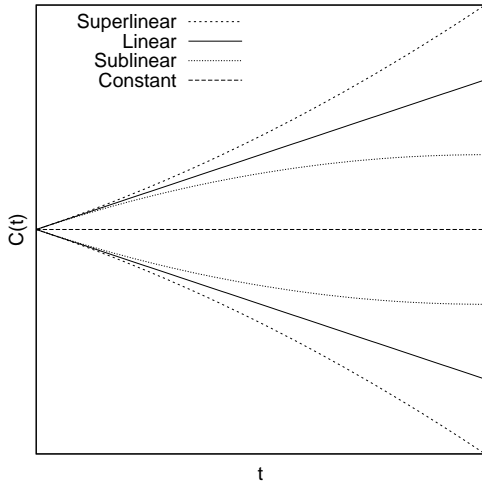


Figure 4: Classification of trajectory dynamics.

with a linear model $G(t) = a_0 + a_1 t$. Otherwise, a true quadratic model is used. Whether the trajectory bends in the direction away from the X axis or toward it, depends on the sign of a_2/a_1 . If the best-fit linear approximation of $G(t)$ is unacceptably inaccurate with $R^2 < 0.7$, we treat $G(t)$ as constant in time.

Therefore, any $G(t)$ can be approximated using one of the following seven smooth functions (Figure 4):

- linear ($G'' \approx 0$):
 - ascending (\uparrow : $G' > 0$),
 - constant (\updownarrow : $G' \approx 0$) or
 - descending (\downarrow : $G' < 0$),
- quadratic locally ascending ($G' > 0$) bending up ($\uparrow\uparrow$: $G'' > 0$, superlinear) or down ($\uparrow\downarrow$: $G'' < 0$, sublinear), or
- quadratic locally descending ($G' < 0$) bending up ($\downarrow\uparrow$: $G'' > 0$, sublinear) or down ($\downarrow\downarrow$: $G'' < 0$, superlinear).

Overall, there are the total of seven possible behaviors for each of P and F , as described above. Each trajectory can be assigned to one of the $7 \times 7 = 49$ macro clusters M_{PF} , based on the publishing dynamics P and social dynamics F (Figure 5).

The largest macro clusters are $M_{\uparrow\uparrow}$ (“readers,” both P and F are constant, 41%), $M_{\uparrow\downarrow}$ (“mainly bloggers,” 15%), and $M_{\downarrow\uparrow}$ (“bloggers-socializers,” 9%).

We assume that a trajectory belongs to a “mainly blogger” or to a “mainly socializer” if it has exactly one linear or superlinear P or F component, respectfully. If both components are linear or superlinear, then the trajectory represents a “blogger-socializer.” Otherwise, it is a “reader” trajectory.

The clusters with anticorrelated publishing and social dynamics (e.g., growing number of posts vs shrinking

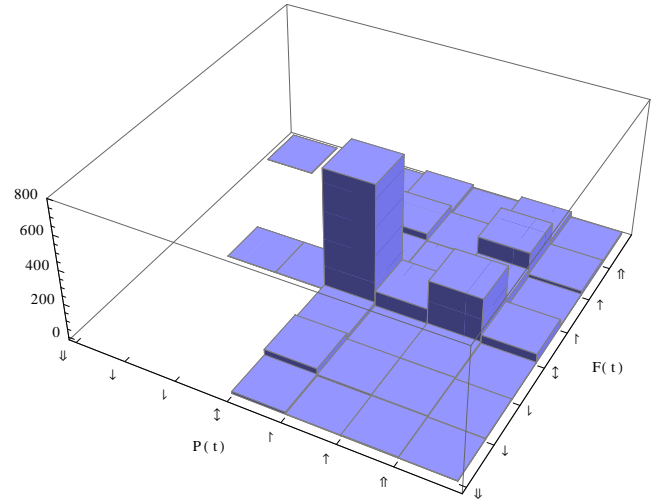


Figure 5: Joint distribution of $P(t)$ and $F(t)$ dynamics.

number of friends) have negligibly small membership (3%). LiveJournal posters are motivated to gain more friends, produce more posts, and increase their presence online. Losing friends as a result of new posts may be a deterrent from writing more controversial posts. Similarly, no one will gain friends as a result of deleting posts and reducing their presence online. In other words, social activity in the selected subset of LiveJournal does not happen at the expense of publishing or the other way around.

Just as with the micro clusters, we calculated the mean trajectory for each macro cluster (Figure 6). We observed that the numbers of friends and posts along

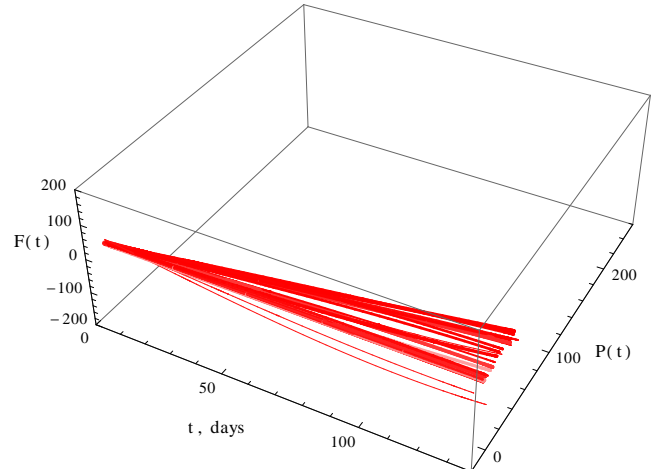


Figure 6: Mean trajectories for each macro cluster M . Line diameters are proportional to the log of the cluster size. Line darkness is proportional to the geometric mean fit quality $\sqrt{R_P^2 R_F^2}$; cf. Figure 3.

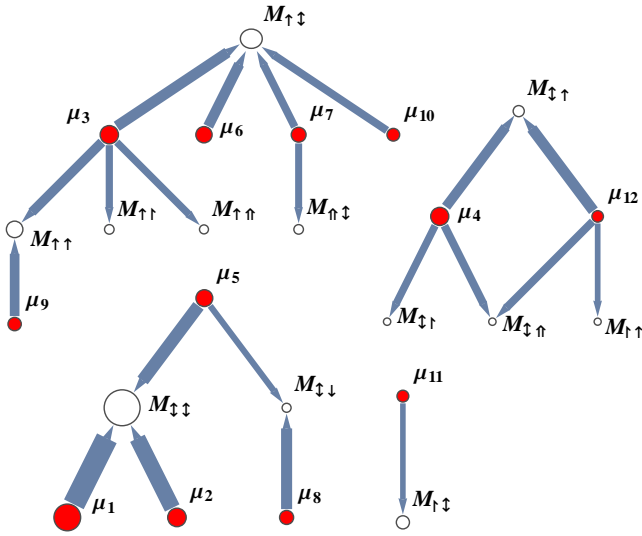


Figure 7: The correspondence between micro clusters μ_i and macro clusters M_i . The correspondence diagrams represent “bloggers-[socializers]” (top left); “socializers” (top right); “readers” (bottom). Edge thickness is proportional to the number of common elements. Vertex areas are proportional to the cluster sizes.

the mean trajectories in each cluster are loosely correlated:

$$F(t) \approx 9\sqrt{P(t)}. \quad (3)$$

This relationship holds over the entire period of observation with $R^2 \approx 0.85$. We consider it as evidence to the mainly blogging nature of LiveJournal, with the number of posts dominating the number of friends most of the time.

5. COMPARISON

Table 2 shows the comparison between the user archetypes obtained through micro- and macroscopic analyses. While both methods confirm the dominance of the “readers” over the other three archetypes, one can see that the macroscopic method consistently underestimates the socializing component. This discrepancy is due to the averaging nature of the macroscopic procedure. A trajectory of a typical “socializer” may have a

Archetype	Micro	Macro	Difference
“Reader”	45%	52%	+7%
“Blogger-Socializer”	20%	15%	-5%
“Socializer”	20%	11%	-9%
“Blogger”	15%	22%	+7%

Table 2: Comparison of user archetypes obtained through micro- and macroscopic analyses.

number of consecutive social events Φ^+ and Φ^- , which will not change her number of friends at the end of the observation period and thus will not be detected by the macroscopic algorithm; such “socializers” will be mistakenly assigned to the “readers” or “bloggers” categories. In other words, if many friend events occur, yet the net change is small, the macro analysis overlooks it.

The correspondence between the micro- and macroscopic clusters is presented in Figure 7. The amount of overlap between any two clusters is used as a measure of their similarity. The twelve microscopic clusters and the twelve largest macroscopic clusters have only 21 significant relationships (of those, one is one-to-one and eleven are either many-to-one or one-to-many). This is just marginally more than the minimum of twelve one-to-one relationships but substantially less than the possible maximum of $12 \times 12 = 144$ random relationships.

Most micro clusters are connected to the macro clusters that represent the same archetype. The only exceptions are the strong connections between $M_{↑↑}$ (“mainly bloggers”) and μ_3 and μ_{10} (both “bloggers-socializers”) and a weak connection between $M_{↑↑}$ (“mainly socializers”) and μ_5 (“readers”). The first exception confirms our hypothesis about the macro method being more socially agnostic. At the moment, we do not have an explanation of the second exception.

The sparsity of the resulting bipartite graph and its cohesion with respect to the user archetypes implies that both clustering methods describe the same taxonomy, but emphasize different nuances of network dynamics.

6. CONCLUSION

We presented a study of joint social and publishing dynamics in LiveJournal—a popular blogging social network (BSN). Over eighteen hundred user accounts have been analyzed at both microscopic level (represented as timed sequences of social and publishing events) and macroscopic level (represented as trajectories in temporal-social-publishing space).

We have observed a significant general positive correlation between blogging and socializing in LiveJournal. We also identified a number of user archetypes that correspond to “mainly bloggers,” “mainly socializers,” “bloggers-socializers,” and “readers” (passive network members who create blogging accounts simply to read other people’s blogs). The analysis has been performed both at the microlevel (individual posts and changes in contact lists modeled as Markov chains) and at the macrolevel (trajectories in the time-friendship-publishing space). Both approaches produced consistent results:

- the majority of the BSN users are passive readers,
- publishing is the dominant active behavior in a

BSN, and

- social activities, when present, complement blogging, rather than compete with it.

Acknowledgment

This research was supported by National Science Foundation Grant #1004996 “Research Experience for Undergraduates.” It has been partially presented as a poster at NetSci-2012, Evanston IL.

The authors are grateful to Kesann Walrond-McClean (currently at Amazon.com) for data collection and interpretation, professors Dan Stefanescu and Honggang Zhang, and other Suffolk University Research Experience for Undergraduates (REU) students for fruitful discussions.

7. REFERENCES

- [1] AHN, Y.-Y., HAN, S., KWAK, H., MOON, S., AND JEONG, H. Analysis of topological characteristics of huge online social networking services. In *Proc. WWW 2007* (Banff, Alberta, Canada, May 2007), ACM, pp. 835–844.
- [2] ANDRIENKO, G., ANDRIENKO, N., RINZIVILLO, S., NANNI, M., PEDRESCHI, D., AND GIANNOTTI, F. Interactive visual clustering of large collections of trajectories. In *Proc. IEEE Symp. on Visual Analytics Science and Technology* (Atlantic City, NJ USA, Oct. 2009), IEEE, pp. 3–10.
- [3] BLOOD, R. How blogging software reshapes the online community. *Communications of the ACM* 47, 12 (2004), 53–55.
- [4] BOYD, D. Friends, friendsters, and top 8: Writing community into being on social network sites, Dec. 2006.
- [5] GOLBECK, J. The dynamics of web-based social networks: Membership, relationships, and change. *First Monday* 12, 11 (2007).
- [6] GOLDER, S., WILKINSON, D., AND HUBERMAN, B. Rhythms of social interaction: Messaging within a massive online network. In *Proc. 3rd International Conference on Communities and Technologies (CT2007)* (East Lansing, MI, June 2007).
- [7] GÖTZ, M., LESKOVEC, J., MCGLOHON, M., AND FALOUTSOS, C. Modeling blog dynamics. In *International Conference on Weblogs and Social Media* (2009).
- [8] GUADAGNO, R., OKDIE, B., AND ENO, C. Who blogs? personality predictors of blogging. *Computers in Human Behavior* 24, 5 (2008), 1993–2004.
- [9] KUMAR, R., NOVAK, J., AND TOMKINS, A. Structure and evolution of online social networks. In *Proc. KDD’06* (Philadelphia, PA, Aug. 2006), pp. 611–617.
- [10] LAFAYETTE, L. Social networking and weblog sites for researchers. *Proc. 3rd Research Australasian Conf.* (Nov. 2009).
- [11] LESKOVEC, J., AND HORVITZ, E. Planetary-scale views on a large instant-messaging network. In *WWW ’08: Proceeding of the 17th international conference on World Wide Web* (New York, NY, USA, 2008), ACM, pp. 915–924.
- [12] LESKOVEC, J., KLEINBERG, J., AND FALOUTSOS, C. Graphs over time: Densification laws, shrinking diameters and possible explanations. In *Proc. KDD’05* (Chicago, IL, Aug. 2005), pp. 177–187.
- [13] MARQUART, E. Microblog sensation: The growing popularity of Tumblr. *CH and Publishing* (2010), 70.
- [14] MOODY, J., BRYNILDSEN, W., OSGOOD, D., FEINBERG, M., AND GEST, S. Popularity trajectories and substance use in early adolescence. *Social Networks* 33, 2 (May 2011), 101–112.
- [15] NARDI, B. A., SCHIANO, D. J., AND GUMBRECHT, M. Blogging as social activity, or, would you let 900 million people read your diary? In *Proceedings of the 2004 ACM conference on Computer supported cooperative work* (New York, NY, USA, 2004), CSCW ’04, ACM, pp. 222–231.
- [16] PEARSON, W., AND MCCARTNEY, M. Dynamics of social networks: a deterministic approach. *Int. J. Appl. Math. Comp. Sci.* 12, 4 (2002), 545–551.
- [17] ROTH, C., AND COINTET, J.-P. Social and semantic coevolution in knowledge networks. *Social Networks* 32 (2010), 16–29.
- [18] ZAKHAROV, P. Structure of LiveJournal social network. In *SPIE Conference Series* (June 2007), vol. 6601, p. 9.
- [19] ZANETTE, D. Dynamics of rumor propagation on small-world networks. *Phys. Rev. E.* 65 (2002), 041908.
- [20] ZHAO, L., GUAN, X., AND YUAN, R. Modeling collective blogging dynamics of popular incidental topics. *Knowledge and Information Systems* (2012), 1–17.