

Lower bounds for testing digraph connectivity with one-pass streaming algorithms

Glencora Borradaile
Oregon State University

Claire Mathieu
Brown University

Theresa Migler
Oregon State University

April 4, 2024

Abstract

In this note, we show that three graph properties - strong connectivity, acyclicity, and reachability from a vertex s to all vertices - each require a working memory of $\Omega(\epsilon m)$ on a graph with m edges to be determined correctly with probability greater than $(1 + \epsilon)/2$.

In the streaming model of computation, the input is given as a sequence, or *stream*, of elements. There is no random access to the elements; the sequence must be scanned in order. The goal is to process the stream using a small amount of working memory. For an overview see [7]. There has been much research devoted to the study of streaming algorithms, most notably the Gödel-prize winning work of Alon, Matias, and Szegedy [2].

For undirected graph problems, there are many lower bounds in the edge streaming model. Henzinger, Raghaven, and Rajagopalan presented a deterministic lower bound of $\Omega(n)$ for the working memory required for the following undirected graph problems: computing the connected components, vertex-connected components, and testing graph planarity of n -vertex graphs [6]. Feigenbaum, Kannan, and Zhang show that any exact, deterministic algorithm for computing the diameter of an undirected graph in the Euclidean plane requires $\Omega(n)$ bits of working memory [4]. Zelke shows that any algorithm that is able to find a minimum cut of an undirected graph requires $\Omega(m)$ bits of working memory, this remains true even if randomization is allowed [8].

For directed graphs problems, the ones most likely to come up in analyses of the internet, much less is known. Henzinger et al. showed that for any $0 < \epsilon < 1$, estimating the size of the transitive closure of a DAG with relative expected error ϵ requires $\Omega(m)$ bits of working memory [6]. Feigenbaum et al. [3] showed that testing reachability from a given vertex s to another given vertex t requires $\Omega(m)$ bits of space, Guruswami and Onak [5] showed that even with p passes, the problem requires $\Omega(n^{1+1/(2(p+1))}/p^{20} \log^{3/2} n)$ bits of space to be solvable with probability at least $9/10$.

As for upper bounds in undirected graphs, there are one-pass algorithms for connected components, k -edge and k -vertex connectivity ($k \leq 3$), and planarity testing that use $O(n \log n)$ bits of working memory [6]. There is an algorithm that approximates the diameter within $1 + \epsilon$ using $O(\frac{1}{\epsilon})$ bits [4]. For upper bounds in directed graphs, there is an

algorithm that computes the exact size of the transitive closure using $O(m \log n)$ bits of working memory[6].

In this short note, we consider three basic connectivity questions in directed graphs: determining if a graph is strongly connected, determining if a graph is acyclic, and determining if a vertex s reaches all other vertices. A directed graph $G = (V, E)$ is said to be *strongly connected* if for every pair of vertices $u, v \in V$ there is a path from u to v and a path from v to u . A directed graph $G = (V, E)$ is said to be *acyclic* if G contains no cycles. We say that a vertex s *reaches* a vertex v if there is a directed path from s to v .

We show that, even with randomization, these graph properties each require $\Omega(m)$ bits of working memory to be decided with probability greater than $(1 + \epsilon)/2$ by a one-pass streaming algorithm on n vertices and m edges. For these lower bounds we will use simple reductions from the index problem (or the bit-vector problem) in communication complexity:

Alice has a bit-vector x of length m . Bob has an index $i \in \{1, 2, \dots, m\}$ and wishes to know the i th bit of x . The only communication allowed is from Alice to Bob.

The following is a rewording of Theorem 2 from Abalayev [1].

Theorem 1 *For Bob to correctly determine x_i with probability better than $\frac{(1+\epsilon)}{2}$, $\Omega(\epsilon m)$ bits of communication are required.*


We will now state and prove our main Lemma:

Lemma 2 *Any algorithm that correctly determines the following graph properties with probability better than $\frac{(1+\epsilon)}{2}$ requires $\Omega(\epsilon m)$ bits of working memory: acyclicity, strong connectivity, and reachability of all from s .*

Proof: We reduce from the index problem and use Theorem 1. Let x denote the m -bit vector owned by Alice. We define the stream using two sets of edges E_1, E_2 . The edge stream first has the edges of E_1 in arbitrary order, followed by the edges of E_2 , also in arbitrary order. The set E_1 is entirely determined by the m -bit vector x owned by Alice, and the set E_2 is entirely determined by the index i owned by Bob. The graph defined by $E_1 \cup E_2$ has $\Omega(\sqrt{m})$ vertices, and E_1 has $O(m)$ edges. To solve the index problem, Alice constructs E_1 and simulates the streaming algorithm up to the point when E_1 has arrived, then sends to Bob the current state of the memory. Upon reception of the message, Bob constructs E_2 and continues the simulation up to the point when E_2 has finished arriving. Bob's final decision is then determined by the outcome of the streaming algorithm. Thus, the lemma will be proved.

Acyclicity Let $n = \lceil \sqrt{m} \rceil$ and let $V = L \cup R$, where L and R both have size n and have vertices labeled 0 through $n - 1$. E_1 is the bipartite graph that has an edge from vertex $j \in L$ to vertex $k \in R$ iff x has a 1 in position $jn + k$. E_2 consists of a single edge determined by Bob's bit i : let $k = i \bmod n$ and $j = \frac{i-k}{n}$. Then E_2 consists of the edge from vertex $k \in R$ to vertex $i \in L$. See figures 1(a) and 1(b) for an illustration of an example E_1 and E_2 .


Observe that $E_1 \cup E_2$ is acyclic iff $x_i = 0$, thus the reduction is complete.

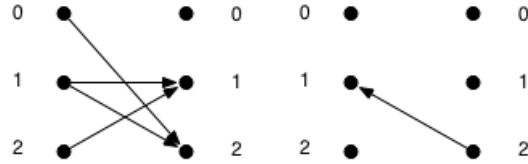

(a) An example of E_1 (b) An example of E_2 corresponding to the bit-responding to B 's index vector 001011010. being 5, $j = 1$ and $k = 2$.

Strong connectivity The construction for E_1 is the same as in the acyclic case. E_2 consists of $4n - 2$ edges determined by Bob's bit i : let $k = i \bmod n$ and $j = \frac{i-k}{n}$. Then E_2 consists of all edges from k to $V - \{k\}$, and from $V - \{j\}$ to j . See figures 1(c) and 1(d) for an illustration of an example E_1 and E_2 .

We claim that G is strongly connected iff $x_i = 1$. Indeed, if G is strongly connected, there must be a path from j to k . The only edges leaving j are to vertices in R and the only edges entering k are from vertices in L . And the only edges extending from R to L are either entering j or leaving k . Thus, the only possible path from j to k is the single edge from j to k which is present only when $x_i = 1$. Now suppose that $x_i = 1$. k can certainly reach every vertex and every vertex can reach j . Since the edge from j to k is present, we know that every vertex can reach k and k can reach every vertex. Therefore, G is strongly connected. Thus the reduction is complete.

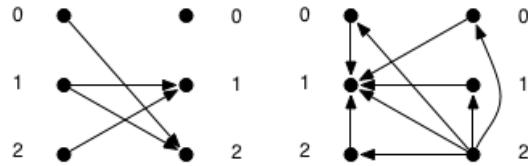


(c) An example of E_1 (d) An example of E_2 corresponding to the bit-responding to B 's index vector 001011010. being 5, $j = 1$ and $k = 2$.

Reachability from s E_1 is as above with additional vertex s with in and out degree 0.

E_2 consists of $2n - 1$ edges determined by Bob's bit i : let $k = i \bmod n$ and $j = \frac{i-k}{n}$. Then E_2 consists of one edge from s to $j \in L$, $n - 1$ edges from $j \in L$ to $R - \{k\}$, and $n - 1$ edges from $k \in R$ to $L - \{j\}$. See figures 1(e) and 1(f) for an illustration of an example E_1 and E_2 .

We claim that in G s reaches everything iff $x_i = 1$. Indeed, if s can reach all vertices in G , and the only edge from s is to j , j must be able to reach all vertices in $G - \{s\}$. In particular j must reach k . The only edges extending from R to L are from k , so the only way for j to reach k is by the edge from j to k which is present only when $x_i = 1$. Now suppose $x_i = 1$. We know s reaches j and therefore all of R , including k , and k reaches all of $L - \{j\}$. Therefore, s reaches all vertices of G . Thus the reduction is complete.

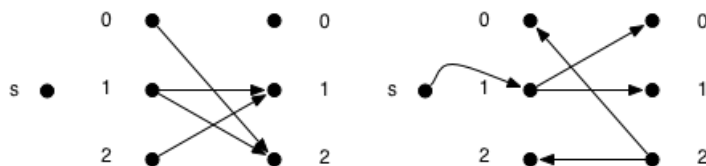

(e) An example of E_1 corresponding to the bit-vector 001011010. (f) An example of E_2 corresponding to B 's index being 5, $j = 1$ and $k = 2$.

□

References

- [1] Farid Abloyev. Lower bounds for one-way probabilistic communication complexity and their application to space complexity. *Theoretical Computer Science*, 157:139–159, 1996.
- [2] Noga Alon, Yossi Matias, and Mario Szegedy. The space complexity of approximating the frequency moments. In *Proceedings of the twenty-eighth annual ACM symposium on Theory of computing*, STOC '96, pages 20–29, New York, NY, USA, 1996. ACM.
- [3] Joan Feigenbaum, Sampath Kannan, Andrew McGregor, Siddharth Suri, and Jian Zhang. On graph problems in a semi-streaming model. *Theor. Comput. Sci.*, 348(2):207–216, December 2005.
- [4] Joan Feigenbaum, Sampath Kannan, and Jian Zhang. Computing diameter in the streaming and sliding-window models. *Algorithmica*, pages 25–41, 2004.
- [5] Venkatesan Guruswami and Krzysztof Onak. Superlinear lower bounds for multipass graph processing. *CoRR*, abs/1212.6925, 2012.
- [6] Monika R. Henzinger, Prabhakar Raghavan, and Sridhar Rajagopalan. Computing on data streams. In *External memory algorithms*, pages 107–118. American Mathematical Society, 1999.

- [7] S. Muthukrishnan. *Data Streams: Algorithms and Applications*. Now Publishers Inc, 1 edition, 2005.
- [8] Mariano Zelke. Intractability of min- and max-cut in streaming graphs. *Inf. Process. Lett.*, 111(3):145–150, jan 2011.