

Diagonal implicit symplectic ERKN methods for solving oscillatory Hamiltonian systems

Mingxue Shi ^{*} Hao Zhang[†] Bin Wang[‡]

December 6, 2021

Abstract

This paper studies diagonal implicit symplectic extended Runge–Kutta–Nyström (ERKN) methods for solving the oscillatory Hamiltonian system $H(q, p) = \frac{1}{2}p^T p + \frac{1}{2}q^T M q + U(q)$. Based on symplectic conditions and order conditions, we construct some diagonal implicit symplectic ERKN methods. The stability of the obtained methods is discussed. Three numerical experiments are carried out and the numerical results demonstrate the remarkable numerical behavior of the new diagonal implicit symplectic methods when applied to the oscillatory Hamiltonian system.

Keywords: diagonal implicit methods; symplectic methods; ERKN methods; oscillatory Hamiltonian systems

MSC: 65L05

1 Introduction

In this paper, we are concerned with diagonal implicit symplectic methods for solving the following oscillatory Hamiltonian systems

$$\dot{q} = \nabla_p H(q, p), \quad q(t_0) = q_0, \quad \dot{p} = -\nabla_q H(q, p), \quad p(t_0) = p_0 \quad (1)$$

with the Hamiltonian

$$H(q, p) = \frac{1}{2}p^T p + \frac{1}{2}q^T M q + U(q). \quad (2)$$

Here M is a $d \times d$ symmetric and positive semi-definite matrix which implicitly preserves the dominant frequencies of the system (1) and function $U(q)$ is a real-valued function whose second derivatives are continuous. Problem (1) with the Hamiltonian of the form (2) often consists in a wide variety of applications such as physics, astronomy, molecular biology, astronomy and classical

^{*}School of Mathematical Sciences, Qufu Normal University, Qufu, Shandong 273165, P.R.China. E-mail: 1947785221@qq.com

[†]School of Mathematical Sciences, Qufu Normal University, Qufu, Shandong 273165, P.R.China. E-mail: 1078836174@qq.com

[‡]School of Mathematical Sciences, Qufu Normal University, Qufu, Shandong 273165, P.R.China. E-mail: wangbinmaths@qq.com

mechanics (see, e.g. [1, 2, 3, 5, 6, 9]). Fermi-Pasta-Ulam problem and the spatial semi-discretization of wave equation with the method of lines are classical examples.

In the past more than twenty years, some researchers studied the single-frequency problem which is a kind of special situation of the multi-frequency problem. That is to say, the multi-frequency problem (1) becomes the single-frequency problem when $M = \omega^2$, where $\omega > 0$ is main frequency of the single-frequency problem and may be estimated in advance. Moreover, the multi-frequency system (1) is more complicated than the single-frequency system. The reasons are as follows. First, the coefficients of numerical methods for solving single-frequency problems depend on ω . However, M of the multi-frequency system is a $d \times d$ matrix which implicitly contains many frequencies. Second, symplectic conditions of methods for solving single-frequency problem can not be extended to that of methods for solving multi-frequency problem (1). So it is important to focus on geometric integration of multi-frequency problem.

In order to solve the oscillatory Hamiltonian systems (1), many novel methods have been developed and studied by many researchers. For the related work, we can refer the reader to [13, 14, 15, 16, 17, 19, 22]. In [21], based on the variation-of-constants formula, Wu et al. formulate a standard form of extended Runge–Kutta–Nyström (ERKN) methods for the oscillatory Hamiltonian system (1) and present the order conditions via B-series theory. On the other hand, the importance of geometric numerical integration for the purpose of preserving some structures of differential equations has recently become apparent. For the survey of this field, we refer to the book [6]. Ruth [10] was the first to publish the results about canonical numerical methods and proposed three-stage canonical Runge–Kutta–Nyström (RKN) method of order three. Some researches following [10] about canonical methods are referred to [1, 11, 20]. In order to preserve the symplectic structure of the Hamiltonian system (2), symplectic conditions for ERKN methods are derived and some novel explicit ERKN methods of order up to four are proposed in [20]. However, the related work about diagonal implicit symplectic ERKN methods for solving oscillatory Hamiltonian systems has not been developed. Therefore, this paper attempts to study diagonal implicit symplectic ERKN methods which may improve accuracy of the numerical solutions of the system (1).

In this paper, we will construct some practical diagonal implicit symplectic ERKN methods. It is noted that when matrix $M \rightarrow \mathbf{0}$, these methods will become their corresponding RKN methods. Its detailed process is as follows. In Section 2, the definition of order conditions and symplectic conditions of ERKN methods are represented. In Section 3, some diagonal implicit symplectic ERKN methods are constructed. In Section 4, the stability is analyzed and the obtained methods are compared with some RKN methods by three numerical experiments. In section 5, we draw the conclusions.

2 Preliminaries

In order to obtain an effective and practical numerical scheme for the system (1), the definition of ERKN methods is given in [22].

Definition 1 *An s -stage diagonal implicit ERKN method with stepsize h for solving the Hamilto-*

nian system (1) is defined by

$$\begin{aligned}
Q_i &= \phi_0(c_i^2 V)q_n + hc_i\phi_1(c_i^2 V)p_n - h^2 \sum_{j=1}^i \bar{a}_{ij}(V)\nabla U(Q_j), \quad i = 1, \dots, s, \\
q_{n+1} &= \phi_0(V)q_n + h\phi_1(V)p_n - h^2 \sum_{i=1}^s \bar{b}_i(V)\nabla U(Q_i), \\
p_{n+1} &= -hM\phi_1(V)q_n + \phi_0(V)p_n - h \sum_{i=1}^s b_i(V)\nabla U(Q_i),
\end{aligned} \tag{3}$$

where c_i are real constants, $b_i(V)$, $\bar{b}_i(V)$, and $\bar{a}_{ij}(V)$ are matrix-valued functions of $V \equiv h^2 M$, and

$$\phi_j(V) := \sum_{k=0}^{\infty} \frac{(-1)^k V^k}{(2k+j)!}, \quad j = 0, 1, \dots, i. \tag{4}$$

The coefficients of (3) can be displayed in a Butcher tableau:

$$\begin{array}{c|c} c & \bar{A}(V) \\ \hline & \bar{b}^T(V) \\ \hline & b^T(V) \end{array} = \begin{array}{c|cc} c_1 & \bar{a}_{11}(V) & \\ \vdots & \vdots & \ddots \\ c_s & \bar{a}_{s1}(V) & \cdots & \bar{a}_{ss}(V) \\ \hline & \bar{b}_1(V) & \cdots & \bar{b}_s(V) \\ \hline & b_1(V) & \cdots & b_s(V) \end{array}$$

Based on the new SEN-tree theory, the order conditions of (3) can be derived by comparing the series expansions of q_{n+1} and p_{n+1} in terms of SEN-trees with those of the true solutions $q(t_n + h)$ and $p(t_n + h)$, respectively. The following theorem presents the order conditions of ERKN methods (see [21]).

Theorem 1 *The necessary and sufficient conditions for an s -stage ERKN method (3) to be of order r are given by*

$$\begin{aligned}
\bar{b}^T(V)\Phi(\tau) &= \frac{\rho(\tau)!}{\gamma(\tau)} \phi_{\rho(\tau)+1}(V) + \mathcal{O}(h^{r-\rho(\tau)}), \quad \rho(\tau) = 1, \dots, r-1, \\
b^T(V)\Phi(\tau) &= \frac{\rho(\tau)!}{\gamma(\tau)} \phi_{\rho(\tau)}(V) + \mathcal{O}(h^{r+1-\rho(\tau)}), \quad \rho(\tau) = 1, \dots, r,
\end{aligned} \tag{5}$$

where τ is an extended Nyström tree associated with an elementary differential $\mathcal{F}(\tau)(q_n, p_n)$ of the function $-\nabla U(q)$ at q_n .

The definitions of $\Phi(\tau)$, $\rho(\tau)$, $\gamma(\tau)$ are referred to [21].

One important property of Hamiltonian systems is that the correspond flow is symplectic. Therefore, it encourages many researchers to study symplectic integration which can preserve the symplecticity of the considered system. The symplectic conditions of ERKN methods are derived in [16] and the following theorem states the symplectic conditions of diagonal implicit ERKN methods for solving the oscillatory Hamiltonian system (1).

Theorem 2 (see [20]) *An s -stage diagonal implicit ERKN method (3) is symplectic if its coefficients satisfy*

$$\begin{aligned}
\phi_0(V)b_i(V) + V\phi_1(V)\bar{b}_i(V) &= d_i\phi_0(c_i^2 V), \quad d_i \in \mathbb{R}, \quad i = 1, \dots, s, \\
\phi_0(V)\bar{b}_i(V) + c_i d_i \phi_1(c_i^2 V) &= b_i(V)\phi_1(V), \quad i = 1, \dots, s, \\
\bar{b}_j(V)b_i(V) &= \bar{b}_i(V)b_j(V) + d_i \bar{a}_{ij}(V), \quad i = 1, \dots, s, \quad j = 1, \dots, i.
\end{aligned} \tag{6}$$

3 Diagonal implicit symplectic ERKN methods

In this section, we will formulate some diagonal implicit symplectic ERKN methods with one, two and three stages.

3.1 One-stage diagonal implicit symplectic methods

One-stage diagonal implicit ERKN methods can be expressed by a Butcher tableau:

$$\begin{array}{c|c} c_1 & \bar{a}_{11}(V) \\ \hline & \bar{b}_1(V) \\ \hline & b_1(V) \end{array}$$

According to the symplectic conditions (6), it is noted that this method is symplectic if

$$\begin{aligned} \phi_0(V)b_1(V) + V\phi_1(V)\bar{b}_1(V) &= d_1\phi_0(c_1^2V), \\ \phi_1(V)b_1(V) - \phi_0(V)\bar{b}_1(V) &= c_1d_1\phi_1(c_1^2V). \end{aligned} \quad (7)$$

Similarly, according to the order conditions (5), the necessary and sufficient conditions for an one-stage diagonal implicit ERKN method (3) to be of order two are given by

$$\begin{aligned} \bar{b}_1(V) &= \phi_2(V) + O(h), \\ b_1(V) &= \phi_1(V) + O(h^2), \\ c_1b_1(V) &= \phi_2(V) + O(h). \end{aligned} \quad (8)$$

By (7), we get

$$\begin{aligned} b_1(V) &= d_1\phi_0((1-c_1)^2V), \\ \bar{b}_1(V) &= d_1(1-c_1)\phi_1((1-c_1)^2V). \end{aligned}$$

Inserting this formula into (8) yields

$$c_1 = \frac{1}{2}, \quad d_1 = 1.$$

Due to the second-order order conditions and symplectic conditions do not contain $\bar{a}_{11}(V)$, so the function $\bar{a}_{11}(V)$ is arbitrary. We consider two kinds of situations.

Case one. When $\bar{a}_{11}(V) = \phi_0(V)$, the Taylor expansions of other coefficients are

$$\begin{aligned} b_1(V) &= I - \frac{1}{8}V + \frac{1}{384}V^2 - \frac{1}{46080}V^3 + \dots, \\ \bar{b}_1(V) &= \frac{1}{2}I - \frac{1}{48}V + \frac{1}{3840}V^2 - \frac{1}{645120}V^3 + \dots, \\ \bar{a}_{11}(V) &= I - \frac{1}{2}V + \frac{1}{24}V^2 - \frac{1}{720}V^3 + \dots. \end{aligned} \quad (9)$$

We denote this method by SERKN1s2(1).

Case two. Choose $\bar{a}_{11}(V) = \bar{b}_1(V)$ and the Taylor expansions of other coefficients are

$$\begin{aligned} b_1(V) &= I - \frac{1}{8}V + \frac{1}{384}V^2 - \frac{1}{46080}V^3 + \dots, \\ \bar{b}_1(V) &= \frac{1}{2}I - \frac{1}{48}V + \frac{1}{3840}V^2 - \frac{1}{645120}V^3 + \dots, \\ \bar{a}_{11}(V) &= \frac{1}{2}I - \frac{1}{48}V + \frac{1}{3840}V^2 - \frac{1}{645120}V^3 + \dots. \end{aligned} \quad (10)$$

We denote this method by SERKN1s2(2).

3.2 Two-stage diagonal implicit symplectic methods

We use a Butcher tableau to show two-stage diagonal implicit ERKN methods:

$$\begin{array}{c|cc} c_1 & \bar{a}_{11}(V) & \\ c_2 & \bar{a}_{21}(V) & \bar{a}_{22}(V) \\ \hline & \bar{b}_1(V) & \bar{b}_2(V) \\ \hline & b_1(V) & b_2(V) \end{array}$$

By (6), the symplectic conditions of two-stage diagonal implicit ERKN methods are given by the following formulas

$$\begin{aligned} \phi_0(V)b_1(V) + V\phi_1(V)\bar{b}_1(V) &= d_1\phi_0(c_1^2V), \\ \phi_1(V)b_1(V) - \phi_0(V)\bar{b}_1(V) &= c_1d_1\phi_1(c_1^2V), \\ \phi_0(V)b_2(V) + V\phi_1(V)\bar{b}_2(V) &= d_2\phi_0(c_2^2V), \\ \phi_1(V)b_2(V) - \phi_0(V)\bar{b}_2(V) &= c_2d_2\phi_1(c_2^2V), \\ \bar{b}_2(V)b_1(V) + d_2\bar{a}_{21}(V) &= \bar{b}_1(V)b_2(V). \end{aligned} \tag{11}$$

By (5), third-order and fourth-order order conditions of two-stage diagonal implicit ERKN methods respectively are

$$\begin{aligned} b_1(V) + b_2(V) &= \phi_1(V) + O(h^3), \\ b_1(V)c_1 + b_2(V)c_2 &= \phi_2(V) + O(h^2), \\ b_1(V)c_1^2 + b_2(V)c_2^2 &= 2\phi_3(V) + O(h), \\ \bar{b}_1(V) + \bar{b}_2(V) &= \phi_2(V) + O(h^2), \\ \bar{b}_1(V)c_1 + \bar{b}_2(V)c_2 &= \phi_3(V) + O(h), \\ b_1(V)\bar{a}_{11}(\mathbf{0}) + b_2(V)(\bar{a}_{21}(\mathbf{0}) + \bar{a}_{22}(\mathbf{0})) &= \phi_3(V) + O(h), \end{aligned} \tag{12}$$

and

$$\begin{aligned} b_1(V) + b_2(V) &= \phi_1(V) + O(h^4), \\ b_1(V)c_1 + b_2(V)c_2 &= \phi_2(V) + O(h^3), \\ b_1(V)c_1^2 + b_2(V)c_2^2 &= 2\phi_3(V) + O(h^2), \\ b_1(V)c_1^3 + b_2(V)c_2^3 &= 6\phi_4(V) + O(h), \\ \bar{b}_1(V) + \bar{b}_2(V) &= \phi_2(V) + O(h^3), \\ \bar{b}_1(V)c_1 + \bar{b}_2(V)c_2 &= \phi_3(V) + O(h^2), \\ \bar{b}_1(V)c_1^2 + \bar{b}_2(V)c_2^2 &= 2\phi_4(V) + O(h), \\ b_1(V)\bar{a}_{11}(\mathbf{0}) + b_2(V)(\bar{a}_{21}(\mathbf{0}) + \bar{a}_{22}(\mathbf{0})) &= \phi_4(V) + O(h), \\ b_1(V)\bar{a}_{11}(\mathbf{0}) + b_2(V)(\bar{a}_{21}(\mathbf{0}) + \bar{a}_{22}(\mathbf{0})) &= \phi_3(V) + O(h^2), \\ c_1b_1(V)\bar{a}_{11}(\mathbf{0}) + c_2b_2(V)(\bar{a}_{21}(\mathbf{0}) + \bar{a}_{22}(\mathbf{0})) &= 3\phi_4(V) + O(h), \\ c_1b_1(V)\bar{a}_{11}(\mathbf{0}) + b_2(V)(c_1\bar{a}_{21}(\mathbf{0}) + c_2\bar{a}_{22}(\mathbf{0})) &= \phi_4(V) + O(h). \end{aligned} \tag{13}$$

By the first four formulas of (11), we obtain

$$\begin{aligned} \bar{b}_1(V) &= b_1(1 - c_1) \frac{\phi_1((1 - c_1)^2V)}{\phi_0(1 - c_1)^2V}, & \bar{b}_2(V) &= b_2(1 - c_2) \frac{\phi_1((1 - c_2)^2V)}{\phi_0(1 - c_2)^2V}, \\ b_1(V) &= d_1\phi_0((-1 + c_1)^2V), & b_2(V) &= d_2\phi_0((-1 + c_2)^2V). \end{aligned} \tag{14}$$

By the last formula of (11), we have

$$\bar{a}_{21}(V) = \frac{b_2(V)\bar{b}_1(V) - b_1(V)\bar{b}_2(V)}{d_2}.$$

Case one. Inserting these formulas of (14) into the first five formulas of (12) yields

$$d_1 = \frac{1 - 2c_2}{2(c_1 - c_2)}, \quad d_2 = \frac{-1 + 2c_1}{2(c_1 - c_2)}, \quad c_2 = \frac{2 - 3c_1}{3 - 6c_1},$$

where c_1 is a parameter.

Considering $\bar{a}_{22}(V) = \bar{a}_{11}(V)$ and the following formula (which is obtained from the last formula of (12))

$$b_1(V)\bar{a}_{11}(V) + b_2(\bar{a}_{21}(V) + \bar{a}_{22}(V)) = \phi_3(V),$$

we obtain

$$\bar{a}_{22}(V) = \bar{a}_{11}(V) = \frac{-\bar{a}_{21}(V)b_2(V) + \phi_3(V)}{b_1(V) + b_2(V)}.$$

We choose $c_1 = \frac{1}{5}$ and then get $c_2 = \frac{7}{9}$, $d_1 = \frac{25}{52}$, $d_2 = \frac{27}{52}$. The Taylor expansions of $b_i(V)$, $\bar{b}_i(V)$, $\bar{a}_{ij}(V)$ are

$$\begin{aligned} b_1(V) &= \frac{25}{52}I - \frac{2}{13}V + \frac{8}{975}V^2 - \frac{64}{365625}V^3 + \dots, \\ b_2(V) &= \frac{27}{52}I - \frac{1}{78}V + \frac{1}{18954}V^2 - \frac{1}{11514555}V^3 + \dots, \\ \bar{b}_1(V) &= \frac{5}{13}I - \frac{8}{195}V + \frac{32}{24375}V^2 - \frac{256}{12796875}V^3 + \dots, \\ \bar{b}_2(V) &= \frac{3}{26}I - \frac{1}{1053}V + \frac{1}{426465}V^2 - \frac{2}{725416965}V^3 + \dots, \\ \bar{a}_{11}(V) &= \frac{7}{312}I + \frac{589}{84240}V + \frac{9931609}{11941020000}V^2 + \frac{25321869691}{290166786000000}V^3 + \dots, \\ \bar{a}_{21}(V) &= \frac{5}{18}I - \frac{169}{10935}V + \frac{28561}{110716875}V^2 - \frac{9653618}{4708235109375}V^3 + \dots, \\ \bar{a}_{22}(V) &= \frac{7}{312}I + \frac{589}{84240}V + \frac{9931609}{11941020000}V^2 + \frac{25321869691}{290166786000000}V^3 + \dots. \end{aligned} \tag{15}$$

We denote this method by SERKN2s3.

Case two. Inserting (14) into the first seven formulas of (13) yields

$$d_1 = \frac{1 - 2c_2}{2(c_1 - c_2)}, \quad d_2 = \frac{-1 + 2c_1}{2(c_1 - c_2)}.$$

Considering $c_1 = \frac{3 - \sqrt{3}}{6}$, $c_2 = \frac{3 + \sqrt{3}}{6}$, we get $d_1 = \frac{1}{2}$, $d_2 = \frac{1}{2}$. According to the eighth and ninth formula of (13), the follow results are obtained:

$$\begin{aligned} \bar{a}_{11}(V) &= \frac{\bar{b}_2(V)\phi_3(V) - b_2(V)\phi_4(V)}{-b_2(V)\bar{b}_1(V) + b_1(V)\bar{b}_2(V)}, \\ \bar{a}_{22}(V) &= \frac{\bar{a}_{21}(V)b_2(V)\bar{b}_1(V) - \bar{a}_{21}(V)b_1(V)\bar{b}_2(V) - \bar{b}_1(V)\phi_3(V) + b_1(V)\phi_4(V)}{-b_2(V)\bar{b}_1(V) + b_1(V)\bar{b}_2(V)}. \end{aligned}$$

The Taylor expansions of other coefficients are

$$\begin{aligned}
b_1(V) &= \frac{1}{2}I - \frac{2 + \sqrt{3}}{24}V + \frac{7 + 4\sqrt{3}}{1728}V^2 - \frac{26 + 15\sqrt{3}}{311040}V^3 + \dots, \\
b_2(V) &= \frac{1}{2}I + \frac{-2 + \sqrt{3}}{24}V + \frac{7 - 4\sqrt{3}}{1728}V^2 + \frac{-26 + 15\sqrt{3}}{311040}V^3 + \dots, \\
\bar{b}_1(V) &= \frac{3 + \sqrt{3}}{12}I - \frac{9 + 5\sqrt{3}}{432}V + \frac{33 + 19\sqrt{3}}{51840}V^2 - \frac{123 + 71\sqrt{3}}{13063680}V^3 + \dots, \\
\bar{b}_2(V) &= \frac{3 - \sqrt{3}}{12}I + \frac{-9 + 5\sqrt{3}}{432}V + \frac{33 - 19\sqrt{3}}{51840}V^2 + \frac{-123 + 71\sqrt{3}}{13063680}V^3 + \dots, \\
\bar{a}_{11}(V) &= \frac{2 - \sqrt{3}}{12}I + \frac{-3 + 2\sqrt{3}}{2160}V + \frac{6 - \sqrt{3}}{1088640}V^2 + \frac{15 + 2\sqrt{3}}{195955200}V^3 + \dots, \\
\bar{a}_{21}(V) &= \frac{1}{2\sqrt{3}}I - \frac{1}{36\sqrt{3}}V + \frac{1}{2160\sqrt{3}}V^2 - \frac{1}{272160\sqrt{3}}V^3 + \dots, \\
\bar{a}_{22}(V) &= \frac{2 - \sqrt{3}}{12}I + \frac{-1 + 6\sqrt{3}}{720}V + \frac{6 - 167\sqrt{3}}{1088640}V^2 + \frac{15 + 238\sqrt{3}}{195955200}V^3 + \dots.
\end{aligned} \tag{16}$$

We denote this method by SERKN2s4 and this method is proved to satisfy all the order conditions and symplectic conditions.

3.3 Three-stage diagonal implicit symplectic methods

The following Butcher tableau is given to describe three-stage diagonal implicit methods:

$$\begin{array}{c|ccc}
c_1 & \bar{a}_{11}(V) & & \\
c_2 & \bar{a}_{21}(V) & \bar{a}_{22}(V) & \\
c_3 & \bar{a}_{31}(V) & \bar{a}_{32}(V) & \bar{a}_{33}(V) \\
\hline
& \bar{b}_1(V) & \bar{b}_2(V) & \bar{b}_3(V) \\
\hline
& b_1(V) & b_2(V) & b_3(V)
\end{array}$$

By (6) and (5), the symplectic condition and fourth-order order conditions of three-stage diagonal implicit ERKN methods respectively are given by the following formulas

$$\begin{aligned}
\phi_0(V)b_1(V) + V\phi_1(V)\bar{b}_1(V) &= d_1\phi_0(c_1^2V), \\
\phi_1(V)b_1(V) - \phi_0(V)\bar{b}_1(V) &= c_1d_1\phi_1(c_1^2V), \\
\phi_0(V)b_2(V) + V\phi_1(V)\bar{b}_2(V) &= d_2\phi_0(c_2^2V), \\
\phi_1(V)b_2(V) - \phi_0(V)\bar{b}_2(V) &= c_2d_2\phi_1(c_2^2V), \\
\phi_0(V)b_3(V) + V\phi_1(V)\bar{b}_3(V) &= d_3\phi_0(c_3^2V), \\
\phi_1(V)b_3(V) - \phi_0(V)\bar{b}_3(V) &= c_3d_3\phi_1(c_3^2V), \\
\bar{b}_1(V)b_2(V) &= \bar{b}_2(V)b_1(V) + d_2\bar{a}_{21}(V), \\
\bar{b}_1(V)b_3(V) &= \bar{b}_3(V)b_1(V) + d_3\bar{a}_{31}(V), \\
\bar{b}_2(V)b_3(V) &= \bar{b}_3(V)b_2(V) + d_3\bar{a}_{32}(V),
\end{aligned} \tag{17}$$

and

$$\begin{aligned}
b_1(V) + b_2(V) + b_3(V) &= \phi_1(V) + O(h^4), \\
b_1(V)c_1 + b_2(V)c_2 + b_3(V)c_3 &= \phi_2(V) + O(h^3), \\
b_1(V)c_1^2 + b_2(V)c_2^2 + b_3(V)c_3^2 &= 2\phi_3(V) + O(h^2), \\
b_1(V)c_1^3 + b_2(V)c_2^3 + b_3(V)c_3^3 &= 6\phi_4(V) + O(h), \\
\bar{b}_1(V) + \bar{b}_2(V) + \bar{b}_3(V) &= \phi_2(V) + O(h^3), \\
\bar{b}_1(V)c_1 + \bar{b}_2(V)c_2 + \bar{b}_3(V)c_3 &= \phi_3(V) + O(h^2), \\
\bar{b}_1(V)c_1^2 + \bar{b}_2(V)c_2^2 + \bar{b}_3(V)c_3^2 &= 2\phi_4(V) + O(h), \\
\bar{b}_1(V)\bar{a}_{11}(\mathbf{0}) + \bar{b}_2(V)(\bar{a}_{21}(\mathbf{0}) + \bar{a}_{22}(\mathbf{0})) + \bar{b}_3(V)(\bar{a}_{31}(\mathbf{0}) + \bar{a}_{32}(\mathbf{0}) + \bar{a}_{33}(\mathbf{0})) &= \phi_4(V) + O(h), \\
b_1(V)\bar{a}_{11}(\mathbf{0}) + b_2(V)(\bar{a}_{21}(\mathbf{0}) + \bar{a}_{22}(\mathbf{0})) + b_3(V)(\bar{a}_{31}(\mathbf{0}) + \bar{a}_{32}(\mathbf{0}) + \bar{a}_{33}(\mathbf{0})) &= \phi_3(V) + O(h^2), \\
b_1(V)c_1\bar{a}_{11}(\mathbf{0}) + b_2(V)c_2(\bar{a}_{21}(\mathbf{0}) + \bar{a}_{22}(\mathbf{0})) + b_3(V)c_3(\bar{a}_{31}(\mathbf{0}) + \bar{a}_{32}(\mathbf{0}) + \bar{a}_{33}(\mathbf{0})) &= 3\phi_4(V) + O(h), \\
b_1(V)c_1\bar{a}_{11}(\mathbf{0}) + b_2(V)(c_1\bar{a}_{21}(\mathbf{0}) + c_2\bar{a}_{22}(\mathbf{0})) + b_3(V)(c_1\bar{a}_{31}(\mathbf{0}) + c_2\bar{a}_{32}(\mathbf{0}) + c_3\bar{a}_{33}(\mathbf{0})) &= \phi_4(V) + O(h).
\end{aligned} \tag{18}$$

On the one hand, b_i and \bar{b}_i , $i = 1, 2, 3$ can be obtained by solving the first six formulas of (17) as follows

$$\begin{aligned}
\bar{b}_1(V) &= \frac{b_1(\phi_0(c_1^2V)\phi_1(V) - c_1\phi_0(V)\phi_1(c_1^2V))}{\phi_0(V)\phi_0(c_1^2V) + c_1V\phi_1(V)\phi_1(c_1^2V)}, \\
\bar{b}_2(V) &= \frac{b_2(\phi_0(c_2^2V)\phi_1(V) - c_2\phi_0(V)\phi_1(c_2^2V))}{\phi_0(V)\phi_0(c_2^2V) + c_2V\phi_1(V)\phi_1(c_2^2V)}, \\
\bar{b}_3(V) &= \frac{b_3(\phi_0(c_3^2V)\phi_1(V) - c_3\phi_0(V)\phi_1(c_3^2V))}{\phi_0(V)\phi_0(c_3^2V) + c_3V\phi_1(V)\phi_1(c_3^2V)}, \\
b_1(V) &= \frac{d_1(\phi_0(V)\phi_0(c_1^2V) + c_1V\phi_1(V)\phi_1(c_1^2V))}{\phi_0(V)^2 + V\phi_1(V)^2}, \\
b_2(V) &= \frac{d_2(\phi_0(V)\phi_0(c_2^2V) + c_2V\phi_1(V)\phi_1(c_2^2V))}{\phi_0(V)^2 + V\phi_1(V)^2}, \\
b_3(V) &= \frac{d_3(\phi_0(V)\phi_0(c_3^2V) + c_3V\phi_1(V)\phi_1(c_3^2V))}{\phi_0(V)^2 + V\phi_1(V)^2}.
\end{aligned} \tag{19}$$

On the other hand, by the last three formulas of (17), we obtain

$$\begin{aligned}
\bar{a}_{21}(V) &= \frac{b_2(V)\bar{b}_1(V) - b_1(V)\bar{b}_2(V)}{d_2}, \\
\bar{a}_{31}(V) &= \frac{b_3(V)\bar{b}_1(V) - b_1(V)\bar{b}_3(V)}{d_3}, \\
\bar{a}_{32}(V) &= \frac{b_3(V)\bar{b}_2(V) - b_2(V)\bar{b}_3(V)}{d_3}.
\end{aligned} \tag{20}$$

In the above formulas, c_i and d_i , $i = 1, 2, 3$ are parameters.

It is noted that \bar{a}_{ii} ($i = 1, 2, 3$) can be obtained by solving the eighth, ninth, tenth formulas of

(18) as follows

$$\begin{aligned}
\bar{a}_{11}(V) &= \frac{((-b_2(V)\bar{b}_3(V)c_2 + b_3(V)\bar{b}_2(V)c_3)\phi_3(V)}{b_2(V)b_3(V)\bar{b}_1(V)(c_2 - c_3) + b_1(V)(b_2(V)\bar{b}_3(V)(c_1 - c_2) + b_3(V)\bar{b}_2(V)(-c_1 + c_3))} \\
&\quad + \frac{(3b_2(V)\bar{b}_3(V) + b_3(V)(-3\bar{b}_2(V) + b_2(V)c_2(V) - b_2(V)c_3(V)))\phi_4(V)}{b_2(V)b_3(V)\bar{b}_1(V)(c_2 - c_3) + b_1(V)(b_2(V)\bar{b}_3(V)(c_1 - c_2) + b_3(V)\bar{b}_2(V)(-c_1 + c_3))}, \\
\bar{a}_{22}(V) &= \frac{\bar{a}_{21}(V)(b_1(V)(b_2(V)\bar{b}_3(V)(-c_1 + c_2) + b_3(V)\bar{b}_2(V)(c_1 - c_3))}{b_2(V)b_3(V)\bar{b}_1(V)(c_2 - c_3) + b_1(V)(b_2(V)\bar{b}_3(V)(c_1 - c_2) + b_3(V)\bar{b}_2(V)(-c_1 + c_3))} \\
&\quad + \frac{b_2(V)b_3(V)\bar{b}_1(V)(-c_2 + c_3) + (b_1(V)\bar{b}_3(V)c_1 - b_3(V)\bar{b}_1(V)c_3)\phi_3(V)}{b_2(V)b_3(V)\bar{b}_1(V)(c_2 - c_3) + b_1(V)(b_2(V)\bar{b}_3(V)(c_1 - c_2) + b_3(V)\bar{b}_2(V)(-c_1 + c_3))} \\
&\quad + \frac{(-3b_1(V)\bar{b}_3(V) + b_3(V)(3\bar{b}_1(V) - b_1(V)c_1 + b_1(V)c_3))\phi_4}{b_2(V)b_3(V)\bar{b}_1(V)(c_2 - c_3) + b_1(V)(b_2(V)\bar{b}_3(V)(c_1 - c_2) + b_3(V)\bar{b}_2(V)(-c_1 + c_3))}, \\
\bar{a}_{33}(V) &= \frac{(\bar{a}_{31}(V) + a_{32}(V))(b_1(V)(b_2(V)\bar{b}_3(V)(-c_1 + c_2) + b_3(V)\bar{b}_2(V)(c_1 - c_3))}{b_2(V)b_3(V)\bar{b}_1(V)(c_2 - c_3) + b_1(V)(b_2(V)\bar{b}_3(V)(c_1 - c_2) + b_3(V)\bar{b}_2(V)(-c_1 + c_3))} \\
&\quad + \frac{b_2(V)b_3(V)\bar{b}_1(V) \times (-c_2 + c_3) + (-b_1(V)\bar{b}_2(V)c_1 + b_2(V)\bar{b}_1(V)c_2)\phi_3(V)}{b_2(V)b_3(V)\bar{b}_1(V)(c_2 - c_3) + b_1(V)(b_2(V)\bar{b}_3(V)(c_1 - c_2) + b_3(V)\bar{b}_2(V)(-c_1 + c_3))} \\
&\quad + \frac{3b_1(V)\bar{b}_2(V) + b_2(V)(-3\bar{b}_1(V) + b_1(V)c_1 - b_1(V)c_2)\phi_4(V)}{b_2(V)b_3(V)\bar{b}_1(V)(c_2 - c_3) + b_1(V)(b_2(V)\bar{b}_3(V)(c_1 - c_2) + b_3(V)\bar{b}_2(V)(-c_1 + c_3))}. \tag{21}
\end{aligned}$$

In order to fulfill the first seven formulas of (18) , the following conditions should be satisfied:

$$\begin{aligned}
d_1 &= \frac{2 - 3c_3 + c_2(-3 + 6c_3)}{6(c_1 - c_2)(c_1 - c_3)}, \\
d_2 &= \frac{-2 + c_1(3 - 6c_3) + 3c_3}{6(c_1 - c_2)(c_2 - c_3)}, \\
d_3 &= \frac{-2 + c_1(3 - 6c_2) + 3c_2}{6(c_1 - c_3)(-c_2 + c_3)}, \\
c_3 &= \frac{3 - 4c_1 - 4c_2 + 6c_1c_2}{4 - 6c_1 - 6c_2 + 12c_1c_2}, \tag{22}
\end{aligned}$$

where c_1 and c_2 are parameters.

Case one. We choose

$$c_1 = \frac{5 - \sqrt{15}}{10}, \quad c_2 = \frac{1}{2}, \tag{23}$$

and then get $c_3 = \frac{5 + \sqrt{15}}{10}$. Under the conditions of (23), the Taylor series expansions of $b_i(V)$,

$\bar{b}_i(V)$, $\bar{a}_{ij}(V)$ ($i = 1, 2, 3$, $j = 1 \dots i$) respectively are

$$\begin{aligned}
b_1(V) &= \frac{5}{18}I - \frac{4 + \sqrt{15}}{72}V + \frac{31 + 8\sqrt{15}}{8640}V^2 - \frac{244 + 63\sqrt{15}}{2592000}V^3 + \dots, \\
b_2(V) &= \frac{4}{9}I - \frac{1}{18}V + \frac{1}{864}V^2 - \frac{1}{103680}V^3 + \dots, \\
b_3(V) &= \frac{5}{18}I + \frac{-4 + \sqrt{15}}{72}V + \frac{31 - 8\sqrt{15}}{8640}V^2 + \frac{-244 + 63\sqrt{15}}{2592000}V^3 + \dots, \\
\bar{b}_1(V) &= \frac{5 + \sqrt{15}}{36}I - \frac{35 + 9\sqrt{15}}{2160}V + \frac{275 + 71\sqrt{15}}{432000}V^2 - \frac{2165 + 559\sqrt{15}}{181440000}V^3 + \dots, \\
\bar{b}_2(V) &= \frac{2}{9}I - \frac{1}{108}V + \frac{1}{8640}V^2 - \frac{1}{1451520}V^3 + \dots, \\
\bar{b}_3(V) &= \frac{5 - \sqrt{15}}{36}I + \frac{-35 + 9\sqrt{15}}{2160}V + \frac{275 - 71\sqrt{15}}{432000}V^2 + \frac{-2165 + 559\sqrt{15}}{181440000}V^3 + \dots, \\
\bar{a}_{11}(V) &= \frac{4 - \sqrt{15}}{20}I - \frac{3}{14000}V - \frac{28 + 9\sqrt{15}}{5040000}V^2 - \frac{5871 + 440\sqrt{15}}{16632000000}V^3 + \dots, \\
\bar{a}_{21}(V) &= \frac{\sqrt{15}}{36}I - \frac{1}{96\sqrt{15}}V + \frac{1}{12800\sqrt{15}}V^2 - \frac{1}{3584000\sqrt{15}}V^3 + \dots, \\
\bar{a}_{22}(V) &= \frac{9 - 2\sqrt{15}}{72}I + \frac{3}{11200}V + \frac{1}{96\sqrt{15}}V + \frac{29 - 42\sqrt{15}}{8064000}V^2 + \frac{-3667 + 330\sqrt{15}}{17740800000}V^3 + \dots, \\
\bar{a}_{31}(V) &= \frac{\sqrt{15}}{18}I - \frac{1}{12\sqrt{15}}V + \frac{1}{400\sqrt{15}}V^2 - \frac{1}{28000\sqrt{15}}V^3 + \dots, \\
\bar{a}_{32}(V) &= \frac{2}{3\sqrt{15}}I - \frac{1}{60\sqrt{15}}V + \frac{1}{8000\sqrt{15}}V^2 - \frac{1}{2240000\sqrt{15}}V^3 + \dots, \\
\bar{a}_{33}(V) &= \frac{4 - \sqrt{15}}{20}I + \frac{-9 + 280\sqrt{15}}{42000}V - \frac{28 + 873\sqrt{15}}{5040000}V^2 + \frac{-5871 + 40535\sqrt{15}}{16632000000}V^3 + \dots.
\end{aligned} \tag{24}$$

We denote this method by SERKN3s4(1), and this method is proved to satisfy all the order conditions and symplectic conditions.

Case two. Choose

$$c_1 = \frac{5 + \sqrt{15}}{10}, \quad c_2 = \frac{5 - \sqrt{15}}{10}, \tag{25}$$

and then we get $c_3 = \frac{1}{2}$. Under the conditions of (25), the Taylor series expansions of other

coefficients respectively are

$$\begin{aligned}
b_1(V) &= \frac{5}{18}I + \frac{-4 + \sqrt{15}}{72}V + \frac{31 - 8\sqrt{15}}{8640}V^2 + \frac{-244 + 63\sqrt{15}}{2592000}V^3 + \dots, \\
b_2(V) &= \frac{5}{18}I - \frac{4 + \sqrt{15}}{72}V + \frac{31 + 8\sqrt{15}}{8640}V^2 - \frac{244 + 63\sqrt{15}}{2592000}V^3 + \dots, \\
b_3(V) &= \frac{4}{9}I - \frac{1}{18}V + \frac{1}{864}V^2 - \frac{1}{103680}V^3 + \dots, \\
\bar{b}_1(V) &= \frac{5 - \sqrt{15}}{36}I + \frac{-35 + 9\sqrt{15}}{2160}V + \frac{275 - 71\sqrt{15}}{432000}V^2 + \frac{-2165 + 559\sqrt{15}}{181440000}V^3 + \dots, \\
\bar{b}_2(V) &= \frac{5 + \sqrt{15}}{36}I - \frac{35 + 9\sqrt{15}}{2160}V + \frac{275 + 71\sqrt{15}}{432000}V^2 - \frac{2165 + 559\sqrt{15}}{181440000}V^3 + \dots, \\
\bar{b}_3(V) &= \frac{2}{9}I - \frac{1}{108}V + \frac{1}{8640}V^2 - \frac{1}{1451520}V^3 + \dots, \\
\bar{a}_{11}(V) &= \frac{4 + \sqrt{15}}{20}I - \frac{3}{14000}V + \frac{-28 + 9\sqrt{15}}{5040000}V^2 + \frac{-5871 + 440\sqrt{15}}{16632000000}V^3 + \dots, \\
\bar{a}_{21}(V) &= -\frac{\sqrt{15}}{18}I + \frac{1}{12\sqrt{15}}V - \frac{1}{400\sqrt{15}}V^2 + \frac{1}{28000\sqrt{15}}V^3 + \dots, \\
\bar{a}_{22}(V) &= \frac{36 + \sqrt{15}}{180}I - \frac{1}{12\sqrt{15}}V - \frac{3}{14000}V + \frac{-28 + 831\sqrt{15}}{5040000}V^2 - \frac{5871 + 40040\sqrt{15}}{16632000000}V^3 + \dots, \\
\bar{a}_{31}(V) &= -\frac{\sqrt{15}}{36}I + \frac{1}{96\sqrt{15}}V - \frac{1}{12800\sqrt{15}}V^2 + \frac{1}{3584000\sqrt{15}}V^3 + \dots, \\
\bar{a}_{32}(V) &= \frac{\sqrt{15}}{36}I - \frac{1}{96\sqrt{15}}V + \frac{1}{12800\sqrt{15}}V^2 - \frac{1}{3584000\sqrt{15}}V^3 + \dots, \\
\bar{a}_{33}(V) &= \frac{1}{8}I + \frac{3}{11200}V + \frac{29}{8064000}V^2 - \frac{3667}{17740800000}V^3 + \dots.
\end{aligned} \tag{26}$$

We denote this method by SERKN3s4(2), which is proved to satisfy all the order conditions and symplectic conditions.

4 Stability and Numerical experiments

4.1 Stability regions

In this section, we are concerned with the stability of the ERKN methods. This has been analyzed in [18] and thence we just briefly recall here the definitions. Consider the revised test equation:

$$y''(t) + \omega^2 y(t) = -\epsilon y(t) \quad \text{with} \quad \omega^2 + \epsilon > 0, \tag{28}$$

where ω represents an estimation of the dominant frequency λ and $\epsilon = \lambda^2 - \omega^2$ is the error of that estimation. Applying a multi-frequency ERKN method to (28) produces

$$\begin{pmatrix} q_{n+1} \\ hq'_{n+1} \end{pmatrix} = S(V, z) \begin{pmatrix} q_n \\ hq'_n \end{pmatrix},$$

where the stability matrix $S(V, z)$ is given by

$$S(V, z) = \begin{pmatrix} \phi_0(V) - z\bar{b}^T(V)N^{-1}\phi_0(c^2V) & \phi_1(V) - z\bar{b}^T(V)N^{-1}(c \cdot \phi_1(c^2V)) \\ -V\phi_1(V) - zb^T(V)N^{-1}\phi_0(c^2V) & \phi_0(V) - zb^T(V)N^{-1}(c \cdot \phi_1(c^2V)) \end{pmatrix}$$

with $V = h^2\omega^2$, $z = h^2\epsilon$ and $N = I + z\bar{A}(V)$.

Definition 2 (See [18].) $R_s = \{(V, z) \mid V > 0 \text{ and } \rho(S) < 1\}$ is called the stability region of a multi-frequency ERKN method and $R_p = \{(V, z) \mid V > 0, \rho(S) = 1 \text{ and } \text{tr}(S)^2 < 4\det(S)\}$ is called the periodicity region of a multi-frequency ERKN method.

The stability regions of our methods are depicted in Figure 1.

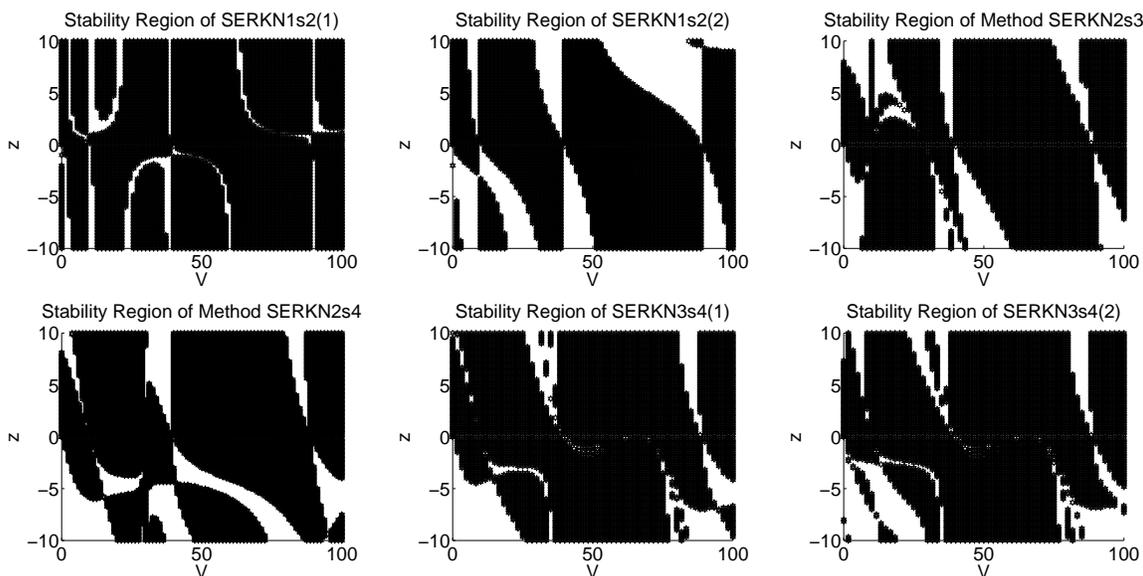


Figure 1: Stability regions (shaded regions) for the obtained methods.

4.2 Numerical experiments

In this section, in order to show the efficiency of our new methods compared with their corresponding methods, we give three numerical experiments and their results. The methods for comparisons are:

- SERKN1s2: the one-stage diagonal implicit symplectic ERKN method (SERKN1s2(1)) of order two derived in Subsection 3.1;
- SERKN2s3: the two-stage diagonal implicit symplectic ERKN method of order three derived in Subsection 3.2;
- SERKN3s4: the three-stage diagonal implicit symplectic ERKN method (SERKN3s4(1)) of order four derived in Subsection 3.3;
- RKN1s2: the one-stage diagonal implicit symplectic RKN method of order two obtained by letting $V \rightarrow \mathbf{0}$ of the method SERKN1s2;

- RKN2s3: the two-stage diagonal implicit symplectic RKN method of order three obtained by letting $V \rightarrow \mathbf{0}$ of the method SERKN2s3;
- RKN3s4: the three-stage diagonal implicit symplectic RKN method of order four obtained by letting $V \rightarrow \mathbf{0}$ of the method SERKN3s4.

The numerical experiments have been carried out on a personal computer and the algorithm has been implemented by using the MATLAB-R2010a.

Problem 1. Consider the sine-Gordon equation with periodic boundary conditions (see [12])

$$\frac{\partial^2 u}{\partial t^2} = \frac{\partial^2 u}{\partial x^2} - \sin u, \quad -1 < x < 1, \quad t > 0, \quad u(-1, t) = u(1, t).$$

We carry out a semi-discretization on the spatial by using second-order symmetric differences and obtain the following system of second-order ODEs in time

$$\frac{d^2 U}{dt^2} + MU = F(t, U), \quad 0 < t \leq t_{\text{end}},$$

where $U(t) = (u_1(t), \dots, u_N(t))^T$ with $u_i(t) \approx u(x_i, t)$, $i = 1, \dots, N$,

$$M = \frac{1}{\Delta x^2} \begin{pmatrix} 2 & -1 & & -1 \\ -1 & 2 & -1 & \\ & \ddots & \ddots & \ddots \\ & & -1 & 2 & -1 \\ -1 & & & -1 & 2 \end{pmatrix}$$

with $\Delta x = 1/N$, and $x_i = -1 + i\Delta x$, and $F(t, U) = -\sin(U) = -(u_1, \dots, u_N)^T$. The Hamiltonian of this system is

$$H(U', U) = \frac{1}{2} U'^T U' + \frac{1}{2} U^T M U - \cos(u_1) - \cos(u_2) - \dots - \cos(u_N).$$

We take the initial conditions as

$$U(0) = (\pi)_{i=1}^N, \quad U_t(0) = \sqrt{N} \left(0.01 + \sin\left(\frac{2\pi i}{N}\right) \right)_{i=1}^N$$

with $N = 32$. We integrate this problem in the interval $[0, 10]$ with stepsizes $h = 1/(20 \times 2^i)$, $i = 1, 2, 3, 4$. Figure 2 (i) shows the global errors. We then solve this problem in the interval $[0, 10]$ with the stepsize $h = 1/(100 \times 2^i)$, $i = 1, 2, 3, 4$ and show the global errors against the CPU time in Figure 2 (ii). Finally we integrate this problem with a fixed stepsize $h = 1/40$ in the interval $[0, t_{\text{end}}]$, $t_{\text{end}} = 10^i$ with $i = 0, 1, 2, 3$. The results of energy conservation are presented in Figure 2 (iii).

Problem 2. Consider the Duffing equation

$$q'' + 100q = k^2(2q^3 - q), \quad q(0) = 0, \quad q'(0) = 10, \quad t \in [0, t_{\text{end}}],$$

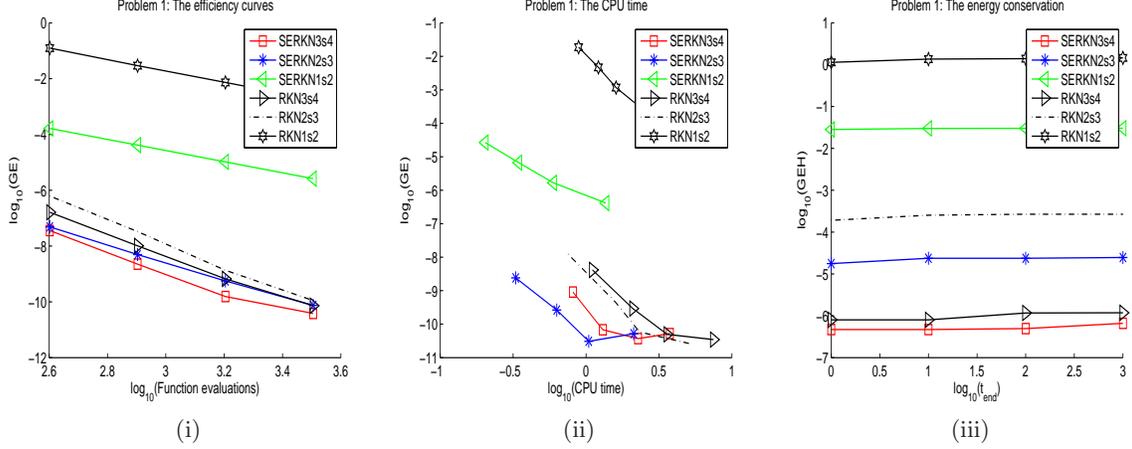


Figure 2: Results for Problem 1. (i): The logarithm of the global error (GE) over the integration interval against the logarithm of the number of function evaluations. (ii): The logarithm of the global error (GE) over the integration interval against the CPU time. (iii): The logarithm of the maximum global error of Hamiltonian $GEH = \max |H_n - H_0|$ against $\log_{10}(t_{\text{end}})$.

with $0 \leq k < 10$. The Hamiltonian of this system is

$$H(q, q') = \frac{1}{2}q'^2 + 50q^2 - k^2\left(\frac{1}{2}q^4 - \frac{1}{2}q^2\right).$$

The analytic solution of this initial value problem is given by $q(t) = sn(10t, k/10)$, and represent a periodic motion in terms of the Jacobian elliptic function sn . In this test we choose the parameter values $k = 0.03$, and integrate this problem with the stepsize $h = 1/(200 \times i)$, $i = 1, 2, 3, 4$ in the interval $[0, 10]$. See Figure 3 (i) for the efficiency curves. We then solve this problem in the interval $[0, 10]$ with the stepsize $h = 1/(40 \times i)$, $i = 1, 2, 3, 4$ and show the global errors against the CPU time in Figure 3 (ii). Finally we integrate this problem with a fixed stepsize $h = 1/50$ in the interval $[0, t_{\text{end}}]$, $t_{\text{end}} = 10^i$ with $i = 0, 1, 2, 3$. The results of energy conservation are presented in Figure. 3 (iii).

Problem 3. Consider the model for stellar orbits in a galaxy (see [7, 8])

$$\begin{aligned} q_1''(t) + a^2q_1(t) &= \epsilon q_2^2(t), & q_1(0) &= 1, & q_1'(0) &= 0, \\ q_2''(t) + b^2q_2(t) &= 2\epsilon q_1(t)q_2(t), & q_2(0) &= 1, & q_2'(0) &= 0, \end{aligned}$$

where q_1 stands for the radial displacement of the orbit of a star from a reference circular orbit, and q_2 stands for the deviation of the orbit from the galactic plane. The time variable t actually denotes the angle of the planets in a reference coordinate system. We choose $a = 2$, $b = 1$. The Hamiltonian of this system is

$$H(q, q') = \frac{1}{2}(q_1'^2 + q_2'^2) + \frac{1}{2}(4q_1^2 + q_2^2) - \epsilon q_1 q_2^2.$$

The problem has been solved on the interval $[0, 1000]$ with $\epsilon = 10^{-3}$. We integrate this problem in the interval $[0, 10]$ with stepsizes $h = 1/(8 \times i)$, $i = 1, 2, 3, 4$ and efficiency curves are presented

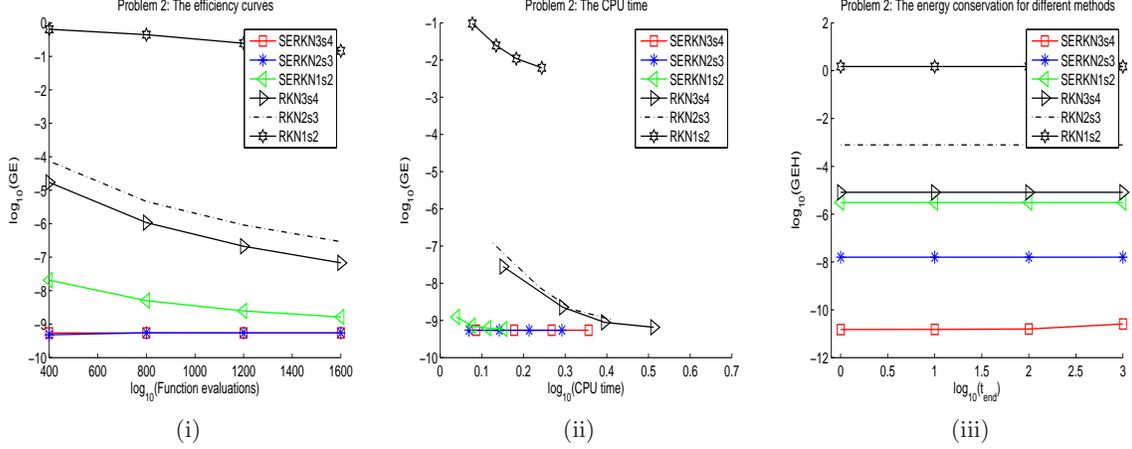


Figure 3: Results for Problem 2. (i): The logarithm of the global error (GE) over the integration interval against the logarithm of the number of function evaluations. (ii): The logarithm of the global error (GE) over the integration interval against the CPU time. (iii): The logarithm of the maximum global error of Hamiltonian $GEH = \max |H_n - H_0|$ against $\log_{10}(t_{\text{end}})$.

in Figure 4(i). At the meantime, we solve this problem in the interval $[0, 10]$ with the stepsize $h = 1/(40 \times i)$, $i = 1, 2, 3, 4$ and show the global errors against the CPU time in Figure 4 (ii). Finally we integrate this problem with a fixed stepsize $h = 1/10$ in the interval $[0, t_{\text{end}}]$, $t_{\text{end}} = 10^i$ with $i = 0, 1, 2, 3$. The results of energy conservation are presented in Figure 4 (iii).

It follows from the numerical results that our novel methods are very promising as compared with their corresponding RKN methods.

5 Conclusions

In this paper, based on symplecticity conditions and order conditions, we obtain one-stage of order two, two-stage of order three and three-stage of order four diagonal implicit symplectic ERKN methods for solving the oscillatory Hamiltonian system (1). We also discuss the stability of the new methods. Furthermore, numerical experiments are performed in comparison with their corresponding RKN methods in the scientific literature. The remarkable efficiency of the new methods are shown by the numerical results.

References

- [1] D. Cohen, E. Hairer, C. Lubich, Numerical Energy Conservation for Multi-Frequency Oscillatory Differential Equations, BIT 45 (2005) 287–305.
- [2] A. García, P. Martín, A. B. González, New methods for oscillatory problems based on classical codes, Appl. Numer. Math. 42 (2002) 141–157.
- [3] B. García-Archilla, J. M. Sanz-Serna, R. D.Skeel, Long-time-step methods for oscillatory differential equations, SIAM J. Sci. Comput. 20 (1999) 930–963.

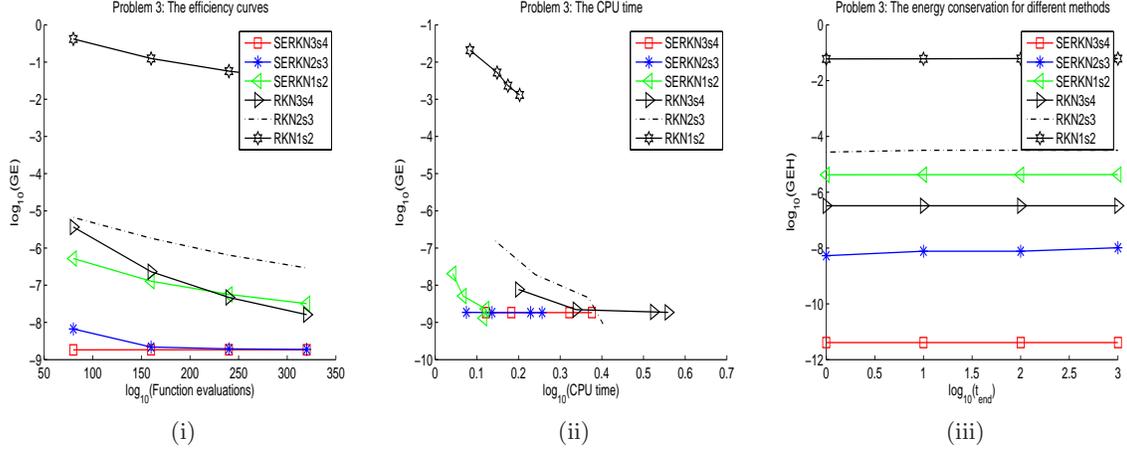


Figure 4: Results for Problem 3. (i): The logarithm of the global error (GE) over the integration interval against the logarithm of the number of function evaluations. (ii): The logarithm of the global error (GE) over the integration interval against the CPU time. (iii): The logarithm of the maximum global error of Hamiltonian $GEH = \max |H_n - H_0|$ against $\log_{10}(t_{\text{end}})$.

- [4] M. Hochbruck, C. Lubich, A Gautschi-type method for oscillatory second-order differential equations. *Numer. Math.* 83 (1999) 403–426.
- [5] E. Hairer, C. Lubich, Long-time energy conservation of numerical methods for oscillatory differential equations, *SIAM J. Numer. Anal.* 38 (2000) 414–441.
- [6] E. Hairer, C. Lubich, G. Wanner, *Geometric Numerical Integration: Structure-Preserving Algorithms for Ordinary Differential Equations*, 2nd ed., Springer-Verlag, Berlin, Heidelberg, 2006.
- [7] J. Kevorkian, J.D. Cole, *Perturbation Methods in Applied Mathematics*, Applied Mathematical Sciences, vol. 34. Springer, New York, 1981.
- [8] J. Kevorkian, J.D. Cole, *Multiple Scale and Singular Perturbation Methods*, Applied Mathematical Sciences, vol. 114. Springer, New York, 1996.
- [9] D. Okunbor, R.D. Skeel, Canonical Runge–Kutta–Nyström methods of order 5 and 6, *J. Comput. Appl. Math* 51 (1994) 375–382.
- [10] R.D. Ruth, A canonical integration technique, *IEEE Trans. Nuclear Sci.* NS 30(4) (1983) 2669–2671.
- [11] T.E. Simos, J. Vigo-Aguiar, Exponentially fitted symplectic integrator, *Phys. Rev. E* 67, (2003) 016701-7
- [12] P.J. Van der Houwen, B.P. Sommeijer, Explicit Runge–Kutta (-Nyström) methods with reduced phase errors for computing oscillating solutions, *SIAM J. Numer. Anal.* 24 (1987) 595–617.
- [13] B. Wang, A. Iserles, X. Wu, Arbitrary order trigonometric Fourier collocation methods for second-order ODEs, *Found. Comput. Math.* 16 (2016) 151–181.

- [14] B. Wang, F. Meng, Y. Fang, Efficient implementation of RKN-type Fourier collocation methods for second-order differential equations, *Appl. Numer. Math.* (2017) <https://doi.org/10.1016/j.apnum.2017.04.008>
- [15] B. Wang, X. Wu, F. Meng, Trigonometric collocation methods based on Lagrange basis polynomials for multi-frequency oscillatory second order differential equations, *J. Comput. Appl. Math.* 313(2017) 185–201.
- [16] B. Wang, X. Wu, J. Xia, Error bounds for explicit ERKN methods for systems of multi-frequency oscillatory second-order differential equations, *Appl. Numer. Math.* 74 (2013) 17–34.
- [17] B. Wang, H. Yang, F. Meng, Sixth order symplectic and symmetric explicit ERKN schemes for solving multi-frequency oscillatory nonlinear Hamiltonian equations, *Calcolo* 54 (2017) 117–140.
- [18] X. Wu, A note on stability of multidimensional adapted Runge-Kutta-Nyström methods for oscillatory systems, *Appl. Math. Modell.* 36 (2012) 6331–6337.
- [19] X. Wu, K. Liu, W. Shi, *Structure-Preserving Algorithms for Oscillatory Differential Equations II*, Springer-Verlag, Heidelberg, 2015.
- [20] X. Wu, B. Wang, J. Xia, Explicit symplectic multidimensional exponential fitting modified Runge-Kutta-Nyström methods, *BIT* 52 (2012) 773–795.
- [21] X. Wu, X. You, W. Shi, B. Wang, ERKN integrators for systems of oscillatory second-order differential equations. *Comput. Phys. Comm.* 181, (2010) 1873–1887.
- [22] X. Wu, X. You, B. Wang, *Structure-Preserving Algorithms for Oscillatory Differential Equations*, Springer-Verlag, Berlin, Heidelberg, 2013.