

Reducing Clocks in Timed Automata while Preserving Bisimulation

Shibashis Guha*

Chinmay Narayan

S. Arun-Kumar

Indian Institute of Technology Delhi
 {shibashis, chinmay, sak}@cse.iitd.ac.in

Abstract. Model checking timed automata becomes increasingly complex with the increase in the number of clocks. Hence it is desirable that one constructs an automaton with the minimum number of clocks possible. The problem of checking whether there exists a timed automaton with a smaller number of clocks such that the timed language accepted by the original automaton is preserved is known to be undecidable. In this paper, we give a construction, which for any given timed automaton produces a timed bisimilar automaton with the least number of clocks. Further, we show that such an automaton with the minimum possible number of clocks can be constructed in time that is doubly exponential in the number of clocks of the original automaton.

1 Introduction

Timed automata [4] is a formalism for modelling and analyzing real time systems. The complexity of model checking is dependent on the number of clocks of the timed automaton (TA) [4,3]. Model checkers use the region graph or a zone graph construction for analysing reachability and other properties in timed automata. These graphs have sizes exponential in the number of clocks of the timed automaton. The algorithms for model checking in turn depend on the sizes of these graphs. Hence it is desirable to construct a timed automaton with the minimum number of clocks that preserves some property of interest (such as timed language equivalence or timed bisimilarity). Here we show that checking the existence of a timed automaton with fewer clocks that is timed bisimilar to the original timed automaton is decidable. Our method is constructive and we provide a 2-EXPTIME algorithm to construct the timed bisimilar automaton with the least possible number of clocks. We also note that if the constructed TA has a smaller number of clocks, then it implies that there exists an automaton with a smaller number of clocks accepting the same timed language.

Related work: In [11], an algorithm has been provided to reduce the number of clocks of a given timed automaton. It produces a new timed automaton that is timed bisimilar to the original one. The algorithm detects a set of *active clocks* at every location and partitions these active clocks into classes such that

* The research of Shibashis Guha was supported by Microsoft Corporation and Microsoft Research India under the Microsoft Research India PhD Fellowship Award.

all the clocks belonging to a class in the partition always have the same value. However, this may not result in the minimum possible number of clocks. The algorithm described in the paper [11] works on the timed automaton directly rather than on its semantics. For instance, if a constraint associated with clock x implies a constraint associated with clock y , and the conjunction of the two constraints appears on an edge, then the constraint associated with clock y may be eliminated. However, the algorithm of [11] does not capture such implication. Also by considering constraints on more than one outgoing edge from a location, e.g. $l_0 \xrightarrow{a, x \leq 3, \emptyset} l_1$ and $l_0 \xrightarrow{a, x > 3, \emptyset} l_2$ collectively, we may sometimes eliminate the constraints that may remove some clock. This too has not been accounted for by the algorithm of [11].

In a related line of work [21], it has been shown that no algorithm can decide the following two things together.

- (i) minimality of the number of clocks while preserving the timed language and
- (ii) for the non-minimal case finding a timed language equivalent automaton with fewer clocks.

Also as mentioned earlier, for a given timed automaton, the problem of determining whether there exists another TA with fewer clocks accepting the same timed language is undecidable [14].

Another result appearing in [17] which uses the region-graph construction is the following. A (C, M) -automaton is one with $|C|$ clocks and M is the largest integer appearing in the timed automaton. Given a timed automaton A , a set of clocks C and an integer M , checking the existence of a (C, M) -automaton that is timed bisimilar to A is shown to be decidable. The method described there constructs a logical formula called the *characteristic formula* and checks whether there exists a (C, M) -automaton that satisfies it. Further, it is shown that a pair of automata satisfying the same characteristic formula are timed bisimilar. The paper also considers the following problem P and leaves it open.

Does there exist a timed automaton with $|C|$ clocks that is timed bisimilar to A ?

We solve the following problem Q .

Given a timed automaton A , construct a timed bisimilar automaton B with the least number of clocks.

Solving the problem Q also solves the problem P and vice versa. If B has say $|C'|$ clocks and $|C| \geq |C'|$, then the answer to the problem P is in the affirmative. For the problem P , if the answer is ‘yes’ for $|C|$ clocks but the answer is ‘no’ for $|C| - 1$ clocks, then it is clear that the timed automaton with the minimum possible number of clocks that is timed bisimilar to A can have no less than $|C|$ clocks.

The rest of the paper is organized as follows: in Section 2, we describe timed automata and introduce several concepts that will be used in the paper. We also

describe the construction of the zone graph in Section 3 used in reducing the number of clocks. This construction of the zone graph has also been used in [15] for deciding several timed and time abstracted relations. In Section 4, we discuss our approach in detail along with a few examples. Section 5 is the conclusion.

2 Timed Automata

Formally, a *timed automaton* (TA) [4] is defined as a tuple $A = (L, Act, l_0, C, E)$ where L is a finite set of locations, Act is a finite set of visible actions, $l_0 \in L$ is the initial location, C is a finite set of clocks and $E \subseteq L \times \mathcal{B}(C) \times Act \times 2^C \times L$ is a finite set of *edges*. The set of constraints or guards on the edges, denoted $\mathcal{B}(C)$, is given by the grammar $g ::= x \bowtie k \mid g \wedge g$, where $k \in \mathbb{N}$ and $x \in C$ and $\bowtie \in \{\leq, <, =, >, \geq\}$. Given two locations l, l' , a transition from l to l' is of the form (l, g, a, R, l') i.e. a transition from l to l' on action a is possible if the constraints specified by g are satisfied; $R \subseteq C$ is a set of clocks which are reset to zero during the transition.

The semantics of a timed automaton (TA) is described by a *timed labelled transition system* (TLTS) [1]. The timed labelled transition system $T(A)$ generated by A is defined as $T(A) = (Q, Lab, Q_0, \{\xrightarrow{\alpha} \mid \alpha \in Lab\})$, where $Q = \{(l, v) \mid l \in L, v \in \mathbb{R}_{\geq 0}^{|C|}\}$ is the set of *states*, each of which is of the form (l, v) , where l is a location of the timed automaton and v is a valuation in $|C|$ dimensional real space where each clock is mapped to a unique dimension in this space; $Lab = Act \cup \mathbb{R}_{\geq 0}$ is the set of labels. Let v_0 denote the valuation such that $v_0(x) = 0$ for all $x \in C$. $Q_0 = (l_0, v_0)$ is the initial state of $T(A)$. A transition may occur in one of the following ways:

- (i) *Delay transitions* : $(l, v) \xrightarrow{d} (l, v + d)$. Here, $d \in \mathbb{R}_{\geq 0}$ and $v + d$ is the valuation in which the value of every clock is incremented by d .
- (ii) *Discrete transitions* : $(l, v) \xrightarrow{a} (l', v')$ if for an edge $e = (l, g, a, R, l') \in E$, v satisfies the constraint g , (denoted $v \models g$), $v' = v_{[R \leftarrow 0]}$, where $v_{[R \leftarrow 0]}$ denotes that every clock in R has been reset to 0, while the remaining clocks are unchanged. From a state (l, v) , if $v \models g$, then there exists an a -transition to a state (l', v') ; after this, the clocks in R are reset while those in $C \setminus R$ remain unchanged.

For simplicity, we do not consider annotating locations with clock constraints (known as *invariant conditions* [16]). Our results extend in a straightforward manner to timed automata with invariant conditions. In Section 4, we provide the modifications to our method for dealing with location invariants. We now define various concepts that will be used in the rest of the paper.

Definition 1. Let $A = (L, Act, l_0, E, C)$ be a timed automaton, and $T(A)$ be the TLTS corresponding to A .

1. **Timed trace:** A sequence of delays and visible actions $d_1 a_1 d_2 a_2 \dots d_n a_n$ is called a *timed trace* of the timed automaton A iff there is a sequence of transitions $p_0 \xrightarrow{d_1} p_1 \xrightarrow{a_1} p'_1 \xrightarrow{d_2} p_2 \xrightarrow{a_2} p'_2 \dots \xrightarrow{d_n} p_n \xrightarrow{a_n} p'_n$ in $T(A)$, where each p_i and p'_i , $0 \leq i \leq n$ are timed automata states and are of the

form (l, v) . p_0 is the initial state of the timed automaton. Given a timed trace $tr = d_1 a_1 d_2 a_2 \dots d_n a_n$, $\text{untime}(tr)$ denotes its projection on Act , i.e. $\text{untime}(tr) = a_1 a_2 \dots a_n$.

2. **Zone and difference bound matrix (DBM):** A zone Z is a set of valuations $\{v \in \mathbb{R}_{\geq 0}^{|C|} \mid v \models \beta\}$, where β is of the form $\beta ::= x \bowtie k \mid x - y \bowtie k \mid \beta \wedge \beta$, k is an integer, $x, y \in C$ and $\bowtie \in \{\leq, <, =, >, \geq\}$. $Z \uparrow$ denotes the future of the zone Z . $Z \uparrow = \{v + d \mid v \in Z, d \geq 0\}$ is the set of all valuations reachable from Z by delay transitions. A zone is a convex set of clock valuations. A difference bound matrix is a data structure used to represent zones. A DBM [8,12] for a set $C = \{x_1, x_2, \dots, x_n\}$ of n clocks is an $(n+1)$ square matrix Ξ where an extra variable x_0 is introduced such that the value of x_0 is always 0. An element Ξ_{ij} is of the form (m_{ij}, \prec) where $\prec \in \{<, \leq\}$ such that $x_i - x_j \prec m_{ij}$. Thus an entry m_{i0} denotes the constraint $x_i - x_0 \prec m_{i0}$ which is equivalent to $x_i \prec m_{i0}$.
3. **Canonical decomposition:** Let $g = \bigwedge_{i=1}^n \gamma_i \in \mathcal{B}(C)$, where each γ_i is an elementary constraint of the form $x_i \bowtie k_i$, such that $x_i \in C$ and k_i is a non-negative integer. A canonical decomposition of a zone Z with respect to g is obtained by splitting Z into a set of zones Z_1, \dots, Z_m such that for each $1 \leq j \leq m$, and $1 \leq i \leq n$, either $\forall v \in Z_j, v \models \gamma_i$ or $\forall v \in Z_j, v \not\models \gamma_i$. For example, consider the zone $Z = x \geq 0 \wedge y \geq 0$ and the guard $x \leq 2 \wedge y > 1$. Z is split with respect to $x \leq 2$, and then with respect to $y > 1$, hence into four zones : $x \leq 2 \wedge y \leq 1$, $x > 2 \wedge y \leq 1$, $x \leq 2 \wedge y > 1$ and $x > 2 \wedge y > 1$. An elementary constraint $x_i \bowtie k_i$ induces the hyperplane $x_i = k_i$ in a zone graph of the timed automaton.
4. **Zone graph:** Given a timed automaton $A = (L, \text{Act}, l_0, C, E)$, a zone graph \mathcal{G}_A of A is a transition system $(S, s_0, \text{Lep}, \rightarrow)$, that is a finite representation of $T(A)$. Here $\text{Lep} = \text{Act} \cup \{\varepsilon\}$. $S \subseteq L \times \mathcal{Z}$ is the set of nodes of \mathcal{G}_A , \mathcal{Z} being the set of zones. The node $s_0 = (l_0, Z_0)$ is the initial node such that $v_0 \in Z_0$. $(l_i, Z) \xrightarrow{a} (l_j, Z')$ iff $l_i \xrightarrow{g, a, R} l_j$ in A and $Z' \subseteq ([Z \cap g]_{R \leftarrow \bar{0}}) \uparrow$ obtained after canonical decomposition of $([Z \cap g]_{R \leftarrow \bar{0}})$. For any Z and Z' , $(l_i, Z) \xrightarrow{\varepsilon} (l_i, Z')$ iff there exists a delay d and a valuation v such that $v \in Z$, $v + d \in Z'$ and $(l_i, v) \xrightarrow{d} (l_i, v + d)$ is in $T(A)$. Here the zone Z' is called a delay successor of zone Z , while Z is called the delay predecessor of Z' . Every node has an ε transition to itself and the ε transitions are also transitive. The relation $\xrightarrow{\varepsilon}$ is reflexive and transitive and so is the delay successor relation. We denote the set of delay successor zones of Z by $ds(Z)$. A zone $Z' \neq Z$ is called the immediate delay successor of a zone Z iff $Z' \in ds(Z)$ and $\forall Z'' \in ds(Z) : Z'' \neq Z$ and $Z'' \neq Z'$, $Z'' \in ds(Z')$. We call a zone Z corresponding to a location to be a base zone if Z does not have a delay predecessor other than itself. For both a and ε transitions, if Z is a zone then Z' is also a zone, i.e. Z' is a convex set.
5. A hyperplane $x = k$ is said to bound a zone Z from above if $\exists v \in Z [\forall d \in \mathbb{R}_{\geq 0} [(v + d)(x) \succ k \iff (v + d)(x) \notin Z]]$, where $\succ \in \{>, \geq\}$. A zone, in general, can be bounded above by several hyperplanes. A hyperplane $x = k$ is

said to bound a zone Z fully from above if $\forall v \in Z [\forall d \in \mathbb{R}_{\geq 0} [(v+d)(x) > k \iff (v+d)(x) \notin Z]]$. Analogously, we can also say that a hyperplane $x = k$ bounds a zone from below if $\exists v \in Z [\forall d \in \mathbb{R}_{\geq 0} [(v-d)(x) < k \iff (v-d)(x) \notin Z]]$, where $< \in \{<, \leq\}$. We can also define a hyperplane bounding a zone fully from below in a similar manner.

When not specified otherwise, in this paper, a hyperplane bounding a zone implies that it bounds the zone from above. A zone Z is bounded above if it has an immediate delay successor zone.

6. **Pre-stability:** A zone Z_1 of location l_1 is pre-stable with respect to a transition $\eta \in \text{Lep}$ leading to a zone Z_2 of location l_2 if
- i) for $\eta = a \in \text{Act} : \forall v_1 \in Z_1, \exists v_2 \in Z_2$ such that $(l_1, v_1) \xrightarrow{a} (l_2, v_2)$ or $\forall v_1 \in Z_1, \nexists v_2 \in Z_2$ such that $(l_1, v_1) \xrightarrow{a} (l_2, v_2)$.

ii) for $\eta = \varepsilon : \forall v_1 \in Z_1, \exists v_2 \in Z_2, \exists d \in \mathbb{R}_{\geq 0}$ such that $(l_1, v_1) \xrightarrow{d} (l_2, v_2)$ or $\forall v_1 \in Z_1, \nexists v_2 \in Z_2$ such that $(l_1, v_1) \xrightarrow{d} (l_2, v_2)$, for any $d \in \mathbb{R}_{\geq 0}$.

A zone graph is said to be pre-stable if the zones corresponding to each of the nodes of the zone graph are pre-stable with respect to their outgoing transitions. For example zone Z_1 in Figure 1 is pre-stable with respect to zone Z_4 , however, $Z_1 \cup Z_2 \cup Z_3$ is not pre-stable with respect to zone Z_4 since $\exists v \in Z_3$ and hence $v \in Z_1 \cup Z_2 \cup Z_3$ such that for all $d \in \mathbb{R}_{\geq 0}$, $v + d \notin Z_4$.

7. **corner point and corner point traces:** A corner point of a zone in the zone graph is a state where corresponding to each clock x , a hyperplane of the form $x = c$ bounding a zone intersects another hyperplane defining the zone. Considering M to be the largest constant appearing in the constraints or the location invariants of the timed automaton, each coordinate of a corner point is of the form $n, n + \delta$ or $n - \delta$ where $n \in \{0, 1, \dots, M\}$ and δ is a symbolic value for an infinitesimally small quantity. In a zone Z , there can be two kinds of corner points, an entry corner point and an exit corner point. For an entry corner point, there is a unique exit corner point, that can be reached from the entry corner point by performing a delay d such that any delay more than d will lead to a state that is in a delay successor zone of Z .

For a zone, it is possible to have a pair of such entry and exit corner points that are not distinct, for example, in Figure 1, in zone Z_4 , the corner point $(x = 5 + \delta, y = 7)$ is both an entry as well as an exit corner point, while the corner point $(x = 5 + \delta, y = 5 + \delta)$ is another entry corner point for the same zone Z_4 and the corresponding exit corner point is $(x = 7, y = 7)$. If the entry and the exit corner points are distinct, then a non-infinitesimally small delay can be performed from the entry corner point to reach the corresponding exit corner point whereas an infinitesimally small delay from the exit corner point causes it to evolve into an entry corner point of the immediate delay successor zone. A zone that is not bounded above does not have any exit corner point.

For an entry corner point, the corresponding exit corner point is the next delay corner point whereas for an exit corner point, the entry corner point in the immediate delay successor zone is the next delay corner point.

Let c_1 and c_2 be constraints of the form $x \succ k_1$ and $y \prec k_2$ respectively, where $k_1, k_2 \in \{0, 1, \dots, M\}$ and $\succ \in \{>, \geq\}$ and $\prec \in \{<, \leq\}$.

We consider delays of the form d_{c_1, c_2} and d_{c_2, c_1} . d_{c_1, c_2} is the delay made from an entry corner point to reach an exit corner point while d_{c_2, c_1} is the delay made from the exit corner point to reach an entry corner point of a delay successor zone. For example, the delay $d_{x \geq 5, y < 7}$ denotes a delay made from a state p' with $p'(x) = 5$ and after making this delay it evolves to state p'' such that $p''(y) = 7 - \delta$. Delays of the form mentioned above are called corner point delays or cp-delays.

A corner point trace (cp-trace) is a timed trace ending at a corner point through delays and visible actions such that each delay takes the trace from one corner point to the next delay corner point. All the delay actions present in a corner point trace are cp-delays.

We create a zone graph such that for any location l , the zones Z and Z' of any two nodes (l, Z) and (l, Z') in the zone graph are disjoint and all zones of the zone graph are pre-stable. This zone graph is constructed in two phases in time exponential in the number of the clocks. The first phase performs a forward analysis of the timed automaton while the second phase ensures pre-stability in the zone graph. The forward analysis may cause a zone graph to become infinite [5]. Several kinds of abstractions have been proposed in the literature [10,5,6] to make the zone graph finite. We use *location dependent maximal constants* abstraction [5] in our construction. In phase 2 of the zone graph creation, the zones are further split to ensure that the resultant zone graph is pre-stable.

Some approaches for preserving convexity and implementing pre-stability have been discussed in [22]. As an example, consider the timed automaton in Figure 1. The pre-stable zones of location l_1 are shown in the right side of the figure. In this paper, from now on, unless stated otherwise, *zone graph* will refer to this form of the pre-stable zone graph that is described above. An algorithmic procedure for the construction of the zone graph is given in [15].

A relation $\mathcal{R} \subseteq Q \times Q$ is a *timed simulation* relation if the following conditions hold for any two timed states $(p, q) \in \mathcal{R}$.

$$\forall a \in Act, p \xrightarrow{a} p' \implies \exists q' : q \xrightarrow{a} q' \text{ and } (p', q') \in \mathcal{R} \text{ and}$$

$$\forall d \in \mathbb{R}_{\geq 0}, p \xrightarrow{d} p' \implies \exists q' : q \xrightarrow{d} q' \text{ and } (p', q') \in \mathcal{R}.$$

A *timed bisimulation* relation is a symmetric timed simulation. Two timed automata are timed bisimilar if and only if their initial states are timed bisimilar. Using a product construction on region graphs, timed bisimilarity for timed automata was shown to be decidable in EXPTIME [9]. In [23], a product construction on zone graph was used for deciding timed bisimulation relation for timed automata.

3 Zone Graph

The detailed algorithm for creating the zone graph has been described in Algorithm 1 and consists of two phases, the first one being a forward analysis of the

Algorithm 1 Construction of Zone Graph

Input: Timed automaton A
Output: Zone graph corresponding to A

- 1: Calculate \max_x^l for each location $l \in L$ and each clock $x \in C$. \triangleright This is required for abstraction to ensure finite number of zones in the zone graph.
 - 2: Initialize Q to an empty queue.
 - 3: $Enqueue(Q, \langle l_0, \emptyset \rangle)$. \triangleright Every element is a pair consisting of a location and its parent
 - 4: $successors_added = false$. \triangleright flag set to true whenever successors of a location are added to Q
 - 5: **while** Q not empty **do**
 - 6: $\langle l, l_p \rangle = dequeue(Q)$
 - 7: **if** $l_p \neq \emptyset$ **then**,
 - 8: For the edge $l_p \xrightarrow{g, a, R'} l$ in A , for each existing zone Z_{l_p} of l_p , create the zone $Z = (Z_{l_p} \uparrow \cap g_{[R', \leftarrow 0]})$ of l , when $Z \neq \emptyset$.
 - 9: Abstract each of the newly created zones if necessary and for any newly created zone Z , for location l , if $\exists Z_1$ of same location such that $Z \cap Z_1 \neq \emptyset$, then merge Z and Z_1 .
 - 10: Update edges from zones of l_p to zones of l appropriately.
 - 11: If a new zone of l is added or an existing zone of l is modified for all successors l_j of l , enqueue $\langle l_j, l \rangle$ to Q .
 - 12: $successors_added := true$.
 - 13: **end if**
 - 14: $new_zone_l := true$. \triangleright flag set to false when the canonical decomposition does not produce further zones
 - 15: **while** new_zone_l **do**
 - 16: Split the existing zones Z of l based on the canonical decomposition of the guards on the outgoing edges of l \triangleright It is not always necessary for a split to happen.
 - 17: For every zone Z of l , consider $Z \uparrow$ and split it further based on the canonical decomposition of the guards on the outgoing edges of l \triangleright Note that the zones created from this split are convex.
 - 18: Abstract each of the newly created zones if necessary and update edges appropriately.
 - 19: **if** new zones are not created **then** set new_zone_l to *false*.
 - 20: **end if**
 - 21: **end while**
 - 22: **if** any new zones of l are created or any existing zones of l are modified due to the canonical decomposition of the outgoing edges of l and $successors_added = false$ **then**
 - 23: for all the successor locations l_j of l to Q , enqueue $\langle l_j, l \rangle$ to Q .
 - 24: **end if**
 - 25: **end while**
 - 26: */* Phase 2 : In this phase, pre-stability is enforced */*
 - 27: $new_zone = true$
 - 28: **while** new_zone **do**
 - 29: $new_zone = false$
 - 30: **for all** edges $l_i \xrightarrow{g, a, R'} l_j$ **do**
 - 31: **for all** pairs of zones Z_{lik}, Z_{l_jm} such that $Z_{lik} \xrightarrow{\alpha} Z_{l_jm}$ is an edge in the zone graph where $\alpha \in Act \cup \mathbb{R}_{\geq 0}$ **do**
 - 32: **if** Z_{lik} is not pre-stable with respect to Z_{l_jm} , **then** Split Z_{lik} to make it pre-stable with respect to Z_{l_jm} . \triangleright Note that this split still maintains convexity of Z_{lik} since the zone is split entirely along an axis that is parallel to the diagonal in the $|C|$ -dimensional space.
 - 33: $new_zone := true$
 - 34: Update the incoming and the outgoing edges for the newly created zones.
 - 35: **end if**
 - 36: **end for**
 - 37: **end for**
 - 38: **end while**
-

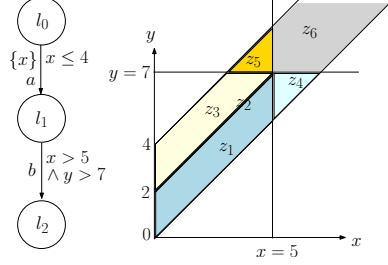


Fig. 1. a timed automaton and the zones for location l_1

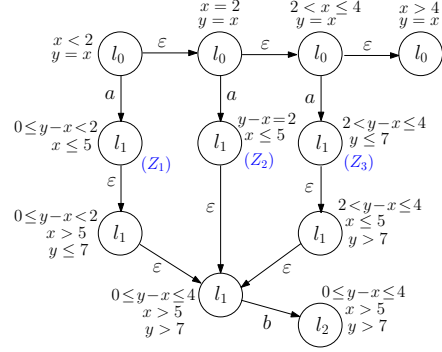


Fig. 2. zone graph for the TA in Figure 1

timed automaton while the second phase ensures pre-stability in the zone graph. The presence of an edge to a location l' in the timed automaton does not imply that the the action of the edge can be performed or location l' is reachable. For an edge $l \xrightarrow{g,a,R} l'$, if for all zones Z of l , $Z \cap g = \emptyset$, then action a cannot be performed at l and l' cannot be reached at l . Such edges can be removed from the timed automaton. For a location l' , if the actions corresponding to none of the incoming edges can be performed, then the location l' is unreachable and it can be removed along with its incoming and outgoing transitions.

The set of valuations for every location is initially split into zones based on the canonical decomposition of its outgoing transition.

After phase 2, pre-stability ensures the following: For a node (l, z) in the zone graph, with $v \in z$, for a timed trace tr , if $(l, v) \xrightarrow{tr} (l'', v'')$, with $v'' \in z''$, then $\forall v'$ in z , $\exists tr'. (l, v') \xrightarrow{tr'} (l'', \tilde{v})$, with $untime(tr') = untime(tr)$ and $\tilde{v} \in z''$. According to the construction given in algorithm 1, for a particular location of the timed automaton, the zones corresponding to any two nodes are disjoint. Convexity of the zones and pre-stability property together ensure that a zone with elapse of time is intercepted by a single hyperplane of the form $x = h$, where $x \in C$ and $h \in \mathbb{N}$. This is stated formally in Lemma 1. Some approaches for preserving convexity and implementing pre-stability have been discussed in [22]. As an example consider the timed automaton in Figure 1. The zones corresponding to location l_1 as produced through algorithm 1 are shown in the right side of the figure.

For a state $q \in T(A)$, $\mathcal{N}(q)$ represents the node of the zone graph with the same location as that of q such that the zone corresponding to $\mathcal{N}(q)$ includes the valuation of q . We often say that a state $q = (l, v)$ is in node $s = (l, Z)$ to indicate that $v \in Z$. For two zone graphs, $\mathcal{G}_{A_1} = (S_1, s_0, Lep, \rightarrow_1)$, $\mathcal{G}_{A_2} = (S_2, s'_0, Lep, \rightarrow_2)$ and a relation $\mathcal{R} \subseteq S_1 \times S_2$, $\mathcal{G}_{A_1} \mathcal{R} \mathcal{G}_{A_2}$ iff $(s_p, s_q) \in \mathcal{R}$. An ε transition represents a delay $d \in \mathbb{R}_{\geq 0}$.

3.1 Creating pre-stable zones

We describe below a procedure for splitting a zone Z_1 into a set \mathcal{Z}_1 of zones w.r.t a zone Z_2 such that the following properties are satisfied.

1. Each zone Z_i in \mathcal{Z}_1 should either be a subset of Z_2 or disjoint from Z_2 .
2. The DBMs in \mathcal{Z}_1 are mutually exclusive and disjoint.
3. The union of the DBMs in \mathcal{Z}_1 is Z_1 .

A naive approach would be to populate \mathcal{Z}_1 with two DBMs, namely the (set) intersection and (set) difference of Z_1 with Z_2 . This ensures that the properties 1, 2 and 3 hold. However, while the intersection of two DBMs is always a DBM, this cannot be said for their difference. Thus, we seek to refine our process by replacing the difference of Z_1 and Z_2 with some DBMs which are mutually exclusive and which cover the difference of Z_1 and Z_2 , so that properties 2 and 3 continue to hold.

One naive way to achieve this is to initially populate \mathcal{Z}_1 with only Z_1 , and then iterate through all the elementary clock constraints c_{ij} of Z_2 . The element m_{ij} in the DBM is a constraint of the form $x_i - x_j < k$ or $x_i - x_j \leq k$. In each iteration, we replace each DBM in \mathcal{Z}_1 with two DBMs, namely its intersection and difference with c_{ij} . Note that the complement of an elementary clock constraint is always an elementary clock constraint and thus the difference can be calculated by simply taking the intersection with the complement of the elementary constraint, which implies that both the intersection and the difference considering a single elementary constraint as above are DBMs. Of course, some of the DBMs thus produced may be empty, and we do not add these to \mathcal{Z}_1 . The theoretical bound on the number of DBMs in \mathcal{Z}_1 at the end is $2^{\text{(number of elementary clock constraints in dbm2)}}$, that is, $2^{O((n+1)^2)}$. The term $(n+1)^2$ comes from the fact that there are $(n+1)^2$ entries in Z_2 each of which is an elementary clock constraint. The above exponential bound is because of the fact that, in the worst case, we double the number of DBMs in \mathcal{Z}_1 in each iteration. This leaves us with a set of mutually exclusive zones which satisfies properties 1, 2 and 3.

However, this is inefficient in that it generates too many zones. So, we refine the process of iterating through the elementary clock constraints c_{ij} . We start with an empty \mathcal{Z}_1 and a pointer which initially points to Z_1 . At each iteration, we evaluate the intersection of c_{ij} and the zone pointed to by the pointer and also their difference which too is a zone since the difference is calculated by taking the intersection with the complement of c_{ij} . The pointer is then updated to point to the intersection DBM, while the difference DBM is added to \mathcal{Z}_1 . This procedure continues until all the c_{ij} have been seen. In the end, if the pointer's target is non-empty, we add it to \mathcal{Z}_1 . At this point, the zones in \mathcal{Z}_1 still cover Z_1 and also satisfy properties 1 and 2. This method leads to a maximum of one zone being added to \mathcal{Z}_1 for each c_{ij} , and one zone being added at the end, which gives us a maximum of $O((n+1)^2 + 1)$ zones in \mathcal{Z}_1 .

Algorithm 2 describes the procedure mentioned above formally.

Algorithm 2 This algorithm returns the intersection and the difference of two zones.

Input: Two zones Z_1 and Z_2

Output: i) Z which is $Z_1 \cap Z_2$ and ii) \mathcal{Z}_1 , a set of zones whose union is $Z_1 - Z_2$

```

1:  $Z := Z_1 \cap Z_2$ 
2:  $\mathcal{Z}_1 := \emptyset, p := Z_1$  ▷  $p$  is a pointer pointing to a zone.
3: for all  $i \in [0, n]$  do
4:   for all  $j \in [0, n]$  do
5:     Let  $c_{ij}$  be the constraint  $x_i - x_j \prec m_{ij}$ , where  $(m_{ij}, \prec)$  is the corresponding
       entry in the DBM of  $Z_2$ .
6:     Let  $\bar{c}_{ij}$  be the complement of the constraint  $c_{ij}$ .
7:      $Z_{11} := p \cap c_{ij}, Z_{12} := p \cap \bar{c}_{ij}$ 
8:     if  $Z_{12} \neq \emptyset$  then
9:        $\mathcal{Z}_1 := \mathcal{Z}_1 \cup Z_{12}$ 
10:    end if
11:    if  $Z_{11} \neq \emptyset$  then
12:       $p := Z_{11}$ 
13:    end if
14:  end for
15: end for
16: if  $Z_{11} \neq \emptyset$  then
17:    $\mathcal{Z}_1 = \mathcal{Z}_1 \cup Z_{11}$ 
18: end if

```

Pre-stability is ensured corresponding to both *delay* and *discrete* transitions in the zone graph.

- **Pre-stabilizing zones corresponding to delay transitions:** Consider two nodes in the zone graph $(l, Z) \xrightarrow{\varepsilon} (l, Z')$ such that Z is not pre-stable w.r.t Z' . The procedure involves splitting Z w.r.t $Z' \downarrow$ such that each newly created zones obtained by splitting Z is pre-stable w.r.t. Z' .

We follow the procedure given in Algorithm 2 to split a zone Z w.r.t the zone Z' .

- **Pre-stabilizing zones corresponding to discrete transitions in the zone graph:** Consider two nodes in the zone graph $(l, Z) \xrightarrow{a} (l', Z')$ such that $a \in Act$ and Z is not pre-stable w.r.t Z' . The method involving the pre-stabilization operation is similar to the $Pre_e(Z')$ operator used in backward analysis of the timed automaton, where e is an edge between say location l and l' of the timed automaton and Z' is a zone of l' . Formally for an edge $l \xrightarrow{g, a, R} l'$ $Pre_e(Z')$ is defined as the following:

$$Pre_e(Z') = \{v \in \mathbb{R}_{\geq 0}^{|C|} \mid \exists v' \in Z', \exists t \in \mathbb{R}_{\geq 0} \text{ such that } v + t \models g \text{ and } [R \leftarrow 0](v + t) = v'\}$$

Let $\llbracket R = 0 \rrbracket$ denotes the set of all clock valuations v such that $v(x) = 0$ when $x \in R$ and $v(x) \in \mathbb{R}_{\geq 0}$ when $x \notin R$. $v(x)$ denotes the valuation of clock x .

In our case, we define the zone \widehat{Z}' as follows:

$\widehat{Z}' = [R \leftarrow 0]^{-1}(Z' \cap \llbracket R = 0 \rrbracket)$. Now Z is split w.r.t \widehat{Z}' following Algorithm 2 that makes all the newly created zones pre-stable w.r.t Z' .

The following lemma states an important property of the zone graph which will further be used for clock reduction.

Lemma 1. *Pre-stability ensures that if the zone Z in any node (l, Z) in the zone graph is bounded above, then it is bounded fully from above by a hyperplane $x = h$, where $x \in C$ and $h \in \mathbb{N}$.*

Proof. We show the proof for two clocks. The same argument holds for arbitrary number of clocks. Consider a $|C|$ dimensional zone Z . Since $|C|=2$, a zone Z that is bounded above is of the form $k_{xy_2} \prec x - y \prec k_{xy_1}$, $k_{x_1} \prec x \prec k_{x_2}$ and $k_{y_1} \prec y \prec k_{y_2}$, where x and y are the two clocks, $\prec \in \{<, \leq\}$. Let Z be bounded above by two hyperplanes $x = k_{x_2}$ and $y = k_{y_2}$. As can be seen from Figure 3, there are two zones Z_1 and Z_2 such that Z_1 is defined by the inequations $x - y \prec k_{xy_1}$, $k_{x_2} \prec x$ and $y \prec k_{y_2}$, while Z_2 is defined as $k_{xy_2} \prec x - y$, $x \prec k_{x_2}$ and $k_{y_2} \prec y$. Making Z pre-stable will divide it into two parts:

- Z' defined by the inequations $k_{x_2} - k_{y_2} \prec x - y \prec k_{xy_1}$, $k_{x_1} \prec x \prec k_{x_2}$ and $k_{y_1} \prec y$ and
- \widehat{Z} defined by the inequations $k_{xy_2} \prec x - y \prec k_{x_2} - k_{y_2}$, $k_{x_1} \prec x$ and $y \prec k_{y_2}$

Z' is bounded fully from above by the hyperplane k_{x_2} while \widehat{Z} is bounded fully from above by the hyperplane k_{y_2} . Note that the inequations defining the zones Z' and \widehat{Z} may vary depending on the relation among the various constants k_{xy_1} , k_{xy_2} , k_{x_1} , k_{x_2} , k_{y_1} and k_{y_2} . In all cases, pre-stability will ensure that there exists a single hyperplane that fully bounds a zone from above.




Fig. 3. For every zone, there exists a hyperplane that bounds it fully from above in a pre-stable zone graph

4 Clock Reduction

Unlike the method described in [11], which works on the syntactic structure of the timed automaton, we use a semantic representation as given by the zone graph described in Section 2 to capture the behaviour of the timed automaton. This helps us to reduce the number of clocks in a more effective way. For a given TA A , we first describe a sequence of stages to construct a TA A_4 that is timed bisimilar to A . Later we prove the minimality in terms of the number of clocks for the TA A_4 . The operations involved in our procedure use a *difference bound matrix* representation of the zones. The following are important considerations in reducing the number of clocks.

- There may be some clock constraints on an edge of the TA that are never enabled. Such edges and constraints may be removed. (Stage 1)
- Splitting some locations may lead to a reduction in the number of the clocks. (Stage 2)
- At some location, some clocks whose values may be expressed in terms of other clock values, may be removed. (Stage 2)
- Two or more constraints on edges outgoing from a location when considered collectively may lead to the removal of some constraints. (Stage 3)
- An efficient way of renaming the clocks across all locations can reduce the total number of clocks further. (Stage 4)

Given a TA A , we apply the above operations in sequence to obtain the TA A_4 . These operations are detailed below.

Stage 1: Removing unreachable edges and associated constraints:

This stage involves creating the pre-stable zone graph of the given timed automaton, as described in Section 2. As mentioned previously in that section, the edges and their associated constraints that are never enabled in an actual transition are removed while creating the zone graph. Suppose there is an edge $l_i \xrightarrow{g,a,R} l_j$ in A but in the zone graph, a corresponding transition of the form $(l_i, Z) \xrightarrow{a} (l_j, Z')$ does not exist. Line 8 in Algorithm 1 also illustrates this. This implies that the transition $l_i \xrightarrow{g,a,R} l_j$ is never enabled and hence is removed from the timed automaton. Since the edges that do not affect any transition get removed during this stage, we have the following lemma trivially.

Lemma 2. *The operations in stage 1 produce a timed automaton A_1 that is timed bisimilar to the original TA A .*

Proof. During the construction of the zone graph, an edge is entirely removed if the corresponding transition is never enabled. Removing those edges corresponding to which no transition takes place does not affect the behaviour of the TA. Hence after stage 1, the resultant TA remains timed bisimilar to the original TA. \square

The time required in this stage is proportional to the size of the zone graph and hence *exponential* in the number of clocks of the timed automaton.

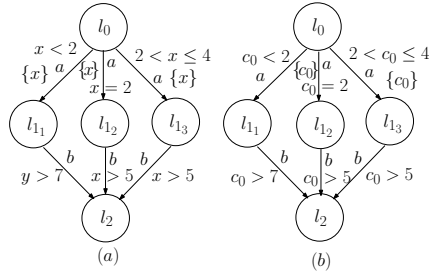


Fig. 4. Splitting locations of the TA in Figure 1

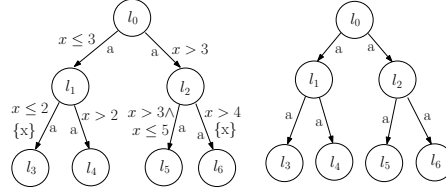


Fig. 5. The two timed automata are timed bisimilar

Stage 2: Splitting locations and removing constraints not affecting transitions: Locations may also require to be split in order to reduce the number of clocks of a timed automaton. Let us consider the example of the timed automaton in Figure 1 and its zone graph in Figure 2. There are three base zones corresponding to location l_1 in the zone graph, i.e. $Z_1 = \{0 \leq y - x < 2, x \leq 5\}$, $Z_2 = \{y - x = 2, x \leq 5\}$ and $Z_3 = \{2 < y - x \leq 4, y \leq 7\}$. This stage splits l_1 into three locations l_{11} , l_{12} and l_{13} (one for each of the base zones Z_1, Z_2 and Z_3) as shown in Figure 4(a). While the original automaton, in Figure 1, contains two elementary constraints on the edge between l_1 and l_2 , the modified automaton, in Figure 4(a), contains only one of these two elementary constraints on the outgoing edges from each of l_{11} , l_{12} and l_{13} to l_2 . Subsequent stages modify it further to generate an automaton using a single clock as in Figure 4(b).

Splitting ensures that only those constraints, that are relevant for every valuation in the base zone of a newly created location, appear on the edges originating from that location. Since the clocks can be reused while describing the behaviour from each of the individual locations created after the split, this may lead to a reduction in the number of clocks.

We describe a formal procedure for splitting a location into multiple locations in Algorithm 3.

Algorithm 3 Algorithm for splitting locations*Input: Timed automaton A_1 obtained after stage 1**Output: Modified TA A_2 after applying stage 2 splitting procedures*

```

1:  $A_2 := A_1$  ▷  $A_1$  is the TA obtained from  $A$  after the first stage
2: for all location  $l_i$  in  $A_1$  do ▷  $i$  is the index of the location
3:   Create  $m$  new locations  $l_{i_1}, \dots, l_{i_m}$  in  $A_2$  ▷ Let  $m$  be the number of base zones of  $l_i$ 
4:   Remove location  $l_i$  and all incoming and outgoing edges to and from  $l_i$  from
    $A_2$ 
5:   for all  $j$  in 1 to  $m$  do
6:     for all incoming edge  $l_r \xrightarrow{a, g_r, R_r} l_i$  in  $A_1$  do
7:       ▷ Split the constraints on the incoming edges to  $l_i$  for the newly created locations
8:        $Z'_{i_j} := Z_{i_j} \uparrow \cap \mathbb{R}_{\geq 0}^{|C|} \uparrow \cap \mathbb{R}_{\leq 0}^{|R_r \setminus \bar{0}|}$  ▷ Let  $Z_{i_j}$  be the base zone corresponding to  $l_{i_j}$ 
9:       ▷ Let  $Z_{r_j}$  is a zone of location  $l_r$  from which there is an  $a$  transition to  $Z_{i_j}$ 
10:      Let  $g_{r_j}$  be the weakest formula such that  $g_r \wedge \text{free}(Z'_{i_j}, R_r) \wedge Z_{r_j} \Rightarrow g_{r_j}$ 
      and  $g_{r_j}$  has a subset of the clocks used in  $g_r$ . ▷  $\text{free}(Z'_{i_j}, R_r)$  is the zone obtained by removing all
      constraints on clocks in  $R_r$  in  $Z'_{i_j}$ 
11:      Create an edge  $l_r \xrightarrow{a, g_{r_j}, R_r} l_{i_j}$  in  $A_2$ 
12:    end for
13:    for all outgoing edge  $l_i \xrightarrow{a, g_i, R_i} l_r$  in  $A_1$  do
14:      if  $Z_{i_j} \uparrow \cap g_i = \emptyset$  then
15:        Do not create this edge from  $l_{i_j}$  to  $l_r$  in  $A_2$  since it is never going to
        be enabled for any valuation of  $Z_{i_j}$ ;
16:      else
17:        Let  $S_r$  be the set of elementary constraints in  $g_i$ 
18:        loop
19:          if  $\exists s' \in S_r, s.t. Z_{i_j} \uparrow \wedge (\bigwedge_{s \in S_r \setminus \{s'\}} s) \Rightarrow Z_{i_j} \uparrow \wedge s'$  then
20:             $S_r = S_r \setminus \{s'\}$ 
21:          else
22:            Create an edge  $l_{i_j} \xrightarrow{a, g_{i'}, R_i} l_r$  in  $A_2$ , where  $g_{i'} = \bigwedge_{s \in S_r}$ 
23:            Break;
24:          end if
25:        end loop
26:      end if
27:    end for
28:  end for
29: end for

```

Note that a zone can be considered to be a set of constraints defining it. Similarly a guard can also be considered in terms of the valuations satisfying it. If there are m base zones in \mathcal{G}_{A_1} corresponding to a location l_i in A_1 , then Line 3 and Line 4 essentially split l_i into m locations l_{i_1}, \dots, l_{i_m} in the new automaton, say A_2 . For each of these newly created locations, Line 6 to Line 11 determine the constraints on their incoming edges.

For each incoming edge $l_r \xrightarrow{a, g_r, R_r} l_i$, there exists a zone Z_{r_j} of location l_r such that Z_{r_j} has an a transition to Z_{i_j} , the j^{th} base zone of l_i . Line 8 calculates

the lower bounds of Z_{i_j} by resetting the clocks R_r in the intersection of $Z_{i_j} \uparrow$ with $\mathbb{R}_{\geq 0}^{|C|}$. In Line 11, $free(Z'_{i_j}, R_r)$ represents a zone which is obtained by removing all constraints on clocks in R_r in Z'_{i_j} . Further, g_{r_j} is calculated as the weakest guard that is simultaneously satisfied by the constraints g_r , Z_{r_j} and $free(Z'_{i_j}, R_r)$ and has a subset of the clocks appearing in g_r . For our running example in Figure 1, if we consider $Z_{i_j} = Z_1$ then we have $Z'_{i_j} = Z_{i_j} \uparrow \cap \mathbb{R}_{[x \leftarrow 0]}^{\{x, y\}} = \{x = 0, y < 2\}$, $Z_{r_j} = \{x = y, x < 2\}$ and $free(Z'_{i_j}, \{x\}) = \{x \geq 0, y < 2\}$. We can see that $x < 2$ is the weakest formula such that $x \leq 4 \wedge x \geq 0 \wedge y < 2 \wedge x = y \wedge x < 2 \Rightarrow x < 2$ holds and hence $g_{r_j} = \{x < 2\}$.

The loop from Line 14 to Line 28 determines the constraints on the outgoing edges from these new locations. Line 15 checks if the zone $Z_{i_j} \uparrow$ has any valuation that satisfies the guard g_i on an outgoing edge from location l_i . If no satisfying valuation exists then this transition will never be enabled from l_{i_j} and hence this edge is not added in A_2 . Loop from Line 19 to Line 26 checks if some elementary constraints of the guard are implied by other elementary constraints of the same guard. If it happens then we can remove those elementary constraints from the guard that are implied by the other elementary constraints.

For our running example, the modified automaton of Figure 4(a) does not contain the constraint $x > 5$ on the edge from l_1 to l_2 even though it was present on the edge from l_1 to l_2 . The reason being that the future of the zone of l_1 (that is $0 \leq y - x < 2$) along with the constraint $y > 7$ implies $x > 5$ hence we do not need to put $x > 5$ explicitly on the outgoing edge from l_1 to l_2 . Removal of such elementary constraints helps in reducing the number of clocks in future stages. The maximum number of locations produced in the timed automaton as a result of the split is bounded by the number of zones in the zone graph. This is exponential in the number of clocks of the original TA A . However, we note that the base zones of a location l in the original TA are distributed across multiple locations as a result of the split of l and no new valuations are created. This gives us the following lemma.

Lemma 3. *The splitting procedure described in this stage does not increase the number of clocks in A_2 , but the number of locations in A_2 may become exponential in the number of clocks of the given TA A . However, there is no addition of new valuations to the underlying state space of the original TA A and corresponding to every state (l, v) of a location l in the TLTS of the original TA A , exactly one state (l_i, v) is created in the TLTS of the modified TA A_2 , where l_i is one of the newly created locations as a result of <http://www.zalafilms.com> splitting l .*

Splitting locations and removing constraints as described above do not alter the behaviour of the timed automaton that leads us to the following lemma.

Lemma 4. *The operations in stage 2 produce a timed automaton A_2 that is timed bisimilar to the TA A_1 obtained at the end of stage 1.*

Proof. In the second stage, a location l is split such that corresponding to every base zone of l , new locations l_1, \dots, l_n are created. Consider valuations

v_1, \dots, v_n in l_1, \dots, l_n respectively. Since the zones of l are distributed over locations l_1, \dots, l_n , before the split, all the valuations v_1, \dots, v_n existed in l . For all v_i , $1 \leq i \leq n$, (l, v_i) (before l is split) is timed bisimilar to (l_i, v_i) after the split. This is because removal of constraints that are implied by other constraints and splitting a location does not change the behaviour of a state (l, v_i) . Hence the timed automaton after stage 2 remains timed bisimilar to the TA A_1 . \square

The number of locations after the split increases exponentially in the worst case in the number of the clocks. The constraints on the incoming edges of l are also split appropriately into constraints on the incoming edges of the newly created locations. Thus these operations require exploring the zones corresponding to location l_i and the incoming and the outgoing edges of l_i and their constraints on these edges. Hence this stage too runs in time that is *exponential* in the number of the clocks of the timed automaton.

Stage 3: Removing constraints by considering multiple edges with the same action: We consider the example in Figure 5. Note that the constraints $x \leq 3$ and $x > 3$ on the edges from l_0 to l_1 and from l_0 to l_2 respectively could as well be merged together to produce a constraint without any clock.

For every action a enabled at any location l , this stage checks whether a guard enabling that action at l can be merged with another guard enabling the same action at that location such that timed bisimilarity is preserved. The transformation made in this stage has been formally described in Algorithm 4. The input to this algorithm is the TA obtained after stage 2, say A_2 . For each location l_i , the algorithm does the following: for every action $a \in Act$, it determines the zones of l_i from which action a is enabled. We call this set \mathcal{Z}_{i_a} . Zone graph construction and splitting of locations in stage 2 ensures that all zones in \mathcal{Z}_{i_a} form a linear chain connected by ε edges as shown in Figure 6. We use \prec to capture this total ordering relation. Let $Z_{i_1} \prec \dots \prec Z_{i_k} \prec Z_{i_{k+1}} \dots \prec Z_{i_m}$ be the zones in this chain. Lemma 1 ensures that for each Z_{i_k} , $k \geq 1$, that is bounded above, there exists a hyperplane that bounds the zone fully from above and similarly, for each Z_{i_k} , $k > 1$ there exists a hyperplane that bounds the zone fully from below. For a zone Z , let $LB(Z)$ and $UB(Z)$ denote these lower and upper bounding hyperplanes of Z respectively. Further, $UB(Z)$ is ∞ if Z is not bounded from above.

Let $\Upsilon_{(l_i, a)} = \{g \mid l_i \xrightarrow{a, g, R} l' \in E_{A_2}\}$ be the set of guards on the outgoing edges from l_i in A_2 which are labelled with a . For any $g \in \Upsilon_{(l_i, a)}$, we define the following:

- $\text{Strt}(g)_{(l_i, a)} = Z \in \mathcal{Z}_{i_a}$ is the zone in \mathcal{Z}_{i_a} which is bounded from below by the same constraints as the lower bound of the constraints in g .
- $\text{End}(g)_{(l_i, a)} = Z \in \mathcal{Z}_{i_a}$ is the zone in \mathcal{Z}_{i_a} which is bounded from above by the same constraints as the upper bound of the constraints in g . If the constraints in g do not have any upper bound, then $\text{End}(g)_{(l_i, a)}$ is the last zone in the chain \mathcal{Z}_{i_a} .
- $\text{Ran}(g)_{(l_i, a)} = \{Z \in \mathcal{Z}_{i_a} \mid \text{Strt}(g)_{(l_i, a)} \prec Z \wedge Z \prec \text{End}(g)_{(l_i, a)}\} \cup \{\text{Strt}(g)_{(l_i, a)}\} \cup \{\text{End}(g)_{(l_i, a)}\}$ is the set of zones ordered by \prec relation in between $\text{Strt}(g)_{(l_i, a)}$ and $\text{End}(g)_{(l_i, a)}$.




Fig. 6. Removing constraints in stage 3

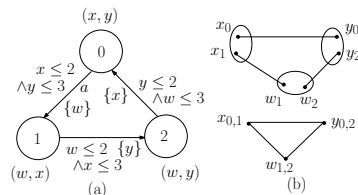


Fig. 7. Colouring clock graph

In Algorithm 4, we use a rather informal notation $g := [C1, C2]$ to denote that $C1$ and $C2$ are the constraints defining the lower and the upper bounds of g respectively. If g does not have any constraint defining the upper bound then $C2 = \infty$. We define a total order \lll on $\mathcal{T}_{(l_i, a)}$ such that for any $g, g' \in \mathcal{T}_{(l_i, a)}$, $g \lll g'$ iff $\exists Z \in \text{Ran}(g)_{(l_i, a)}$ such that $Z < Z'$ for all $Z' \in \text{Ran}(g')_{(l_i, a)}$. Similar to the zones let us use ordered indexed variable g_{i_1}, \dots, g_{i_p} to denote $g_{i_1} \lll \dots \lll g_{i_k} \lll g_{i_{k+1}} \dots \lll g_{i_p}$. One such total order on guards is shown in Figure 6. The loop from Line 5 to Line 33 in Algorithm 4 traverses the elements of $\mathcal{T}_{(l_i, a)}$ in this total order with the help of a variable $next$ initialized to 2. In every iteration of this loop, the invariant $g_{curr} \lll g_{i_{next}}$ holds. Three possibilities exist based on whether the set union of zones corresponding to these guards is (i) not convex (ii) convex but non-overlapping, or (iii) convex as well as overlapping.

If the union is non-convex then both g_{curr} and the index $next$ are changed in Line 7 to pick the next ordered pair in this order. For cases (ii) and (iii), new guards are created by merging corresponding zones as long as the modified automaton preserves timed bisimilarity. If timed bisimilarity is preserved then the modified automaton A' is set as the current automaton which is A_3 (Line 13 and Line 28) and $next$ is incremented to process the next guard. Otherwise the guard g_{curr} is set to $g_{i_{next}}$ and $next$ is incremented by 1 (Line 15 and Line 33). The only difference in these two cases is in creating the new guard.

For case (ii), convex but non-overlapping zones, a new guard is created from the lower bound of $\text{Strt}(g_{curr})_{(l_i, a)}$ and the upper bound of $\text{End}(g_{i_{next}})_{(l_i, a)}$. For case (iii), there are three possibilities of combining guards, mentioned in Line 19, Line 21 and Line 23. The first possibility is the same as in case (ii). The second and the third possibilities are replacing the upper bound of g_{curr} with the lower bound of $\text{Strt}(g_{i_{next}})_{(l_i, a)}$ and the lower bound of $g_{i_{next}}$ with the upper bound of $\text{End}(g_{curr})_{(l_i, a)}$ respectively.

A zone graph captures the behaviour of the timed automaton and hence timed bisimilarity between two TAs can be checked using their zone graphs [23,15]. This is why we create the pre-stable zone graph as described in Section 2 as it enables one to directly check timed bisimilarity on this zone graph created through Algorithm 1 following the procedure described in [15].

Lemma 5. *The operations in stage 3 produce a timed automaton A_3 that is timed bisimilar to the TA A_2 obtained at the end of stage 2.*

Algorithm 4 Algorithm for stage 3*Input: Timed automaton A_2 obtained after stage 2**Output: Modified TA A_3 after applying stage 3 procedures*

```

1:  $A_3 := A_2$  ▷  $A_2$  is the TA obtained from  $A$  after the first two stages
2: for all location  $l_i$  in  $A_2$  do ▷  $i$  is the index of the location, the set of locations do not change in this stage
3:   for all  $a \in \text{sort}(l_i)$  do ▷  $\text{sort}(l_i)$  is the set of actions in  $l_i$  that can be performed from  $l_i$ 
4:      $g_{curr} := g_{i_1}, next := 2$ 
5:     while  $next < |\Upsilon_{(l_i, a)}| - 1$  do
6:       if  $\text{Ran}(g_{curr})_{(l_i, a)} \cup \text{Ran}(g_{i_{next}})_{(l_i, a)}$  is not convex then
7:          $g_{curr} := g_{i_{next}}, next := next + 1$ 
8:       else if  $\text{Ran}(g_{i_{next}})_{(l_i, a)} \cap \text{Ran}(g_{curr})_{(l_i, a)} = \emptyset$  then ▷ non-overlapping but contiguous
9:          $g'_{curr} := [LB(\text{Strt}(g_{curr})_{(l_i, a)}), UB(\text{End}(g_{i_{next}})_{(l_i, a)})]$ 
10:         $g'_{i_{next}} := g'_{curr}$ 
11:        Let  $A'$  be the TA obtained by replacing all occurrences of  $g_{curr}$  and
12:         $g_{i_{next}}$  with  $g'_{curr}$  and  $g'_{i_{next}}$  respectively in  $A_3$ 
13:        if  $A'$  is timed bisimilar to  $A_3$  then
14:           $A_3 := A', g_{curr} := g'_{curr}, next := next + 1$ 
15:        else
16:           $g_{curr} := g_{i_{next}}, next := next + 1$ 
17:        end if
18:      else ▷  $\text{Ran}(g_{curr})_{(l_i, a)}$  and  $\text{Ran}(g_{i_{next}})_{(l_i, a)}$  have overlapping zones
19:        ▷ There are three ways to combine  $g_{curr}$  and  $g_{i_{next}}$ , and
20:        ▷ Resultant new guards should be checked for timed bisimilarity in the following order
21:        (i).  $g'_{curr} := [LB(\text{Strt}(g_{curr})_{(l_i, a)}), UB(\text{End}(g_{i_{next}})_{(l_i, a)})]$ ,
22:            $g'_{i_{next}} := g'_{curr}$ 
23:        (ii).  $g'_{curr} := [LB(\text{Strt}(g_{curr})_{(l_i, a)}), LB(\text{Strt}(g_{i_{next}})_{(l_i, a)})]$ ,
24:             $g'_{i_{next}} := [LB(\text{Strt}(g_{i_{next}})_{(l_i, a)}), UB(\text{End}(g_{i_{next}})_{(l_i, a)})]$ 
25:        (iii).  $g_{curr} := [LB(\text{Strt}(g_{curr})_{(l_i, a)}), UB(\text{End}(g_{curr})_{(l_i, a)})]$ ,
26:             $g'_{i_{next}} := [UB(\text{End}(g_{curr})_{(l_i, a)}), UB(\text{End}(g_{i_{next}})_{(l_i, a)})]$ 
27:        while  $1 \leq i \leq 3$  do ▷ Corresponding to the three cases above
28:          Let  $A'$  be the TA obtained by replacing all occurrences of  $g_{curr}$ 
29:          and  $g_{i_{next}}$  with the  $i^{\text{th}}$   $g'_{curr}$  and  $g'_{i_{next}}$  respectively in  $A_3$ 
30:          if  $A'$  is timed bisimilar to  $A_3$  then
31:             $A_3 := A', g_{curr} := g'_{curr}, next := next + 1$ 
32:            Break
33:          else
34:             $i := i + 1$ 
35:          end if
36:        end while
37:        if  $i = 4$  then ▷ Bisimilarity could not be preserved in any of these three cases
38:           $g_{curr} := g_{i_{next}}, next := next + 1$ 
39:        end if
40:      end if
41:    end if
42:  end while
43: end for

```

Proof. In the third stage, a zone of some location l may be merged with another zone if their union is convex and this process may be repeated a finite number of times. The successor zones are also re-computed following the constraints on the outgoing edges from location l . This operation is done if the resultant zone graph is still timed bisimilar to the original zone graph, i.e. the initial states of the two zone graphs are timed bisimilar. The changes in the zone graph are reflected in the timed automaton in the following way. If from a location l_i there are edges of the form $l_i \xrightarrow{a, g_1, R_1} l_{i1}, l_i \xrightarrow{a, g_2, R_2} l_{i2}, \dots, l_i \xrightarrow{a, g_n, R_n} l_{in}$ in the timed automaton A such that they are labelled with the same action a , then some of the constraints may be replaced with a constraint equivalent to $g_i \cup g_j \cup \dots, g_i, g_j \in \{g_1, g_2, \dots, g_n\}$ if the resultant timed automaton is timed bisimilar to the original timed automaton. Hence the operations in this stage create a timed bisimilar TA. \square

The procedure above requires checking whether the union of two zones is convex or not. Here we describe the procedure as outlined in [7] for this. An *H-polyhedron* defines the half-space representation of a convex polyhedron. Let \mathfrak{P} be a convex polyhedron in \mathbb{R}^{dim} , dim being the dimension in the real space. Given $\lambda \in \mathbb{R}^{dim}$ and $\chi \in \mathbb{R}$, the inequality $\lambda^T x \leq \chi$ is said to be *valid* for \mathfrak{P} if the inequality is satisfied by all points in \mathfrak{P} .

Let $\mathfrak{P} = \{x \in \mathbb{R}^{dim} : \mathfrak{A}x \leq \mu\}$ and $\mathfrak{Q} = \{x \in \mathbb{R}^{dim} : \mathfrak{B}x \leq \nu\}$ be (possibly unbounded) H-polyhedra whose envelope is defined by

$$env(\mathfrak{P}, \mathfrak{Q}) = \{x \in \mathbb{R}^{dim} : \overline{\mathfrak{A}}x \leq \overline{\mu}, \overline{\mathfrak{B}}x \leq \overline{\nu}\},$$

where $\overline{\mathfrak{A}}x \leq \overline{\mu}$ is the subsystem of $\mathfrak{A}x \leq \mu$ obtained by removing all the inequalities not valid for the polyhedron \mathfrak{Q} . Similarly, $\overline{\mathfrak{B}}x \leq \overline{\nu}$ is the subsystem of $\mathfrak{B}x \leq \nu$ obtained by removing all the inequalities not valid for the polyhedron \mathfrak{P} . It is easy to see that $\mathfrak{P} \cup \mathfrak{Q} \subseteq env(\mathfrak{P}, \mathfrak{Q})$. Theorem 3 in [7] states the following important result.

$$\mathfrak{P} \cup \mathfrak{Q} \text{ is convex} \Leftrightarrow \mathfrak{P} \cup \mathfrak{Q} = env(\mathfrak{P}, \mathfrak{Q})$$

This theorem also leads to an algorithm for checking the convexity of $\mathfrak{P} \cup \mathfrak{Q}$ for two given polyhedra \mathfrak{P} and \mathfrak{Q} and it also produces a minimal H-representation of $\mathfrak{P} \cup \mathfrak{Q}$ when the union is convex. The representation is minimal in the sense that it does not contain any redundant inequality. An inequality is said to be redundant for an *H-polyhedron* \mathfrak{P} , if its removal preserves the polyhedron. As shown in the paper [7], the complexity of running the algorithm is polynomial though it is not strongly polynomial since the algorithm involves solving LPs but algorithms for solving LPs like the ellipsoid method and the interior point method are not strongly polynomial.

As mentioned above, in this stage, while removing the constraints, timed bisimilarity is checked and the number of bisimulation checks is bounded by the number of zones in the zone graph of the TA obtained after stage 2. Further each check of timed bisimilarity involves checking convexity of union of zones that invokes the algorithm of [7] that has a polynomial complexity. From Lemma

3, in stage 2, no new valuations are added to the underlying state space of the original TA A , and corresponding to every valuation (l, v) , exactly one valuation (l_i, v) is created, where l and l_i are as described in Lemma 3. Thus the number of zones in the zone graph of A_2 is still exponential in the number of clocks of the original TA A . Checking timed bisimilarity is done in EXPTIME [9,18]. A zone graph is constructed prior to every bisimulation check and the construction is done in EXPTIME. Hence this entire stage runs in EXPTIME.

Stage 4: Finding Active clocks, clock replacement and renaming:

The active clocks in a location determine the behaviour of the timed automaton from that location. The valuation of a clock that is not active at location l does not affect the behaviour of the timed automaton from that location. For example, a clock that does not appear in the outgoing edges of the locations reachable from l is not active at l . Similarly, if a clock is reset on every path starting from location l before appearing in a constraint, then too it is not active at l . Given a location l , an iterative method for finding the set of active clocks at l , denoted $act(l)$, is given in [11]. The method has been modified and stated below for the case where clock assignments of the form $x := y, x, y \in C$ are disallowed.

Determining active clocks : For a location l , let $clk(l)$ be the set of clocks that appear on the constraints on the outgoing edges of l . Let $\rho : (2^C \times E) \rightarrow 2^C$ be a partial function such that for an edge $e = l \xrightarrow{g,a,R} l'$, $\rho(act(l'), e)$ gives the set of active clocks of l' that are not reset along e . For all $l \in L$, $act(l)$ is the limit of the convergent sequence $act_0(l) \subseteq act_1(l) \dots$ such that $act_0(l) := clk(l)$ and $act_{i+1}(l) := act_i(l) \cup \bigcup_{e=(l,g,a,R,l') \in E} \rho(act_i(l'), e)$.

Removing redundant resets : Once we find the active clocks of a location l , we remove all resets of clock x on the incoming edges of l if $x \notin act(l)$.

Partitioning active clocks : Using the DBM representation of the zones, one can determine from the set of active clocks in every location whether some of the clocks in the timed automaton can be expressed in terms of other clocks and thus be removed. Any $x, y \in act(l)$ belong to an equivalence class iff the same relation of the form $x - y = k$, for some fixed integer k , is maintained between these clocks across all zones of l . This is checked using the DBM of the zones of l . In this case either x can be replaced by $y + k$ or y can be replaced by $x - k$. Let π_l be the partition induced by this equivalence relation.

We note that the size of the largest partition does not give the minimum number of clocks required to represent a TA while preserving timed bisimulation. An example is shown in Figure 7(a). Though the automaton in the figure has two active clocks partitioned into two different classes in every location, a timed bisimilar TA cannot be constructed with only two clocks. Assigning the minimum number of clocks to represent the timed automaton so that timed bisimilarity is preserved can be reduced to the problem of finding the chromatic number of a graph as described below.

Clock graph colouring and clock renaming : A clock graph, G_{A_3} , for the timed automaton A_3 is constructed in the following way. This graph contains a vertex for each class in the partition π_l , for every location l . Let V_l be the set of vertices

corresponding to the classes of π_l . For each pair of distinct vertices $r_1, r_2 \in V_l$, an edge between r_1 and r_2 exists denoting that r_1 and r_2 cannot be assigned the same colour. This is because two classes in the partition π_l cannot be represented using the same clock.

Moreover, if at least one clock, say x , is common in two classes corresponding to two different locations without any intervening reset of x then only one vertex represents these two classes. For example, in Figure 7, clock x is active in both locations 0 and 1. $\{x\}$ forms a class in the partition of the active clocks for each of locations 0 and 1. Thus we create vertices x_0 and x_1 corresponding to these two classes. However, since there is no intervening reset of clock x between locations 0 and 1, the vertices x_0 and x_1 are merged together and the resultant graph is termed the *clock graph*. Thus after merging some classes into one class, the resultant class can have active clocks corresponding to multiple locations. For a class \mathcal{T} , let $loc(\mathcal{T})$ represent the set of locations whose active clocks are members of \mathcal{T} .

Finding the minimum number of clocks to represent the TA A_3 is thus equivalent to colouring its clock graph with the minimum number of colours so that no two adjacent vertices have the same colour. The number of colours gives the minimum number of clocks required to represent the TA. If a colour ι is assigned to a vertex r , then all the clocks in the class corresponding to r , say \mathcal{T} , are renamed ι . The value of ι can be chosen to be equal to some clock in \mathcal{T} that is considered to be the *representative clock* for that class. The constraints involving the rest of these clocks in \mathcal{T} are adjusted appropriately and any resets of the clocks, different from the representative clock, present on the incoming edges to l such that $l \in loc(\mathcal{T})$ are also removed.

For example, suppose vertex r corresponds to a class \mathcal{T} having clocks x , y and z such that the valuations of the clocks are related as $x - y = k_1$ and $y - z = k_2$. If colour ι is assigned to vertex r , then the clocks x , y and z in class \mathcal{T} are replaced with ι . If the value of clock ι is chosen to be the same as clock y , then every occurrence of x in \mathcal{T} is replaced with $y + k_1$, while every occurrence of z in \mathcal{T} is replaced with $y - k_2$ in the constraints involving x and z . The corresponding resets of clocks x and z are also removed.

In Figure 7(a), a TA with three locations is shown. In locations 0, 1 and 2, the sets of active clocks are $\{x, y\}$, $\{w, x\}$ and $\{w, y\}$ respectively. At every location, in this example, each of the active clocks itself makes a class of the partition. Since there are six classes in total, we draw initially six vertices. As mentioned earlier, the vertices x_0 and x_1 are merged into a single vertex. Similarly w_1 , w_2 and y_0 , y_2 are also merged. We call the resultant vertices $x_{0,1}$, $w_{1,2}$ and $y_{0,2}$. Adding the edges as described previously, we get the clock graph which is a triangle as shown in Figure 7(b). Thus the chromatic number of this graph is 3 which translates to the number of clocks obtained through the operations in stage 4. Since this stage consists of finding the active clocks and renaming them, we have the following lemma.

Lemma 6. *The operations in stage 4 produce a timed automaton A_4 that is timed bisimilar to the TA A_3 obtained after stage 3.*

Proof. In stage 4, clocks are renamed. Also in every zone in each location, the active clocks are identified and partitioned such that all clocks belonging to a class in the partition are represented with a single clock, say ι . If there is a clock x in the same class \mathcal{T} such that $x - \iota = m$, where m is an integer, then the constraint of the form $x \bowtie k$ is replaced with $\iota \bowtie k - m$ for all the constraints on the edges outgoing from locations $l \in \text{loc}(\mathcal{T})$. The clock renaming and replacing the integer constants in the way mentioned above do not change any bisimulation property of a timed state. Hence the operations in stage 4 preserve the timed bisimulation property of the original TA A . \square

Lemma 7. *The problem of clock renaming operation on the clock graph as described above is NP-complete in the size of the input.*

Proof. Consider any arbitrary graph G without any parallel edge, i.e. there should be at most one edge between a pair of vertices in G . We show that there exists a TA whose clock graph is the same as G . Thus coloring the vertices of G is reduced to assigning minimum number of clocks to the clock graph.

The reduction is the following: Let the vertices of G be x_1, x_2, \dots, x_n . Corresponding to every edge e between x_i and x_j , $1 \leq i, j \leq n$, create a location l of the timed automaton whose active clocks are x_i and x_j . For the reduction to be correct, we also need to show that x_i cannot be replaced with x_j in any of the constraints on the outgoing edges from location l . Let the locations of the timed automaton be numbered l_1, l_2, \dots, l_m where m is the number of edges in G .

Now note that every location l_1, \dots, l_m has exactly two active clocks. We create a timed automaton which is acyclic. We create the timed automaton in a way such that among the locations l_1, l_2, \dots, l_m , there will be exactly one location in the automaton that will have no incoming edge and one location without any outgoing edge. We create three additional locations l_0, l_{m+1} and l_{m+2} . We add an edge from location l_0 to the location without any incoming edge and similarly an edge from the location among l_1, l_2, \dots, l_m without any outgoing edge to location l_{m+1} and an edge from location l_{m+1} to location l_{m+2} . If the active clocks of l_1 are x_i and x_j , then we draw an edge from l_0 to l_1 with the constraint $x_i \leq 1$ and reset x_j .

The other edges in the timed automaton are drawn in the following manner. We add the edge from location l_u to l_v (and not from l_v to l_u) such that doing so maintains the acyclicity of the timed automaton. An edge is drawn between two locations l_u and l_v if $\text{act}(l_u) \cap \text{act}(l_v) \neq \emptyset$. Note that there can be at most one active clock common between two distinct locations l_u and l_v .

Now we describe the constraints and the resets on the edges of the timed automaton. Consider two locations l_u and l_v connected by an edge from l_u to l_v and let the active clocks of l_u be x_i and x_j while the active clocks of l_v be x_j and x_t . On this edge we add a constraint $x_i \leq k$, where $k \in \mathbb{N}$ and reset x_t . The value of k is chosen in the following way. Suppose clock x_i was reset on an incoming edge of l_w such that there is a path from l_w to l_u without any reset of x_i . We denote by $\text{wt}(x_i)_{w,u}$, the maximum sum of the integers used in the constraints over all paths from l_w to l_u . We assign to k the value $1 + \max_w \text{wt}(x_i)_{w,u}$, i.e. one

added to the maximum of such weights at location l_u computed over all incoming paths. This value of k ensures that all the valuations that reach location l_u , satisfy all the constraints that appear on the edges reachable from location l_u . This leads to the fact that none of the locations are further split.

If the active clocks at some l_i , $1 \leq i \leq m$ be x_r and x_s , then we add an edge from l_i to l_{m+1} with the constraint $x_r \leq k_r$ and an edge from l_{m+1} to l_{m+2} with the constraint $x_s \leq k_s$ without loss of generality. k_r and k_s are calculated in the same way as k as described above.

We can construct the clock graph corresponding to the timed automaton thus constructed and find that the clock graph is isomorphic to the input graph G . Thus G can be coloured by renaming the clocks of the timed automaton constructed above so that least possible number of clocks are used after the renaming the clocks. \square

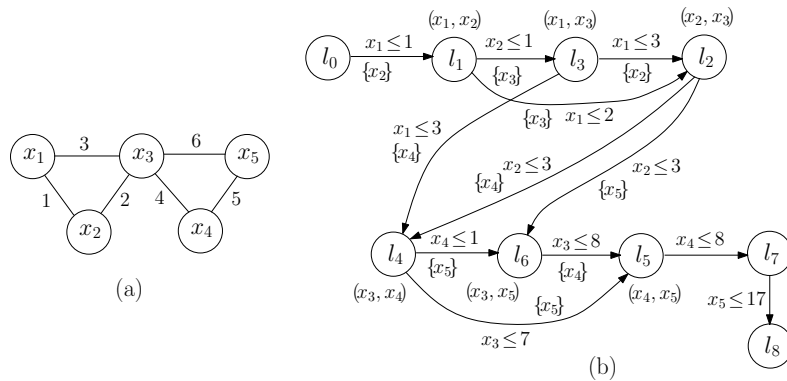


Fig. 8. (a) a graph G (b) TA with clock graph same as G

Figure 8(a) shows a graph G and 8(b) shows the TA constructed following the procedure described above. Note that there are 6 edges in G corresponding to which there are 6 locations in the TA which are l_1 to l_6 . There are three additional locations l_0, l_7 and l_8 . Corresponding to every location in l_1 to l_6 , its active clocks are written inside parentheses. For example, the active clocks of l_1 are x_1 and x_2 denoting that the edge in G corresponding to location l_1 connects vertices x_1 and x_2 in G .

We look at the complexity of the operations in this stage. The sequence of computation of active clocks converges within n iterations and every iteration runs in time $O(|E|)$, where there are n locations and $|E|$ edges respectively in the timed automaton after the first three stages. This is due to the fact that in iteration i , for some location l , its active clocks are updated so as to include those active clocks of the locations l' such that there exists a path of length at most i between l and l' and these clocks are not reset along this path. In each iteration, each edge is traversed once for updating the set of active clocks of the locations. Thus the complexity of finding active clocks is $O(n \times |E|)$. Partitioning the active clocks of each of the locations too requires traversing the zone graph

and checking the clock relations from the DBM of the zones. This can be done in time equal to the order of the size of the zone graph times the size of DBM which is in EXPTIME.

Finally, determining the chromatic number of a graph is possible in time exponential in the number of the vertices of the graph [19,13]. Since the number of locations after the splitting operation in stage 2 is exponential in the number of clocks in A , renaming the clocks using the clock graph runs in time doubly exponential in the number of the clocks of the original timed automaton A . Thus we have the following theorem.

Theorem 1. *The stages mentioned above run in 2-EXPTIME.*

In the presence of an invariant condition, considering an edge $l \xrightarrow{g,a,R} l'$, a zone Z' of l' is initially created from zone Z of l such that $Z' = (Z \cap g)_{[R \leftarrow \bar{0}]} \uparrow \cap I(l')$, if $(Z \cap g)_{[R \leftarrow \bar{0}]} \uparrow \cap I(l') \neq \emptyset$, where $I(l')$ is the invariant on location l' . The edge can be removed from the timed automaton if for all zones Z of l , $(Z \cap g)_{[R \leftarrow \bar{0}]} \uparrow \cap I(l') = \emptyset$. The invariant condition on location l' can be entirely removed if for every incoming edge $l \xrightarrow{g,a,R} l'$ and for each zone Z of l , $(Z \cap g)_{[R \leftarrow \bar{0}]} \uparrow \cap I(l') = (Z \cap g)_{[R \leftarrow \bar{0}]} \uparrow$ holds. Considering the clock relations in the zones of a location, an elementary constraint in the invariant too is removed if it is implied by the rest of the elementary constraints in the invariant. In stage 4, for computing the set of active clocks $act(l)$ in location l , $clk(l)$ is defined as the union of the set of clocks appearing in the constraints on the outgoing edges from l and the set of clocks appearing in $I(l)$.

Proof of Minimality of clocks: Let A_4 be the TA obtained from a TA A through the four stages described earlier. We show that all the hyperplanes induced by the constraints appearing in the timed automata A_4 and appearing in its zone graph are necessary for defining the behaviour of the timed automata. Further, we can show that these constraints in A_4 are expressed using the minimum possible number of clocks.

The following lemma states that every hyperplane in the zone graph of A_4 is needed for preserving bisimulation.

Lemma 8. *In the zone graph of A_4 , every hyperplane (modulo clock renaming) that bounds a zone from above is necessary.*

Proof. Every constraint appearing in the timed automaton A_4 induces a hyperplane in the zone graph of the automaton. We need to show that each of these hyperplanes defines the behaviour of timed automaton; stated otherwise, removal of any of these hyperplanes will alter the behaviour of the initial state of the timed automaton and with this modification, the initial state of the automaton will no longer be timed bisimilar to the initial state of any timed automaton timed bisimilar to A_4 .

In stage 3, we consider constraints on multiple outgoing edges from a location such that each of these edges is labelled with the same action. In this stage, a zone is merged with its immediate successor zone if and only if by doing so, the initial state remains timed bisimilar to the one before merging the zones.

Thus in the zone graph of A_4 , if a hyperplane exists, it implies that it could not be removed due to merging of zones in stage 3 since by doing so, the automaton does not remain bisimilar any more. Hence the hyperplane is necessary for preserving timed bisimulation.

Since we argue about any arbitrary hyperplane in the zone graph of A_4 , we can say that every hyperplane in the zone graph of A_4 is necessary for preserving bisimulation property of A_4 . \square

Lemma 9. *In the TA A_4 , for each location l and clock $x \in act(l)$, there exists a constraint involving x on some outgoing edge of l or on the outgoing edge of another location l' reachable from l such that there is at least one path from l to l' without any intervening reset of x . This constraint induces a hyperplane in the zone graph of A_4 which if removed so as to not bound a zone in the zone graph of the timed automaton, does not preserve timed bisimulation property of the timed automaton A .*

Proof. We consider a location $l \in L$ and suppose $x \in act(l)$. By the definition of active clocks, there is a constraint involving clock x on the outgoing edge of l or on the outgoing edge of a location l' such that there is a path from l to l' on which clock x is not reset.

Now a constraint $x \bowtie k$ involving clock x induces a hyperplane in the zone graph of automaton A_4 that is of the form $x = k$. Since from lemma 8, every hyperplane appearing in the zone graph of A_4 is necessary for preserving bisimulation, this hyperplane too cannot be removed.

Since we consider an arbitrary location l and some active clock x of l , the lemma thus holds true for all active clocks in each location of the timed automaton A_4 . \square

Definition 2. Minimal bisimilar TA: *For a given timed automaton B , a minimal bisimilar TA B_1 is one that is timed bisimilar to B and has the minimum number of clocks possible.*

Fact 2 *For every TA B , there exists a minimal bisimilar TA.*

One can show that the clocks of a TA that is minimal bisimilar to A_4 can replace the clocks of A_4 which gives us the following lemma.

Lemma 10. *The timed automaton A_4 has the same number of clocks as a minimal bisimilar TA for A .*

Proof. We prove the lemma by showing that the clocks of A_4 can be replaced with the clocks of a minimal bisimilar TA that uses say $|C_B|$ clocks. Let A_4 has $|C_{A_4}|$ clocks. We know that if B is a minimal TA, we have $|C_B| \leq |C_{A_4}|$. Replacing clocks of a timed automaton with another set of clocks is essentially *renaming* of the clocks. Since due to the operations in stage 4, any renaming cannot reduce the number of clocks in A_4 and if the clocks of A_4 can be replaced with the clocks of B , we have $|C_{A_4}| \leq |C_B|$, thus giving $|C_{A_4}| = |C_B|$.

We consider a minimal TA B_1 timed bisimilar to the given TA A and apply the operations in the four stages on it to produce a TA B . The application of these stages on the minimal TA does not add to the number of clocks and since B_1 is already minimal, B has the same number of clocks as B_1 . Due to the transformation from B_1 to B , it is ensured that in B 's zone graph, for each zone in every location, there exists a hyperplane that fully bounds it. Similarly in the zone graph of A_4 too, for each zone of every location, there exists a hyperplane that fully bounds it.

We use the zone graphs of A_4 and B for mapping the clocks of A_4 to the clocks of B . From Lemma 9, for a location l_{A_4} of A_4 , corresponding to every clock $x \in act(l_{A_4})$, a hyperplane of the form $x = k$ corresponding to a constraint $x \bowtie k$ exists in the zone graph of A_4 which cannot be removed so that the modified TA remains timed bisimilar. Since A_4 and B are timed bisimilar, there is a corresponding hyperplane, say $y = k'$, induced by a constraint $y \bowtie k'$ which too cannot be removed from B while preserving timed bisimulation.

In the following part of the proof, the cp-traces we consider are the ones that start from the initial state of the zone graph and the delays in the trace are such that it moves from an entry corner point to the exit corner point of the same zone and from an exit corner point to an entry corner point of the immediate delay successor zone. We consider multiple finite cp-traces in the zone graph such that all the corner points in the zone graph are traversed by some cp-trace at least once.

Now we consider a part of a cp-trace in the zone graph of A_4 from the initial state to an exit corner point (l_{A_4}, v) of zone Z_{A_4} . Suppose the hyperplane $x = k$ bounds the zone Z_{A_4} and the constraint $x \bowtie k$ induces the hyperplane and it cannot be removed while preserving timed bisimulation. Since A_4 and B are timed bisimilar, there exists a state (l_B, v') in the zone graph of B that is timed bisimilar to (l_{A_4}, v) and (l_B, v') is an exit corner point of some zone Z_B . Continuing this way, we consider *all* the different exit corner points in Z_{A_4} and the corresponding bisimilar corner points in Z_B to find out the clock involved in the hyperplane bounding the zone Z_{A_4} , that is x and the clock in the corresponding hyperplane bounding Z_B that is say y and thus we can replace clock x in A_4 with clock y of B . This is repeated until all the occurrences of all the clocks in A_4 are replaced with clocks in B .

As mentioned above, here $x \in act(l_{A_4})$ and $y \in act(l_B)$. Since an active clock of a location cannot be replaced with another active clock of the same location, every active clock in every location in A_4 , can be mapped uniquely to a clock in B which can replace the clock in A_4 . Stated otherwise, if x could be replaced with any of the two clocks $y_1, y_2 \in act(l_B)$, then in B itself, y_1 could have replaced y_2 or vice versa. Continuing this way, we have a mapping for each clock in A_4 and the clocks associated to the constraints in all the edges in A_4 are replaced with clocks in B .

Now since the clocks of A_4 have been replaced with the clocks of B and from the operations of stage 4, any renaming of clocks of A_4 requires at least as many clocks as in A_4 , we have $|C_{A_4}| \leq |C_B|$. On the other hand, since B is a minimal

bisimilar TA, we have $|C_B| \leq |C_{A_4}|$. Thus we have $|C_{A_4}| = |C_B|$, i.e. A_4 and B have the same number of clocks. Stated otherwise, A_4 has the least number of clocks among the TAs that are timed bisimilar to the original timed automaton A . \square

Theorem 3. *There exists an algorithm to construct a TA A_4 that is timed bisimilar to a given TA A such that among all the timed automata that are timed bisimilar to A , A_4 has the minimum number of clocks. Further, the algorithm runs in time that is doubly exponential in the number of clocks of A .*

5 Conclusion

In this paper, we have described an algorithm, which given a timed automaton A , produces another timed automaton A_4 with the smallest number of clocks that is timed bisimilar to A . Since A_4 is timed bisimilar to A , it also accepts the same timed language as A . The problem appears in a different form in [17] where it was left open. In [17], this problem has been described as given a timed automaton A and a set C of clocks, whether there exists a timed automaton that is timed bisimilar to the original automaton A and has $|C|$ clocks. It is easy to see that a solution to our problem solves the problem in [17] and vice versa.

For reducing the number of clocks of the timed automaton, we rely on a semantic representation of the timed automaton rather than its syntactic form as in [11]. This helps us to reason about the behaviour of the timed automaton more effectively. We could just as well have used a region graph construction, the asymptotic complexity would remain the same. However, the zone graph we use in our approach is usually much smaller in size than the region graph. Besides, the size of the zone graph is independent of the constants used in the timed automaton. There is an exponential increase in the number of locations while producing the TA with the minimal number of clocks. However, there is no addition of new valuations to the underlying state space of the timed automaton in stage 2, since the splitting of a location l , described in stage 2, involves distributing the zones of l across the locations l is split into.

We note that pre-stability of the zones with respect to transitions is essential for the operations in stage 2. Notice that regions are inherently pre-stable [20] and therefore the region graph construction would work here as well though the number of locations obtained through splitting would be larger than in the case of zone graphs.

Our algorithm has a 2-EXPTIME upper bound, however, it needs to be used only once to reduce the number of clocks. Reachability analysis and often model checking for timed automata like TCTL model checking are PSPACE-complete [4,2,3]. Since reachability analysis and model checking the timed automata are usually performed several times to verify different properties, we may consider first reducing the number of clocks before doing the model checking. With fewer clocks, the DBM representation of a zone will also be smaller in size which may as well contribute towards reducing the computation time for model checking.

References

1. L. Aceto, A. Ingólfssdóttir, K.G. Larsen, and J. Srba. *Reactive Systems: Modelling, Specification and Verification*. Cambridge University Press, 2007.
2. L. Aceto and F. Laroussinie. Is your model checker on time? on the complexity of model checking for timed modal logics. In *Proceedings of MFCS*, pages 125–136, London, UK, 1999. Springer-Verlag.
3. R. Alur, C. Courcoubetis, and D. Dill. Model-checking in dense real-time. *Inf. Comput.*, 104:2–34, May 1993.
4. R. Alur and D.L. Dill. A theory of timed automata. *Theoretical Computer Science*, 126:183–235, 1994.
5. G. Behrmann, P. Bouyer, E. Fleury, and K. G. Larsen. Static guard analysis in timed automata verification. In *TACAS*, pages 254–270, 2003.
6. G. Behrmann, P. Bouyer, K. G. Larsen, and R. Pelanek. Lower and upper bounds in zone-based abstractions of timed automata. *International Journal on Software Tools for Technology Transfer*, 8:204–215, 2006.
7. Alberto Bemporad, Komei Fukuda, and Fabio Danilo Torrisi. Convexity recognition of the union of polyhedra. *Computational Geometry*, 18(3):141–154, 2001.
8. B. Berthomieu and M. Menasche. An enumerative approach for analyzing time petri nets. In *IFIP Congress*, pages 41–46, 1983.
9. K. Cerans. Decidability of bisimulation equivalences for parallel timer processes. In *Proceedings of CAV*, volume 663, pages 302–315. Springer-Verlag, 1992.
10. C. Daws and S. Tripakis. Model checking of real-time reachability properties using abstractions. In *TACAS*, pages 313–329, 1998.
11. C. Daws and S. Yovine. Reducing the number of clock variables of timed automata. In *Proc. RTSS’96, 73-81, IEEE*, pages 73–81. IEEE Computer Society Press, 1996.
12. D. L. Dill. Timing assumptions and verification of finite-state concurrent systems. In *Automatic Verification Methods for Finite State Systems*, pages 197–212, 1989.
13. D. Eppstein. Small maximal independent sets and faster exact graph coloring. *J. Graph Algorithms Appl.*, 7:131–140, 2003.
14. O. Finkel. Undecidable problems about timed automata. In *Proceedings of FORMATS*, pages 187–199. Springer-Verlag, 2006.
15. S. Guha, S. N. Krishna, C. Narayan, and S. Arun-Kumar. A unifying approach to decide relations for timed automata and their game characterization. In *Express/SOS*, pages 47–62, 2013.
16. T. A. Henzinger, X. Nicollin, J. Sifakis, and S. Yovine. Symbolic model checking for real-time systems. *Information and Computation*, 111:394–406, 1992.
17. F. Laroussinie, K. G. Larsen, and C. Weise. From timed automata to logic – and back. In *Proceedings of MFCS*, pages 529–539, 1995.
18. F. Laroussinie and Ph. Schnoebelen. The state explosion problem from trace to bisimulation equivalence. In *FoSSaCS*, pages 192–207, 2000.
19. E. L. Lawler. A note on the complexity of the chromatic number problem. *Inf. Process. Lett.*, 5:66–67, 1976.
20. Balaguru Srivathsan. *Abstractions for timed automata*. PhD thesis, LaBRI, University of Bordeaux, 2012.
21. S. Tripakis. Folk theorems on the determinization and minimization of timed automata. *Inf. Process. Lett.*, 99:222–226, September 2006.
22. S. Tripakis and S. Yovine. Analysis of timed systems using time-abstracting bisimulations. *Formal Methods in System Design*, 18:25–68, 2001.
23. C. Weise and D. Lenzkes. Efficient scaling-invariant checking of timed bisimulation. In *STACS*, pages 177–188, 1997.