

Nonreciprocal transmission and fast-slow light effects in a cavity optomechanical system

Jun-Hao Liu,¹ Ya-Fei Yu,^{1,*} and Zhi-Ming Zhang^{1,†}

¹*Guangdong Provincial Key Laboratory of Nanophotonic Functional Materials and Devices (School of Information and Optoelectronic Science and Engineering), and Guangdong Provincial Key Laboratory of Quantum Engineering and Quantum Materials, South China Normal University, Guangzhou 510006, China*

compiled: January 10, 2022

We study the nonreciprocal transmission and the fast-slow light effects in a cavity optomechanical system, in which the cavity supports a clockwise and a counter-clockwise circulating optical modes, both the two modes are driven simultaneously by a strong pump field and a weak signal field. We find that when the intrinsic photon loss of the cavity is equal to the external coupling loss of the cavity, the system reveals a nonreciprocal transmission of the signal fields. However, when the intrinsic photon loss is much less than the external coupling loss, the nonreciprocity about the transmission properties almost disappears, and the nonreciprocity is shown in the group delay properties of the signal fields, and the system exhibits a nonreciprocal fast-slow light propagation phenomenon.

OCIS codes: (270.0270) Quantum optics; (120.4880) Optomechanics; (230.0230) Optical devices.
<http://dx.doi.org/10.1364/XX.99.099999>

1. Introduction

In recent years, optical nonreciprocity has got a lot of attentions for its important applications in photonic network, signal processing, and one-way optical communication protocols. In the common nonreciprocal devices, such as, isolator, circulator, nonreciprocal phase shifter, the transmission of the information is not symmetric. At present, the researches about the optical nonreciprocity mainly focused on two aspects: one is the transmission properties of the signal fields, another is the photonic statistical properties of the signal fields.

For the first aspect, scientists have demonstrated that many physical effects and physical systems, such as Faraday rotation effect in the magneto-optical crystals [1–3], optical nonlinearity [4], spatial-symmetry-breaking structures [5, 6], optoacoustic effects [7, 8], the parity-time-symmetric structures [9–12], can be used to realize the optical nonreciprocal transmission. Efforts have also been made to study the nonreciprocal transmission in cavity optomechanical systems [13–17]. Manipatruni et al. demonstrated that the optical nonreciprocal transmission was based on the momentum difference between the forward and backward-moving light beams in a Fabry-Perot cavity with one moveable mirror [18]. Hafezi et al. proposed a scheme to achieve the

nonreciprocal transmission in a microring resonator by using an unidirectional optical pump [19]. Metelmann and Clerk discussed a general method for nonreciprocal photon transmission and amplification via reservoir engineering [20]. Peterson et al. demonstrated an efficient frequency-converting microwave isolator based on the optomechanical interactions [21]. Mirza et al. studied the optical nonreciprocity and slow light propagation in coupled spinning optomechanical resonators [22].

For the second aspect, the researches on the photonic statistic properties of the transmitted fields in nonreciprocal devices are fewer. At present, the relevant theoretical works include the nonreciprocal photon blockade [23], the authors discussed how to create and manipulate nonclassical light via photon blockade in rotating nonlinear devices. They found that the light with sub-Poissonian or super-Poissonian photon-number statistics can emerge when driving the resonator from its left or right side. Subsequently, Xu et al. proposed a scheme to manipulate the statistic properties of the photons transport nonreciprocally via quadratic optomechanical coupling [24].

In this paper, we study the nonreciprocal transmission and the fast-slow light effects in a cavity optomechanical system, as shown in Fig. 1. We show that when the intrinsic photon loss of the cavity equals the external coupling loss of the cavity, we can achieve the nonreciprocal transmission of the signal fields with the red-sideband pumping or the blue-sideband pumping. We also show that when the intrinsic photon loss is much less than the

* yuyafei@m.scnu.edu.cn

† zhangzhiming@m.scnu.edu.cn

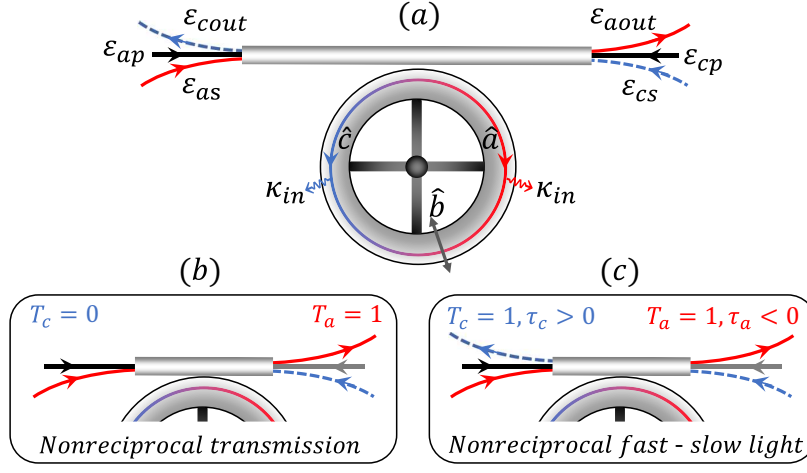


Fig. 1. (a) Schematic diagram of our proposed model. An optomechanical microtoroid cavity supports a clockwise circulating mode (\hat{a}) and a counter-clockwise circulating mode (\hat{c}), both the two cavity modes couple with the mechanical mode (\hat{b}) via the radiation pressure. The pump fields (ε_{ap} , ε_{cp}) and signal fields (ε_{as} , ε_{cs}) couple with the cavity modes by an optical fiber. (b) The nonreciprocal transmission: the right-moving signal field is completely transmitted ($T_a = 1$), while the left-moving signal field is blocking-up ($T_c = 0$). (c) The nonreciprocal fast-slow light: both the right-moving field and the left-moving signal field are transmitted ($T_a = T_c = 1$). However, the group delay of the right-moving signal field is negative ($\tau_a < 0$), that corresponds to the fast light. The group delay of the left-moving signal field is positive ($\tau_c > 0$), that corresponds to the slow light.

external coupling loss, the nonreciprocity of the system about the optical transmission properties almost disappears, now the system exhibits a nonreciprocal fast-slow light propagation phenomenon, i.e., the group velocity of the right-moving signal field will be speed up (fast light), while the group velocity of the left-moving signal field will be slowed down (slow light), or vice versa.

2. Model and Hamiltonian

Our system model is shown in Fig. 1(a). We consider an optomechanical microtoroid cavity, which supports a clockwise circulating mode (\hat{a}) and a counter-clockwise circulating mode (\hat{c}), both the two cavity modes couple with the mechanical mode (\hat{b}) via the radiation pressure. The cavity mode \hat{a} (\hat{c}) is driven simultaneously by a strong pump field ε_{ap} (ε_{cp}) and a weak signal field ε_{as} (ε_{cs}). The total Hamiltonian of the system can be expressed as

$$H_{total} = H_{om} + H_{aps} + H_{cps} + H_{ac}, \quad (1)$$

where $H_{om} = \hbar\omega_0\hat{a}^\dagger\hat{a} + \hbar\omega_0\hat{c}^\dagger\hat{c} + \hbar\omega_m\hat{b}^\dagger\hat{b} + \hbar g(\hat{a}^\dagger\hat{a} + \hat{c}^\dagger\hat{c})(\hat{b}^\dagger + \hat{b})$ is the Hamiltonian of the cavity optomechanical system. \hat{a} (\hat{c}) and \hat{b} are the annihilation operators of the clockwise (counter clockwise) circulating cavity mode and the mechanical mode with frequency ω_0 and ω_m , respectively. g is the optomechanical coupling strength between the cavity modes and the mechanical mode. $H_{aps} = i\hbar\varepsilon_{ap}(\hat{a}^\dagger e^{-i\omega_{ap}t} - H.c.) + i\hbar\varepsilon_{as}(\hat{a}^\dagger e^{-i\omega_{as}t} - H.c.)$ describes the interactions of the cavity mode \hat{a} with the pump field of amplitude $\varepsilon_{ap} = \sqrt{2\kappa P_{ap}/\hbar\omega_{ap}}$ and the signal field of amplitude $\varepsilon_{as} = \sqrt{2\kappa P_{as}/\hbar\omega_{as}}$, respectively, in which κ is the coupling decay rate of

the cavity, and P_{ap} (P_{as}) is the laser power. Similarly, $H_{cps} = i\hbar\varepsilon_{cp}(\hat{c}^\dagger e^{-i\omega_{cp}t} - H.c.) + i\hbar\varepsilon_{cs}(\hat{c}^\dagger e^{-i\omega_{cs}t} - H.c.)$ describes the interaction Hamiltonian of cavity mode \hat{c} with the pump field of amplitude $\varepsilon_{cp} = \sqrt{2\kappa P_{cp}/\hbar\omega_{cp}}$ and the signal field of amplitude $\varepsilon_{cs} = \sqrt{2\kappa P_{cs}/\hbar\omega_{cs}}$, respectively. The last term $H_{ac} = \hbar J(\hat{a}^\dagger\hat{c} + \hat{c}^\dagger\hat{a})$ represents the interaction between the two cavity modes with the strength J .

For simplicity, we assume that the two pump fields have the same frequency, i.e., $\omega_{ap} = \omega_{cp} = \omega_p$. In the rotation frame with $H_r = \omega_p(\hat{a}^\dagger\hat{a} + \hat{c}^\dagger\hat{c})$, the system Hamiltonian can be written as

$$\begin{aligned} H = & \hbar\Delta\hat{a}^\dagger\hat{a} + \hbar\Delta\hat{c}^\dagger\hat{c} + \hbar\omega_m\hat{b}^\dagger\hat{b} + \hbar g(\hat{a}^\dagger\hat{a} + \hat{c}^\dagger\hat{c})(\hat{b}^\dagger + \hat{b}) \\ & + i\hbar\varepsilon_{ap}(\hat{a}^\dagger - H.c.) + i\hbar\varepsilon_{as}(\hat{a}^\dagger e^{-i\delta_{as}t} - H.c.) \\ & + i\hbar\varepsilon_{cp}(\hat{c}^\dagger - H.c.) + i\hbar\varepsilon_{cs}(\hat{c}^\dagger e^{-i\delta_{cs}t} - H.c.) \\ & + \hbar J(\hat{a}^\dagger\hat{c} + \hat{c}^\dagger\hat{a}), \end{aligned} \quad (2)$$

where $\Delta = \omega_c - \omega_p$ is the frequency detuning between the cavity field (\hat{a}, \hat{c}) and the pump field ($\varepsilon_{ap}, \varepsilon_{cp}$), and $\delta_{as} = \omega_{as} - \omega_p$ ($\delta_{cs} = \omega_{cs} - \omega_p$) is the frequency detuning between the signal field ε_{as} (ε_{cs}) and the pump field ε_{ap} (ε_{cp}). The system dynamics is fully described by the set of quantum Heisenberg-Langevin equations

$$\begin{aligned} \frac{d\hat{a}}{dt} = & -(i\Delta + \kappa_t)\hat{a} - ig\hat{a}(\hat{b}^\dagger + \hat{b}) - iJ\hat{c} + \varepsilon_{ap} \\ & + \varepsilon_{as}e^{-i\delta_{as}t} + \sqrt{2\kappa}\hat{a}_{in}, \\ \frac{d\hat{c}}{dt} = & -(i\Delta + \kappa_t)\hat{c} - ig\hat{c}(\hat{b}^\dagger + \hat{b}) - iJ\hat{a} + \varepsilon_{cp} \\ & + \varepsilon_{cs}e^{-i\delta_{cs}t} + \sqrt{2\kappa}\hat{c}_{in}, \\ \frac{d\hat{b}}{dt} = & -(i\omega_m + \gamma)\hat{b} - ig(\hat{a}^\dagger\hat{a} + \hat{c}^\dagger\hat{c}) + \sqrt{2\gamma}\hat{b}_{in}, \end{aligned} \quad (3)$$

where the cavity has the damping rate $\kappa_t = \kappa_{in} + \kappa$, which are assumed to be due to the intrinsic photon loss and external coupling loss, respectively, and the mechanical mode has the damping rate γ . \hat{a}_{in} (\hat{c}_{in}), and \hat{b}_{in} are the δ -correlated operators of the input noises for the cavity mode \hat{a} (\hat{c}) and the mechanical mode \hat{b} , respectively. These noise operators satisfy $\langle \hat{a}_{in} \rangle = \langle \hat{c}_{in} \rangle = \langle \hat{b}_{in} \rangle = 0$.

In this model, we are interested in the mean response of the system. Thus, in the following, we turn to calculate the evolutions of the expectation values of \hat{a} , \hat{c} , \hat{b} , and we denote $\langle \hat{a} \rangle \equiv A$, $\langle \hat{c} \rangle \equiv C$, $\langle \hat{b} \rangle \equiv B$, $\langle \hat{a}^\dagger \rangle \equiv A^*$, $\langle \hat{c}^\dagger \rangle \equiv C^*$, $\langle \hat{b}^\dagger \rangle \equiv B^*$. By using the mean-field assumption $\langle \hat{a}\hat{b}\hat{c} \rangle = \langle \hat{a} \rangle \langle \hat{b} \rangle \langle \hat{c} \rangle$, we can write the equations for the mean values as

$$\begin{aligned} \frac{dA}{dt} &= -(i\Delta + \kappa_t)A - igA(B + B^*) - iJC \\ &\quad + \varepsilon_{ap} + \varepsilon_{as}e^{-i\delta_{as}t}, \\ \frac{dC}{dt} &= -(i\Delta + \kappa_t)C - igC(B + B^*) - iJA \\ &\quad + \varepsilon_{cp} + \varepsilon_{cs}e^{-i\delta_{cs}t}, \\ \frac{dB}{dt} &= -(i\omega_m + \gamma)B - ig(|A|^2 + |C|^2). \end{aligned} \quad (4)$$

Equations (4) can be solved by using the perturbation method in the limit of the strong pump fields, while taking the signal fields to be weak. Using the linearization approximation, we make the following ansatz [25]

$$\begin{aligned} X &= X_0 + X_{a+}e^{-i\delta_{as}t} + X_{a-}e^{i\delta_{as}t} \\ &\quad + X_{c+}e^{-i\delta_{cs}t} + X_{c-}e^{i\delta_{cs}t}, \end{aligned} \quad (5)$$

where X can be any one of the quantities A , B , C , or their complex conjugates A^* , C^* , B^* . X_0 represents the steady-state mean value of the corresponding system mode, and X_{a+} , X_{a-} , X_{c+} , X_{c-} are the additional fluctuations. By substituting Eq. (5) into Eqs. (4), and keeping only the first-order in the small quantities and neglecting the nonlinear terms like $A_{a+}C_{a+}$, $A_{a+}B_{c-}$, $B_{c-}C_{a+}$, \dots , we can obtain the steady-state mean value equations, and the fluctuation equations for the cavity mode components A_{a+} and C_{c+} (see the appendix). By solving these equations, we find that $A_{a+} = \eta(\delta_{as})\varepsilon_{as}$, $C_{c+} = \xi(\delta_{cs})\varepsilon_{cs}$, the concrete forms of the coefficients $\eta(\delta_{as})$ and $\xi(\delta_{cs})$ are tediously long, and we will not write them out here.

The relation among the input, internal, and output fields is given as [26] $X^{out} = X^{in} - 2\kappa X$. By using the ansatz again, we write the output field X^{out} as $X_0^{out} + X_{a+}^{out}e^{-i\delta_{as}t} + X_{a-}^{out}e^{i\delta_{as}t} + X_{c+}^{out}e^{-i\delta_{cs}t} + X_{c-}^{out}e^{i\delta_{cs}t}$. Then we can obtain the output field components $A_{a+}^{out} = \varepsilon_{as} - 2\kappa A_{a+}$ and $C_{c+}^{out} = \varepsilon_{cs} - 2\kappa C_{c+}$. The transmissivities can be written as $t_a(\delta_{as}) = A_{a+}^{out}/\varepsilon_{as}$, $t_c(\delta_{cs}) = C_{c+}^{out}/\varepsilon_{cs}$. The nonreciprocal transmission is then described by the normalized transmissivities (transmission spectra)

$$\begin{aligned} T_a &= |t_a(\delta_{as})|^2 = |1 - 2\kappa\eta(\delta_{as})|^2, \\ T_c &= |t_c(\delta_{cs})|^2 = |1 - 2\kappa\xi(\delta_{cs})|^2. \end{aligned} \quad (6)$$

What's more, in the resonant region of the transmission spectra, the output signal fields have the phase dispersions $\phi_a(\omega_{as}) = \arg[T_a(\omega_{as})]$ and $\phi_c(\omega_{cs}) = \arg[T_c(\omega_{cs})]$, which can cause the group delay [27]

$$\tau_a = \frac{d\phi_a(\omega_{as})}{d\omega_{as}}, \tau_c = \frac{d\phi_c(\omega_{cs})}{d\omega_{cs}}. \quad (7)$$

The group delay τ_a (τ_c) > 0 corresponds to the slow light propagation of the signal field, and the group delay τ_a (τ_c) < 0 corresponds to the fast light propagation of the signal field. In the following, we will discuss the nonreciprocal transmission ($T_a = 1$, $T_c = 0$ or $T_a = 0$, $T_c = 1$) and the nonreciprocal fast-slow light effects ($\tau_a > 0$, $\tau_c < 0$ or $\tau_a < 0$, $\tau_c > 0$), respectively.

In this paper, the parameters are chosen based on the recently experiment [28, 29]: $\omega_m = 2\pi \times 10$ MHz and $\gamma = 2\pi \times 10^2$ Hz (quality factor $Q_m = 10^5$), the equivalent mass of the mechanical resonance $m = 5$ ng, and the equivalent cavity length $l = 1$ mm. The damping rate of the optical cavity $\kappa = 2\pi \times 1$ MHz, the wavelength of the pump laser $\lambda = 1064$ nm. The other parameters are $J = 2\pi \times 10^3$ Hz, $\kappa_{in} = 2\pi \times 1$ MHz.

3. Nonreciprocal transmission

In this section, we numerically evaluate the transmission spectra T_a and T_c to show the possibility of achieving the nonreciprocal transmission of the signal fields.

Firstly, we assume that the system works near the red sideband ($\Delta = \omega_m$). In Fig. 2 we plot T_a and

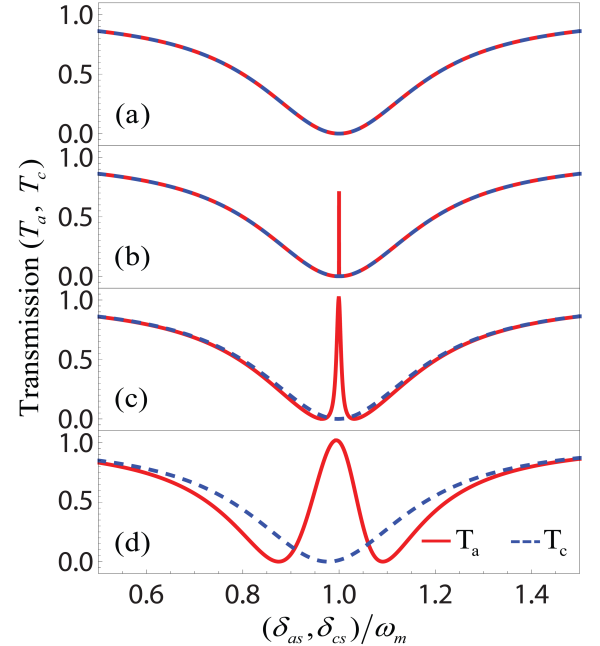


Fig. 2. The transmission spectra T_a (red solid lines) and T_c (blue dashed lines) as a function of δ_{as}/ω_m and δ_{cs}/ω_m , respectively. The system works near the red sideband ($\Delta = \omega_m$). The parameters are: (a) $P_a = P_c$, (b) $P_a = 10^2 P_c$, (c) $P_a = 10^4 P_c$, (d) $P_a = 10^5 P_c$. The other parameters are stated in the text.

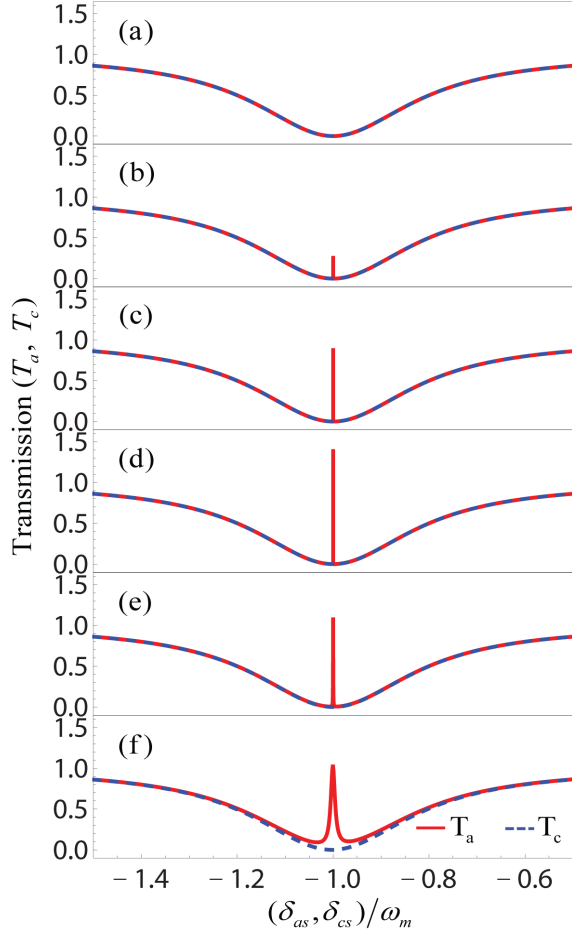


Fig. 3. The transmission spectra T_a (red solid lines) and T_c (blue dashed lines) as a function of δ_{as}/ω_m and δ_{cs}/ω_m , respectively. The system works near the blue sideband ($\Delta = -\omega_m$). The parameters are: (a) $P_a = P_c$, (b) $P_a = 6P_c$, (c) $P_a = 8.5P_c$, (d) $P_a = 9.5P_c$, (e) $P_a = 5 \times 10^2 P_c$, (f) $P_a = 10^4 P_c$. The other parameters are stated in the text.

T_c as a function of δ_{as}/ω_m and δ_{cs}/ω_m , respectively. Here we hold the pump power P_c constant, $P_c = 100\text{nW}$ [30]. We can see that the transmission of the left-moving signal field is simply that of a bare resonator, and T_c exhibits a dip near $\delta_{cs} = \omega_m$ ($T_c \approx 0$). By adjusting the pump power P_a , we find that the transmission of the right-moving signal field can be obviously modified. Near $\delta_{as} = \omega_m$, T_a will exhibit a very narrow peak and gradually increase with the increase of P_a . When $P_a = 10^4 P_c$, we have $T_a \approx 1$. If we continue to increase P_a , the spectrum will exhibit a split, and this is associated with the normal mode splitting [31]. The above features can result in a nonreciprocal transmission of the signal fields in our system, i.e., the right-moving signal field is completely transmitted, while the left-moving signal field is blocking-up.

Then we consider that the system works near the blue sideband ($\Delta = -\omega_m$), and we also choose $P_c = 100\text{nW}$. In Fig. 3, we can see that T_c exhibits a dip near $\delta_{cs} =$

$-\omega_m$ ($T_c \approx 0$). By adjusting the pump power P_a , T_a will exhibit a very narrow peak near $\delta_{as} = -\omega_m$, with the increase of P_a , the peak value will first increase and then decrease. When $P_a = 9.5P_c$, we have $T_a > 1$, $T_c < 1$, now the right-moving signal field can be amplified, while the left-moving signal field cannot be amplified. When $P_a = 10^4 P_c$, we have $T_a \approx 1$, $T_c \approx 0$. Now the system can also be used to realize the nonreciprocal transmission of the signal fields.

In addition, in our system, the transmissive direction of the signal field can be changed by adjusting the ratio of P_a and P_c . For example, when $\Delta = \omega_m$, $P_a = 100\text{nW}$ and $P_c = 10^4 P_a$, now the left-moving signal field is completely transmitted while the right-moving signal field is blocking-up.

4. Nonreciprocal fast-slow light effects

In this section, we show how to realize the nonreciprocal fast-slow light propagation of the signal fields, i.e., both the right-moving and left-moving signal fields can be completely transmitted, while the group velocity of the right-moving signal field will be speed up and the left-moving signal field will be slowed down, or vice versa.

In Fig. 4, we plot T_a and T_c for different intrinsic photon loss rate κ_{in} under the unbalanced-pumping condition ($P_a = 10^5 P_c$, $P_c = 100\text{nW}$). We find that with the decrease of κ_{in} the transmission of the left-moving signal field T_c will gradually increase near $\delta_{cs} = -\omega_m$. However, the transmission of the right-moving signal field

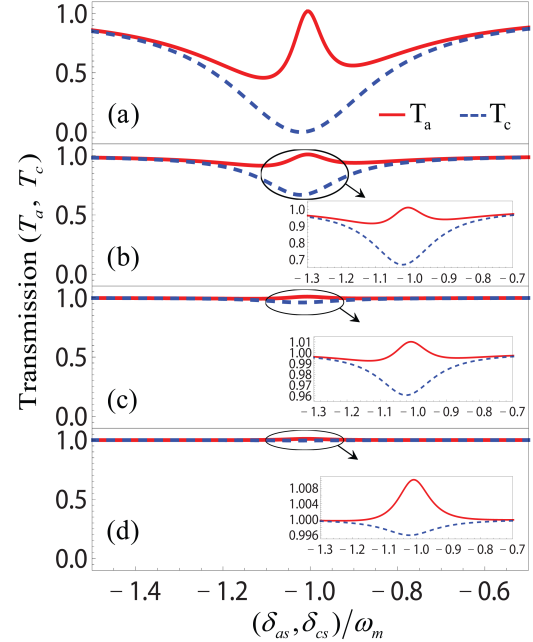


Fig. 4. The transmission spectra T_a (red solid lines) and T_c (blue dashed lines) as a function of δ_{as}/ω_m and δ_{cs}/ω_m , respectively, for different intrinsic photon loss rate κ_{in} . The system works near the blue sideband ($\Delta = -\omega_m$). The parameters are: (a) $\kappa_{in} = \kappa$, (b) $\kappa_{in} = 10^{-1}\kappa$, (c) $\kappa_{in} = 10^{-2}\kappa$, (d) $\kappa_{in} = 10^{-3}\kappa$. The other parameters are stated in the text.

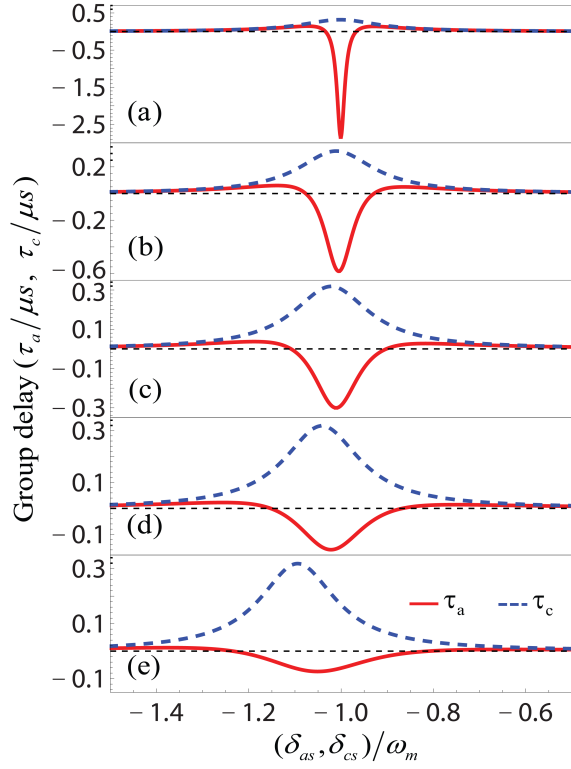


Fig. 5. The group delay τ_a (red solid lines) and τ_c (blue dashed lines) as a function of δ_{as}/ω_m and δ_{cs}/ω_m , respectively. The system works near the blue sideband ($\Delta = -\omega_m$). The parameters are: (a) $P_a = 1 \times 10^4 P_c$, (b) $P_a = 5 \times 10^4 P_c$, (c) $P_a = 1 \times 10^5 P_c$, (d) $P_a = 2 \times 10^5 P_c$, (e) $P_a = 5 \times 10^5 P_c$. The other parameters are stated in the text.

$T_a \approx 1$ near $\delta_{as} = -\omega_m$. When $\kappa_{in} = 10^{-1}\kappa$, we have $T_a \approx 1$, $T_c \approx 0.7$, now the nonreciprocity of the system about the optical transmission is weakened. When $\kappa_{in} = 10^{-3}\kappa$, we have $T_a \approx 1.01$, $T_c \approx 0.996$, and the nonreciprocity of the system about the optical transmission almost disappears ($T_a \approx T_c$).

However, in this situation ($\kappa_{in} \ll \kappa$), the nonreciprocity of system is shown in the group delay properties of the signal fields. In Fig. 5, we plot τ_a and τ_c as a function of δ_{as}/ω_m and δ_{cs}/ω_m , respectively. We can see that in the range of the parameters we considered (we have plotted the transmission spectra T_a and T_c and we can guarantee that $T_a \approx T_c \approx 1$ for all the parameters used in Fig. 5), the group delay of the right-moving signal field is negative near $\delta_{as} = -\omega_m$ (the group velocity will be speed up), that corresponds to the fast light propagation. While the group delay of the left-moving signal field is positive near $\delta_{cs} = -\omega_m$ (the group velocity will be slowed down), that corresponds to the slow light propagation. This shows that the system can exhibit a nonreciprocal fast-slow light propagation of the signal fields.

Furthermore, we can change the propagation direction of the fast-slow light by adjusting the ratio of P_a and P_c . For example, in Fig. 5(c), we have $\tau_a \approx -0.3\mu s$

and $\tau_c \approx 0.3\mu s$. However, if we choose $P_a = 100\text{nW}$ and $P_c = 10^5 P_a$, then we have $\tau_a \approx 0.3\mu s$ and $\tau_c \approx -0.3\mu s$, now the right-moving signal field is slow light and the left-moving signal field is fast light.

5. Conclusion

In summary, we have studied the nonreciprocal transmission and the fast-slow light effects in a cavity optomechanical system. We have shown that for both the red-sideband pumping or the blue-sideband pumping, the system can act as an optical unidirectional isolator. We have also shown that if the intrinsic photon loss is much less than the external coupling loss, the nonreciprocity of the system on the optical transmission almost disappears, now the system reveals an interesting nonreciprocal fast-slow light propagation phenomenon. Our proposed model might have applications in the photonic network.

Fundings. This work was supported by the National Natural Science Foundation of China (Nos. 11574092, 61775062, 61378012, 91121023); the National Basic Research Program of China (No. 2013CB921804).

Appendix

By substituting Eq. (5) into Eqs. (4), we can obtain the the steady-state mean value equations

$$\begin{aligned} 0 &= -(i\Delta + \kappa_t)A_0 - igA_0(B_0 + B_0^*) - iJC_0 + \varepsilon_{ap}, \\ 0 &= -(i\Delta + \kappa_t)C_0 - igC_0(B_0 + B_0^*) - iJA_0 + \varepsilon_{cp}, \\ 0 &= -(i\omega_m + \gamma)B_0 - ig(|A_0|^2 + |C_0|^2). \end{aligned} \quad (\text{A1})$$

In this system, we are interested on the dynamics of the cavity mode components $A_{a+}e^{-i\delta_{as}t}$ and $C_{c+}e^{-i\delta_{cs}t}$ which are resonance with the corresponding signal fields $\varepsilon_{as}e^{-i\delta_{as}t}$ and $\varepsilon_{cs}e^{-i\delta_{cs}t}$, respectively. We can obtain

$$\begin{aligned} \Phi_a B_{a+} &= -ig(A_0^* A_{a+} + A_{a+}^* A_0 + C_0^* C_{a+} + C_{a+}^* C_0), \\ \Omega_a A_{a+} &= -igA_0(B_{a+} + B_{a+}^*) - iJC_{a+} + \varepsilon_{as}, \\ \Omega_a C_{a+} &= -igC_0(B_{a+} + B_{a+}^*) - iJA_{a+}, \end{aligned} \quad (\text{A2})$$

$$\begin{aligned} \Phi_c B_{c+} &= -ig(A_0^* A_{c+} + A_{c+}^* A_0 + C_0^* C_{c+} + C_{c+}^* C_0), \\ \Omega_c C_{c+} &= -igC_0(B_{c+} + B_{c+}^*) - iJA_{c+} + \varepsilon_{cs}, \\ \Omega_c A_{c+} &= -igA_0(B_{c+} + B_{c+}^*) - iJC_{c+}, \end{aligned} \quad (\text{A3})$$

where $\Phi_k = i(\omega_m - \delta_{ks}) + \gamma$ and $\Omega_k = i[\Delta + g(B_0 + B_0^*) - \delta_{ks}] + \kappa_t$, $k = a, c$.

References

- [1] R. L. Espinola, T. Izuhara, M. C. Tsai, R. M. Osgood Jr, and H. Dötsch, "Magneto-optical nonreciprocal phase shift in garnet/silicon-on-insulator waveguides," *Opt. Lett.* **29**, 941 (2004).
- [2] M. Levy, "Nanomagnetic route to bias-magnet-free on-chip faraday rotators," *J. Opt. Soc. Am. B* **22**, 254 (2005).
- [3] T. R. Zaman, X. Guo, and R. J. Ram, "Faraday rotation in an InP waveguide," *App. Phys. Lett.* **90**, 023514 (2007).

- [4] X. Guo, C. L. Zou, H. Jung, and H. X. Tang, “On-chip strong coupling and efficient frequency conversion between telecom and visible optical modes,” *Phys. Rev. Lett.* **117**, 123902 (2016).
- [5] C. Wang, C. Zhou, and Z. Li, “On-chip optical diode based on silicon photonic crystal heterojunctions,” *Opt. Express* **19**, 26948 (2011).
- [6] K. Xia, M. Alamri, and M. S. Zubairy, “Ultrabroadband nonreciprocal transverse energy flow of light in linear passive photonic circuits,” *Opt. Express* **21**, 25619 (2013).
- [7] Q. Wang, F. Xu, Z. Y. Yu, X. S. Qian, X. K. Hu, Y. Q. Lu, and H. T. Wang, “A bidirectional tunable optical diode based on periodically poled LiNbO₃,” *Opt. Express* **18**, 7340 (2010).
- [8] M. S. Kang, A. Butsch, and P. S. J. Russell, “Reconfigurable light-driven opto-acoustic isolators in photonic crystal fibre,” *Nat. Photonics* **5**, 549 (2011).
- [9] C. Eüter, K. G. Makris, R. El-Ganainy, D. N. Christodoulides, M. Segev, and D. Kip, “Observation of parity-time symmetry in optics,” *Nat. Phys.* **6**, 192 (2010).
- [10] H. Ramezani, T. Kottos, R. El-Ganainy, and D. N. Christodoulides, “Unidirectional nonlinear PT-symmetric optical structures,” *Phys. Rev. A* **82**, 043803 (2010).
- [11] L. Feng, M. Ayache, J. Q. Huang, Y. L. Xu, M. H. Lu, Y. F. Chen, Y. Fainman, and A. Scherer, “Nonreciprocal light propagation in a silicon photonic circuit,” *Science* **333**, 729 (2011).
- [12] J. H. Wu, M. Artoni, and G. C. La Rocca, “Non-Hermitian degeneracies and unidirectional reflectionless atomic lattices,” *Phys. Rev. Lett.* **113**, 123004 (2014).
- [13] X. W. Xu and Y. Li, “Optical nonreciprocity and optomechanical circulator in three-mode optomechanical systems,” *Phys. Rev. A* **91**, 053854 (2015).
- [14] L. Tian and Z. Li, “Nonreciprocal quantum-state conversion between microwave and optical photons,” *Phys. Rev. A* **96**, 013808 (2017).
- [15] S. Barzanjeh, M. Wulf, M. Peruzzo, M. Kalaei, P. B. Dieterle, O. Painter, and J. M. Fink, “Mechanical on-chip microwave circulator,” *Nat. Commun.* **8**, 953 (2017).
- [16] D. Malz, L. D. Tóth, N. R. Bernier, A. K. Feofanov, T. J. Kippenberg, and A. Nunnenkamp, “Quantum-limited directional amplifiers with optomechanics,” *Phys. Rev. Lett.* **120**, 023601 (2018).
- [17] X. Z. Zhang, L. Tian, and Y. Li, “Optomechanical transistor with mechanical gain,” *Phys. Rev. A* **97**, 043818 (2018).
- [18] S. Manipatruni, J. T. Robinson, and M. Lipson, “Optical nonreciprocity in optomechanical structures,” *Phys. Rev. Lett.* **102**, 213903 (2009).
- [19] M. Hafezi and P. Rabl, “Optomechanically induced nonreciprocity in microring resonators,” *Opt. Express* **20**, 7672 (2012).
- [20] A. Metelmann and A. A. Clerk, “Nonreciprocal photon transmission and amplification via reservoir engineering,” *Phys. Rev. X* **5**, 021025 (2015).
- [21] G. A. Peterson, F. Lecocq, K. Cicak, R. W. Simmonds, J. Aumentado, and J. D. Teufel, “Demonstration of efficient nonreciprocity in a microwave optomechanical circuit,” *Phys. Rev. X* **7**, 031001 (2017).
- [22] I. M. Mirza, W. Ge, and H. Jing, “On the optical nonreciprocity and slow light propagation in coupled spinning optomechanical resonators,” *arXiv:1810.03709* (2018).
- [23] R. Huang, A. Miranowicz, J. Q. Liao, F. Nori, and H. Jing, “Nonreciprocal Photon Blockade,” *Phys. Rev. Lett.* **121**, 153601 (2018).
- [24] X. W. Xu, Y. J. Zhao, H. Wang, H. Jing, and A. X. Chen, “Nonreciprocal photon blockade via quadratic optomechanical coupling,” *arXiv:1809.07596* (2018).
- [25] Q. Yang, B. P. Hou, and D. G. Lai, “Local modulation of double optomechanically induced transparency and amplification,” *Opt. Express* **25**, 9697 (2017).
- [26] C. W. Gardiner and M. J. Collett, “Input and output in damped quantum systems: Quantum stochastic differential equations and the master equation,” *Phys. Rev. A* **31**, 3761 (1985).
- [27] A. H. Safavi-Naeini, T. M. Alegre, J. Chan, M. Eichenfield, M. Winger, Q. Lin, and O. Painter, “Electromagnetically induced transparency and slow light with optomechanics,” *Nature(London)* **472**, 7341 (2011).
- [28] D. Vitali, S. Gigan, A. Ferreira, H. R. Böhm, P. Tombesi, A. Guerreiro, V. Vedral, A. Zeilinger, and M. Aspelmeyer, “Optomechanical entanglement between a movable mirror and a cavity field,” *Phys. Rev. Lett.* **98**, 030405 (2007).
- [29] T. Palomaki, J. Teufel, R. Simmonds, and K. Lehnert, “Entangling Mechanical Motion with Microwave Fields,” *Science* **342**, 710 (2013).
- [30] It should be point out that P_c cannot be zero, since the linearization demands a strong the pump fields. For the parameters here, we take $P_c = 100$ nW, and we have $C_0 \approx 28$.
- [31] J. M. Dobrindt, I. Wilson-Rae, and T. J. Kippenberg, “Parametric normal-mode splitting in cavity optomechanics,” *Phys. Rev. Lett.* **101**, 263602 (2008).