

Identifying Orbital Angular Momentum of Vectorial Vortices with Pancharatnam Phase and Stokes Parameters

Dengke Zhang, Xue Feng,* Kaiyu Cui, Fang Liu, and Yidong Huang
*Department of Electronic Engineering, Tsinghua National Laboratory for
 Information Science and Technology, Tsinghua University, Beijing 100084, China.*

In this work, an explicit formula is deduced for identifying the orbital angular moment (OAM) of vectorial vortex with space-variant state of polarization (SOP). Different to scalar vortex, the OAM of vectorial vortex can be attributed to two parts: the azimuthal gradient of Pancharatnam phase and the product of the azimuthal gradient of orientation angle of SOP and relevant solid angle on the Poincaré sphere. With our formula, a geometrical description for OAM of light beams can be achieved under the framework of the traditional Poincaré sphere. Numerical simulations for two types of vectorial vortices have been carried on to confirm our presented formula and demonstrate the geometrical description of OAM. Furthermore, the finding will pave the way for precise characterization of OAM charge of vectorial vortices.

I. INTRODUCTION

It is well known that light carries both linear and angular momenta while the angular momenta (AM) can be divided into spin angular momentum (SAM) and orbital angular momentum (OAM) [1–3]. Generally, in the paraxial approximation, it is believed that SAM and OAM are associated with polarization and spatial profile of the light fields, respectively [4]. As explicated by Allen *et al.* in 1992 [5], a scalar vortex field with wavefront of $\exp(-il\phi)$ holds discrete OAM of lh per photon, where l is the topological charge. Thus, for scalar vortices, the topological charge is directly related to the OAM of light beam. However, for vectorial vortex fields, even in the paraxial approximation, only the helical wavefront is insufficient to characterize OAM just by utilizing topological charge while the state of polarization (SOP) of light field should also be taken into account [6, 7]. As demonstrated by Wang *et al.* in 2010 [8], besides the azimuthal phase gradient, the OAM also can be generated from the curl of polarization in a vectorial vortex field. Meanwhile, Hasman *et al.* declared that there is a link between OAM and geometric phase induced by space-variant SOP of light fields [9–11]. But so far, the explicit relation between OAM and phase distribution in vectorial vortex fields is still veiled.

In this work, we found that, for vectorial vortex, the OAM can be attributed to two parts: the azimuthal gradient of Pancharatnam phase and the product of the azimuthal gradient of orientation angle of SOP and the related solid angle on the Poincaré sphere. Numerical simulations have been carried on vectorial vortices generated by superposition of two scalar vortex fields and phased array antenna, and both of them have confirmed such relation. Further, since our deduced formula of OAM charge is expressed with normal Stokes parameters, the traditional Poincaré sphere can be utilized to fully characterize both the SAM and OAM. It indicates that geo-

metrical description and characterization of OAM can be achieved by adopting the basic Poincaré sphere, which is different to the previous reports based on multiple high-order Poincaré spheres [12–14]. On the other hand, as measuring Stokes parameters is a standard measurement of polarization state, it can be expected that such formula could provide an effective and accurate method for identifying the OAM charge, which is very urgent in practical application of OAM beams [15–20]. Meanwhile, because of the explicit expression between OAM and SOP, we believe that this work would provide a new sight of studies on the vectorial vortices, spin-orbit interaction, and such related fields [21–26].

II. THEORETICAL DESCRIPTION

Under the paraxial approximation, the electric field of a fully polarized vectorial vortex beam with angular frequency ω propagating along z direction in free space can be written as [27]

$$\vec{E}(x, y) = i\omega \left(\alpha \hat{x} + \beta \hat{y} + \frac{i}{k} \left(\frac{\partial \alpha}{\partial x} + \frac{\partial \beta}{\partial y} \right) \hat{z} \right) e^{ikz}, \quad (1)$$

where α and β represent the complex amplitude of x - and y -component of electric field, respectively. Obviously, such a vectorial vortex beam has space-variant SOP and its z -component of angular momentum density can be calculated and divided into spin and orbital parts in cylindrical coordinate system as

$$j_z^{\text{spin}} = i\omega\epsilon_0 r \frac{\partial}{\partial r} (\alpha^* \beta - \beta^* \alpha), \quad (2)$$

$$j_z^{\text{orbit}} = i\frac{\omega\epsilon_0}{2} \left(\alpha \frac{\partial}{\partial \phi} \alpha^* + \beta \frac{\partial}{\partial \phi} \beta^* - \alpha^* \frac{\partial}{\partial \phi} \alpha - \beta^* \frac{\partial}{\partial \phi} \beta \right), \quad (3)$$

As demonstrated in Ref. [12], an effective tool for studying SOP of light is the Poincaré sphere with Stokes parameters. Here, Stokes parameters and the Poincaré

* x-feng@tsinghua.edu.cn

sphere are also introduced to deduce the relation between OAM and SOP. In equations (2) and (3), the complex amplitudes of α and β can be written as $A_{x(y)}(x, y)e^{-i\delta_{x(y)}(x, y)}$, where $A_{x(y)}$ and $\delta_{x(y)}$ are amplitude and phase (both are real numbers), respectively. Then, the Stokes parameters would be defined as [28]

$$\begin{aligned} S_0 &= \tilde{A}_x^2 + \tilde{A}_y^2 \\ S_1 &= \tilde{A}_x^2 - \tilde{A}_y^2 \\ S_2 &= 2\tilde{A}_x\tilde{A}_y \cos \delta_s \\ S_3 &= 2\tilde{A}_x\tilde{A}_y \sin \delta_s \end{aligned} \quad (4)$$

where $\tilde{A}_{x(y)} = A_{x(y)}/\sqrt{I_E}$ are normalized to the electric intensity of $I_E = A_x^2 + A_y^2$ and $\delta_s = \delta_y - \delta_x$ is the phase difference between x - and y -components. Then using S_1 , S_2 , and S_3 as the sphere's Cartesian coordinates, the Poincaré sphere is constructed and its corresponding orientation angle ψ_S of SOP on the Poincaré sphere can be resolved by

$$\tan(2\psi_S) = S_2/S_1. \quad (5)$$

With the ratio of angular momentum to energy examined by Allen [29], the average SAM charge and OAM charge of a vortex beam can be calculated. The SAM charge can be solved by calculating the SAM density with S_3 , which directly represents the polarization degree [28]. While for OAM charge, there is no explicit connection with Stokes parameters. According to the feature of space-variant SOP in vectorial vortex fields, Pancharatnam phase is adopted to reveal the phase distribution for a vectorial vortex beam as shown in Ref. [11]. The reason is that the Pancharatnam phase can well describe the phase difference of lights with different SOP and the OAM is a quantity related to the phase distribution of lights. As described in Ref. [30], Pancharatnam phase is defined as $\psi_P = \arg(\langle \Phi_A | \Phi_B \rangle)$ between two different SOPs of $|\Phi_A\rangle$ and $|\Phi_B\rangle$. Based on mode expansion theory, any optical beam can be expanded by right and left circularly polarized light, which are written as $|\Phi_{R(L)}\rangle = (\hat{x} \pm i\hat{y})/\sqrt{2}$. For the same reason, in the paper, the right or the left circularly polarized field is set as a reference field. Then the Pancharatnam phase of the investigated vectorial vortex field $|\Phi_E\rangle = \alpha\hat{x} + \beta\hat{y}$ (defined by equation (1)) to the reference field is given by

$$\psi_{PR(L)} = \arg(\langle \Phi_{R(L)} | \Phi_E \rangle). \quad (6)$$

After some derivations (detailed in Appendix A), by applying the orientation angle ψ_S of SOP on the Poincaré sphere and the Pancharatnam phase $\psi_{PR(L)}$ defined by equations (5) and (6), the average OAM charge can be resolved as

$$l = \frac{\iint I_E \left(-S_0 \frac{\partial \psi_{PR(L)}}{\partial \phi} \mp (S_0 \pm S_3) \frac{\partial \psi_S}{\partial \phi} \right) r dr d\phi}{\iint I_E S_0 r dr d\phi}. \quad (7)$$

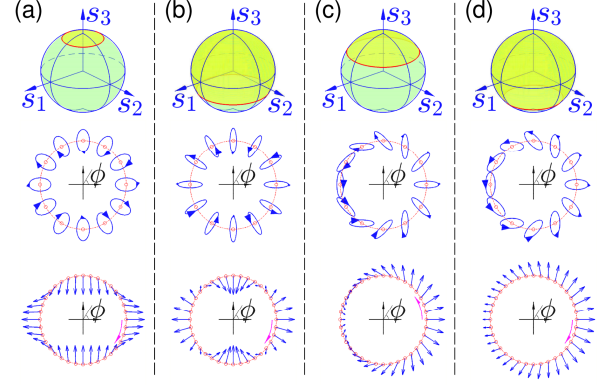


Figure 1. **SOP distributions.** Four vector beams with azimuthal variant state of polarization (SOP) generated with equation (8) are shown in four row panels, corresponding to (a-d). In each panel, different sketches of SOP trace on the Poincaré sphere marked by red line, SOP distribution in space and snap picture of SOP are demonstrated in order. Associated parameters in equation (8) for field generation are (a) $\{l_L, l_R\} = \{1, 3\}$, $\theta = 30^\circ$, (b) $\{l_L, l_R\} = \{1, 3\}$, $\theta = 120^\circ$, (c) $\{l_L, l_R\} = \{-2, 1\}$, $\theta = 60^\circ$, and (d) $\{l_L, l_R\} = \{-2, 1\}$, $\theta = 135^\circ$, respectively.

In bracket of numerator of equation (7), the first term is the derivative of spiral spatial phase, which is the topological Pancharatnam charge similar to definition in Ref. [11], and could be understood as the counterpart of topological charge in scalar vortex fields. The second term is related to the variation of SOP in space, which could be analyzed with Poincaré sphere. To illustrate the physical interpretations and applicable scope of equation (7), in the following section, two cases are demonstrated, where vectorial vortices are generated by superposition of two scalar vortex fields and phased array antenna.

III. SIMULATION RESULTS

Superposition of two scalar vortex fields. For general vector beams, such as radially and azimuthally polarized light, the field can be generated according to [31]

$$\begin{aligned} |\Phi_E\rangle &= \frac{1}{\sqrt{2}} \cos\left(\frac{\theta}{2}\right) (\hat{x} - i\hat{y})e^{-il_L\phi} \\ &\quad + \frac{1}{\sqrt{2}} \sin\left(\frac{\theta}{2}\right) (\hat{x} + i\hat{y})e^{-il_R\phi}, \end{aligned} \quad (8)$$

where θ is zenith angle in spherical coordinate (the Poincaré sphere), and the set $\{l_L, l_R\}$ is topological charge of field components with left and right circular polarization respectively. For a fully polarized light ($S_0 = 1$), there is a relation of $\Omega_{R(L)} = 2\pi(S_0 \pm S_3)$, where $\Omega_{R(L)}$ is the solid angle formed by the swept surface area of SOP revolving around the south (north) pole on the

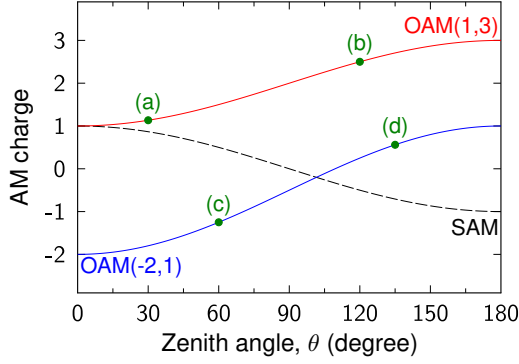


Figure 2. **Charges of vector beams generated by superposition of scalar vortices.** The calculated OAM charge for the vector beams generated with equation (8) of $\{l_L, l_R\} = \{1, 3\}$ and $\{-2, 1\}$ at different zenith angle in spherical coordinate (the Poincaré sphere). Green dots of OAM charges are calculated with our formula, which are corresponding to cases shown in Fig. 1(a-d), respectively. Solid lines are calculated by mode expansion method according to equation (8).

Poincaré sphere. Thus, equation (7) can be rewritten as

$$l = \frac{\iint \left(-\frac{\partial \psi_{PR(L)}}{\partial \phi} \mp \frac{\partial \psi_S}{\partial \phi} \frac{\Omega_{R(L)}}{2\pi} \right) r dr d\phi}{\iint r dr d\phi}. \quad (9)$$

With field expression in equation (8), azimuthal gradients of the Pancharatnam phase and the orientation angle could be analytically expressed as (see Appendix B)

$$\frac{\partial \psi_{PR(L)}}{\partial \phi} = -l_{R(L)}, \quad (10)$$

$$\frac{\partial \psi_S}{\partial \phi} = -\frac{l_L - l_R}{2}. \quad (11)$$

Thus, substituting equations (10) and (11) into equation (9), the OAM charge then read

$$l = l_{R(L)} \pm \frac{(l_L - l_R)}{2} \frac{\Omega_{R(L)}}{2\pi}. \quad (12)$$

In the right side of equation (12), the first term corresponds to the topological Pancharatnam charge (l_{TPC}), which is referenced to right or left circularly polarized field and just equal to $l_{R(L)}$ in this case. The second term is the SOP-related charge, which is the product of the azimuthal gradient of orientation angle of SOP and the related solid angle on the Poincaré sphere. For more clarity, some simulations have been carried on four fields generated with equation (8) and the results are shown in Fig. 1.

Figure 1(a-d) are the calculated results while the parameters are set as $\{l_L, l_R\} = \{1, 3\}$ with $\theta = 30^\circ, 120^\circ$ and $\{l_L, l_R\} = \{-2, 1\}$ with $\theta = 60^\circ, 135^\circ$. For each row panel, there are three parts in order: SOP trace on

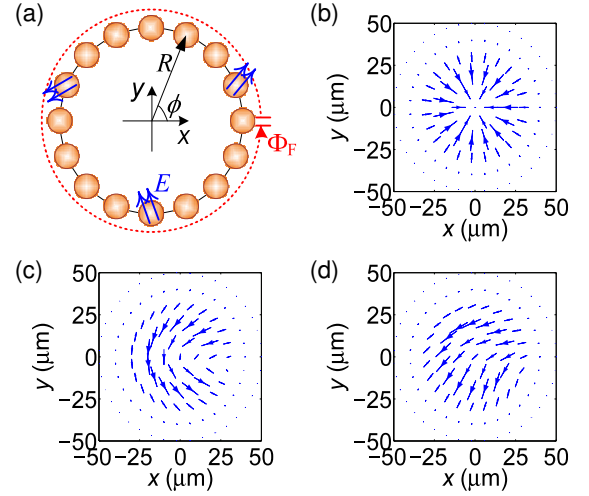


Figure 3. **Vectorial vortices generated with PAA.** (a) Schematic of the considered phased array antenna (PAA), which consists of 16 units. Each unit emits linearly polarized Gaussian beam and the polarization direction and initial phase can be set. With PAA, varied vectorial vortex beams can be generated, (b) state of polarization (SOP) makes two revolutions at latitude on the Poincaré sphere (radially polarized vectorial beam), (c) SOP makes one revolution (L-line vortex), and (d) SOP makes half revolution.

Poincaré sphere marked by red line, SOP distribution in space, and a SOP snap in space. In Fig. 2, calculated results of OAM charges are shown as the green dots, which are calculated by equation (12) for the four cases shown in Fig. 1(a-d). For comparison, the OAM charges are also calculated by mode expansion method according to equation (8) and shown as solid lines in Fig. 2. For the cases shown in Fig. 1(a) and 1(b), the left circularly polarized fields (north pole on the Poincaré sphere) is selected as the reference field and swept surface areas are also shown with yellow zone. While for Fig. 1(c) and 1(d), right circularly polarized field (south pole on the Poincaré sphere) is selected as the reference. In Fig. 2, all the calculated results with our formula are in good agreement with those calculated by mode expansion method. From the results shown in Figs. 1 and 2, a clear relation of OAM charge versus the Pancharatnam phase, orientation angle of SOP, and the related solid angle on the Poincaré sphere is presented. Furthermore, with our formula, a geometrical description of OAM can be obtained by utilizing a basic Poincaré sphere, as shown in Fig. 1.

Phased array antenna. Recently, more and more attentions have been focused on the generation of OAM beams with phased array antenna (PAA) in RF, microwave, and lightwave region [32–35]. To model such process, some simulations are also carried on an annular PAA with antenna unit of linearly polarized Gaussian beam as schematically shown in Fig. 3(a). In the simulations, the optical communication wavelength of 1550 nm is adopted. For each Gaussian beam, the waist size is

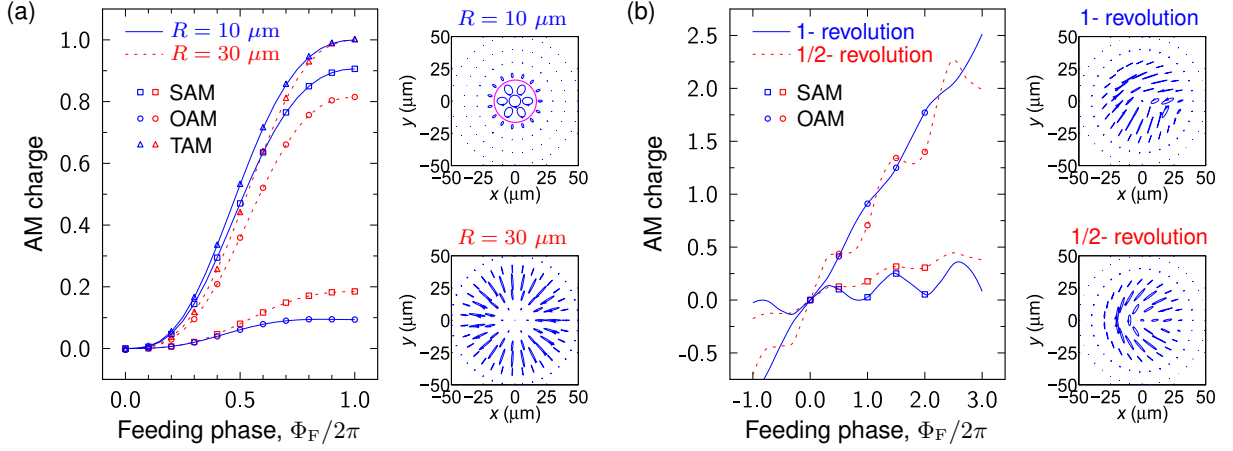


Figure 4. **Charges of vectorial vortices generated by PAA.** Calculated angular momentum (AM) charges of (a) the vortex beam shown in Fig. 3(b) at different feeding phase of two different PAA radius of 10 and 30 μm , and (b) the vortex beam shown in Fig. 3(c) and 3(d) at different feeding phase of fixed PAA radius of 20 μm . In the figures, lines are calculated by Barnett's method and symbols are calculated by our formula for OAM and Stoke parameter of S_3 for SAM. Right-side insets also show the corresponding SOP distribution at feed phase of 2π .

8 μm and polarization direction is azimuthal-dependent. The unit number is 16 and radius (R) of annular PAA, which is defined by the distance between the PAA center and each unit center as marked in Fig. 3(a), can be adjusted. These parameters ensure that the generated beam satisfies the paraxial approximation, thus Barnett's method [3] can be utilized as a reference with the results calculated by equation (7). As demonstrated in Ref. [33], the AM charges of the generated beam can be tuned by varying the phase difference between adjacent units. In our simulation, the adjacent phase differences are uniform and the whole feeding phase of a circle (Φ_F) is used to describe the setting phase of PAA. With such a structure, various vortex beams can be generated, such as radially or azimuthally polarized vector beams, L-line vortex beams [36], and so on.

Figure 3(b) shows a radially polarized vectorial beam, where SOP makes two revolutions at latitude on the Poincaré sphere for a circle in the space. Corresponding AM charges are calculated by both Barnett's method and our formula, which are shown as lines and dots in Fig. 4(a), respectively. Two cases with different PAA radius of 10 and 30 μm are also considered under the varied feeding phase, both methods give consistent OAM charge. Furthermore, Fig. 3(c) and 3(d) display another two types of vortex beams, where SOP makes one and half revolution at latitude on the Poincaré sphere for a circle in the space, respectively. For a fixed PAA radius of 20 μm , the OAM charges at different feeding phase are also calculated and presented in Fig. 4(b), and again, they are also in a very good agreement. These results indicate that the calculations for OAM charge with equation (7) can be applied on not only general vector beams but also complex vortex beams under the paraxial approximation, which can be explained by the principle of

superposition with basis beams [37].

IV. DISCUSSION

It should be noticed that, for most general vector beam shown in Fig. 3(b), the feeding phase are transferred to both OAM and SAM (see Fig. 4(a)), which is quite different to the scalar vortex beam. For a scalar vortex beam, the feeding phase Φ_F would be fully transferred to OAM. Even for the cases of $\Phi_F = 2N\pi$ (N is any integer number), the number of N will be the value of total angular momentum (TAM) charge of generated beam, while not the OAM charge (recently, a similar report was presented in Ref. [38]). The reason is that some feeding phase is transferred to SAM in the central zone of vortex as shown with magenta circle in right-side inset of Fig. 4(a) and meanwhile the reduction of solid angle of swept area on Poincaré sphere would suppress the transformation of OAM from feeding phase. Fortunately, through a carefully designed PAA, the proportion of OAM charge can be varied by reducing power proportion of field around vortex center. For the same reason of partial OAM induced by azimuthal gradient of SOP-related phase, the detection of OAM charge will be different with that for scalar vortex by only detecting phase angle of wavefront. Thus, to characterize OAM charge of vectorial vortices, new method is required. Here, we predict that such detection can be achieved by traditional measurement of Stokes parameters according to equation (7).

In equation (7), we introduce a reference field to calculate the OAM charge of vortices. In this paper, only special reference field, SOP of right- or left-handed circular polarization, was adopted. However, this does not mean that a general reference field would induce an incor-

rect calculation result of OAM charge. To demonstrate this fact, a series of simulation were carried out to make a contrast, which is explained in detail in Appendix C. Although the selection of reference field do not affect the result of OAM charge, right or left circularly polarized field is a normal choice in the measurement of Stokes parameters and can be induced a simple and elegant expression of OAM charge as equation (7).

In summary, for paraxial vectorial vortex beams propagating in free space, it is deduced that the OAM charge is not only related with the topological Pancharatnam charge but also the SOP-related charge induced by space-variant state of polarization (SOP). Based on such a connection, OAM also can be fully represented by the fundamental Poincaré sphere. And we predict that the de-

tection of OAM charge can be achieved by testing Stokes parameters, which is a standard test of polarization measurement for antennas. Moreover, because of the explicit relation with SOP, we believe that this work would give some new insights for studies on vectorial vortices, spin-orbit interaction, photonic topological insulators, and so on.

Acknowledgements. This work was supported by the National Basic Research Program of China (Grant No. 2011CBA00608), the National Natural Science Foundation of China (Grant No. 61307068 and 61321004) and by the Opened Fund of the State Key Laboratory on Integrated Optoelectronics, China. No. IOSKL2013KF09. The authors would like to thank Dr. Yu Wang, Mr. Peng Zhao and Dr. Wei Zhang for their valuable discussions and helpful comments.

-
- [1] M. Padgett, J. Courtial, and L. Allen, *Phys. Today* **57**, 35 (2004).
 - [2] S. Franke-Arnold, L. Allen, and M. Padgett, *Laser Photonics Rev.* **2**, 299 (2008).
 - [3] S. Barnett, *J. Opt. B Quan. Semiclass. Opt.* **4**, S7 (2002).
 - [4] A. M. Yao and M. J. Padgett, *Adv. Opt. Photon.* **3**, 161 (2011).
 - [5] L. Allen, M. Beijersbergen, R. Spreeuw, and J. Woerdman, *Phys. Rev. A* **45**, 8185 (1992).
 - [6] R. Zambrini and S. M. Barnett, *Opt. Express* **15**, 15214 (2007).
 - [7] I. Freund, A. I. Mokhun, M. S. Soskin, O. V. Angelsky, and I. I. Mokhun, *Opt. Lett.* **27**, 545 (2002).
 - [8] X.-L. Wang, J. Chen, Y. Li, J. Ding, C.-S. Guo, and H.-T. Wang, *Phys. Rev. Lett.* **105**, 253602 (2010).
 - [9] Z. Bomzon, G. Biener, V. Kleiner, and E. Hasman, *Opt. Lett.* **27**, 1141 (2002).
 - [10] Z. Bomzon, G. Biener, V. Kleiner, and E. Hasman, *Opt. Lett.* **27**, 285 (2002).
 - [11] A. Niv, G. Biener, V. Kleiner, and E. Hasman, *Opt. Express* **14**, 4208 (2006).
 - [12] G. Milione, S. Evans, D. A. Nolan, and R. R. Alfano, *Phys. Rev. Lett.* **108**, 190401 (2012).
 - [13] G. Milione, H. I. Sztul, D. A. Nolan, and R. R. Alfano, *Phys. Rev. Lett.* **107**, 053601 (2011).
 - [14] M. J. Padgett and J. Courtial, *Opt. Lett.* **24**, 430 (1999).
 - [15] F. Tamburini, E. Mari, A. Sponselli, B. Thidé, A. Bianchini, and F. Romanato, *New J. Phys.* **14**, 033001 (2012).
 - [16] J. Wang, J.-Y. Yang, I. M. Fazal, N. Ahmed, Y. Yan, H. Huang, Y. Ren, Y. Yue, S. Dolinar, M. Tur, and A. E. Willner, *Nat. Photonics* **6**, 488 (2012).
 - [17] A. Nicolas, L. Veissier, L. Giner, E. Giacobino, D. Maxein, and J. Laurat, *Nat. Photonics* **8**, 234 (2014).
 - [18] A. Dudley, G. Milione, R. R. Alfano, and A. Forbes, *Opt. Express* **22**, 14031 (2014).
 - [19] G. Milione, M. P. J. Lavery, H. Huang, Y. Ren, G. Xie, T. A. Nguyen, E. Karimi, L. Marrucci, D. A. Nolan, R. R. Alfano, and A. E. Willner, *Opt. Lett.* **40**, 1980 (2015).
 - [20] G. Milione, A. Dudley, T. A. Nguyen, O. Chakraborty, E. Karimi, A. Forbes, and R. R. Alfano, *J. Opt.* **17**, 035617 (2015).
 - [21] E. Galvez, P. Crawford, H. Sztul, M. Pysher, P. Haglin, and R. Williams, *Phys. Rev. Lett.* **90**, 203901 (2003).
 - [22] K. Bliokh, *Phys. Rev. Lett.* **97**, 043901 (2006).
 - [23] A. Aiello, N. Lindlein, C. Marquardt, and G. Leuchs, *Phys. Rev. Lett.* **103**, 100401 (2009).
 - [24] K. Bliokh, Y. Gorodetski, V. Kleiner, and E. Hasman, *Phys. Rev. Lett.* **101**, 030404 (2008).
 - [25] E. Karimi, S. Slussarenko, B. Piccirillo, L. Marrucci, and E. Santamato, *Phys. Rev. A* **81**, 053813 (2010).
 - [26] K. Y. Bliokh, A. Niv, V. Kleiner, and E. Hasman, *Nat. Photonics* **2**, 748 (2008).
 - [27] J. P. Torres and L. Torner, *Twisted Photons: Applications of Light with Orbital Angular Momentum* (John Wiley & Sons, 2011).
 - [28] M. Born and E. Wolf, *Principles of optics: electromagnetic theory of propagation, interference and diffraction of light* (CUP Archive, 1999).
 - [29] L. Allen and M. J. Padgett, *Opt. Commun.* **184**, 67 (2000).
 - [30] M. Berry, *J. Mod. Opt.* **34**, 1401 (1987).
 - [31] C. Maurer, A. Jesacher, S. Fürhapter, S. Bernet, and M. Ritsch-Marte, *New J. Phys.* **9**, 78 (2007).
 - [32] S. Mohammadi, L. Daldorff, J. Bergman, R. Karlsson, B. Thidé, K. Forozesh, T. Carozzi, and B. Isham, *IEEE Trans. Antennas Propag.* **58**, 565 (2010).
 - [33] D. Zhang, X. Feng, and Y. Huang, *Opt. Express* **20**, 26986 (2012).
 - [34] X. Cai, J. Wang, M. Strain, B. Johnson-Morris, J. Zhu, M. Sorel, J. O'Brien, M. Thompson, and S. Yu, *Science* **338**, 363 (2012).
 - [35] G. Milione, H. I. Sztul, D. A. Nolan, J. Kim, M. Etienne, J. McCarthy, J. Wang, and R. R. Alfano, in *CLEO: Science and Innovations* (OSA, 2011) p. CTuB2.
 - [36] J. F. Nye, *Proc. R. Soc. Lond. A* **389**, 279 (1983).
 - [37] J. B. Götte, K. O'Holleran, D. Preece, F. Flossmann, S. Franke-Arnold, S. M. Barnett, and M. J. Padgett, *Opt. Express* **16**, 993 (2008).
 - [38] J. Zhu, Y. Chen, Y. Zhang, X. Cai, and S. Yu, *Opt. Lett.* **39**, 4435 (2014).
-

APPENDIX A: RELATION OF ORBITAL ANGULAR MOMENTUM, PANCHARATNAM PHASE, AND STOKES PARAMETERS

Under the paraxial approximation, the electric and magnetic fields of a fully polarized vectorial vortex beam of angular frequency ω propagating along z direction can be written as [27]

$$\vec{E}(x, y) = i\omega \left(\alpha \hat{x} + \beta \hat{y} + \frac{i}{k} \left(\frac{\partial \alpha}{\partial x} + \frac{\partial \beta}{\partial y} \right) \hat{z} \right) e^{ikz}, \quad (\text{A1a})$$

$$\vec{B}(x, y) = ik \left(-\beta \hat{x} + \alpha \hat{y} + \frac{i}{k} \left(-\frac{\partial \beta}{\partial x} + \frac{\partial \alpha}{\partial y} \right) \hat{z} \right) e^{ikz}, \quad (\text{A1b})$$

where α and β represent the complex amplitude of x - and y -component of electric field. They can be written as

$$\alpha(x, y) = A_x(x, y) e^{-i\delta_x(x, y)}, \quad (\text{A2a})$$

$$\beta(x, y) = A_y(x, y) e^{-i\delta_y(x, y)}, \quad (\text{A2b})$$

where $A_{x(y)}$ and $\delta_{x(y)}$ are real numbers and represent amplitude and phase, respectively. Thus, Stokes parameters are defined by [28]

$$\begin{aligned} S_0(x, y) &= \tilde{A}_x^2 + \tilde{A}_y^2, \\ S_1(x, y) &= \tilde{A}_x^2 - \tilde{A}_y^2, \\ S_2(x, y) &= 2\tilde{A}_x \tilde{A}_y \cos \delta_s, \\ S_3(x, y) &= 2\tilde{A}_x \tilde{A}_y \sin \delta_s \end{aligned} \quad (\text{A3})$$

where $\tilde{A}_{x(y)} = A_{x(y)}/\sqrt{I_E}$ are normalized electric field components with electric intensity of $I_E = A_x^2 + A_y^2$ and $\delta_s = \delta_y - \delta_x$ the phase difference between x and y electric field components. Then using S_1 , S_2 , and S_3 as the sphere's Cartesian coordinates, the Poincaré sphere is constructed and the corresponding spherical angles ($2\psi_S, 2\chi_S$) are resolved by [28]

$$\tan(2\psi_S) = S_2/S_1, \quad (\text{A4a})$$

$$\sin(2\chi_S) = S_3/S_0, \quad (\text{A4b})$$

The linear momentum density, which is defined as $\vec{p} = \varepsilon_0 \vec{E} \times \vec{B}$, can be written and divided into transverse and longitudinal components

$$\vec{p}_\perp = i \frac{\omega \varepsilon_0}{2} [(\alpha \nabla \alpha^* + \beta \nabla \beta^* - \alpha^* \nabla \alpha - \beta^* \nabla \beta) + 2 \nabla \times ((\alpha^* \beta - \beta^* \alpha) \hat{z})], \quad (\text{A5a})$$

$$p_z = \omega k \varepsilon_0 (|\alpha|^2 + |\beta|^2) = \omega k \varepsilon_0 I_E S_0. \quad (\text{A5b})$$

Meanwhile, the energy density of such a beam is

$$w = cp_z = \varepsilon_0 \omega^2 (|\alpha|^2 + |\beta|^2) = \varepsilon_0 \omega^2 I_E S_0. \quad (\text{A6})$$

Then, the cross product of line momentum density with $\vec{r}$ (radius vector) gives the angular momentum density, and z -component of angular momentum density is

$$\begin{aligned} j_z &= (\vec{r} \times \vec{p})_z = r p_\phi \\ &= i \frac{\omega \varepsilon_0}{2} \left[\left(\alpha \frac{\partial}{\partial \phi} \alpha^* + \beta \frac{\partial}{\partial \phi} \beta^* - \alpha^* \frac{\partial}{\partial \phi} \alpha - \beta^* \frac{\partial}{\partial \phi} \beta \right) + 2r \frac{\partial}{\partial r} (\alpha^* \beta - \beta^* \alpha) \right]. \end{aligned} \quad (\text{A7})$$

Further, j_z can be divided into spin and orbital parts as

$$j_z^{\text{spin}} = i\omega\varepsilon_0 r \frac{\partial}{\partial r} (\alpha^* \beta - \beta^* \alpha) = \omega\varepsilon_0 r \frac{\partial (I_E S_3)}{\partial r}, \quad (\text{A8a})$$

$$\begin{aligned} j_z^{\text{orbit}} &= i \frac{\omega\varepsilon_0}{2} \left(\alpha \frac{\partial}{\partial \phi} \alpha^* + \beta \frac{\partial}{\partial \phi} \beta^* - \alpha^* \frac{\partial}{\partial \phi} \alpha - \beta^* \frac{\partial}{\partial \phi} \beta \right) \\ &= \omega\varepsilon_0 I_E \left(\tilde{A}_x^2 \frac{\partial \delta_x}{\partial \phi} + \tilde{A}_y^2 \frac{\partial \delta_y}{\partial \phi} \right). \end{aligned} \quad (\text{A8b})$$

With the ratio of angular momentum over energy that is examined by Allen [29], the average SAM charge and OAM charge can be calculated as

$$s = \omega \frac{\iint j_z^{\text{spin}} r dr d\phi}{\iint \omega r dr d\phi} = \frac{\iint I_E S_3 r dr d\phi}{\iint I_E S_0 r dr d\phi}, \quad (\text{A9a})$$

$$l = \omega \frac{\iint j_z^{\text{orbit}} r dr d\phi}{\iint \omega r dr d\phi} = \frac{\iint I_E \left(\tilde{A}_x^2 \frac{\partial \delta_x}{\partial \phi} + \tilde{A}_y^2 \frac{\partial \delta_y}{\partial \phi} \right) r dr d\phi}{\iint I_E S_0 r dr d\phi}. \quad (\text{A9b})$$

Then, introducing Pancharatnam phase for two different SOPs of $|\Phi_A\rangle$ and $|\Phi_B\rangle$, which is defined by [30]

$$\psi_P = \arg(\langle \Phi_A | \Phi_B \rangle). \quad (\text{A10})$$

Here, using right or left circularly polarized field as reference field, the Pancharatnam phase of any field $|\Phi_E\rangle = \alpha\hat{x} + \beta\hat{y}$ can be written as

$$\psi_{\text{PR(L)}} = \arg(\langle \Phi_{\text{R(L)}} | \Phi_E \rangle). \quad (\text{A11})$$

Then we can obtain

$$\tan \psi_{\text{PR(L)}} = \frac{\tilde{A}_y \cos \delta_y \pm \tilde{A}_x \sin \delta_x}{\tilde{A}_y \sin \delta_y \mp \tilde{A}_x \cos \delta_x}. \quad (\text{A12})$$

Further, we can deduce the azimuthal gradient of the Pancharatnam phase as

$$\frac{\partial \psi_{\text{PR}}}{\partial \phi} = \frac{-\cos \delta_s}{S_0 - S_3} \left(\tilde{A}_x \frac{\partial \tilde{A}_y}{\partial \phi} - \tilde{A}_y \frac{\partial \tilde{A}_x}{\partial \phi} \right) + \frac{S_3}{2(S_0 - S_3)} \left(\frac{\partial \delta_x}{\partial \phi} + \frac{\partial \delta_y}{\partial \phi} \right) - \frac{1}{S_0 - S_3} \left(\tilde{A}_x^2 \frac{\partial \delta_x}{\partial \phi} + \tilde{A}_y^2 \frac{\partial \delta_y}{\partial \phi} \right), \quad (\text{A13a})$$

$$\frac{\partial \psi_{\text{PL}}}{\partial \phi} = \frac{\cos \delta_s}{S_0 + S_3} \left(\tilde{A}_x \frac{\partial \tilde{A}_y}{\partial \phi} - \tilde{A}_y \frac{\partial \tilde{A}_x}{\partial \phi} \right) - \frac{S_3}{2(S_0 + S_3)} \left(\frac{\partial \delta_x}{\partial \phi} + \frac{\partial \delta_y}{\partial \phi} \right) - \frac{1}{S_0 + S_3} \left(\tilde{A}_x^2 \frac{\partial \delta_x}{\partial \phi} + \tilde{A}_y^2 \frac{\partial \delta_y}{\partial \phi} \right). \quad (\text{A13b})$$

On the other hand, using equations (A4a) and (A3), we can obtain

$$\frac{\partial \psi_S}{\partial \phi} = \frac{S_0 \cos \delta_s}{S_0^2 - S_3^2} \left(\tilde{A}_x \frac{\partial \tilde{A}_y}{\partial \phi} - \tilde{A}_y \frac{\partial \tilde{A}_x}{\partial \phi} \right) - \frac{S_1 S_3}{2(S_0^2 - S_3^2)} \left(\frac{\partial \delta_y}{\partial \phi} - \frac{\partial \delta_x}{\partial \phi} \right). \quad (\text{A14})$$

With relation of

$$S_0 \left(\frac{\partial \delta_x}{\partial \phi} + \frac{\partial \delta_y}{\partial \phi} \right) - S_1 \left(\frac{\partial \delta_y}{\partial \phi} - \frac{\partial \delta_x}{\partial \phi} \right) = 2 \left(\tilde{A}_x^2 \frac{\partial \delta_x}{\partial \phi} + \tilde{A}_y^2 \frac{\partial \delta_y}{\partial \phi} \right)$$

and equations (A13a), (A13b), and (A14), the following equations are obtained

$$S_0 \frac{\partial \psi_{\text{PR}}}{\partial \phi} = -(S_0 + S_3) \frac{\partial \psi_S}{\partial \phi} - \left(\tilde{A}_x^2 \frac{\partial \delta_x}{\partial \phi} + \tilde{A}_y^2 \frac{\partial \delta_y}{\partial \phi} \right), \quad (\text{A15a})$$

$$S_0 \frac{\partial \psi_{\text{PL}}}{\partial \phi} = (S_0 - S_3) \frac{\partial \psi_S}{\partial \phi} - \left(\tilde{A}_x^2 \frac{\partial \delta_x}{\partial \phi} + \tilde{A}_y^2 \frac{\partial \delta_y}{\partial \phi} \right). \quad (\text{A15b})$$

Through further derivation with equations (A15a) and (A15b), we can finally obtain

$$\tilde{A}_x^2 \frac{\partial \delta_x}{\partial \phi} + \tilde{A}_y^2 \frac{\partial \delta_y}{\partial \phi} = -S_0 \frac{\partial \psi_{\text{PR(L)}}}{\partial \phi} \mp (S_0 \pm S_3) \frac{\partial \psi_S}{\partial \phi}. \quad (\text{A16})$$

Then, substituting equation (A16) into equation (A9b), we can solve the OAM charge. In equation (A16), the first term is the derivative of $\psi_{\text{PR(L)}}$ known as the topological Pancharatnam charge, and the second term is the SOP-related charge.

APPENDIX B: OAM CHARGE OF VECTOR BEAMS GENERATED BY TWO SCALAR VORTEX BEAMS

General vector beam can be generated by mode expansion as [31]

$$|\Phi_E\rangle = \frac{1}{\sqrt{2}} \cos\left(\frac{\theta}{2}\right) (\hat{x} - i\hat{y}) e^{-il_L\phi} + \frac{1}{\sqrt{2}} \sin\left(\frac{\theta}{2}\right) (\hat{x} + i\hat{y}) e^{-il_R\phi - i\varphi_0}. \quad (\text{A17})$$

Thus, with equation (A11), we can obtain

$$\frac{\partial \psi_{\text{PR(L)}}}{\partial \phi} = -l_{\text{R(L)}}. \quad (\text{A18})$$

Further, the Stokes parameters can be deduced

$$\begin{aligned} S_1 &= \sin \theta \cos(-(l_L - l_R)\phi - \varphi_0), \\ S_2 &= \sin \theta \sin(-(l_L - l_R)\phi - \varphi_0). \end{aligned} \quad (\text{A19})$$

Thus, with equations (A4a) and (A3), we obtain

$$\psi_S = -((l_L - l_R)\phi + \varphi_0)/2. \quad (\text{A20})$$

Then,

$$\frac{\partial \psi_S}{\partial \phi} = -(l_L - l_R)/2. \quad (\text{A21})$$

Substituting equations (A18) and (A21) into equations (A9b) and (A16), the OAM charge can be written as

$$l = l_R + \frac{(l_L - l_R)}{2} (1 + \sin 2\chi_S) = l_{\text{TPC}}^R + \frac{(l_L - l_R)}{2} \frac{\Omega_R}{2\pi} = l_{\text{TPC}}^R + \frac{\phi_{\text{gO}}^R}{\pi}, \quad (\text{A22a})$$

$$l = l_L - \frac{(l_L - l_R)}{2} (1 - \sin 2\chi_S) = l_{\text{TPC}}^L - \frac{(l_L - l_R)}{2} \frac{\Omega_L}{2\pi} = l_{\text{TPC}}^L - \frac{\phi_{\text{gO}}^L}{\pi}. \quad (\text{A22b})$$

where $l_{\text{TPC}}^{\text{R(L)}} = l_{\text{R(L)}}$ is the topological Pancharatnam charge that is referenced to right (left) circularly polarized field, $\Omega_{\text{R(L)}}$ is the solid angle formed by the swept surface area of SOP revolving around the south (north) pole on the Poincaré sphere, and the $\phi_{\text{gO}}^{\text{R(L)}}$ is the equivalent SOP-related phase induced by space-variant SOP.

APPENDIX C: REFERENCE FIELD WITH GENERAL SOP

In the main text, the reference field was selected as right (left) circularly polarized field in order to induce an elegant expression (see equation (7) in the main text) for calculating the OAM charge. But it does not mean that choice of general reference fields would lead to any deviation. Here, we provide the calculation process with simulation for the case of using general reference field. For easy calculation, the selected reference field $|\Phi_A\rangle$ is located on the $S_2 - S_3$ plane, and rotates an angle of α relative to $|\Phi_L\rangle$ around S_1 axis. Figure A1(a) and A1(b) illustrate coordinate systems with the reference field of $|\Phi_L\rangle$ and $|\Phi_A\rangle$, respectively. In Fig. A1(a), the contracted 3D coordinate (red axes of $x - y - z$) holding $|\Phi_L\rangle$ located at z direction coincide with coordinate of the Poincaré sphere. Thus the investigated vectorial vortex field $|\Phi_E\rangle$ in this coordinate can be expressed as $(2\psi_S, 2\chi_S)$. After coordinate transformation with

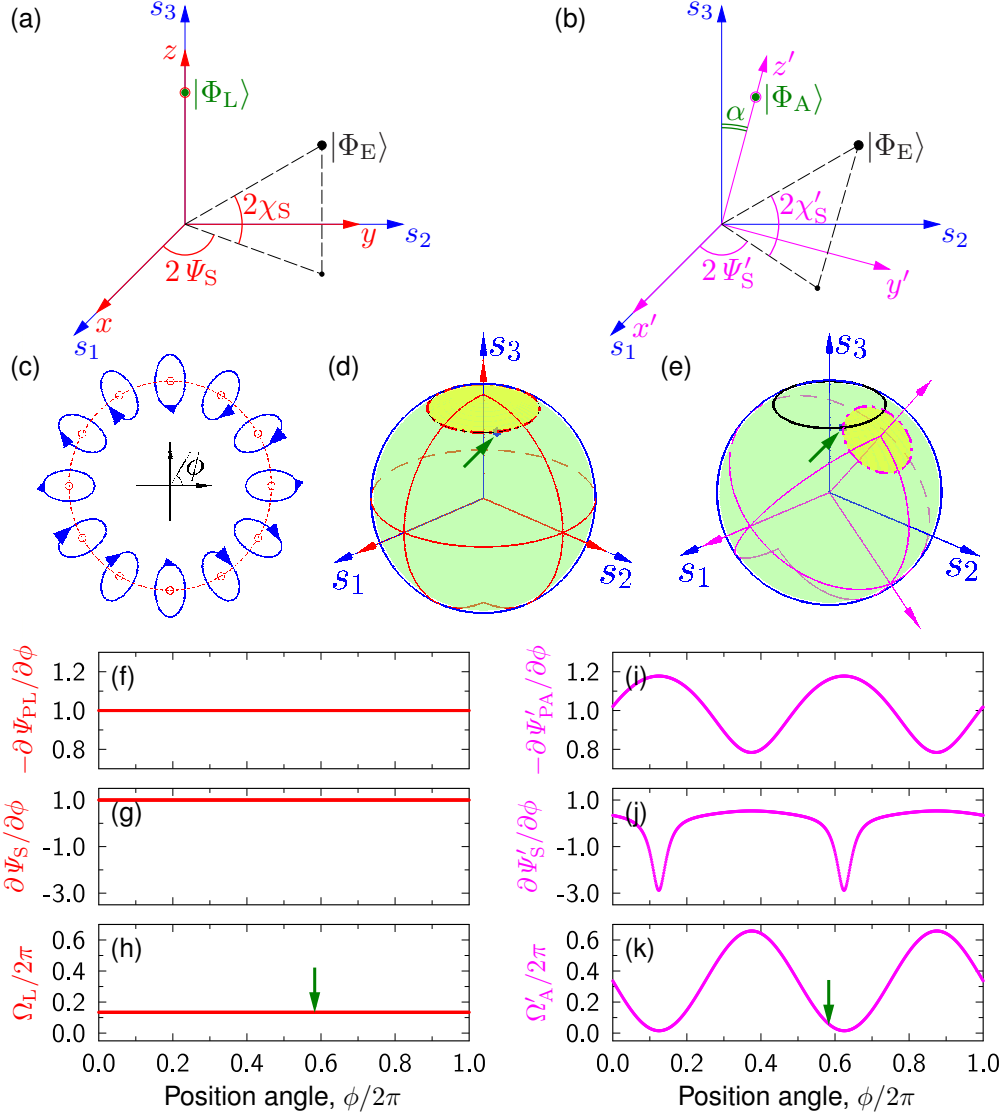


Figure A1. (a) Coordinate of the Poincaré sphere (blue axes) is represented by $S_1 - S_2 - S_3$. Coordinate (red axes), represented by $x - y - z$ and used in the calculations, is contracted with reference field $|\Phi_L\rangle$ located at z direction. Any studied field $|\Phi_E\rangle$ can be expressed as $(2\psi_S, 2\chi_S)$ in the coordinate of $x - y - z$. (b) Rotated coordinate (magenta axes), represented by $x' - y' - z'$ and used in the calculations, is contracted with reference field $|\Phi_A\rangle$ located at z direction. Any studied field $|\Phi_E\rangle$ can be expressed as $(2\psi'_S, 2\chi'_S)$. (c) The field is simulated in (d-k). (d) and (e) SOP trace on the Poincaré sphere, the yellow surface area corresponds to solid angle of considered SOP marked by green arrow in calculation with reference $|\Phi_L\rangle$ and $|\Phi_A\rangle$, respectively. (f-h) Calculated three parts in equation (A23). (i-k) Calculated three parts in equation (A24).

assuming the new reference $|\Phi_A\rangle$ located at direction, as shown in Fig. A1(b), $|\Phi_E\rangle$ in the new contracted 3D coordinate (magenta axes of $x' - y' - z'$) can be expressed as $(2\psi'_S, 2\chi'_S)$.

Firstly, we consider the calculation of OAM charge with reference $|\Phi_L\rangle$, combining equations (A18), (A21), (A22b), and (A9b), we rewrite the OAM charge with the reference field $|\Phi_L\rangle$, it reads

$$l = \frac{\iint I_E \left(-\frac{\partial \psi_{PL}}{\partial \phi} + \frac{\partial \psi_S}{\partial \phi} \frac{\Omega_L}{2\pi} \right) r dr d\phi}{\iint I_E S_0 r dr d\phi}. \quad (\text{A23})$$

In equation (A23), there are three parts in numerator: azimuthal gradient of Pancharatnam phase $(-\partial \psi_{PL}/\partial \phi)$, azimuthal gradient of SOP-related phase $(\partial \psi_S/\partial \phi)$, and the relevant solid angle $(\Omega_L/2\pi)$, which is formed by the swept surface area of SOP revolving around the $|\Phi_L\rangle$ on the Poincaré sphere. With similar method, the calculation

equation of OAM charge under reference field $|\Phi_A\rangle$ can be written as

$$l = \frac{\iint I_E \left(-\frac{\partial \psi_{PA}}{\partial \phi} + \frac{\partial \psi'_S}{\partial \phi} \frac{\Omega'_A}{2\pi} \right) r dr d\phi}{\iint I_E S_0 r dr d\phi}. \quad (\text{A24})$$

where $\psi_{PA} = \langle \Phi_A | \Phi_E \rangle$ is Pancharatnam phase referenced to $|\Phi_A\rangle$, ψ'_S is the angle under new coordinate (see Fig. A1(b)), and Ω'_A is solid angle of SOP swept area around new reference $|\Phi_A\rangle$.

In order to verify the correctness of the equation (A24), simulations are carried out. Here, we consider the field shown in Fig. A1(c) (the same field shown in Fig. 1(a) in main text), and calculate the OAM charge with reference fields of $|\Phi_L\rangle$ and $|\Phi_A\rangle$, respectively. Figures A1(f-h) show the calculated three parts in equation (A23) with reference $|\Phi_L\rangle$, while Figs. A1(i-k) show the calculated three parts in equation (A24) with reference $|\Phi_A\rangle$. In particular, the surface areas of solid angle are illustrated Figs. A1(d, e) for a typical SOP, which is also marked in Figs. A1(d, e, h, k) with green arrows. Although each of three parts is different, the calculated OAM charges of the light beam are equal with two reference fields. From the above simulations, we believe that OAM charge can be calculated by adopting any reference fields. However, with reference field of right- or left-handed circular polarization, an elegant form (equation (7) in main text) could be obtained. Moreover, right- or left-handed circular polarization is the natural choice to measure Stokes parameters. Thus, the reference field of right- or left-handed circular polarization is adopted in the main text.