

On Optimal Family of Codes for Archival DNA Storage

Dixita Limbachiya, Vijay Dhameliya, Madhav Khakhar and Manish K. Gupta
 Dhirubhai Ambani Institute of Information and Communication Technology
 Gandhinagar, Gujarat, 382007 India
 Email: dlimbachiya@acm.org and mankg@computer.org

Abstract

¹ DNA based storage systems received attention by many researchers. This includes archival and re-writable random access DNA based storage systems. In this work, we have developed an efficient technique to encode the data into DNA sequence by using non-linear families of ternary codes. In particular, we propose an algorithm to encode data into DNA with high information storage density and better error correction using a sub code of Golay code. Theoretically, 115 exabytes (EB) data can be stored in one gram of DNA by our method.

I. INTRODUCTION

Big data explosion due to advancement in social networking and IoT (Internet of Things) produces immense data, which urge the data scientists to strive for the development of better data storage medium. Optical, digital and cloud data storage [2] medium have their own limitations and need to be maintained regularly. While the computer scientists are endeavoring to develop dense data storage medium, researchers at the other end thought of exploring natural medium to safeguard this data. Properties of DNA like scalability, density and long term stability makes it ideal for long term archival of data. A good deal of work has been done to store the data on DNA [3] [4] [5] [6]. By employing error correction for DNA data storage, the breakthrough was made by N. Goldman and his team [7] in the year 2013. They developed very efficient and novel approach for storing the data of size 739 KB on DNA and retrieving it back. They used four folds redundancy to tackle errors by retrieving correct data from one of the copies of DNA strands. But due to redundancy there was increase in the length of DNA which makes the technique expensive to use DNA for storage at the commercial level. In the year 2014, group at The Chinese University of Hong Kong developed method for larger DNA reads used to embed the data [8]. Low Density Parity-Check (LDPC) codes based method was introduced by Aldrin Kay-Yuen Yim et al., to encode data in DNA for improved length of DNA reads. Most of the methods used so far have limitations in size of the data inserted in DNA and cost associated with DNA synthesis and sequencing technology. Work of Goldman [7] and Church [6] has laid a cornerstone for DNA based data storage systems. Recently model of DNA channel for data storage is proposed by Han Mao Kiah et al., [9]. Also a rewritable random access DNA based storage system has been very recently reported [1]. In [10], Reed Solomon codes based DNA storage system has been reported. In this work, we have developed error correction scheme (a family of non linear ternary codes) by modifying Goldman's scheme [7] for the error detection and correction along with improvement in storage capacity to store data on DNA.

The paper is organized as follows. Section 2 describes briefly related work and the Goldman's approach. Section 3 gives our work on non-linear ternary codes. Section 4 discuss the analysis of class DNA Golay code sub code. Final section 5 concludes the paper with general remarks.

II. ERROR CORRECTION FOR DNA STORAGE

There are various error correction schemes used for DNA based data storage systems [11] [12] [13] but the effective schemes was first introduced by Church [6] and Goldman [7]. Using next generation synthesis and sequencing technology, Church came up with efficient one bit per base algorithm of encoding information bits into fixed length of DNA chunks (99 bases). Flanking primers at the beginning and end of information data was inserted to identify the specific DNA segment in which the particular data was encoded. This method includes homo polymer repeated sequences that cause errors while writing and reading the data. This difficulty was taken care by Goldman's approach for DNA based data storage in 2013. Goldman used one bit per base system introduced by Church and modifying it by employing the improved base 3 Huffman code (trits 0, 1 and 2) encoding scheme. In this original file type to binary code which is then converted to a ternary code which is in turn converted to the triplet DNA code. It involved four steps shown in Fig 1. Binary digits holding the ASCII codes was converted to base-3 Huffman code that replaces each byte with five or six base-3 digits (trits). Each of trit was encoded with one of the three nucleotides different from the previous one used (to avoid homopolymers that cause error in the synthesis of DNA). DNA

¹Dixita, Vijay and Madhav contributed equally. Corresponding author: Manish K. Gupta, email: mankg@computer.org. Recently a re-writable DNA based storage system has been reported in [1].

strand was divided into chunks each of length 117 base pair (bp). To include redundancy for error detection and correction, 75 bases for each DNA information chunks were overlapped for four fold redundancy to get the data loss that occurred during synthesis and sequencing DNA. For the data security each redundant chunk was converted to reverse complement of the strand in every alternate chunks. Each DNA chunk was appended with an indexing information bit to determine the location of the data in each chunk and the file from which it is generated. At the end parity check bit was added for error detection. For details the reader is referred to [7]. We modified the Goldman's scheme further as described in next section.

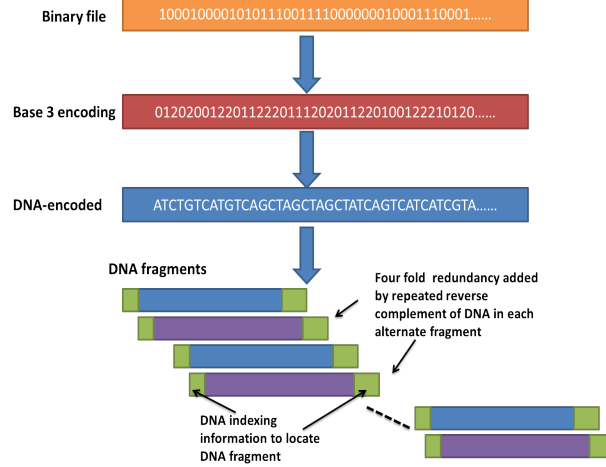


Fig. 1: Stepwise encoding of data into DNA using Goldman's approach is explained in detail. In this original file type to binary code (0, 1) which is then converted to a ternary code (0, 1, 2), which is in turn converted to the DNA code. Four fold redundancy is added to each DNA chunk by introducing reverse complement to every alternate DNA chunk. DNA chunk index is added to each DNA chunk to locate the file.

III. FAMILY OF NON-LINEAR TERNARY CODES

Goldman used four fold redundancy due to which was increase in the length of the DNA used to encode data which makes the DNA based storage medium more expensive. In this work, non-linear ternary error correction codes is used instead of Huffman codes as referred in Fig 3. In DNA we have only three nucleotides different from the last one. So it is inescapable to have codewords in base-3 in order to avoid homopolymers runs [7]. The non-linear ternary codes described here improve the storage capacity of DNA by decreasing the length of the DNA required for storing a file. Any arbitrary computer file can be converted into list of ASCII values ranging from 0 to 255. So we need set of 256 ternary codewords, each corresponding to one value in $\{0, \dots, 255\}$, to encode any such file into DNA string. From exhaustive search and enumeration of codewords we identified and constructed seven families of non linear ternary codes with the parameters $(9, 256, 3)_3$, $(11, 256, 5)_3$, $(15, 256, 7)_3$, $(18, 256, 9)_3$, $(21, 256, 11)_3$, $(24, 256, 13)_3$ and $(26, 256, 15)_3$ respectively [14]. Among these, $(11, 256, 5)_3$ is a sub code of ternary Golay code (listed in the Table II) [15]. We discuss encoding using the subcode $(11, 256, 5)_3$ in detail. The ternary Golay code consists of 729 codewords of length 11, with minimum hamming distance 5. So it allows receiver to identify 4 trits of errors and correct 2 trits of errors that occur in codeword. The steps b and c of the algorithm shown in Fig 1 were modified by using ternary Golay codes instead of Huffman codes (see Fig 4). Each byte of a computer file is encoded to Golay code Table II. The table consists of 243 codewords from 729 Golay codewords such that minimum hamming distance between any two codewords is 6. These 243 codewords were assigned to 243 ASCII values having highest probability of occurrences according to frequency table used by Goldman as described in supplementary file. Remaining 13 ASCII values were assigned with codewords chosen randomly from remaining set of ternary Golay codewords i.e. these 13 codewords will have minimum hamming distance 5 with other 243 codewords. This ensures that by maximum likelihood decoding we can correct up to 2 trit flip error. Since there exists only 243 codewords in set of 3^{11} codewords with minimum hamming distance 6, it is not possible to construct code consisting of minimum 256 codewords such that length of codewords is 11 and minimum hamming distance more than 5. The file information (i.e. file size and file extension) was encoded using same table and appended at the end of this string with Golay codes of comma and semicolon as separators. Next, this string of trits was converted to DNA such that only one of three nucleotides, different from the last one, was used to encode current bit into nucleotide. The resulting DNA sequence was split into segments (or chunks) of 99 bases each as shown in Fig 2 where $(i = 99)$ is number of bases used for storing file content. Here, λ is number of bases required to store file index number (no of file index trits = 2, thus allowing maximum of 9 files to be distinguished), μ is number of bases required for storing chunk index (no of segment index trits $\mu = \lceil \log_3(\text{total no of segments}) \rceil$) and one base for odd parity-check trit [7] were appended at the end of each segment of 99 bases. This parity is obtained by summing odd bits for file identifier and chunk index.

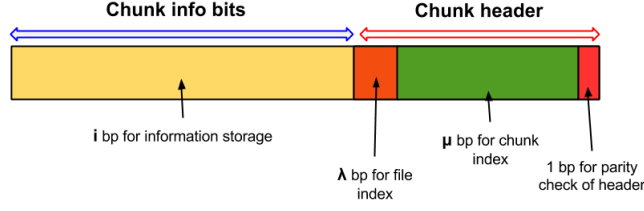


Fig. 2: Chunk architecture for DNA Golay code approach. There is two main parts of chunk, one is chunk info bits and other is chunk header. Chunk info bits contains original data information and chunk header has index. Chunk header includes file index for identification of file and chunk index to identify chunk. Last is appended odd parity check information.

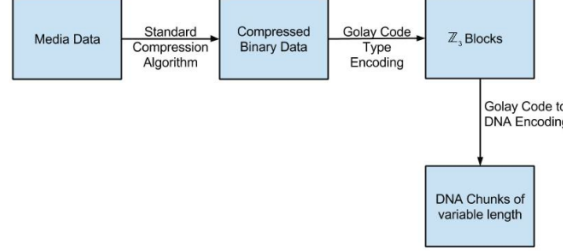


Fig. 3: Schematic flow diagram for DNA Golay code approach. Computer file is compressed using standard compression methods. Compressed binary file is converted to non linear family of codes by assigning each character to codeword. This ternary code is converted to DNA and DNA sequence is fragmented into chunk of variable length. No redundancy is added to chunk. Error correction can be done by nearest-neighbour likelihood decoding approach.

Example 1. To understand the encoding and decoding procedure, here is demonstrated simple example. Message data is "DA". Each letter of message is converted to ASCII characters. ASCII characters for each letter are 68 and 65 respectively. ASCII characters are converted to sub code of ternary Golay code of length 11. Codes corresponding to letter D is 02221221120 and for A is 10111000101 referred from table II. DNA sequence corresponding to message DNA is CATGATGCTGAGTCTCGTAGTC. This DNA sequence is divided to chunks C_1 is CATGATGCTGA and C_2 is GTCTCGTAGTC (here of length 11). Index of chunk i and file identifier (ID) is appended at the end of the message data. Let the chunk index for each DNA chunk be 0 and 1. File identifier for the file be 00. Also for checksum, parity bit P is added which can be calculated by summation of odd position trits in ID and i . Now each DNA chunk is appended by with chunk identifier bases (concatenating ID, i , P). Chunk identifier for each DNA chunk here is CGTA and CGAG respectively. So final DNA chunks are CATGATGCTGACGTA and GTCTCGTAGTCCGAG.

A. Error Correction Analysis

Definition. Let $\Sigma_{DNA} = \{A, T, G, C\}$ be the alphabet of DNA nucleotides. A DNA code $\mathcal{C}_{DNA}(n, M)$ is a sub set of Σ_{DNA}^n of size M with each codewords of length n .

Definition. The Hamming distance $d_H(\bar{x}_{DNA}, \bar{y}_{DNA})$ between two DNA codewords $\bar{x}_{DNA}$ and $\bar{y}_{DNA}$ is the number of positions in which $\bar{x}_{DNA}$ and $\bar{y}_{DNA}$ differs. For instance, let $\bar{x}_{DNA} = ATGACT$ $\bar{y}_{DNA} = ATTAGC$, then $d_H(\bar{x}_{DNA}, \bar{y}_{DNA}) = 3$.

Lemma 2. Let ϕ be the map used for the conversion (using Table I) of $\mathcal{C}_{Z_3}$ ternary code to $\mathcal{C}_{DNA}$ DNA code i.e., $\phi(\mathcal{C}_{Z_3}) = \mathcal{C}_{DNA}$. Observe that the map ϕ is not unique.

Proof. Easy to observe. □

Lemma 3. Let $\bar{x}_{DNA} \in \mathcal{C}_{DNA}$ send through a noisy channel and $\bar{y}_{DNA}$ is received. If $d_H(\bar{x}_{DNA}, \bar{y}_{DNA}) = t$ and corresponding ternary code obtained using Goldman's base Table I for $\bar{x}_{DNA}$ and $\bar{y}_{DNA}$ are $\bar{x}$ and $\bar{y}$ respectively then $t < d_H(\bar{x}, \bar{y}) \leq 2t$.

Proof. Using Lemma 2. □

Example 4. let $\bar{x}_{DNA} = GTCTCGTAGTC$ and $\bar{y}_{DNA} = GAGTCGTAGTC$ then $\bar{x} = 10111000101$ and $\bar{y} = 11101000101$. The minimum hamming distance $d_H(\bar{x}_{DNA}, \bar{y}_{DNA}) = 2$ and $d_H(\bar{x}, \bar{y}) = 2$.

Lemma 5. Using double layer error correcting scheme, we can correct any 2 bit flips in DNA.

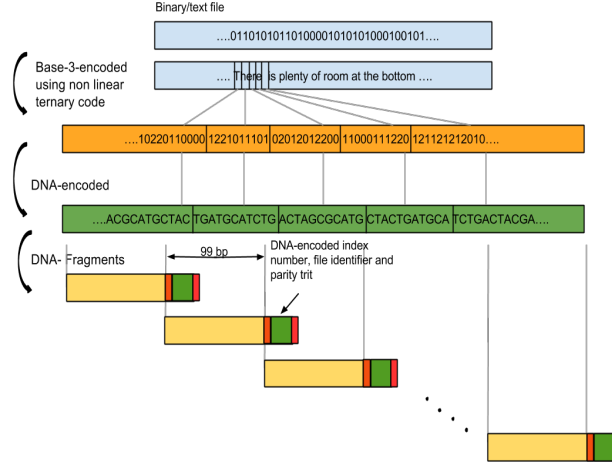


Fig. 4: Improved error correction approach for DNA data storage using DNA Golay code is developed here. It depicts the steps of conversion of file into DNA sequence by using DNA Golay code table. In first step, binary code (blue bar) was mapped to base 3 non linear ternary code (orange bar) where each byte was replaced with base 3 numbers called trits (for ternary Golay code with 11 trits). These trits were then converted to DNA code (green bar) by replacing each trit with one of the three nucleotides different from the previous one used to avoid homopolymers. Long DNA was divided into DNA chunks of length 99 base pairs without redundancy. Each DNA segment was appended with index, file identifier and parity trits.

TABLE I: Goldman base table designed to covert Huffman code to DNA nucleotides avoiding homo polymer

	0	1	2
A	C	G	T
C	G	T	A
G	T	A	C
T	A	C	G

Proof. Correction of 1 bit flip in DNA is straightforward using Lemma 2. In case of 2 bit flips we can prove it by contradiction and Lemma 1 and 2. $\square$

Remark 1. *If error occurs in chunk header, error cannot be corrected and data cannot be retrieved.*

IV. ANALYSIS

Performance of error correcting codes used for DNA data storage can be measured by Shannon information capacity, information ratio of base to bits. Family of non linear codes described here has many advantages over codes used for DNA data storage. It has properties like higher data density, higher DNA Shannon information, lower DNA storage cost and code rate almost 0.5. We describe them now briefly.

A. DNA Information Density

Amount of data that can be encoded in DNA can be quantified by DNA information density.

Definition. *For a given DNA based information storage system, DNA information density is total amount of data that can be stored in unit gram of DNA.*

At theoretical maximum, one gram of single stranded genetic code can store 455 EB (exabytes) of information [6]. Goldman achieved information density 2.2 PB (petabytes) per gram of DNA. Using DNA Golay codes, computationally we achieved information density for DNA based storage medium as $1.15 \times 10^{20} = 115$ EB (Exabytes) per gram DNA.

Proposition 6. *DNA storage capacity using our chunk architecture for one gram of DNA is calculated by solving the following non-linear equation*

$$[(182 \times 10^{19} \times l) \div \left((l + 3) + \log_3 \left(\frac{N(x+22)}{l} \right) \times N \right)] - 22 = x,$$

where x = number of bytes per one gram of DNA, l = Length of chunk without chunk index, N = Length of the error correcting code.

In case of DNA Golay codes, DNA storage capacity obtained is 1.15×10^{20} (115 Exabytes) bytes per gram of DNA by using $l = 99$ and $N = 11$.

B. DNA Storage Cost

Cost of DNA synthesis and sequencing is a major limitation of DNA storage medium. Considering synthesis cost to be \$0.05 per base [7], total cost per MB for different file size (bytes) was plotted by us. Using DNA Golay code, required amount of the DNA decreased which resulted in decreased cost. We also plotted the cost to store data using various non-linear ternary codes of our family. We observe that with the increase in the amount of data, there is negligible increase in cost per unit data (1 MB) associated with DNA based storage using non linear family of codes developed by us. In contrary, cost for the DNA increases with the increase in data using Goldman method.

C. Tradeoff for Code Rate

The information rate of our encoding scheme is 0.73 bits per base by encoding 8 bits into 11 DNA bases per byte (i.e. $8/11 = 0.73$ bits per base). It can be improved further to 0.89 by using 9 base per byte (i.e. $8/9 = 0.89$ bits per base) by encoding each byte using code $(9, 256, 3)_3$, at the cost of reduction in error detection capacity to 2 trits and correction capacity to 1 trits per codeword. It can be observed that error correction capacity t for each code increases linearly with increase in length of the code n . But with increase in these two parameters, there is declination in code rate. For reliable data storage, code rate is optimal with $(11, 256, 5)_3$ code, if one choose code with $(9, 256, 3)_3$, there is decrease in code rate. Hence there is open challenge for the construction of codes with optimal code rate for DNA based archival storage medium. Thus one can conclude that code of family $(11, 256, 5)_3$ is optimal code at present.

V. CONCLUSIONS

In this paper, we introduced non linear family of DNA codes with different parameters to develop efficient DNA based archival information storage system. Using non linear ternary Golay code (DNA Golay Code), we are able to correct 2 flip errors per block of 11 nucleotides along with significant improvement in storage capacity. Using this approach, we obtained significant difference in data storage density and length of DNA required when compared to Goldman's et al approach. We also developed a software DNA cloud 2.0 which implements our encoding schemes available at <http://www.guptalab.org/dnacloud/>. We hope our codes generate interest in coding theory community to construct better coding schemes for this upcoming area.

REFERENCES

- [1] S. M. H. T. Yazdi, Y. Yuan, J. Ma, H. Zhao, and O. Milenkovic, "A rewritable, random-access DNA-based storage system," *CS.IT*, vol. abs/1505.02199, p. 26, 2015. [Online]. Available: <http://arxiv.org/abs/1505.02199>
- [2] A. G. Dimakis, P. B. Godfrey, Y. Wu, M. J. Wainwright, and K. Ramchandran, "Network coding for distributed storage systems," *Information Theory, IEEE Transactions on*, vol. 56, no. 9, pp. 4539–4551, 2010.
- [3] J. Davis, "Microvenus," *Art Journal*, vol. 55, no. 1, pp. 70–74, 1996.
- [4] J. P. Cox, "Long-term data storage in DNA," *TRENDS in Biotechnology*, vol. 19, no. 7, pp. 247–250, 2001.
- [5] P. C. Wong, K.-k. Wong, and H. Foote, "Organic data memory using the DNA approach," *Communications of the ACM*, vol. 46, no. 1, pp. 95–98, 2003.
- [6] G. M. Church, Y. Gao, and S. Kosuri, "Next-generation digital information storage in DNA," *Science*, vol. 337, no. 6102, pp. 1628–1628, 2012.
- [7] N. Goldman, P. Bertone, S. Chen, C. Dessimoz, E. M. LeProust, B. Sipos, and E. Birney, "Towards practical, high-capacity, low-maintenance information storage in synthesized DNA," *Nature*, 2013.
- [8] A. K.-Y. Yim, A. C.-S. Yu, J.-W. Li, A. I.-C. Wong, J. F. Loo, K. M. Chan, S. Kong, K. Y. Yip, and T.-F. Chan, "The essential component in DNA-based information storage system: Robust error-tolerating module," *Frontiers in Bioengineering and Biotechnology*, vol. 2, p. 49, 2014.
- [9] H. M. Kiah, G. J. Puleo, and O. Milenkovic, "Codes for DNA storage channels," *CS.IT*, vol. abs/1410.8837, 2014. [Online]. Available: <http://arxiv.org/abs/1410.8837>
- [10] R. N. Grass, R. Heckel, M. Puddu, D. Paunescu, and W. J. Stark, "Robust chemical preservation of digital information on DNA in silica with error-correcting codes," *Angewandte Chemie International Edition*, vol. 54, no. 8, pp. 2552–2555, 2015.
- [11] G. C. Smith, C. C. Fiddes, J. P. Hawkins, and J. P. Cox, "Some possible codes for encrypting data in DNA," *Biotechnology letters*, vol. 25, no. 14, pp. 1125–1130, 2003.
- [12] N. Yachie, K. Sekiyama, J. Sugahara, Y. Ohashi, and M. Tomita, "Alignment-based approach for durable data storage into living organisms," *Biotechnology progress*, vol. 23, no. 2, pp. 501–505, 2007.
- [13] D. Houghton and F. Balado, "Repetition coding as an effective error correction code for information encoded in DNA," in *Bioinformatics and Bioengineering (BIBE), 2011 IEEE 11th International Conference on*. IEEE, 2011, pp. 253–260.
- [14] M. Grassl, "Bounds on the minimum distance of linear codes and quantum codes," Online available at <http://www.codetables.de>, 2007, accessed on 2015-02-17.
- [15] M. J. E. Golay, "Notes on digital coding," *Proceedings of The IEEE*, vol. 37, pp. 657–657, 1949.

TABLE II: Codewords from subcode of Ternary Golay Code i.e. $[11, 6, 5]_3$ assigned to 256 ASCII values is given in the table.

ASCII Values	Golay codes	Weight	ASCII values	Golay codes	Weight	ASCII values	Golay codes	Weight	ASCII values	Golay codes	Weight
86	00002111202	6	170	00001222101	6	127	00020220222	6	253	00022001121	6
52	00021112020	6	138	00010110111	6	41	00012221010	6	86	00011002212	6
42	00201010122	6	100	00200121021	6	44	00202202220	6	250	00221200011	6
132	00220011210	6	161	00222122112	9	98	00211120200	6	8	00210201102	6
34	00212012001	6	10	00102020211	6	149	00101101110	6	87	00100212012	6
21	00122210100	6	74	00121021002	6	36	00120102201	6	69	00112100022	6
177	00111211221	9	20	00110022120	6	213	02012212122	9	163	02011020021	6
229	02010101220	6	255	02002102011	6	197	02001210210	6	133	02000021112	6
252	02022022200	6	26	02021100102	6	173	02020211001	6	151	02210222211	9
82	02212000110	6	75	02211111012	9	37	02200112100	6	166	02202220002	6
191	02201001201	6	88	02220002022	6	63	02222110221	9	68	02221221120	9
150	02111202000	6	76	02110010202	5	4	02112121101	9	154	02101122222	9
234	02100200121	6	22	02102011020	6	162	02121012111	9	105	02120120010	6
102	02122201212	9	171	01021121211	9	104	01020202110	6	169	01022010012	6
196	01011011100	6	208	01010122002	6	84	01012200201	6	130	01001201022	6
146	01000012221	6	72	01002120120	6	16	01222101000	6	66	01221212202	9
24	01220020101	6	106	01212021222	9	223	01211102121	9	58	01210210020	6
137	01202211111	9	73	01201022010	6	101	01200100212	6	168	01120111122	9
181	01122222021	9	175	01121000220	6	251	01110001011	6	40	01112112210	9
140	01111220112	9	17	01100221200	6	83	01102002102	6	254	01101110001	6
240	20121202122	9	214	20120010021	6	53	20122121220	9	202	20111122011	9
25	20110200210	6	18	20112011112	9	247	20101012200	6	174	20100120102	6
112	20102201001	6	89	20022212211	9	210	20021020110	6	217	20020101012	6
248	20012102100	6	194	20011210002	6	182	20010021201	6	80	20002022022	6
79	20001100221	6	195	20000211120	6	12	20220222000	6	209	20222000202	6
165	20221111101	9	245	20210112222	9	2	20212220121	9	81	20211001020	6
38	20200002111	6	141	20202110010	6	211	20201221212	9	239	22100111211	9
95	22102222110	9	43	22101000012	6	224	22120001100	6	203	22122112002	9
145	22121220201	9	147	22110221022	9	19	22112002221	9	50	22111110120	9
136	22001121000	6	107	22000202202	6	134	22002010101	6	109	22021011222	9
153	22020122121	9	148	22022200020	6	205	22011201111	9	212	22010012010	6
54	22012120212	9	241	22202101122	9	156	22201212021	9	115	22200020220	6
116	22222021011	9	78	22221102210	9	67	22220210112	9	70	22212211200	9
178	22211022102	9	159	22210100001	6	142	21112020000	6	92	21111101202	9
48	21110212101	9	90	21102210222	9	218	21101021121	9	126	21100102020	6
39	21122100111	9	219	21121211010	9	167	21120022212	9	114	21010000122	6
172	21012111021	9	14	21011222220	9	120	21000220011	6	139	21002001210	6
160	21001112112	9	33	21020110200	6	179	21022221102	9	117	21021002001	6
225	21211010211	9	129	21210121110	9	183	21212202012	9	230	21201200100	6
35	21200011002	6	93	21202122201	9	6	21221120022	9	32	21220201221	9
56	21222012120	9	158	10212101211	9	185	10211212110	9	47	10210020012	6
143	10202021100	6	123	10201102002	6	204	10200210201	6	242	10222211022	9
111	10221022221	9	103	10220100120	6	108	10110111000	6	9	10112222202	9
65	10111000101	6	249	10100001222	6	13	10102112121	9	180	10101220020	6
226	10120221111	9	144	10122002010	6	15	10121110212	9	57	10011121122	9
128	10010202021	6	135	10012010220	6	243	10001011011	6	190	10000122210	6
207	10002200112	6	77	10021201200	6	45	10020012102	6	91	10022120001	6
192	12221010000	6	186	12220121202	9	216	12222202101	9	97	12211200222	9
118	12210011121	9	246	12212122020	9	215	12201120111	9	51	12200201010	6
206	12202012212	9	184	12122020122	9	227	12121101021	9	233	12120212220	9
237	12112210011	9	188	12111021210	9	113	12110102112	9	49	12102100200	6
201	12101211102	9	155	12100022001	6	222	12020000211	6	231	12022111110	9
5	12021222012	9	27	12010220100	6	131	12012001002	6	164	12011122201	9
3	12000110022	6	46	12002221221	9	119	12001002120	6	28	11200222122	9
176	11202000021	6	23	11201111220	9	64	11220112011	9	157	11222220210	9
187	11221001112	9	244	11210002200	6	238	11212110102	9	96	11211221001	9
235	11101202211	9	60	11100010110	6	1	11102121012	9	110	11121122100	9
200	11120200002	6	221	11122011201	9	99	11111012022	9	31	11110120221	9
198	11112201120	9	193	11002212000	6	125	11001020202	6	124	11000101101	6
152	11022102222	9	122	11021210121	9	71	11020021020	6	94	11012022111	9
220	11011100010	6	29	11010211212	9	199	00000201211	5	61	00000102122	5
11	00002012110	5	228	00002210021	5	62	00001021220	5	55	00001120012	5
121	00020121100	5	7	00020022011	5	30	00022100210	5	232	00022202002	5
189	00021010201	5	59	00010212200	5	236	00010011022	5	0	00000000000	0