

# Exploring Hierarchies in Online Social Networks

Can Lu, Jeffrey Xu Yu, Rong-Hua Li\*, Hao Wei

*The Chinese University of Hong Kong, Hong Kong, China*

*\*Guangdong Province Key Laboratory of Popular High Performance Computers, Shenzhen University, China*

{lucan, yu, rhli, hwei}@se.cuhk.edu.hk

arXiv:1502.04220v1 [cs.SI] 14 Feb 2015

## ABSTRACT

Social hierarchy (i.e., pyramid structure of societies) is a fundamental concept in sociology and social network analysis. The importance of social hierarchy in a social network is that the topological structure of the social hierarchy is essential in both shaping the nature of social interactions between individuals and unfolding the structure of the social networks. The social hierarchy found in a social network can be utilized to improve the accuracy of link prediction, provide better query results, rank web pages, and study information flow and spread in complex networks. In this paper, we model a social network as a directed graph  $G$ , and consider the social hierarchy as DAG (directed acyclic graph) of  $G$ , denoted as  $G_D$ . By DAG, all the vertices in  $G$  can be partitioned into different levels, the vertices at the same level represent a disjoint group in the social hierarchy, and all the edges in DAG follow one direction. The main issue we study in this paper is how to find DAG  $G_D$  in  $G$ . The approach we take is to find  $G_D$  by removing all possible cycles from  $G$  such that  $G = \mathcal{U}(G) \cup G_D$  where  $\mathcal{U}(G)$  is a maximum Eulerian subgraph which contains all possible cycles. We give the reasons for doing so, investigate the properties of  $G_D$  found, and discuss the applications. In addition, we develop a novel two-phase algorithm, called Greedy-&-Refine, which greedily computes an Eulerian subgraph and then refines this greedy solution to find the maximum Eulerian subgraph. We give a bound between the greedy solution and the optimal. The quality of our greedy approach is high. We conduct comprehensive experimental studies over 14 real-world datasets. The results show that our algorithms are at least two orders of magnitude faster than the baseline algorithm.

## 1. INTRODUCTION

Social hierarchy refers to the pyramid structure of societies, with minority on the top and majority at the bottom, which is a prevalent and universal feature in organizations. Social hierarchy is also recognized as a fundamental characteristic of social interactions, being well studied in both sociology and psychology [11]. In recent years, social hierarchy has attracted considerable attention and generates profound and lasting influence in various fields, especially social

networks. This is because the hierarchical structure of a population is essential in shaping the nature of social interactions between individuals and unfolding the structure of underlying social networks. Gould in [11] develops a formal theoretical model to model the emergence of social hierarchy, which can accurately predict the network structure. By the social status theory in [11], individuals with low status typically follow individuals with high status. Clauset et al. in [8] develop a technique to infer hierarchical structure of a social network based on the degree of relatedness between individuals. They show that the hierarchical structure can explain and reproduce some commonly observed topological properties of networks and can also be utilized to predict missing links in networks. Assuming that underlying hierarchy is the primary factor guiding social interactions, Maiya and Berger-Wolf in [22] infer social hierarchy from undirected weighted social networks based on maximum likelihood. All these studies imply that social hierarchy is a primary organizing principle of social networks, capable of shedding light on many phenomena. In addition, social hierarchy is also used in many aspects of social network analysis and data mining. For instance, social hierarchy can be utilized to improve the accuracy of link prediction [21], provide better query results [15], rank web pages [12], and study information flow and spread in complex networks [1, 2].

In this paper, we focus on social networks that can be modeled by directed graphs, because in many social networks (e.g., Google+, Weibo, Twitter) information flow and influence propagate follow certain directions from vertices to vertices. Given a social network as a directed graph  $G$ , its social hierarchy can be represented as a directed acyclic graph (DAG). By DAG, all the vertices in  $G$  are partitioned into different levels (disjoint groups), and all the edges in the cycle-free DAG follow one direction, as observed in social networks that prestige users at high levels are followed by users at low levels and the prestige users typically do not follow their followers. Here, a level in DAG represents the status of a vertex in the hierarchy the DAG represents.

The issue we study in this paper is how to find hierarchy as a DAG in a general directed graph  $G$  which represents a social network. Given a graph  $G$ , there are many possible ways to obtain a DAG. First, converting graph  $G$  into a DAG, by contracting all vertices in a strongly connected component in  $G$  as a vertex in DAG, does not serve the purpose, because all vertices in a strongly connected component do not necessarily belong to the same level in a hierarchy. Second, a random DAG does not serve the purpose, because it heavily relies on the way to select the vertices as the start to traverse and the way to traverse. Therefore, two random DAGs can be significantly different topologically. Third, finding the maximum DAG of  $G$  is not only NP-hard but also NP-approximate [14]. The way we do is to find the DAG by removing all possible cycles

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

Copyright 20XX ACM X-XXXXX-XX-X/XX/XX ...\$15.00.



the properties of the hierarchy  $G_D$  and the applications.


**The representativeness:** The maximum Eulerian subgraph  $\mathcal{U}(G)$  for a general graph  $G$  is not unique. A natural question is how representative  $G_D$  is as the hierarchy. Note that  $G_D$  is only unique w.r.t  $\mathcal{U}(G)$  found. Below, we show  $G_D$  identified by an arbitrary  $\mathcal{U}(G)$  is representative based on a notion of *strictly-higher* defined between two vertices in  $G_D$ , over a ranking  $r(\cdot)$  where  $r(u) < r(v)$  for each edge  $(u, v) \in G_D$ . Here, for two vertices  $u$  and  $v$ , a larger rank implies a vertex is in a higher status in a follower relationship, and  $u$  is *strictly-higher* than  $v$  if  $r(u) > r(v)$  and  $u$  is reachable from  $v$ , i.e. there is a directed path from  $v$  to  $u$  in  $G_D$ .

**Theorem 2.1:** *Let  $G_{D_1}$  and  $G_{D_2}$  be two DAGs for  $G$  such that  $G = \mathcal{U}_1(G) \cup G_{D_1} = \mathcal{U}_2(G) \cup G_{D_2}$ . There are no vertices  $u$  and  $v$  such that  $u$  is strictly-higher than  $v$  in  $G_{D_1}$  whereas  $v$  is strictly-higher than  $u$  in  $G_{D_2}$ .*

**Proof Sketch:** Assume the opposite. We can construct an auxiliary graph  $G' = G \cup \{(u, v)\}$ . Then finding the maximum Eulerian subgraph for  $G'$  can be done in two steps. In the first step, find the maximum Eulerian subgraph  $\mathcal{U}(G)$ , and in the second step, find the maximum Eulerian subgraph for  $G$  plus the additional edge  $(u, v)$ . Since  $G = \mathcal{U}_1(G) \cup G_{D_1} = \mathcal{U}_2(G) \cup G_{D_2}$ , there are supposed to be at least two corresponding relaxing orders, when the first phase terminates, namely, identifying  $\mathcal{U}_1(G)$  and  $\mathcal{U}_2(G)$ . For one relaxing order, we can show that the added edge  $(u, v)$  can be relaxed, which results in finding  $\mathcal{U}(G')$  such that  $|E(\mathcal{U}(G'))| > |E(\mathcal{U}(G))|$ . For the other relaxing order, we can also show that the added edge  $(u, v)$  cannot be relaxed and  $\mathcal{U}(G') = \mathcal{U}(G)$ . It leads to a contradiction, because it can find two different maximum Eulerian subgraphs for  $G'$  with different sizes.

Alternatively, let the ranking in  $G_{D_1}$  and  $G_{D_2}$  be  $r_1(\cdot)$  and  $r_2(\cdot)$ . Assume there are two vertices  $u$  and  $v$  such that  $u$  is *strictly-higher* than  $v$  by  $r_1$  whereas  $v$  is *strictly-higher* than  $u$  by  $r_2$ . We prove this cannot achieve based on the finding in [13]. In [13], it gives a total score on  $G$  which measures how  $G$  is different from DAG  $G_D$  based on a ranking  $r(\cdot)$ . The total score, denoted as  $A(G, r)$ , is obtained by summing up the weights assigned to edges,  $\max\{r(u) - r(v) + 1, 0\}$  for edge  $(u, v)$ . The finding in [13] is that the minimum total score equals to the number of edges in the maximum Eulerian subgraph,  $\min_r \{A(G, r)\} = |E(\mathcal{U}(G))|$ . Choose  $r_1$  and  $r_2$  satisfying that  $A(G, r_1) = |E(\mathcal{U}_1(G))|$  and  $A(G, r_2) = |E(\mathcal{U}_2(G))|$ . Since  $u$  is *strictly-higher* than  $v$  in  $G_{D_1}$ , there is a directed path from  $v$  to  $u$  in  $G_{D_1}$ . We can construct an auxiliary graph  $G' = G \cup \{(u, v)\}$ , then  $|E(\mathcal{U}(G'))| > |E(\mathcal{U}_1(G))|$ . On the other hand, over the same  $G'$ , since  $v$  is *strictly-higher* than  $u$  in  $G_{D_2}$ , we can show  $|E(\mathcal{U}(G'))| \leq A(G', r_2) = A(G, r_2)$ , which leads to a contradiction.  $\square$

**A case study:** With the hierarchy (DAG  $G_D$ ) found, suppose we assign every vertex  $u$  a minimum non-negative rank  $r(u)$  such that  $r(u) < r(v)$  for any edge  $(u, v) \in G_D$ , where  $r(\cdot)$  is a strictly-higher rank. To show whether such ranking reflects the ground truth, as a case study, we conduct testing using Twitter, where the celebrities are known, for instance, refer to Twitter Top 100 (<http://twittercounter.com/pages/100>). We sample a subgraph among 41.7 million users (vertices) and 1.47 billion relationships (edges) from Twitter social graph  $\mathbf{G}$  crawled in 2009 [16]. In brief, we randomly sample 5 vertices in the celebrity set given in Twitter, and then sample 1,000,000 vertices starting from the 5 vertices as seeds using random walk sampling [17]. We construct an induced subgraph  $G'$  of the 1,000,000 vertices sampled from  $\mathbf{G}$ , and we uniformly sample about 10,000,000 edges from  $G'$  to obtain the sample graph  $G$ , which contains 759,105 vertices and

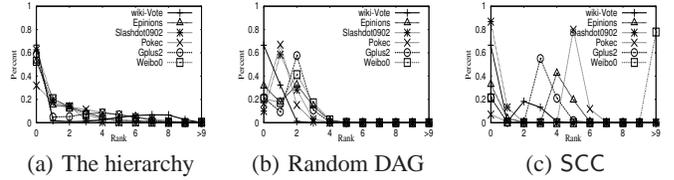

**Figure 2: Rank Distribution**

Graph	$ V $	$ E $	$ V(\mathcal{U}(G)) $	$ E(\mathcal{U}(G)) $
Gplus0	100,000	115,090	2,833	6,271
Gplus1	100,000	512,281	14,797	70,537
Gplus2	100,000	2,867,781	51,605	770,854
Gplus3	100,000	8,289,203	87,941	3,644,147
Weibo0	100,000	2,431,525	96,765	850,136
Weibo1	100,000	2,446,002	96,833	855,131
Weibo2	100,000	2,463,050	96,902	861,729
Weibo3	100,000	2,479,140	96,969	868,044

**Table 1: To study social mobility**

11,331,061 edges. In  $G$ , we label a vertex  $u$  as a celebrity, if  $u$  is a celebrity and has at least 100,000 followers in  $\mathbf{G}$ . There are 430 celebrities in  $G$  including Britney Spears, Oprah Winfrey, Barack Obama, etc. We compute the hierarchy ( $G_D$ ) of  $G$  using our approach and rank vertices in  $G_D$ . The hierarchy reflects the truth: 88% celebrities are in the top 1% vertices and 95% celebrities in the top 2% vertices. In consideration of efficiency, we can approximate the exact hierarchy with a greedy solution obtained by *Greedy* in Section 5. In the approximate hierarchy, 85% celebrities are in the top 1% vertices and 93% celebrities in the top 2% vertices.

**The pyramid structure of rank distribution** is one of the most fundamental characteristics of social hierarchy. We test the social networks: wiki-Vote, Epinions, Slashdot0902, Pokec, Google+, Weibo. The details about the datasets are in Table 1 and Table 3. The rank distribution derived from hierarchy  $G_D$ , shown in Fig. 2(a), indicates the existence of pyramid structure, while the rank distributions derived from a random DAG (Fig. 2(b)) and by contracting SCCs (Fig. 2(c)) are rather random. Here, the x-axis is the rank where a high rank means a high status, and the y-axis is the percentage in a rank over all vertices. By analyzing the vertices,  $u$ , in  $G$  over the difference between in-degree and out-degree, i.e.  $d_I(u) - d_O(u)$ , it reflects the fact that those vertices  $u$  with negative  $d_I(u) - d_O(u)$  are always at the bottom of  $G_D$ , whereas those vertices in the higher rank are typically with large positive  $d_I(u) - d_O(u)$  values.

**The social mobility:** With the DAG  $G_D$  found, we can further study social mobility over the social hierarchy  $G_D$  represents. Here, social mobility is a fundamental concept in sociology, economics and politics, and refers to the movement of individuals from one status to another. It is important to identify individuals who jump from a low status (a level in  $G_D$ ) to a high status (a level in  $G_D$ ). We conduct experimental studies using the social network Google+ (<http://plus.google.com>) crawled from Jul. 2011 to Oct. 2011 [27, 26], and Sina Weibo (<http://weibo.com>) crawled from 28 Sep. 2012 to 29 Oct. 2012 [24]. For Google+ and Weibo, we randomly extract 100,000 vertices respectively, and then extract all edges among these vertices in 4 time intervals during the period the datasets are crawled, as shown in Table 1.

We show social mobility in Fig. 3. We compare two snapshots,  $G_1$  and  $G_2$ , and investigate the social mobility from  $G_1$  to  $G_2$ . For Google+,  $G_1$  and  $G_2$  are Gplus0 and Gplus1, and for Weibo,  $G_1$  and  $G_2$  are Weibo0 and Weibo1. For  $G_1$ , we divide all vertices into 5 equal groups. The top 20% go into group 5, and the second 20% go to group 4, for example. In Fig. 3, the x-axis shows the 5 groups

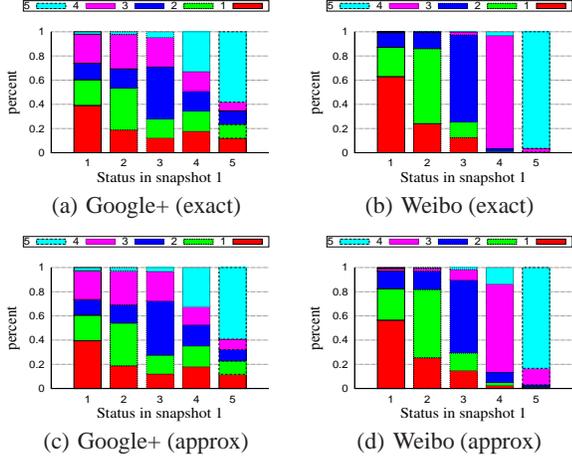


Figure 3: Social mobility result from hierarchy

#### Algorithm 1 $BF-U(G)$

**Input:** A graph  $G = (V, E)$

**Output:** Two subgraphs of  $G$ ,  $\mathcal{U}(G)$  and  $G_D$  ( $G = \mathcal{U}(G) \cup G_D$ )

```

1:  $w(v_i, v_j) \leftarrow -1$  for each edge  $(v_i, v_j) \in E$ ;
2: while there is a negative cycle  $p_c$  in  $G$  do
3:   for every edge  $(v_i, v_j)$  in the negative cycle  $p_c$  do
4:      $w(v_i, v_j) \leftarrow -w(v_i, v_j)$ ;
5:     Reverse the direction of the edge  $(v_i, v_j)$  to be  $(v_j, v_i)$ ;
6:   end for
7: end while
8:  $G_D$  is a subgraph that contains all edges with weight -1;
9:  $\mathcal{U}(G)$  is a subgraph containing the reversed edges with weight +1;

```

for  $G_1$ . Consider the number of vertices in a group as 100%. In Fig. 3, we show the percentage of vertices in one group moves to another group in  $G_2$ . Fig. 3(a) and Fig. 3(b) show the results for Google+ and Weibo. Some observations can be made. Google+ is a new social network when crawled since it starts from Jun. 29, 2011, and Weibo is a rather mature social network since it starts from Aug. 14, 2009. From Fig. 3(a), many vertices move from one status to another, whereas from Fig. 3(b), only a very small number of vertices move from one status to another. Similar results can be observed from approximate hierarchies, by our greedy solution *Greedy* given in Section 5, as shown in Fig. 3(c) and Fig. 3(d). Those moved to/from the highest level deserve to be investigated.

**Recovering the hidden directions** is to identify the direction of an edge if the direction of the edge is unknown [25]. The directionality of edges in social networks being recovered is important in many social analysis tasks. We show that our approach has advantage over the semi-supervised approach (SM-ReDirect) in [25]. Here, the task is using the given 20% directed edges as training data to recover the directions for the remaining edges. In our approach, we construct a graph  $G$  from the 20% training data, and identify  $G_D$  by  $G = \mathcal{U}(G) \cup G_D$ . With the ranking  $r(\cdot)$  over the vertices, we predict the direction of an edge  $(u, v)$  is from  $u$  to  $v$  if  $r(v) > r(u)$ . Take Slashdot and Epinion datasets used [25], our approach outperforms the matrix-factorization based SM-ReDirect both in terms of accuracy and efficiency. For Slashdot, our prediction accuracy is 0.7759 whereas SM-ReDirect is 0.6529. For Epinion, ours is 0.8285 whereas SM-ReDirect is 0.7118. Using approximate hierarchy, our accuracy is 0.7682 for Slashdot and 0.8277 for Epinion, respectively.

### 3. THE EXISTING ALGORITHM

#### Algorithm 2 $DS-U(G)$

**Input:** A graph  $G = (V, E)$

**Output:** Two subgraphs of  $G$ ,  $\mathcal{U}(G)$  and  $G_D$  ( $G = \mathcal{U}(G) \cup G_D$ )

```

1: for each edge  $(v_i, v_j)$  in  $E(G)$  do  $w(v_i, v_j) \leftarrow -1$ ;
2: for each vertex  $u$  in  $V(G)$  do  $dst(u) \leftarrow 0$ ,  $relax(u) \leftarrow true$ ,
    $pos(u) \leftarrow 0$ ;
3: while there is a vertex  $u \in V(G)$  such that  $relax(u) = true$  do
4:    $S_V \leftarrow \emptyset$ ,  $S_E \leftarrow \emptyset$ ,  $NV \leftarrow \emptyset$ ;
5:   if  $FindNC(G, u)$  then
6:     while  $S_V.top() \neq NV$  do
7:        $S_V.pop(); (v_i, v_j) \leftarrow S_E.pop()$ ;
8:        $w(v_i, v_j) \leftarrow -w(v_i, v_j)$ ;
9:       Reverse the direction of the edge  $(v_i, v_j)$  to be  $(v_j, v_i)$ ;
10:    end while
11:    $S_V.pop(); (v_i, v_j) \leftarrow S_E.pop()$ ;
12:    $w(v_i, v_j) \leftarrow -w(v_i, v_j)$ ;
13:   Reverse the direction of the edge  $(v_i, v_j)$  to be  $(v_j, v_i)$ ;
14:   end if
15: end while
16:  $G_D$  is a subgraph that contains all edges with weight -1;
17:  $\mathcal{U}(G)$  is a subgraph containing the reversed edges with weight +1;

```

#### Algorithm 3 $FindNC(G, u)$

```

1:  $S_V.push(u)$ ;
2: for each edge  $(u, v)$  starting at  $pos(u)$  in  $E(G)$  do
3:    $pos(u) \leftarrow pos(u) + 1$ ;
4:   if  $dst(u) + w(u, v) < dst(v)$  then
5:      $dst(v) \leftarrow dst(u) + w(u, v)$ ;
6:      $relax(v) \leftarrow true$ ,  $pos(v) \leftarrow 0$ ;
7:     if  $v$  is not in  $S_V$  then
8:        $S_E.push((u, v))$ ;
9:       if  $FindNC(G, v)$  then return true; endif
10:    else
11:       $S_E.push((u, v)); NV \leftarrow v$ ; return true;
12:    end if
13:   end if
14: end for
15:  $relax(u) \leftarrow false$ ;
16:  $S_V.pop(); S_E.pop()$  if  $S_E$  is not empty; return false;

```

To find the maximum Eulerian subgraph, Gupte, et al. in [13] propose an iterative algorithm based on the Bellman-Ford algorithm, which we call  $BF-U$  (Algorithm 1). Let  $w(v_i, v_j)$  be a weight assigned to an edge  $(v_i, v_j)$  in  $G$ . Initially,  $BF-U$  assigns an edge-weight with a value of -1 to every edge in graph  $G$  (Line 1). Let a negative cycle be a cycle with a negative sum of edge weights. In every iteration (Lines 2-7),  $BF-U$  finds a negative cycle  $p_c$  repeatedly until there are no negative cycles. For every edge  $(v_i, v_j)$  in the negative cycle  $p_c$  found, it changes the weight of  $(v_i, v_j)$  to be  $-w(v_i, v_j)$  and reverses the direction of the edge (Lines 4-5). As a result, it finds a maximum Eulerian subgraph  $\mathcal{U}(G)$  and a directed acyclic graph (DAG) of  $G$ , denoted as  $G_D$ , such that  $G = \mathcal{U}(G) \cup G_D$ . Since the number of edges with weight +1 increases by at least one during each iteration, there are at most  $O(m)$  iterations (Line 2-7). In every iteration it has to invoke the Bellman-Ford algorithm to find a negative cycle (Line 2), or to determine whether there is a negative cycle. The time complexity of Bellman-Ford algorithm is  $O(nm)$ . Therefore, in the worst case, the total time complexity of  $BF-U$  is  $O(nm^2)$ , which is too expensive for real-world graphs.

### 4. A NEW ALGORITHM

To address the scalability problem of  $BF-U$ , we propose a new algorithm, called  $DS-U$ . Different from  $BF-U$  which starts by finding

a negative cycle using the Bellman-Ford algorithm in every iteration.  $DS-U$  finds a negative cycle only when necessary with condition. In brief, in every iteration, when necessary,  $DS-U$  invokes an algorithm  $FindNC$  (short for find a negative cycle) to find a negative cycle while relaxing vertices following  $DFS$  order. Applying amortized analysis [23], we prove the time complexity of  $DS-U$ , is  $O(m^2)$  to find the maximum Eulerian subgraph  $\mathcal{U}(G)$ .

The  $DS-U$  algorithm is outlined in Algorithm 2, which invokes  $FindNC$  (Algorithm 3) to find a negative cycle. Here,  $FindNC$  is designed based on the same idea of relaxing edges as used in the Bellman-Ford algorithm. In addition to edge weight  $w(v_i, v_j)$ , we use three variables for every vertex  $u$ ,  $relax(u)$ ,  $pos(u)$ , and  $dst(u)$ . Here,  $relax(u)$  is a Boolean variable indicating whether there are out-going edges from  $u$  that may need to relax to find a negative cycle. It will try to relax an edge from  $u$  further when  $relax(u) = true$ . When relaxing from  $u$ ,  $pos(u)$  records the next vertex  $v$  in  $N_O(u)$  (maintained as an adjacent list) for the edge  $(u, v)$  to be relaxed next. It means that all edges from  $u$  to any vertex before  $pos(u)$  has already been relaxed.  $dst(u)$  is an estimation on the vertex  $u$  which decreases when relaxing. When  $dst(u)$  decreases,  $relax(u)$  is reset to be  $true$  and  $pos(u)$  is reset to be 0, since all its out-going edges can be possibly relaxed again. Initially, in  $DS-U$ , every edge weight  $w(v_i, v_j)$  is initialized to -1, and the three variables,  $relax(u)$ ,  $pos(u)$ , and  $dst(u)$ , on every vertex  $u$  are initialized to  $true$ , 0, and 0, respectively. All  $w(v_i, v_j)$ ,  $relax(u)$ ,  $pos(u)$ , and  $dst(u)$  are used in  $FindNC$  to find a negative cycle following the main idea of Bellman-Ford algorithm in  $DFS$  order. A negative cycle, found by  $FindNC$  while relaxing edges, is maintained using a vertex stack  $S_V$  and an edge stack  $S_E$  together with a variable  $NV$ , where  $NV$  maintains the first vertex of a negative cycle. In  $DS-U$ , by popping vertex/edges from  $S_V/S_E$  until encountering the vertex in  $NV$ , a negative cycle can be recovered. As shown in Algorithm 2, in the while statement (Lines 3-15), for every vertex  $u$  in  $V(G)$ , only when there is a possible relax ( $relax(u) = true$ ) and there is a negative cycle found by the algorithm  $FindNC$ , it will reverse the edge direction and update the edge weight,  $w(v_i, v_j)$ , for each edge  $(v_i, v_j)$  in the negative cycle (Lines 6-13).




Figure 4: A subgraph  $G$  of Fig. 1

**Example 4.1:** We explain  $DS-U$  (Algorithm 2) using an example graph  $G$  in Fig. 4. For every vertex  $u$ , there is an adjacent list to maintain its out-neighbors. Initially, for every vertex  $u$ ,  $dst(u) = 0$ ,  $relax(u) = true$ ,  $pos(u) = 0$ ; and for every edge  $(v_i, v_j)$ ,  $w(v_i, v_j) = -1$ . Suppose we process  $v_6, v_3, v_1, v_2, v_8$  in such an order. In the first iteration,  $relax(v_6) = true$  and  $FindNC(G, v_6)$  returns true, which implies a negative cycle is found. Here, for all vertices in  $G$ , we have  $dst(v_6) = 0$ ,  $relax(v_6) = true$ ,  $pos(v_6) = 1$ ;  $dst(v_3) = -4$ ,  $relax(v_3) = true$ ,  $pos(v_3) = 0$ ;  $dst(v_1) = -2$ ,  $relax(v_1) = true$ ,  $pos(v_1) = 0$ ;  $dst(v_2) = -3$ ,  $relax(v_2) = true$ ,  $pos(v_2) = 0$ ;  $dst(v_8) = 0$ ,  $relax(v_8) = true$ ,  $pos(v_8) = 0$ . In addition,  $NV = v_3$ ,  $S_V = \{v_6, v_3, v_1, v_2\}$ ,  $S_E = \{(v_6, v_3), (v_3, v_1), (v_1, v_2), (v_2, v_3)\}$ . Following Lines 6–13 in Algorithm 2, we find and reverse negative cycle  $(v_3, v_1, v_2, v_3)$  and make  $w(v_3, v_2) = w(v_2, v_1) = w(v_1, v_3) = 1$ . In the second iteration, the out-neighbors of  $v_6$  are relaxed from  $pos(v_6) = 1$  in  $v_6$ 's adjacent list, i.e. from edge  $(v_6, v_8)$ .  $FindNC(G, v_6)$  returns false. We have,  $dst(v_6) = 0$ ,  $relax(v_6) = false$ ,  $pos(v_6) = 2$ , and  $dst(v_8) =$

$-1$ ,  $relax(v_8) = false$ ,  $pos(v_8) = 1$ . In the following iterations ( $FindNC(G, v_3)$ ,  $FindNC(G, v_1)$ , and  $FindNC(G, v_2)$ ), all return false. Finally, for vertex  $v_8$ , since  $relax(v_8) = false$ ,  $FindNC(G, v_8)$  is unnecessary, and  $DS-U(G)$  terminates. It finds the maximum Eulerian subgraph  $\mathcal{U}(G) = \{(v_3, v_1), (v_1, v_2), (v_2, v_3)\}$ .

**Lemma 4.1:** In Algorithm 2, if there is a negative cycle  $C$ ,  $relax(u) = true$  holds for at least one vertex  $u \in V(C)$ .

**Proof Sketch:** Assume the opposite, i.e., there exists a negative cycle  $C$  such that for every vertex  $u \in V(C)$ ,  $relax(u) = false$ . Let  $C = (v_0, v_1, \dots, v_{k-1}, v_k = v_0)$ , then  $\sum_{i=0}^{k-1} w(v_i, v_{i+1}) < 0$ . Since  $relax(v_i) = false$  holds for  $i = 0, 1, \dots, k-1$ , then  $dst(v_{i+1}) \leq dst(v_i) + w(v_i, v_{i+1})$ . It leads to a contradiction, if summing both sides from  $i = 0$  to  $i = k-1$ , then  $dst(v_0) = dst(v_k) \leq dst(v_0) + \sum_{i=0}^{k-1} w(v_i, v_{i+1}) < dst(v_0)$ .  $\square$

**Theorem 4.1:** Algorithm 2 correctly finds the maximum Eulerian subgraph  $\mathcal{U}(G)$  when it terminates.

**Proof Sketch:** It can be proved by Lemma 4.1.  $\square$

**Lemma 4.2:** Given an Eulerian graph  $G$ , when  $DS-U(G)$  terminates, for each vertex  $u$ ,  $dst(u) \in [-2m, 0]$ , where  $m = |E(G)|$ .

**Proof Sketch:** We do mathematical induction on the maximum number of cycles the Eulerian graph  $G$  contains.

1. If  $G$  contains only one cycle, i.e.  $G$  is a simple cycle itself, it is easy to see that for each vertex  $u$ ,  $dst(u) \geq -m \in [-2m, 0]$ .

2. Assume Lemma 4.2 holds when  $G$  contains no more than  $k$  cycles, we prove it also holds when  $G$  contains at most  $k+1$  cycles. We first decompose  $G$  into a simple cycle  $C$  which is the last negative cycle found during  $DS-U(G)$  and the remaining is an Eulerian graph  $G'$  containing at most  $k$  cycles. We explain the validation of this decomposition as follows. If the last negative cycle found contains some positive edges, then the resulting maximum Eulerian subgraph  $\mathcal{U}(G)$  will contain some negative edges, it is against the fact that  $G$  itself is given as Eulerian. Next, we decompose  $DS-U(G)$  into two phases, it finds  $G'$  as an Eulerian subgraph in the first phase while cycle  $C$  is identified in the second phase. According to the assumption, when the first phase completes, for each vertex  $u \in G'$ ,  $dst(u) \in [-2|E(G')| - |E(C)|, 0]$ , where  $-2|E(G')|$  is by  $DS-U(G')$  and  $-|E(C)|$  is the result by relaxing  $C$ . There are two cases for the second phase.

- (a) If  $V(C) \cap V(G') = \emptyset$ , the two phases are independent. Therefore, when the second phase terminates, for each vertex  $u \in V(C)$ ,  $dst(u) \in [-2|E(C)|, 0]$ , and for each vertex  $u \in V(G')$ ,  $dst(u) \in [-2|E(G')|, 0]$ , Lemma 4.2 holds.
- (b) If  $V(C) \cap V(G') \neq \emptyset$ , suppose  $w \in V(C) \cap V(G')$ , then  $dst(w) \in [-2|E(G')| - |E(C)|, 0]$  when the first phase completes. During the second phase,  $dst(w)$  decreases by  $|E(C)|$ , then  $dst(w) \geq -2|E(G')| - 2|E(C)| \in [-2m, 0]$ . For any vertex  $v \in V(G') \setminus V(C)$ ,  $dst(v)$  can only change along a path  $p = (w_0, w_1, \dots, w_{k-1}, w_k = v)$ , where  $w_0 \in V(C)$  and  $(w_i, w_{i-1}) \in E(G')$ , for  $i = 1, \dots, k$ . Then  $d(v) = d(w_0) + \sum_{i=0}^{k-1} w(w_i, w_{i+1}) > d(w_0) \geq -2m \in [-2m, 0]$ . Therefore, Lemma 4.2 holds.  $\square$




Figure 5: Example graph to explain 2(b) in Lemma 4.2

**Example 4.2:** We explain the proof of 2(b) in Lemma 4.2 using Fig. 5. Fig. 5 shows an Eulerian graph  $G$  containing simple cycles. Suppose the first negative cycle found is  $C_1 = (v_1, v_2, v_3, v_4, v_1)$ , with the resulting  $dst(v_1) = -4, dst(v_2) = -1, dst(v_3) = -2, dst(v_4) = -3$ . In a similar way, suppose the second negative cycle found is  $C_2 = (v_1, v_5, v_6, v_3, v_2, v_1)$  by relaxing  $dst(v_1) = -5, dst(v_5) = -5, dst(v_6) = -6, dst(v_3) = -7, dst(v_2) = -6$ , and the third negative cycle is  $C_3 = (v_3, v_7, v_8, v_1, v_4, v_3)$  with  $dst(v_1) = -10, dst(v_4) = -9, dst(v_3) = -8, dst(v_7) = -8, dst(v_8) = -9$ . By reversing these three negative cycles, we have a cycle  $C = (v_1, v_2, v_3, v_4)$ , and a graph  $G'$  which is a simple cycle with  $(v_1, v_5, v_6, v_3, v_7, v_8, v_1)$ . As can be seen, the current  $\min\{dst(u)\} = dst(v_1) = -10$  is in the range of  $[-2|E(G')| - |E(C)|, 0]$ . When  $DS-U(G)$  terminates,  $\min\{dst(u)|u \in V(C)\} = dst(v_1) = -14$  is in the range of  $[-2|E(G)|, 0]$ , and  $\min\{dst(u)|u \in V(G') \setminus V(C)\} = dst(v_8) = -13$  is in the range of  $[-2|E(G)|, 0]$ . It shows that Lemma 4.2 holds for this example.

**Lemma 4.3:** Given a general graph  $G$ , when  $DS-U(G)$  terminates, for each vertex  $u$ ,  $dst(u) \in [-4m, 0]$ , where  $m = |E(G)|$ .

**Proof Sketch:** For a general graph  $G$ , we can add edges  $(u, v)$  from vertices  $u$  with  $d_I(u) > d_O(u)$  to vertices  $v$  with  $d_I(v) < d_O(v)$  and  $(u, v) \notin E(G)$ . Obviously, the resulting augment graph  $G^A$  has at most  $2m$  edges.

Based on Lemma 4.2, when  $DS-U(G^A)$  terminates, each vertex  $u$  satisfies  $d(u) \in [-4m, 0]$ . On the other hand,  $DS-U(G^A)$  can be decomposed into two phases,  $DS-U(G)$  and further relaxations exploiting  $E(G^A) \setminus E(G)$ , implying that for each vertex  $u$ ,  $dst(u) \in [-4m, 0]$  holds when  $DS-U(G)$  terminates.  $\square$

**Lemma 4.4:** For each value of  $dst(u)$  of every vertex  $u$ , the out-neighbors of  $u$ , i.e.  $N_O(u)$ , are relaxed at most once.

**Proof Sketch:** As shown in Algorithm. 3,  $dst(u)$  is monotone decreasing, and  $pos(u)$  is monotone increasing for a particular  $dst(u)$  value. So Lemma 4.4 holds.  $\square$

**Theorem 4.2:** Time complexity of  $DS-U(G)$  is  $O(m^2)$ .

**Proof Sketch:** Given Lemma 4.2, Lemma 4.3, and Lemma 4.4, since every edge  $(u, v)$  is checked at most  $|dst(u)| + |dst(v)| \leq 8m$  times for relaxations. By applying amortized analysis [23], the time complexity of  $DS-U(G)$  is  $O(m^2)$ .  $\square$

Consider Algorithm 2. During each iteration of the while loop, only a small part of the graph can be traversed and most edges are visited at most twice. Therefore, each iteration can be approximately bounded as  $O(m)$ , and the time complexity of  $DS-U$  is approximated as  $O(K \cdot m)$ , where  $K$  is the number of iterations, bounded by  $|E(\mathcal{U}(G))| \leq m$ . In the following discussion, we will analyze the time complexity of algorithms based on the number of iterations.

## 5. THE OPTIMAL: GREEDY-&REFINE

$DS-U$  reduces the time complexity of  $BF-U$  to  $O(m^2)$ , but it is still very slow for large graphs. To further reduce the running time of  $DS-U$ , we propose a new two-phase algorithm which is shown to be two orders of magnitude faster than  $DS-U$ . Below, we first in-

roduce an important observation which can be used to prune many unpromising edges. Then, we will present our new algorithms as well as theoretical analysis.

Let  $\mathcal{S}$  be a set of strongly connected components (SCCs) of  $G$ , such that  $\mathcal{S} = \{G_1, G_2, \dots\}$ , where  $G_i$  is an SCC of  $G$ ,  $G_i \subseteq G$ , and  $G_i \cap G_j = \emptyset$  for  $i \neq j$ . We show that for any edge, if it is not included in any SCC  $G_i$  of  $G$ , then it cannot be contained in the maximum Eulerian subgraph  $\mathcal{U}(G)$ . Therefore, the problem of finding the maximum Eulerian subgraph of  $G$  becomes a problem of finding the maximum Eulerian subgraph of each  $G_i \in \mathcal{S}$ , since the union of the maximum Eulerian subgraph of  $G_i \in \mathcal{S}$ ,  $1 \leq i \leq |\mathcal{S}|$ , is the maximum Eulerian subgraph of  $G$ .

**Lemma 5.1:** An Eulerian graph  $G$  can be divided into several edge disjoint simple cycles.

**Proof Sketch:** It can be proved if there is a process that we can repeatedly remove edges from a cycle found in an Eulerian graph  $G$ , and  $G$  has no edges after the last cycle being removed. Note that  $d_I(u) = d_O(u)$  for every  $u$  in  $G$ . Let a subgraph of  $G$ , denoted as  $G_c$ , be such a cycle found in  $G$ .  $G_c$  is an Eulerian subgraph, and  $G \ominus G_c$  is also an Eulerian subgraph. The lemma is established.  $\square$

**Theorem 5.1:** Let  $G$  be a directed graph, and  $\mathcal{S} = \{G_1, G_2, \dots\}$  be a set of SCCs of  $G$ . The maximum Eulerian subgraph of  $G$ ,  $\mathcal{U}(G) = \bigcup_{G_i \in \mathcal{S}} \mathcal{U}(G_i)$ .

**Proof Sketch:** For each edge  $e = (u, v) \in \mathcal{U}(G)$ , there is at least one cycle containing this edge, given by Lemma 5.1. Therefore,  $u$  and  $v$  belong to the same SCC, i.e., for any edge  $e' \in G - \mathcal{S}$ , it cannot be included in  $\mathcal{U}(G)$ . The theorem is established.  $\square$

Below, we discuss how to find the maximum Eulerian subgraph for each strongly connected component (SCC)  $G_i$  of  $G$ . In the following discussion, we assume that a graph  $G$  is an SCC itself.

We can use  $DS-U$  to find the maximum Eulerian subgraph for an SCC  $G$ . However,  $DS-U$  is still too expensive to deal with large graphs. The key issue is that the number of iterations in  $DS-U$  (Algorithm 2, Lines 3-15), can be very large when the graph and its maximum Eulerian subgraph are both very large. Since in most iterations, the number of edges with weight +1 increases only by 1, and thus it takes almost  $|\mathcal{U}(G)|$  iterations to get the optimal number of edges in the maximum Eulerian subgraph  $\mathcal{U}(G)$ .

In order to reduce the number of iterations, we propose a two-phase Greedy-&Refine algorithm, abbreviated by  $GR-U$ . Here, a Greedy algorithm computes an Eulerian subgraph of  $G$ , denoted as  $\tilde{\mathcal{U}}(G)$ , and a Refine algorithm refines the greedy solution  $\tilde{\mathcal{U}}(G)$  to get the maximum Eulerian subgraph  $\mathcal{U}(G)$ , which needs at most  $|E(\mathcal{U}(G))| - |E(\tilde{\mathcal{U}}(G))|$  iterations. The  $GR-U$  algorithm is given in Algorithm 4, and an overview is shown in Fig. 6. In Algorithm 4, it first computes all SCCs (Line 1). For each SCC  $G_i$ , it computes an Eulerian subgraph using Greedy, denoted as  $\tilde{\mathcal{U}}(G_i)$  (Line 3). In Greedy, in every iteration  $l$  ( $1 \leq l \leq l_{max}$ ), it identifies a subgraph by an  $l$ -Subgraph algorithm, and further deletes/reverses all specific length- $l$  paths called pn-paths which we will discuss in details by DFS. Note  $l_{max}$  is a small number. After computing  $\tilde{\mathcal{U}}(G_i)$ ,  $G_i - \tilde{\mathcal{U}}(G_i)$  is near acyclic, and it moves all cycles from  $G_i - \tilde{\mathcal{U}}(G_i)$  to  $\tilde{\mathcal{U}}(G_i)$  (Line 4). Finally, it refines  $\tilde{\mathcal{U}}(G_i)$  to obtain the optimal  $\mathcal{U}(G_i)$  by calling Refine (Line 5). The union of all  $\mathcal{U}(G_i)$  is the maximum Eulerian subgraph for  $G$ . Below, we first list some important concepts introduced in the algorithm and analysis parts in Table. 2, and then we shall detail the greedy algorithm and refine algorithm, respectively.

### 5.1 The Greedy Algorithms

Given a graph  $G$ , we propose two algorithms to obtain an ini-

Used-In	Symbol	Meaning
Greedy	label( $u$ )	label( $u$ ) = $d_O(u) - d_I(u)$
	pn-path ( $u, v$ )	path( $u = v_1, v_2, \dots, v_l = v$ ), label( $u$ ) > 0, label( $v$ ) < 0, and label( $v_i$ ) = 0 for $1 < i < l$
	$G_l$	( $l$ -Subgraph) subgraph of $G$ contains all pn-paths of length $l$
	$G^l$	$V(G^l) = V(G)$ , $E(G^l) = \{(u, v) \mid (v, u) \in E(G)\}$
	level( $v$ )	the shortest distance from any vertex $u$ with a positive label, label( $u$ ) > 0, in $G$
	rlevel( $v$ )	the shortest distance to any vertex $u$ with a negative label, label( $u$ ) < 0, in $G$
Refine Analysis	$\tilde{G}$	$V(\tilde{G}) = V(G)$ , $\forall (v_i, v_j) \in E(\tilde{G}), (v_j, v_i) \in E(\tilde{G})$ , and $w(v_j, v_i) = -w(v_i, v_j)$
	p-path/n-path	a path where every edge is with a positive/negative weight
	k-cycle	$(v_1^+, v_1^-, v_2^+, \dots, v_k^+, v_k^-, v_1^+)$ , where $(v_i^+, v_i^-)$ are n-paths, and $(v_i^-, v_{i+1}^+)$ plus $(v_k^-, v_1^+)$ are p-paths
	$\Delta_k$	the total weight of n-edges for a k-cycle ( $\Delta_k = \sum_{i=1, \dots, k} w(v_i^+, v_i^-)$ )
	$\Delta'_k$	the total weight of p-edges for a k-cycle ( $\Delta'_k = \sum_{i=1, \dots, k-1} w(v_i^-, v_{i+1}^+) + w(v_k^-, v_1^+)$ )
	$\mathcal{G}$	$\mathcal{G} = G_P \oplus G_N$ , $G_P = G \ominus \mathcal{U}(G)$ and $G_N = G \ominus \mathcal{U}(G)$

Table 2: Notations

#### Algorithm 4 GR-U ( $G$ )

- 1: Compute SCCs of  $G$ ,  $S = \{G_1, G_2, \dots\}$ ;
- 2: **for** each  $G_i \in S$  **do**
- 3:    $\tilde{\mathcal{U}}(G_i) \leftarrow$  Greedy ( $G_i$ );
- 4:   Move all cycles found in  $G_i - \tilde{\mathcal{U}}(G_i)$  to  $\tilde{\mathcal{U}}(G_i)$ ; {Make  $G_i - \tilde{\mathcal{U}}(G_i)$  acyclic}
- 5:    $\mathcal{U}(G_i) \leftarrow$  Refine ( $\tilde{\mathcal{U}}(G_i)$ ,  $G_i$ );
- 6: **end for**
- 7: **return**  $\bigcup_{i=1}^{|S|} \mathcal{U}(G_i)$ ;

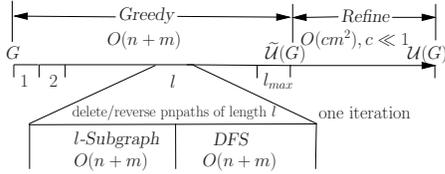


Figure 6: An Overview of Greedy-&Refine

tial Eulerian subgraph  $\tilde{\mathcal{U}}(G)$ . The first algorithm is denoted as *Greedy-D* (Algorithm 5), which deletes edges from  $G$  to make  $d_I(v) = d_O(v)$  for every vertex  $v$  in  $\tilde{\mathcal{U}}(G)$ . The second algorithm is denoted as *Greedy-R* (Algorithm 8), which reverses edges instead of deletion to the same purpose. We use *Greedy* when we refer to either of these two algorithms. By definition, the resulting  $\tilde{\mathcal{U}}(G)$  is an Eulerian subgraph of  $G$ . The more edges we have in  $\tilde{\mathcal{U}}(G)$ , the closer the resulting subgraph  $\tilde{\mathcal{U}}(G)$  is to  $\mathcal{U}(G)$ . We discuss some notations below

**The vertex label:** For each vertex  $u$  in  $G$ , we define a vertex label on  $u$ , label( $u$ ) =  $d_O(u) - d_I(u)$ . If label( $u$ ) = 0, it means that  $u$  can be a vertex in an Eulerian subgraph without any modifications. If label( $u$ )  $\neq$  0, it needs to delete/reverse some adjacent edges to make label( $u$ ) being zero.

**The pn-path:** We also define a positive-start and negative-end path between two vertices,  $u$  and  $v$ , denoted as pn-path ( $u, v$ ). Here, pn-path ( $u, v$ ) is a path  $p = (v_1, v_2, \dots, v_l)$ , where  $u = v_1$  and  $v = v_l$  with the following conditions: label( $u$ ) > 0, label( $v$ ) < 0, and all label( $v_i$ ) = 0 for  $1 < i < l$ . Clearly, by this definition, if we delete all the edges in pn-path ( $u, v$ ), then label( $u$ ) decreases by 1, label( $v$ ) increases by 1, and all intermediate vertices in pn-path ( $u, v$ ) will have their labels as zero. To make all vertex labels being zero, the total number of such pn-paths to be deleted/reversed is  $N = \sum_{\text{label}(u) > 0} \text{label}(u)$ .

**The transportation graph  $G^T$ :** A transportation graph  $G^T$  of  $G$  is a graph such that  $V(G^T) = V(G)$  and  $E(G^T) = \{(u, v) \mid (v, u) \in E(G)\}$ .

#### Algorithm 5 Greedy-D ( $G$ )

- 1:  $l \leftarrow 1$ ;  $G' \leftarrow G$ ;
- 2: **while** some vertex  $u \in G'$  with label( $u$ ) > 0 **do**
- 3:    $G' \leftarrow$  PN-path-D ( $G'$ ,  $l$ );  $l \leftarrow l + 1$ ;
- 4: **end while**
- 5: **return**  $G'$ ;

#### Algorithm 6 PN-path-D ( $G, l$ )


- 1:  $G_l \leftarrow l$ -Subgraph ( $G, l$ );
- 2: Enqueue all vertices  $u \in V(G_l)$  with label( $u$ ) > 0 into queue  $Q$ ;
- 3: **while**  $Q \neq \emptyset$  **do**
- 4:    $u \leftarrow Q.\text{top}()$ ;
- 5:   Following DFS starting from  $u$  over  $G_l$ , traverse unvisited edges and mark them "visited"; let the path from  $u$  to  $v$  be pn-path ( $u, v$ ), when it reaches the first vertex  $v$  in  $G_l$  with level( $v$ ) =  $l$ ;
- 6:   **if** pn-path ( $u, v$ )  $\neq \emptyset$  **then**
- 7:     delete all edges in pn-path ( $u, v$ ) from  $G$ ;
- 8:     label( $u$ )  $\leftarrow$  label( $u$ ) - 1; label( $v$ )  $\leftarrow$  label( $v$ ) + 1;
- 9:     **if** label( $u$ ) = 0 **then**  $Q.\text{dequeue}()$ ;
- 10:   **else**
- 11:      $Q.\text{dequeue}()$ ;
- 12:   **end if**
- 13: **end while**
- 14: **return**  $G$ ;

**The level and rlevel:** level( $v$ ) is the shortest distance from any vertex  $u$  with a positive label, label( $u$ ) > 0, in  $G$ . rlevel( $v$ ) is the shortest distance from any vertex  $u$  with a positive label, label( $u$ ) > 0, in  $G^T$ . Note rlevel( $v$ ) is the shortest distance to any vertex  $u$  with a negative label, label( $u$ ) < 0, in  $G$ .


##### 5.1.1 The Greedy-D Algorithm

Below, we first concentrate on *Greedy-D* (Algorithm 5). Let  $G'$  be  $G$  (Line 1). In the **while** loop (Lines 2-4), it repeatedly deletes all pn-paths starting from length  $l = 1$  by calling an algorithm *PN-path-D* (Algorithm 6) until no vertex  $u$  in  $G'$  with a positive value (label( $u$ ) > 0).

**Example 5.1:** Consider graph  $G$  in Fig. 7. Three vertices,  $v_2, v_4$ , and  $v_8$ , in double cycles, have a label +1, and three other vertices,  $v_1, v_3$ , and  $v_7$ , in dashed cycles, have a label -1. Initially,  $l = 1$ , *Greedy-D* (Algorithm 5) deletes pn-path ( $v_2, v_3$ ), making label( $v_2$ ) = label( $v_3$ ) = 0. When  $l = 2$ , pn-path ( $v_4, v_1$ ) = ( $v_4, v_3, v_1$ ) is deleted. Finally, when  $l = 5$ , pn-path ( $v_8, v_7$ ) = ( $v_8, v_{11}, v_{12}, v_{13}, v_{14}, v_7$ ) will be deleted. In Fig. 7, the graph with solid edges is  $\tilde{\mathcal{U}}(G)$  or the graph  $G'$  returned by Algorithm 5. It is worth mentioning that for the same graph  $G$ , *DS-U* needs 10 iterations. From the Eulerian subgraph  $\mathcal{U}(G)$  obtain by *Greedy*, it only needs at most 2 additional iterations to get the maximum Eulerian

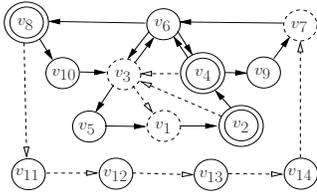

**Figure 7: An Eulerian subgraph obtained by Greedy for graph  $G$  in Fig. 1**

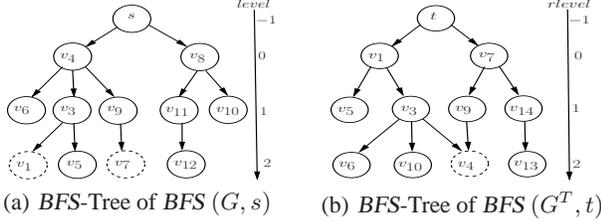

**Figure 8: BFS-Trees used for constructing  $l$ -Subgraph**


subgraph.

It is worth noting that  $\tilde{\mathcal{U}}(G)$  is not optimal. Some edges in  $\tilde{\mathcal{U}}(G)$  may not be in the maximum Eulerian subgraph, while some edges deleted should appear in the maximum Eulerian subgraph. In next section, we will discuss how to obtain the maximum Eulerian subgraph  $\mathcal{U}(G)$  from the greedy solution  $\tilde{\mathcal{U}}(G)$ .

**Finding all pn-paths with length  $l$ :** The *PN-path-D* algorithm is shown in Algorithm 6. In brief, for a given graph  $G$ , *PN-path-D* first extracts a subgraph  $G_l \subseteq G$  which contains all pn-paths of length  $l$  that are possible to be deleted from  $G$  by calling an algorithm *l-Subgraph* (Algorithm 7) in Line 1. In other words, all edges in  $E(G)$  but not in  $E(G_l)$  cannot appear in any pn-paths with a length  $\leq l$ . Based on  $G_l$  obtained, *PN-path-D* deletes pn-paths from  $G$  (not from  $G_l$ ) with additional conditions (in Lines 2-13). Let  $G'_l$  be a subgraph of  $G_l$  that includes all edges appearing in pn-paths of length  $l$  to be deleted in *PN-path-D*. *PN-path-D* will return a subgraph  $G \setminus G'_l$  as a subgraph of  $G$ , which will be used in the next run in *Greedy-D* for deleting pn-paths with length  $l + 1$ .

We discuss the *l-Subgraph* algorithm (Algorithm 7), which extracts  $G_l$  from  $G$  by *BFS* (breadth-first-search) traversing  $G$  twice. In the first *BFS* (Lines 4-6), it adds a virtual vertex  $s$ , and adds an edge  $(s, u)$  to every vertex  $u$  with a positive label ( $\text{label}(u) > 0$ ) in  $G$ . Then, it assigns a level to every vertex in  $G$  as follows. Let  $\text{level}(s)$  be  $-1$ . By *BFS*, it assigns  $\text{level}(u)$  to be  $\text{level}(\text{parent}(u)) + 1$ , where  $\text{parent}(u)$  is the parent vertex of  $u$  following *BFS*. In the second *BFS* (Lines 7-10), it conceptually considers the transposition graph  $G^T$  of  $G$  by reversing every edge  $(v, u) \in E(G)$  as  $(u, v) \in E(G^T)$  (Line 7). Then, it assigns a different rlevel to every vertex in  $G$  using the transposition graph  $G^T$ . Like the first *BFS*, it adds a virtual vertex  $t$ , and adds an edge  $(t, u)$  to every vertex  $u$  with a negative label ( $\text{label}(u) < 0$ ) in  $G^T$ . Then, it assigns rlevel to every vertex in  $G^T$  as follows. Let  $\text{rlevel}(t)$  be  $-1$ . By *BFS*, it assigns  $\text{rlevel}(u)$  to be  $\text{rlevel}(\text{parent}(u)) + 1$ , where  $\text{parent}(u)$  is the parent vertex of  $u$  in  $G^T$  following *BFS*. The resulting subgraph  $G_l$  to be returned from *l-Subgraph* is extracted as follows. Here,  $V(G_l)$  contains all vertices  $u$  in  $G$  if  $\text{level}(u) + \text{rlevel}(u) = l$  for the given length  $l$ , and  $E(G_l)$  contains all edges  $(u, v)$  if both  $u$  and  $v$  appear in  $V(G_l)$ ,  $(u, v) \in E(G)$ , and  $\text{level}(u) + 1 = \text{level}(v)$  (Lines 11-13). The following example illustrates how *l-Subgraph* algorithm works.

**Example 5.2:** Fig. 9 illustrates the  $G_l$  returned by *l-Subgraph* (Al-

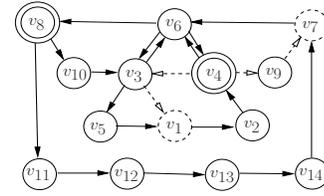

**Figure 9: An  $l$ -Subgraph for length  $l = 2$**

**Algorithm 7  $l$ -Subgraph ( $G, l$ )**

- 1: **for** each vertex  $u$  in  $V(G)$  **do**
- 2:    $\text{level}(u) \leftarrow \infty, \text{rlevel}(u) \leftarrow \infty$ ;
- 3: **end for**
- 4: Add a virtual vertex  $s$  and an edge  $(s, u)$  from  $s$  to every vertex  $u$  in  $G$  if  $\text{label}(u) > 0$ ;
- 5:  $\text{level}(s) \leftarrow -1$ ;
- 6:  $\text{level}(u) \leftarrow \text{level}(\text{parent}(u)) + 1$  for all vertices  $u$  in  $G$  following *BFS* starting from  $s$ ;
- 7: Construct a graph  $G^T$  where  $V(G^T) = V(G)$  and  $E(G^T) = \{(u, v) | (v, u) \in E(G)\}$ ;
- 8: Add a virtual vertex  $t$  and an edge  $(t, u)$  from  $t$  to every vertex  $u$  in  $G^T$  if  $\text{label}(u) < 0$ ;
- 9:  $\text{rlevel}(t) \leftarrow -1$ ;
- 10:  $\text{rlevel}(u) \leftarrow \text{rlevel}(\text{parent}(u)) + 1$  for all vertices  $u$  in  $G^T$  following *BFS* starting from  $t$ ;
- 11: Extract a subgraph  $G_l$ ;
- 12:  $V(G_l) = \{u | \text{level}(u) + \text{rlevel}(u) = l\}$ ;
- 13:  $E(G_l) = \{(u, v) | u \in V(G_l), v \in V(G_l), (u, v) \in E(G), \text{level}(u) + 1 = \text{level}(v)\}$ ;
- 14: **return**  $G_l$ ;

gorithm 7) when  $l = 2$ . It is constructed using two *BFS*, i.e., *BFS* ( $G, s$ ) and *BFS* ( $G^T, t$ ), and the associated *BFS*-trees with  $\text{level} \leq 2$  and  $\text{rlevel} \leq 2$  are shown in Fig. 8(a) and Fig. 8(b), respectively. In Fig. 8(a), vertices  $v_1$  and  $v_7$  are the only vertices with  $\text{level} < 0$ . In Fig. 8(b), vertex  $v_4$  is the only one with  $\text{level} > 0$ . Therefore,  $G_l$  contains only four edges, in dashed lines, which is much smaller than the original graph  $G$  to be handled.

**Lemma 5.2:** By *l-Subgraph*, the resulting subgraph  $G_l$  includes all pn-paths of length  $l$  in  $G$ .

**Proof Sketch:** Recall that *l-Subgraph* returns a graph  $G_l$  where  $V(G_l) = \{u | \text{level}(u) + \text{rlevel}(u) = l\}$  and  $E(G_l) = \{(u, v) | u \in V(G_l), v \in V(G_l), (u, v) \in E(G), \text{level}(u) + 1 = \text{level}(v)\}$ . It implies the following. All vertices in  $G_l$  are on at least one shortest path from a positive label vertex  $u$  ( $\text{label}(u) > 0$ ) to a negative label vertex  $v$  ( $\text{label}(v) < 0$ ) of length  $l$ . All edges are on such shortest paths. No any edge in a pn-path of length  $l$  will be excluded from  $G_l$ . In other words, there does not exist an edge  $(u', v')$  on pn-path  $(u, v)$  of length  $l$ , which does not appear in  $E(G_l)$ .  $\square$

We explain *PN-path-D* (Algorithm 6). Based on  $G_l$  obtained from  $G$  using *l-Subgraph* (Algorithm 7), in *PN-path-D*, we delete all possible pn-paths of length  $l$  from  $G$  (Lines 2-13). The deletion of all pn-paths of length  $l$  from the given graph  $G$  is done using *DFS* over  $G_l$  with a queue  $Q$ . It first pushes all vertices  $u$  in  $V(G_l)$  with a positive label ( $\text{label}(u) > 0$ ) into queue  $Q$ , because they are the starting vertices of all pn-paths with length  $l$ . We check the vertex  $u$  on the top of queue  $Q$ . With the vertex  $u$ , we do *DFS* starting from  $u$  over  $G_l$ , traverse unvisited edges in  $G_l$ , and mark the edges visited as “visited”. Let  $p$  be the first pn-path  $(u, v)$  with length  $l$  along *DFS*. We delete all edges on  $p$ , and adjust the labels as to reduce  $\text{label}(u)$  by 1 and increase  $\text{label}(v)$  by 1. We dequeue  $u$  from queue  $Q$  until we cannot find any more pn-paths of length  $l$  starting from  $u$ , i.e.  $p$  returned by *DFS* ( $u$ ) is empty. It is important to note that we only visit each edge at most once. There are two

---

**Algorithm 8** *Greedy-R* ( $G$ )

---

```
1:  $l \leftarrow 1$ ;  
2: Assign an initial value of  $-1$  to the weight  $w(v_i, v_j)$  for every edge  
    $(v_i, v_j) \in E$ ;  
3: while some vertex  $u \in G$  with  $\text{label}(u) > 0$  do  
4:    $G \leftarrow \text{PN-path-R}(G, l)$ ; {PN-path-R is the same as PN-path-D (Al-  
   algorithm 6) except that in Algorithm 6, Line 7 is changed to be “re-  
   verse all edges in pn-paths  $(u, v)$  in  $G$ , both weights and direc-  
   tions”}  
5:    $l \leftarrow l + 1$ ;  
6: end while  
7: Remove edges  $(v_i, v_j)$  from  $G$  if  $w(v_i, v_j) = +1$ ;  
8: return  $G$ ;
```

---

cases. One is that the edges visited will be deleted and there is no need to revisit. The other is that they are marked as “visited” but not included in any pn-paths with length  $l$ . For this case, these edges will not appear in any other pn-paths starting from any other vertices.

**Lemma 5.3:** *By PN-path-D, all pn-paths of length  $l$  are deleted.*

**Proof Sketch:** It can be proved based on *DFS* over  $G_l$  obtained from  $l$ -Subgraph.

**Lemma 5.4:** *By PN-path-D, the resulting  $G$  does not include any pn-paths of length  $\leq l$ .*

**Proof Sketch:** Let  $G'_i$  be the resulting graph of *PN-path-D* after deleting all pn-paths of length  $i$  from  $G$ . It is trivial when  $i = 1$ . Assume that it holds for  $G'_i$  when  $i < l$ . We prove that  $G'_i$  holds when  $i = l$ . First, there are no pn-paths of length  $\leq l - 1$  in graph  $G'_{l-1}$  as a result of *PN-path-D* by assumption. Second,  $G'_l \subseteq G'_{l-1}$  because  $G'_l$  is obtained by deleting pn-paths of length  $l$  from  $G'_{l-1}$ , as given in the *Greedy-D* algorithm (Algorithm 5). Furthermore, in *PN-path-D*, every vertex  $u$  with  $\text{label}(u) = 0$  in  $G'_{l-1}$  keeps  $\text{label}(u) = 0$  in  $G'_l$ . If there is a pn-path  $(u, v)$  of length  $\leq l - 1$  found in  $G'_l$ , then it must be in  $G'_{l-1}$ , which contradicts the assumption. Therefore,  $G'_l$  does not include any pn-paths of length  $\leq l$ .  $\square$


**Theorem 5.2:** *The PN-path-D algorithm correctly identifies a subgraph  $G_l$  which contains all pn-paths of length  $l$  and returns a graph includes no pn-paths of length  $\leq l$ .*

**Proof Sketch:** It can be proved by Lemma 5.2 and Lemma 5.4.

We discuss the time complexity of the *Greedy-D* algorithm. In our experiments, we show that more than 99.99% pn-paths deleted in most real-world datasets are with a length less than or equal to 6. We take the maximum length  $l_{max}$  in the *Greedy-D* algorithm, which is equivalent to the iterations of calling *PN-path-D*, as a constant, since it is always less than 100 in our extensive experiments. Here, both *PN-path-D* and  $l$ -Subgraph cost  $O(n + m)$ , because  $l$ -Subgraph invokes *BFS* twice and *PN-path-D* performs *DFS* once in addition. Given  $l_{max}$  as a constant, the time complexity of the *Greedy-D* algorithm is  $O(n + m)$ .

### 5.1.2 The Greedy-R Algorithm

The *Greedy-R* algorithm is shown in Algorithm 8. Like *Greedy-D*, *Greedy-R* will result in an Eulerian subgraph. Unlike *Greedy-D*, it reverses the edges on pn-paths of length  $l$  from  $l = 1$  until there does not exist a vertex  $u$  in  $G$  with  $\text{label}(u) > 0$ . Initially, *Greedy-R* assigns every edge,  $(v_i, v_j)$ , in  $G$  with a weight  $w(v_i, v_j) = -1$ . Then, in the while loop, it calls *PN-path-R*. *PN-path-R* is the same as *PN-path-D* (Algorithm 6) except that in Algorithm 6 Line 7 is changed to be “reverse all edges in pn-path  $(u, v)$  in  $G$ , both weights and directions”. As a result, *Greedy-R* identifies an Eule-



**Figure 10:** An example to explain *PN-path-R*.

rian subgraph of  $G$ ,  $\tilde{U}(G)$ . Here,  $E(\tilde{U}(G))$  contains all edges with a weight  $= -1$  and  $V(\tilde{U}(G))$  contains all the vertices in  $E(\tilde{U}(G))$ . Below, we give two lemmas to prove the correctness of *Greedy-R*.


**Lemma 5.5:** *By PN-path-R, the resulting  $G$  does not include any pn-paths of length  $\leq l$ .*

**Proof Sketch:** Let  $G'_i$  be the resulting graph of *PN-path-R* ( $G, i$ ), i.e. after reversing all pn-paths of length  $i$  from  $G$ . It is trivial when  $i = 1$ . Assume that it holds for  $G'_i$  when  $i < l$ . We prove that  $G'_i$  holds when  $i = l$ . Otherwise, suppose that there is a pn-path  $(v_1, v_2)$  of length  $< l$  in  $G'_l$ , then there exists at least one edge  $e = (v, v')$  in pn-path  $(v_1, v_2)$  that has been reversed during *PN-path-R* ( $G, l$ ), otherwise, pn-path  $(v_1, v_2)$  will be fully included in  $G'_{l-1}$ . Without loss of generality, assume that edge  $(v', v)$  is a part of pn-path  $(u_1, u_2) = (u_1, v', v, u_2)$  of length  $l$ . Fig. 10 shows  $G'_{l-1}$  (before calling *PN-path-R* ( $G, l$ )). Then, we can easily construct pn-path  $(u_1, v_2) = (u_1, v', v_2)$  and pn-path  $(v_1, u_2) = (v_1, v, u_2)$ , and at least one of them is of length  $\leq l - 1$ , contradicting the assumption. In addition, there can not exist any pn-path of length  $l$  in  $G'_l$ . As a consequence, by *PN-path-R*, the resulting  $G$  does not include any pn-paths of length  $\leq l$ .  $\square$

Similar to Theorem. 5.2, *PN-path-R* algorithm correctly identifies a subgraph  $G_l$  which contains all pn-paths of length  $l$  and returns a graph includes no pn-paths of length  $\leq l$ .

**Theorem 5.3:** *The PN-path-R algorithm correctly identifies a subgraph  $G_l$  which contains all pn-paths of length  $l$  and returns a graph includes no pn-paths of length  $\leq l$ .*

We omit the proof of Theorem. 5.3 since it can be proved in a similar manner like Theorem. 5.2 using Lemma 5.5.

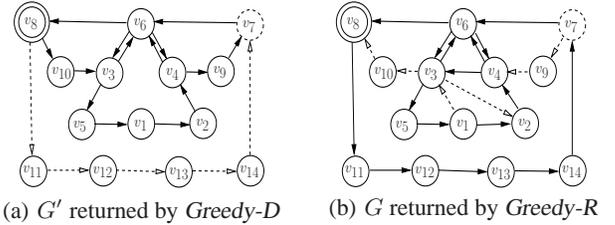

**Figure 11:**  $\tilde{U}(G)$  returned by *Greedy-D* and *Greedy-R*

It is worth noticing that  $\tilde{U}(G)$  obtained by *Greedy-R* is at least as good as that obtained by *Greedy-D*. If each edge in  $G - \tilde{U}(G)$  is reversed once, then the  $\tilde{U}(G)$  obtained by *Greedy-R* is equivalent to that obtained by *Greedy-D*, as each edge appears in at most one pn-path. On the other hand, if there are some edges being reversed more than once, *Greedy-R* performs better. Fig. 11 shows the difference between *Greedy-D* and *Greedy-R*. Since pn-paths of length 1 and 2 are the same, we only show the last deleted/reversed pn-path. In Fig. 11(a), we delete pn-path  $(v_8, v_7) = (v_8, v_{11}, v_{12}, v_{13}, v_{14}, v_7)$ . On the other hand, in Fig. 11(b), we reverse pn-path  $(v_8, v_7) = (v_8, v_{10}, v_3, v_4, v_9, v_7)$ . Here edge  $(v_4, v_3)$  is reversed twice.  $\tilde{U}(G)$  returned by *Greedy-R* consists of solid lines, which is better than that returned by *Greedy-D*.

## 5.2 The Refine Algorithm

With the greedy Eulerian subgraph  $\tilde{U}(G)$  found, we have insight

---

**Algorithm 9** *Refine* ( $\tilde{\mathcal{U}}(G), G$ )

---

**Input:** A graph  $G$ , and the Eulerian subgraph obtained by *Greedy*,  $\tilde{\mathcal{U}}(G)$   
**Output:** Two subgraphs of  $G$ ,  $\mathcal{U}(G)$  and  $G_D$  ( $G = \mathcal{U}(G) \cup G_D$ )

```
1: for each edge  $(v_i, v_j)$  in  $E(G)$  do
2:   if  $(v_i, v_j) \in \tilde{\mathcal{U}}(G)$  then
3:     reverse the edge to be  $(v_j, v_i)$  in  $G$ ;  $w(v_j, v_i) \leftarrow +1$ ;
4:   else
5:      $w(v_i, v_j) \leftarrow -1$ ;
6:   end if
7: end for
8: Assign  $dst(u)$  for every  $u \in V(G)$  based on Eq. (1);
9: for each vertex  $u$  in  $V(G)$  do  $relax(u) \leftarrow true$ ,  $pos(u) \leftarrow 0$ ;
10: Enqueue every vertex  $u$  in  $V(G)$  into a queue  $\mathcal{Q}$ ;
11:  $u \leftarrow \mathcal{Q}.front()$ ;
12: while  $\mathcal{Q} \neq \emptyset$  do
13:    $S_V \leftarrow \emptyset$ ,  $S_E \leftarrow \emptyset$ ,  $NV \leftarrow \emptyset$ ;
14:   if  $relax(u) = true$  and  $FindNC(G, u)$  then
15:     Reverse negative cycle and change the edge weights using  $S_V$ 
      and  $S_E$  (refer to Algorithm 2);
16:      $\mathcal{Q} \leftarrow \mathcal{Q} \cup S_V$ ;
17:   else
18:      $\mathcal{Q}.pop()$ ;  $u \leftarrow \mathcal{Q}.front()$ ;
19:   end if
20: end while
21:  $G_D$  is a subgraph that contains all edges with a weight of -1;
22:  $\mathcal{U}(G)$  is a subgraph that contains the edges reversed for all edges with
      a weight of +1;
```

---

on  $G$  because we know  $G = \tilde{\mathcal{U}}(G) \cup \tilde{G}_D$  where  $\tilde{G}_D$  is a DAG (acyclic), and can design a *Refine* algorithm based on such insight, to reduce the number of times to update  $dst(u)$ , which reduces the cost of relaxing. The *Refine* algorithm (Algorithm 9) is designed based on the similar idea given in *DS-U* using *FindNC* with two following enhancements.

First, we utilize  $G = \tilde{\mathcal{U}}(G) \cup \tilde{G}_D$  to initialize the edge weight  $w(v_i, v_j)$  for every edge  $(v_i, v_j)$  and  $dst(u)$  for every vertex  $u$  in  $G$ . The edge weights are initialized in Line 1-7 in Algorithm 9 based on  $\tilde{\mathcal{U}}(G)$  which is a greedy Eulerian subgraph. We also make use of  $\tilde{G}_D$  to initialize  $dst(u)$  based on Eq. (1) in Line 8.

$$dst(u) = \begin{cases} 0 & \text{if } d_I(u) \text{ in } \tilde{G}_D \text{ is } 0, \\ \min\{dst(v) - 1 \mid (v, u) \in \tilde{G}_D\} & u \in \tilde{G}_D, \\ 0 & \text{otherwise} \end{cases} \quad (1)$$

Some comments on the initialization are made below. Following Algorithm 2,  $dst(u)$  can be initialized as  $dst(u) = 0$ . In fact, consider Lemma 4.1. No matter what  $dst(v_i)$  is for a vertex  $v_i$  ( $1 \leq i \leq k-1$ ) in a negative cycle  $C = (v_1, v_2, \dots, v_k = v_1)$ , the negative cycle can be identified because there is at least one edge  $(v_i, v_{i+1})$  that can be relaxed. Based on it, if we initialize  $dst(u)$  in a way such that  $dst(u) \leq dst(v) + w(v, u)$ , then  $u$  cannot be relaxed through  $(v, u)$  before updating  $dst(v)$ . It reduces the number of times to update  $dst(u)$ , and improves the efficiency. We explain it further. Because for any edge,  $(v, u) \in \tilde{G}_D$ ,  $u$  can never be relaxed through edge  $(v, u)$  before  $dst(v)$  being updated, *FindNC* ( $G, u$ ) will relax edges along a path with a few branches to identify a negative-cycle. The variables such as  $relax(u)$  and  $pos(u)$  are initialized in Line 9 as done in Algorithm 2.

Second, we use a queue  $\mathcal{Q}$  to maintain candidate vertices,  $u$ , from which there may exist negative-cycles, if  $relax(u) = true$ . Initially, all vertices are enqueued into  $\mathcal{Q}$ . In each iteration, when invoking *FindNC* ( $G, v$ ), let  $V'$  be the set of vertices relaxed. Among

$V'$ , for any vertex  $w \in S_V \setminus \{v\}$ ,  $dst(w)$  has been updated and it has only relaxed partial out-neighbors when finding the negative cycle. On the other hand, for any vertex  $w \in V' \setminus S_V$ , all of the out-neighbors of  $w$  have been relaxed and cannot be relaxed before updating  $dst(w)$ . We exclude  $w \in V' \setminus S_V$  from  $\mathcal{Q}$  implicitly by setting  $relax(w) = false$  in *FindNC* ( $G, w$ ).

**Example 5.3:** Suppose we have a greedy Eulerian subgraph  $\tilde{\mathcal{U}}(G)$  (Fig. 7) of  $G$  (Fig. 1) by *Greedy-D*, and will refine it to the optimal  $\mathcal{U}(G)$  using *Refine*. Initially, all edges (solid lines) in  $\tilde{\mathcal{U}}(G)$  are reversed with initial +1 edge weight, and all remaining edges in  $\tilde{G}_D$  are initialized with -1 edge weight.  $dst(v_1) = -2$ ,  $dst(v_3) = -1$ ,  $dst(v_7) = -5$ ,  $dst(v_{11}) = -1$ ,  $dst(v_{12}) = -2$ ,  $dst(v_{13}) = -3$ ,  $dst(v_{14}) = -4$ , and other vertices  $u$  have  $dst(u) = 0$ . In the while loop, *FindNC* ( $G, v_1$ ) relaxes  $dst(v_5) = -1$  and returns false. This makes  $relax(v_1) = relax(v_5) = false$  by which  $v_1$  and  $v_5$  are dequeued from  $\mathcal{Q}$ . Afterwards, none of  $v_2, v_3, v_4, v_6$  can relax any out-neighbors, and all are dequeued from  $\mathcal{Q}$ . *FindNC* ( $G, v_7$ ) relaxes all vertices, finds a negative cycle  $(v_7, v_9, v_4, v_2, v_3, v_{10}, v_8, v_{11}, v_{12}, v_{13}, v_{14}, v_7)$ , and adds  $v_2, v_3, v_4$  into  $\mathcal{Q}$  as new candidates. Then, no vertices from  $v_8$  to  $v_{14}$  can relax any out-neighbors until *FindNC* ( $G, v_2$ ) finds the last negative cycle  $(v_2, v_4, v_3, v_2)$ . For most cases, *FindNC* ( $G, u$ ) relaxes a few of  $u$ 's out-neighbors.

We discuss the time complexity of *Refine*. The initialization (Lines 1–9) is  $O(n + m)$ . Since  $\tilde{\mathcal{U}}(G)$  approximates  $\mathcal{U}(G)$ , the number of negative-cycles found by *Refine* will be no more than  $|E(\mathcal{U}(G))| - |E(\tilde{\mathcal{U}}(G))|$ , and vertices  $u$  will have  $dst(u)$  updated less than  $|E(\mathcal{U}(G))| - |E(\tilde{\mathcal{U}}(G))|$  times. This implies the while loop costs  $O(|E(\mathcal{U}(G))| - |E(\tilde{\mathcal{U}}(G))| \cdot m)$ . Time complexity of *Refine* is  $O(cm^2)$ , where  $c \ll 1$ , as confirmed in our testing.

### 5.3 The Bound between Greedy and Optimal

We discuss the bound between  $\tilde{\mathcal{U}}(G)$  obtained by *Greedy* and the maximum Eulerian subgraph  $\mathcal{U}(G)$ . To simplify our discussion, below, a graph  $G$  is a graph with multiple edges between two vertices but without self loops, and every edge  $(v_i, v_j)$  is associated with a weight  $w(v_i, v_j)$ , which is initialized to be -1. Given a graph  $G$ , we use  $\bar{G}$  to represent the reversed graph of  $G$  such that  $V(\bar{G}) = V(G)$  and  $E(\bar{G})$  contains every edge  $(v_j, v_i)$  if  $(v_i, v_j) \in E(G)$ , and  $w(v_j, v_i) = -w(v_i, v_j)$ . In addition, we use two operations,  $\oplus$  and  $\ominus$ , for two graphs  $G_i$  and  $G_j$ . Here,  $G_{ij} = G_i \oplus G_j$  is an operation that constructs a new graph  $G_{ij}$  by union of two graphs,  $G_i$  and  $G_j$ , such that  $V(G_{ij}) = V(G_i) \cup V(G_j)$ , and  $E(G_{ij}) = E(G_i) \cup E(G_j)$ . And  $G' = G_i \ominus G_j$  is an operation that constructs a new graph  $G'$  by removing a subgraph  $G_j$  from  $G_i$  ( $G_j \subseteq G_i$ ) such that  $V(G') = V(G_i)$  and  $E(G') = E(G_i) \setminus E(G_j)$ . Given two Eulerian subgraphs,  $G_i$  and  $G_j$ , it is easy to show that  $G_i \oplus G_j$  and  $G_i \ominus G_j$  are still Eulerian graphs. Given any graph  $G$ ,  $G \oplus \bar{G}$  is an Eulerian graph. Note that assume that there is a cycle with two edges,  $(v_i, v_j)$  and  $(v_j, v_i)$ , between two vertices,  $v_i$  and  $v_j$ , in  $G$ . there will be four edges in  $G \oplus \bar{G}$ , i.e., two edges are from  $G$  and two corresponding reversed edges from  $\bar{G}$ .

We discuss the bound using an Eulerian graph  $\mathcal{G} = \overline{G_P} \oplus G_N$ , where  $G_P = G \ominus \tilde{\mathcal{U}}(G)$  and  $G_N = G \ominus \mathcal{U}(G)$ . We call every edge in  $G_N$  a negative edge (n-edge), and a path in  $G_N$  a negative path (n-path). We also call every edge in  $\overline{G_P}$  a positive edge (p-edge), and a path in  $\overline{G_P}$  a positive path (p-path). It is important to note that p-edges are given for  $\overline{G_P}$  but not for  $G_P$ , all n-edges are with a weight of -1, while all p-edges are with a weight of +1, because they are the reversed edges in  $G_P$ . Here,  $\mathcal{G}$  is a graph with multiple

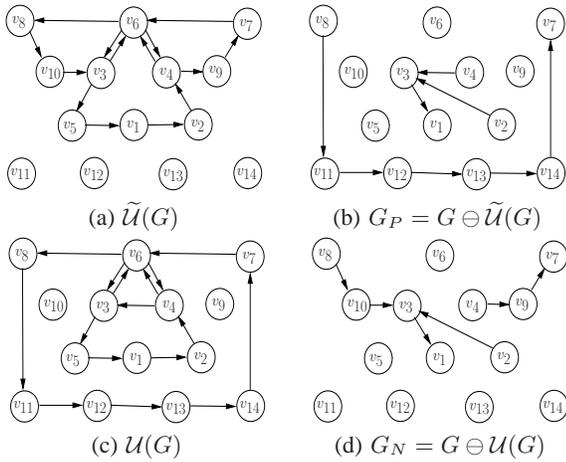


Figure 12:  $\tilde{U}(G)$  and  $U(G)$  of  $G$  in Fig. 1

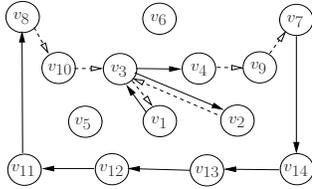


Figure 13:  $\mathcal{G} = \overline{G_P} \oplus G_N$  where  $G_P = G \ominus \tilde{U}(G)$  and  $G_N = G \ominus U(G)$ .

edges between a pair of vertices.

**Example 5.4:** Consider the example graph  $G$  in Fig. 1. The Eulerian subgraph obtained by *Greedy*, i.e.  $\tilde{U}(G)$  is shown in Fig. 12(a). It is worth noting that we make use of the resulting graph of *Greedy-D*, since that obtained by *Greedy-R* is actually the maximum Eulerian subgraph in this case. Fig. 12(c) shows the maximum Eulerian subgraph  $U(G)$ . As observed, some edges in  $\tilde{U}(G)$  do not appear in  $U(G)$ , while some edges that do not appear in  $\tilde{U}(G)$  appear in  $U(G)$ . Fig. 12(b) and Fig. 12(d) show  $G_P = G \ominus \tilde{U}(G)$  and  $G_N = G \ominus U(G)$ , respectively. Fig. 13 shows  $\mathcal{G} = \overline{G_P} \oplus G_N$ . In Fig. 13, the solid edges represent the p-edges from  $\overline{G_P}$ , and the dashed edges represent the n-edges from  $G_N$ .

Since  $\mathcal{G}$  is Eulerian, it can be divided into several edge disjoint simple cycles as given by Lemma 5.1. Among these cycles, there are no cycles in  $\mathcal{G}$  with only n-edges, because they must be in  $U(G)$  if exist. And there are no cycles in  $\mathcal{G}$  with only p-edges, because all such cycles have been moved into  $\tilde{U}(G_i)$  in *GR-U* (Algorithm 4, Line 4).

Next, let a cycle be a positive-cycle if the total weight of the edges in this cycle  $> 0$ , and let it be a negative-cycle if its total weight of edges  $< 0$ . We show there are no negative-cycles in  $\mathcal{G}$ .

**Lemma 5.6:** *There does not exist a negative-cycle in  $\mathcal{G}$ .*

**Proof Sketch:** Assume there is a negative-cycle in  $\mathcal{G}$ , denoted as  $G_{cyc}$ . Since there are no cycle with only p-edges or n-edges, there are p-edges and n-edges in  $G_{cyc}$ . We divide  $G_{cyc}$  into two subgraphs,  $G_p$  and  $G_n$ . Here  $G_p$  consists of all p-edges, where each p-edge is with a +1 weight, and  $G_n$  consists of all n-edges, where each n-edge is with a -1 weight. Clearly,  $|E(G_p)| < |E(G_n)|$ , since it assumes that  $G_{cyc}$  is a negative-cycle. Note that  $U(G) \ominus G_p \oplus G_n$ , which is equivalent to  $U(G) \oplus G_{cyc} \ominus (G_p \oplus G_n)$ , is Eulerian, and it contains more edges than  $U(G)$ , resulting in a con-

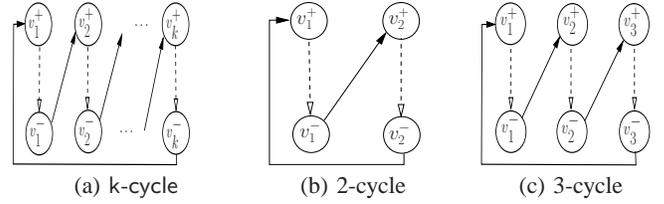


Figure 14: k-cycle

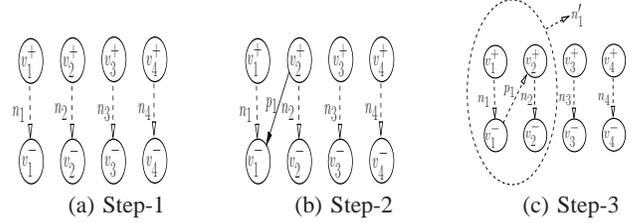


Figure 15: k-cycle generated by *Greedy-R*

tradition. Therefore, there does not exist a negative-cycle in  $\mathcal{G}$ .  $\square$

Lemma 5.6 shows all cycles in  $\mathcal{G}$  are non-negative. Since there are no cycles with only p-edges or n-edges, each cycle in  $\mathcal{G}$  can be partitioned into an alternating sequence of  $k$  p-paths and  $k$  n-paths, and represented as  $(v_1^+, v_1^-, v_2^+, \dots, v_k^+, v_k^-, v_1^+)$ , where  $(v_i^+, v_i^-)$ , for  $i = 1, 2, \dots, k$ , are n-paths, and  $(v_i^-, v_{i+1}^+)$ , for  $i = 2, \dots, k-1, k$ , plus  $(v_k^-, v_1^+)$  are p-paths. We call such cycle a k-cycle. Fig. 14(a) shows an example of k-cycle, and an arrow presents a path. p-paths are in solid lines while n-paths are in dashed lines.

The difference  $|E(U(G))| - |E(\tilde{U}(G))|$  is equal to  $|E(G \ominus \tilde{U}(G))| - |E(G \ominus U(G))| = |E(G_P)| - |E(G_N)| = |E(\overline{G_P})| - |E(G_N)|$ , becomes the total number of edges in  $G_P$  minus the total number of edges in  $G_N$ . On the other hand, the difference  $|E(U(G))| - |E(\tilde{U}(G))|$  can be considered as the total weight of all k-cycles in  $\mathcal{G}$ . Recall that all edges in  $G$  are with weight -1 and the edges in  $\overline{G}$  are with weight +1 by our definition. Assume that  $\mathcal{G} = \{C_1, C_2, \dots\}$ , where  $C_i$  is a k-cycle. The total weight of  $\mathcal{G}$  regarding all k-cycles is  $w(\mathcal{G}) = \sum_i w(C_i)$ . Below, we bound  $|E(U(G))| - |E(\tilde{U}(G))|$  using k-cycles.

Consider  $\mathcal{G}$  in Fig. 13, there are 3 k-cycles.  $C_1 = (v_3, v_1, v_3)$  and  $C_2 = (v_3, v_2, v_3)$  with weight 0, and  $C_3 = (v_8, v_{11}, v_{12}, v_{13}, v_{14}, v_7, v_9, v_4, v_3, v_{10}, v_8)$  with weight 2. This means that it needs at most 2 more iterations to get the maximum Eulerian subgraph from the greedy solution.

For a k-cycle  $(v_1^+, v_1^-, v_2^+, \dots, v_k^+, v_k^-, v_1^+)$ , we use  $\Delta_k$  and  $\Delta'_k$  to represent the total weight of n-edges<sup>1</sup> and p-edges, i.e.  $\Delta_k = \sum_{i=1, \dots, k} w(v_i^+, v_i^-)$  and  $\Delta'_k = \sum_{i=1, \dots, k-1} w(v_i^-, v_{i+1}^+) + w(v_k^-, v_1^+)$ . Because  $\Delta_k$  is determined by the optimal in  $|E(G_N)| = |E(G \ominus U(G))|$ , the bound is obtained when getting the maximum of  $\Delta'_k$ .

**Theorem 5.4:** *The upper bound of the total weight of p-edges in a k-cycle with specific k is k times that of n-edges, i.e.,  $\Delta'_k \leq k \cdot \Delta_k$*

**Proof Sketch:** The proof is based on the way k-cycles constructed by *Greedy-R*. For simplicity, we first assume that each n-path and p-path is a pn-path itself, and we will deal with general cases later. Based on *Greedy-R*, a k-cycle is constructed as shown in Fig. 15, which is a 4-cycle. Initially, there are 4 n-paths,  $n_i =$

<sup>1</sup>For n-edges, we take the absolute value of total weight.

$(v_i^+, v_i^-)$ ,  $i = 1, 2, \dots, 4$ , as Fig. 15(a) shows. *Greedy-R* deals with pn-paths of length  $l$  from a small  $l$  to a large  $l$ . First, *Greedy-R* finds a path  $p_1 = \text{pn-path}(v_2^+, v_1^-)$ , and combines  $p_1$  with two separated n-paths,  $n_1$  and  $n_2$  into a new n-path  $n_1'$ . Here,  $\text{len}(p_1)$  is no larger than any  $\text{len}(n_i)$ . *Greedy-R* will repeat this process to add all p-paths,  $p_i$  into k-cycle in an ascending order of their lengths. The last p-path  $(v_k^-, v_1^+)$  to be added to k-cycle should be the longest one among all p-paths. Then its upper bound is  $\sum_{i=1, \dots, k} w(v_i^+, v_i^-) + \sum_{i=1, \dots, k-1} w(v_i^-, v_{i+1}^+)$ . Otherwise, its upper bound should be  $\max\{w(v_i^-, v_{i+1}^+)\}$ . Below, we prove Theorem. 5.4.

- For 2-cycle (Fig. 14(b)): Since  $w(v_1^-, v_2^+) \leq w(v_1^+, v_1^-)$ ,  $w(v_1^-, v_2^+) \leq w(v_2^+, v_2^-)$ , and  $w(v_2^-, v_1^+) \leq w(v_1^+, v_1^-) + w(v_1^-, v_2^+) + w(v_2^+, v_2^-)$  we have,

$$\begin{aligned} \Delta'_2 &= w(v_1^-, v_2^+) + w(v_2^-, v_1^+) \\ &\leq w(v_1^+, v_1^-) + 2 \cdot w(v_1^-, v_2^+) + w(v_2^+, v_2^-) \\ &\leq 2 \cdot \Delta_2 \end{aligned}$$

- For 3-cycle (Fig. 14(c)): Since

$$\begin{aligned} w(v_1^-, v_2^+) &\leq w(v_1^+, v_1^-), w(v_2^+, v_2^-), w(v_3^+, v_3^-) \\ w(v_2^-, v_3^+) &\leq w(v_1^+, v_1^-) + w(v_1^-, v_2^+) + w(v_2^+, v_2^-) \\ w(v_2^-, v_3^+) &\leq w(v_3^+, v_3^-) \\ w(v_3^-, v_1^+) &\leq w(v_1^+, v_1^-) + w(v_1^-, v_2^+) + w(v_2^+, v_2^-) + \\ &\quad w(v_2^-, v_3^+) + w(v_3^+, v_3^-) \end{aligned}$$

we have,


$$\begin{aligned} \Delta'_3 &= w(v_1^-, v_2^+) + w(v_2^-, v_3^+) + w(v_3^-, v_1^+) \\ &\leq \Delta_3 + 2 \cdot (w(v_1^-, v_2^+) + w(v_2^-, v_3^+)) \\ &\leq 2 \cdot \Delta_3 + 3 \cdot w(v_1^-, v_2^+) \leq 3 \cdot \Delta_3 \end{aligned}$$

- Assume that it holds for k-cycles when  $k < l$ , we prove that it also holds when  $k = l$ . Suppose that the shortest p-path is  $(v_1^-, v_2^+)$ , combine  $(v_1^+, v_1^-)$ ,  $(v_1^-, v_2^+)$  and  $(v_2^+, v_2^-)$  into a single p-path  $(v_1^+, v_2^-)$ , then we get a k-cycle as  $k = l - 1$ . As a result,  $\Delta'_k \leq (k - 1) \cdot (\Delta_k + w(v_1^-, v_2^+)) + w(v_1^-, v_2^+) \leq k \cdot \Delta_k$ .  $\square$

Let  $\Delta'_i$  and  $\Delta_i$  denote the total weight of p-edges and n-edges in a k-cycle  $C_i$ . Bounding  $|E(\mathcal{U}(G))| - |E(\tilde{\mathcal{U}}(G))|$  can be formulated as an LP (linear programming) problem.

$$\begin{aligned} \max \quad & \sum_{C_i} (\Delta'_i - \Delta_i) \\ \text{s.t.} \quad & \text{(Cond-1)} \Delta'_i > \Delta_i, \quad \forall i, \\ & \text{(Cond-2)} \Delta'_i \leq k_i \cdot \Delta_i, \text{ for a k-cycle } C_i \text{ with } k\text{-value } k_i, \\ & \text{(Cond-3)} \sum_{C_i} (\Delta'_i + \Delta_i) \leq |E(\mathcal{G})| \leq |E| \end{aligned}$$

In Fig. 16(a),  $B_t$  at y-axis illustrates the theoretical upper bound of  $|E(\mathcal{U}(G))| - |E(\tilde{\mathcal{U}}(G))| = \frac{K-1}{K+1}|E|$  by solving the LP problem, where the three solid lines represent the three conditions in the above LP problem, respectively. Here,  $K$  is the maximum among all  $k$  values. The theoretical upper bound is far from tight. First,  $|E(\mathcal{G})| \ll |E|$ , which is a tighter upper bound of  $\sum_{C_i} (\Delta'_i + \Delta_i)$ , moving Cond-3 towards the origin. Second, for most k-cycles,  $\Delta'_k = (1 + \epsilon) \cdot \Delta_k$ ,  $0 < \epsilon < 1$ , since most p-paths in a k-cycle are far from the upper bound it can get. This leads Cond-2 moving towards x-axis. Therefore, a tighter empirical upper bound is  $B_p$  at y-axis in Fig. 16(b). We will show it in the experiments.

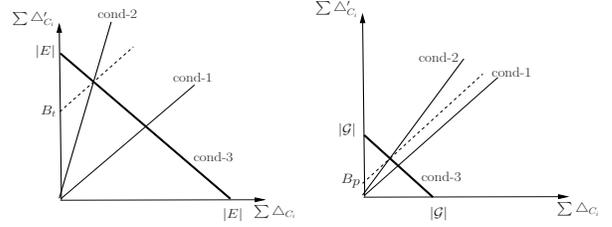

(a) Theoretical Upper Bound (b) Empirical Upper Bound

Figure 16: Upper Bounds

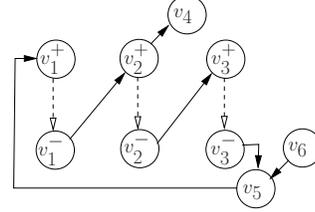


Figure 17: General p-paths

We have proved Theorem 5.4 for the case p-paths and n-paths are pn-paths, which shows that each p-path in a k-cycle has an implicit upper bound. In general, there are cases where p-paths are not pn-paths. In fact, each p-path in a k-cycle can be classified into two classes. (a) A p-path is a part of a pn-path, including the case that the p-path is a pn-path. (b) A p-path can be divided into several sub-paths, each is a part of a pn-path. In Fig. 17, there are three p-paths in the k-cycle,  $(v_1^-, v_2^+)$  is a part of pn-path  $(v_1^-, v_4)$ ,  $(v_2^-, v_3^+)$  itself is pn-path  $(v_2^-, v_3^+)$  and  $(v_3^-, v_4)$  consists of two sub-paths:  $(v_3^-, v_5)$  and  $(v_5, v_4)$ , and each of them is a part of a pn-path or itself is a pn-path.

For the cases when a p-path in a k-cycle is not a pn-path, we use  $w_p$  and  $w_u$  to denote its practical weight and the theoretical upper bound it can reach when itself is a pn-path, respectively. Since we concentrate on weight of p-paths, we treat such a p-path as a pn-path with weight  $w_p$  if  $w_p < w_u$ , and treat it as a pn-path with weight  $w_u$  if  $w_p > w_u$  and add the difference  $w_p - w_u$  to a global variable  $W$ . We will show in Section 6 that  $W$  is very small compared with  $|E(\mathcal{U}(G))|$ .

**Time complexity:** Revisit *GR-U* (Algorithm 4), it includes four parts: SCC decomposition (Line 1), *Greedy* (Line 3), cycle moving (Line 4) and *Refine* (Line 5). SCC decomposition can be accomplished in 2 DFS, in time  $O(n + m)$ . As analyzed in Section 5, *Greedy* invokes  $l_{max}$  times PN-path, and each PN-path needs 2 BFS (*l-Subgraph*) and 1 DFS (remove/reverse pn-paths). Since  $l_{max}$  is small ( $< 100$  in our extensive experiments), the time complexity of *Greedy* is  $O(n + m)$ . Regarding moving cycles from  $G_i - \tilde{\mathcal{U}}(G_i)$  to  $\tilde{\mathcal{U}}(G_i)$ , it is equivalent to moving cycles from non-trivial SCCs of  $G_i - \tilde{\mathcal{U}}(G_i)$  to  $\tilde{\mathcal{U}}(G_i)$ . Based on the fact that  $G_i - \tilde{\mathcal{U}}(G_i)$  is near acyclic, there are a few cycles in  $G_i - \tilde{\mathcal{U}}(G_i)$ , cycle moving is in  $O(n + m)$ . The time complexity of *Refine*, as given in Section 5.2 is  $O(cm^2)$ , because most *FindNC* ( $G, u$ ) relax edges along a path with a few branches and vertices  $u$  will have  $dst(u)$  updated less than  $|E(\mathcal{U}(G))| - |E(\tilde{\mathcal{U}}(G))|$  times.

## 6. PERFORMANCE STUDIES

We conduct extensive experiments to evaluate two proposed *GR-U* algorithms. One is *GR-U-D* using *Greedy-D* (Algorithm 5) and *Refine* (Algorithm 9), and the other is *GR-U-R* using *Greedy-R* (Algorithm 8) and *Refine* (Algorithm 9). We do not compare our

Graph	$ V $	$ E $	$ V(\mathcal{U}(G)) $	$ E(\mathcal{U}(G)) $
wiki-Vote	7,115	103,689	1,286	17,676
Gnutella	62,586	147,892	11,952	18,964
Epinions	75,879	508,837	33,673	264,995
Slashdot0811	77,360	828,159	70,849	734,021
Slashdot0902	82,168	870,159	71,833	748,580
web-NotreDame	325,729	1,469,679	99,120	783,788
web-Stanford	281,903	2,312,497	211,883	691,521
amazon	403,394	3,387,388	399,702	1,973,965
Wiki-Talk	2,394,385	5,021,410	112,030	1,083,509
web-Google	875,713	5,105,039	461,381	1,841,215
web-BerkStan	685,230	7,600,595	478,774	2,068,081
Pokec	1,632,803	30,622,560	1,297,362	20,911,934

Table 3: Summary of real Datasets

Graph	Refine	GR-U-D	Refine	GR-U-R	DS-U	$c$
wiki-Vote	0.1	0.1	0.1	0.1	1.0	0.100
Gnutella	0.5	0.5	0.4	0.4	1.6	0.250
Epinions	15.9	16.1	15.2	15.4	414.4	0.037
Slashdot0811	80.6	80.8	70.9	71.0	12,748.6	0.006
Slashdot0902	87.3	87.5	76.6	76.8	14,324.5	0.005
web-NotreDame	2.6	3.0	2.4	2.7	370.4	0.007
web-Stanford	21.5	25.7	16.7	24.9	2,780.0	0.009
amazon	126.5	133.5	124.8	130.5	44,865.0	0.003
Wiki-Talk	504.3	504.9	487.3	487.9	9,120.1	0.053
web-Google	100.2	110.3	78.6	84.6	35,271.7	0.002
web-BerkStan	129.7	137.7	67.8	75.9	7,853.9	0.010
Pokec	80,954.5	80,983.7	80,120.4	80,140.5	-	-
Gplus2	363.5	364.2	360.5	361.2	59,083.8	0.009
Weibo0	206.5	207.3	202.4	203.3	8,004.6	0.025

Table 4: Efficiency of GR-U-D, GR-U-R and DS-U

algorithms with  $BF-U$  in [13], because  $BF-U$  is in  $O(nm^2)$  and is too slow. We use our  $DS-U$  as the baseline algorithm, which is  $O(m^2)$ . We show that *Greedy* produces an answer which is very close to the exact answer. In order to confirm *Greedy* is of time complexity  $O(n + m)$ , we show the largest iteration  $l_{max}$  used in *Greedy* is a small constant by showing that the longest pn-path (the same as  $l_{max}$ ) deleted/reversed by *Greedy* is small. In addition, we confirm the constant  $c$  of  $O(c \cdot m^2)$  for *Refine* is very small by showing statistics of  $\mathcal{G}$ ,  $W$ , and k-cycles. We also confirm the scalability of  $GR-U$  as well as *Greedy* and *Refine*.

All these algorithms are implemented in C++ and compiled by gcc 4.8.2, and tested on machine with 3.40GHz Intel Core i7-4770 CPU, 32GB RAM and running Linux. The time unit used is second.

**Datasets:** We use 14 real datasets. Among the datasets, Epinions, wiki-Vote, Slashdot0811, Slashdot0902, Pokec, Google+, and Weibo are social networks; web-NotreDame, web-Stanford, web-Google, and web-BerkStan are web graphs; Gnutella is a peer-to-peer network; amazon is a product co-purchasing network; and Wiki-Talk is a communication network. All the datasets are downloaded from Stanford large network dataset collection (<http://snap.stanford.edu/data/>) except for Google+ and Weibo. The detailed information of the datasets are summarized in Table 1 and Table 3. In the tables, for each graph, the 2nd and 3rd columns show the numbers of vertices and edges<sup>2</sup>, respectively, and the 4th and 5th columns show the numbers of vertices and edges of its maximum Eulerian subgraph, respectively.

**Efficiency:** Table 4 shows the efficiency of these three algorithms, i.e.,  $GR-U-D$ ,  $GR-U-R$ , and  $DS-U$ , over 14 real datasets. For  $GR-U-D$ , the 2nd column shows the running time of *Refine* and the 3rd column shows the total running time of  $GR-U-D$ . As can be seen, for  $GR-U-D$ , the running time of *Refine* dominates that of *Greedy-D*. The 4th and 5th columns show the running time of *Refine* and the total running time of  $GR-U-R$ , respectively. Likewise, the *Refine* algorithm is the most time-consuming procedure in  $GR-U-R$ .

<sup>2</sup>for each dataset, we delete all self-loops if exist.

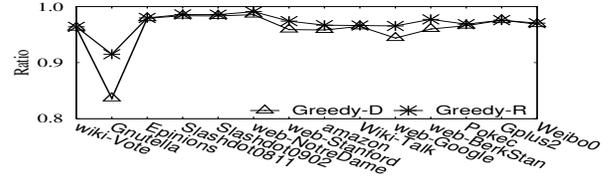


Figure 18:  $|E(\tilde{\mathcal{U}}(G))|/|E(\mathcal{U}(G))|$

Graph	IRD	ISD %	IRR	ISR %	IR_DSU
wiki-Vote	659	95.4	629	95.6	14,361
Gnutella	2,504	69.5	1,410	82.8	8,202
Epinions	5,466	97.4	5,334	97.4	207,124
Slashdot0811	11,464	97.9	9,990	98.2	541,970
Slashdot0902	12,036	97.8	10,426	98.1	554,163
web-NotreDame	9,030	98.1	6,119	98.7	486,240
web-Stanford	23,427	94.8	15,721	96.5	448,960
amazon	75,104	94.1	61,818	95.2	1,282,326
Wiki-Talk	37,662	95.7	36,139	95.9	871,020
web-Google	90,375	92.4	59,387	95.0	1,196,616
web-BerkStan	69,078	95.2	41,703	97.1	1,437,188
Pokec	686,765	-	635,286	-	-
Gplus2	18,766	96.9	18,721	96.9	613,008
Weibo0	25,991	96.2	24,550	96.4	686,765

Table 5: The numbers of Iterations

It is important to note that both  $GR-U-D$  and  $GR-U-R$  significantly outperform  $DS-U$ . In most large datasets,  $GR-U-D$  and  $GR-U-R$  are two orders of magnitude faster than  $DS-U$ . For instance, in web-Stanford dataset,  $GR-U-R$  takes 25 seconds to find the maximum Eulerian subgraph, while  $DS-U$  takes 2,780 seconds, which is more than 100 times slower. In addition, it is worth mentioning that in Pokec dataset,  $DS-U$  cannot get a solution in two weeks. In the 6th column,  $c$  is the  $c$  value in *Refine*'s time complexity  $O(cm^2)$ , by comparing running time of  $GR-U-R$  and  $DS-U$ . In all graphs,  $c \ll 1$ . Note  $BF-U$  is very slow, for example,  $BF-U$  takes more than 30,000 seconds to handle the smallest dataset wiki-Vote, while our  $GR-U$  takes only 0.1 second.

**Effectiveness of Greedy:** To evaluate the effectiveness of the greedy algorithms, we first study the size of Eulerian subgraph obtained by *Greedy-D* and *Greedy-R*. Fig. 18 depicts the results. In Fig. 18,  $|E(\tilde{\mathcal{U}}(G))|$  denotes the size of Eulerian subgraph obtained by the greedy algorithms,  $|E(\mathcal{U}(G))|$  denotes the size of the maximum Eulerian subgraph, and  $|E(\tilde{\mathcal{U}}(G))|/|E(\mathcal{U}(G))|$  denotes the ratio between them. The ratios obtained by both *Greedy-D* and *Greedy-R* are very close to 1 in most datasets. That is to say, both *Greedy-D* and *Greedy-R* can get a near-maximum Eulerian subgraph, indicating that both *Greedy-D* and *Greedy-R* are very effective. The performance of *Greedy-R* is slightly better than that of *Greedy-D*, which supports our analysis. The ratio of Gnutella dataset using *Greedy-D* is slightly lower than others. One possible reason is that Gnutella is much sparser than other datasets, thus some inappropriate pn-path deletions may result in enlarging other pn-paths, and this situation can be largely relieved in *Greedy-R*.

Second, we investigate the numbers of iterations used in  $GR-U-D$ ,  $GR-U-R$ , and  $DS-U$ . Table 5 reports the results. In Table 5, the 2nd and 4th columns 'IRD' and 'IRR' denote the numbers of iterations used in the refinement procedure (i.e., *Refine*, Algorithm 9) of  $GR-U-D$  and  $GR-U-R$ , respectively. The last column 'IR\_DSU' reports the total number of iterations used in  $DS-U$ . From these columns, we can see that in large graphs (e.g., web-NotreDame dataset), the numbers of iterations used in *Refine* of  $GR-U-D$  and  $GR-U-R$  are at least two orders of magnitude smaller than those used in  $DS-U$ . In addition, it is worth mentioning that in Pokec dataset,  $DS-U$  cannot get a solution in two weeks. The 3rd and 5th

Graph	$ E(\mathcal{U}(G)) $	$ E(G) $	$W$
wiki-Vote	17,676	3,214	20
Gnutella	18,964	6,906	10
Epinions	264,995	30,997	129
Slashdot0811	734,021	45,315	118
Slashdot0902	748,580	46,830	145
web-NotreDame	783,788	10,439	3,963
web-Stanford	691,521	35,402	6,168
amazon	1,973,965	202,513	12,994
Wiki-Talk	1,083,509	158,848	331
web-Google	1,841,215	149,425	22,361
web-BerkStan	2,068,081	105,569	16,991
Pokec	20,911,934	3,003,797	8,964
Gplus2	770,854	117,641	80
weibo0	850,136	124,395	384

Table 6: Statistics of  $|\mathcal{G}|$  and  $W$

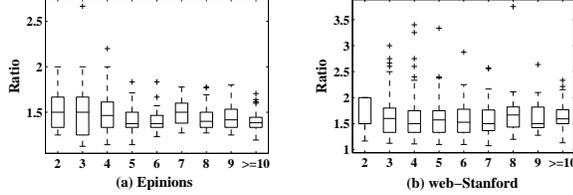


Figure 19: Distributions of  $k$ -cycles for each  $k$

columns report the percentages of iterations saved by  $GR-U-D$  and  $GR-U-R$ , respectively. Both  $Greedy-D$  and  $Greedy-R$  can reduce at least 95% iterations in most datasets. Similarly, the results obtained by  $GR-U-R$  are slightly better than those obtained by  $GR-U-D$ .

**The largest iteration  $l_{max}$ :** We show the largest iteration  $l_{max}$  in  $Greedy$  by showing the longest  $pn$ -paths deleted/reversed, which is the numbers of  $PN$ -path- $D/PN$ -path- $R$  invoked by  $Greedy-D/Greedy-R$  using the real datasets. Below, the first/second number is the longest  $pn$ -paths deleted/reversed. wiki-Vote (9/9), Gnutella (29/22), Epinions (12/10), Slashdot0811 (6/6), Slashdot0902 (8/8), web-NotreDame (96/41), web-Stanford (275/221), amazon (57/37), Wiki-Talk (9/7), web-Google (93/37), web-BerkStan (123/85), Pokec (14/13), Gplus2 (9/8), and Weibo0 (12/10). The longest  $pn$ -paths deleted or reversed are always of small size, especially compared with  $|E|$ . Therefore, the time complexity of  $Greedy$  can be regarded as  $O(n + m)$ .

**The support to a small  $c$ :** We show the support that  $c$  given in  $O(cm^2)$  for  $Refine$  is small by giving statistics of  $\mathcal{G}$ ,  $W$ , and  $k$ -cycles. We first show the statistics of  $|\mathcal{G}|$  ( $= \overline{G}_P \oplus G_N$ ) and  $W$  discussed in Section 5.3. Table 6 reports the results. From Table 6, we can find that for each graph,  $|E(\mathcal{G})|$  and  $W$  are small compared with  $|E(\mathcal{U}(G))|$ . These results confirm our theoretical analysis in Section 5.3. Second, we study the statistics of  $k$ -cycles. The results of Epinions and web-Stanford datasets are depicted in Fig. 19, and similar results can be observed from other datasets. In Fig. 19,  $y$ -axis denotes the ratio between the total weights of  $p$ -edges and the total weights of  $n$ -edges (i.e.,  $\Delta'_k/\Delta_k$  defined in Section 5.3), and the  $x$ -axis denotes  $k$  for  $k$ -cycles, where  $k = 2, 3, \dots, \geq 10$ . As can be seen, for all  $k$ -cycles, the ratios are always smaller than 2 in both Epinions and web-Stanford datasets. These results confirm our analysis in Section 5.3.

**Scalability:** We test the scalability for  $GR-U-R$ ,  $GR-U-D$ , and  $DS-U$ . We report the results for web-NotreDame and web-Stanford in Fig. 20. Similar results are observed for other real datasets. To test the scalability, we sample 10 subgraphs starting from 10% of edges, up to 100% by 10% increments. Fig. 20(a) and Fig. 20(b) show both  $GR-U-R$  and  $GR-U-D$  scale well. For web-NotreDame, we further show the performance of  $Greedy$  and  $Refine$  in Fig. 20(c) and Fig. 20(d). In Fig. 20(c),  $Greedy$  seems to be not really linear.

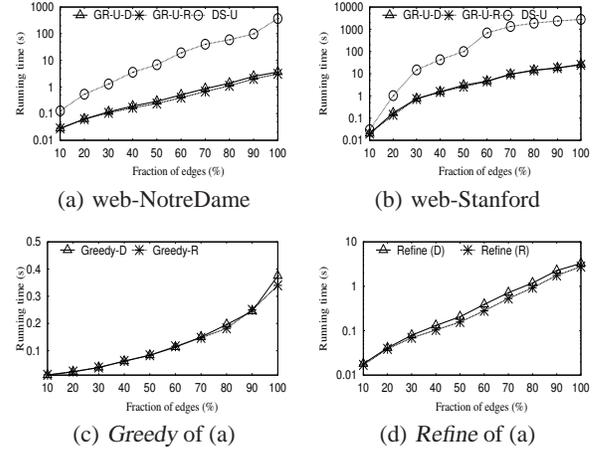


Figure 20: Scalability: web-NotreDame and web-Stanford

We explain the reason below. Revisit Algorithm 4, the efficiency of  $Greedy$  is mainly determined by two factors, the graph size (or more precisely the size of the largest SCC) and the number of times invoking  $PN$ -path (i.e.  $l_{max}$ ). When a subgraph is sparse, both SCC size and  $l_{max}$  tend to be small (the smallest sample graph with 10% edges contains a largest SCC with 1,155 vertices and 4,317 edges, and  $l_{max} = 30/16$  for  $Greedy-D/Greedy-R$ ), whereas, both the size of the largest SCC and  $l_{max}$  tend to be large in dense subgraphs (the entire graph contains a largest SCC with 53,968 vertices and 296,228 edges, and  $l_{max} = 96/41$  for  $Greedy-D/Greedy-R$ ).

## 7. CONCLUSION

In this paper, we study social hierarchy computing to find a social hierarchy  $G_D$  as DAG from a social network represented as a directed graph  $G$ . To find  $G_D$ , we study how to find a maximum Eulerian subgraph  $\mathcal{U}(G)$  of  $G$  such that  $G = \mathcal{U}(G) \cup G_D$ . We justify our approach, and give the properties of  $G_D$  and the applications. The key is how to compute  $\mathcal{U}(G)$ . We propose a  $DS-U$  algorithm to compute  $\mathcal{U}(G)$ , and develop a novel two-phase  $Greedy$ -&- $Refine$  algorithm, which greedily computes an Eulerian subgraph and then refines this greedy solution to find the maximum Eulerian subgraph. The quality of our greedy approach is high which can be used to support social mobility and recover the hidden directions. We conduct extensive experiments to confirm the efficiency of our  $Greedy$ -&- $Refine$  approach.

## 8. REFERENCES

- [1] D. Acemoglu, A. Ozdaglar, and A. ParandehGheibi. Spread of (mis) information in social networks. *Games and Economic Behavior*, 70(2), 2010.
- [2] J. A. Almendral, L. López, and M. A. Sanjuán. Information flow in generalized hierarchical networks. *Physica A: Statistical Mechanics and its Applications*, 324(1), 2003.
- [3] B. Ball and M. E. Newman. Friendship networks and social status. *Network Science*, 1(01), 2013.
- [4] L. Cai and B. Yang. Parameterized complexity of evenodd subgraph problems. *Journal of Discrete Algorithms*, 9(3), 2011.
- [5] P. A. Catlin. Supereulerian graphs: a survey. *Journal of Graph theory*, 16(2), 1992.
- [6] W. Chen, L. V. Lakshmanan, and C. Castillo. *Information and Influence Propagation in Social Networks*. Morgan & Claypool, 2013.
- [7] Z. Chen and H. Lai. Reduction techniques for supereulerian graphs and related topics: a survey. *Combinatorics and graph theory*, 95, 1995.
- [8] A. Clauset, C. Moore, and M. E. Newman. Hierarchical structure and the prediction of missing links in networks. *Nature*, 453(7191), 2008.

- [9] H. Fleischner. *Eulerian graphs and related topics*, volume 1. North Holland, 1990.
- [10] H. Fleischner. (some of) the many uses of eulerian graphs in graph theory (plus some applications). *Discrete Mathematics*, 230(1), 2001.
- [11] R. V. Gould. The origins of status hierarchies: A formal theory and empirical test1. *American journal of sociology*, 107(5), 2002.
- [12] M. S. Granovetter. The strength of weak ties. *American journal of sociology*, 1973.
- [13] M. Gupte, P. Shankar, J. Li, S. Muthukrishnan, and L. Iftode. Finding hierarchy in directed online social networks. In *Proc. of WWW'11*, 2011.
- [14] V. Guruswami, R. Manokaran, and P. Raghavendra. Beating the random ordering is hard: Inapproximability of maximum acyclic subgraph. In *Proc. of FOCS'08*, 2008.
- [15] J. M. Kleinberg. Authoritative sources in a hyperlinked environment. *Journal of the ACM (JACM)*, 46(5), 1999.
- [16] H. Kwak, C. Lee, H. Park, and S. Moon. What is twitter, a social network or a news media? In *Proc. of WWW'10*, 2010.
- [17] J. Leskovec and C. Faloutsos. Sampling from large graphs. In *Proc. of KDD'06*, 2006.
- [18] J. Leskovec, D. Huttenlocher, and J. Kleinberg. Predicting positive and negative links in online social networks. In *Proc. of WWW'10*, 2010.
- [19] J. Leskovec, D. Huttenlocher, and J. Kleinberg. Signed networks in social media. In *Proc. of CHI'10*, 2010.
- [20] D. Li, D. Li, and J. Mao. On maximum number of edges in a spanning eulerian subgraph. *Discrete mathematics*, 274(1), 2004.
- [21] D. Liben-Nowell and J. Kleinberg. The link-prediction problem for social networks. *Journal of the American society for information science and technology*, 58(7), 2007.
- [22] A. S. Maiya and T. Y. Berger-Wolf. Inferring the maximum likelihood hierarchy in social networks. In *Proc. of CSE'09*, 2009.
- [23] R. E. Tarjan. Amortized computational complexity. *SIAM Journal on Algebraic Discrete Methods*, 6(2), 1985.
- [24] J. Zhang, B. Liu, J. Tang, T. Chen, and J. Li. Social influence locality for modeling retweeting behaviors. In *Proc. of IJCAI'13*, 2013.
- [25] J. Zhang, C. Wang, and J. Wang. Who proposed the relationship?: recovering the hidden directions of undirected social networks. In *Proc. of WWW'14*, 2014.
- [26] N. Zhenqiang Gong, A. Talwalkar, L. Mackey, L. Huang, E. C. R. Shin, E. Stefanov, D. Song, et al. Jointly predicting links and inferring attributes using a social-attribute network (SAN). *ACM Workshop on Social Network Mining and Analysis*, 2011.
- [27] N. Zhenqiang Gong, W. Xu, L. Huang, P. Mittal, E. Stefanov, V. Sekar, and D. Song. Evolution of social-attribute networks: Measurements, modeling, and implications using google+. *ACM/USENIX Internet Measurement Conference*, 2012.