

Electromagnetic fields in a time-varying medium: Exceptional points and operator symmetries

Theodoros T. Koutserimpas, Romain Fleury

Abstract— In this paper, we study the interactions of electromagnetic waves with a non-dispersive dynamic medium that is temporally dependent. Electromagnetic fields under material time-modulation conserve their momentum but not their energy. We assume a time-variation of the permittivity, permeability and conductivity and derive the appropriate time-domain solutions based on the causality state at a past observation time. We formulate a time-transitioning state matrix and connect the unusual energy transitions of electromagnetic fields in time-varying media with the exceptional point theory. This state-matrix approach allows us to analyze further the electromagnetic waves in terms of parity and time-reversal symmetries and signify parity-time symmetric wave-states without the presence of a spatially symmetric distribution of gain and loss, or any inhomogeneities and material periodicity. This paper provides a useful arsenal to study electromagnetic wave phenomena under time-varying media and points out novel physical insights connecting the resulting energy transitions and electromagnetic modes with exceptional point physics and operator symmetries.

Index Terms— electromagnetic propagation, exceptional point theory, time-domain analysis, time-varying systems, time-reversal, parity operator symmetry.

I. INTRODUCTION

ELECTROMAGNETIC wave propagation under time-modulation has been first studied by Morgenthaler [1]. It was showed that electromagnetic waves reflect not only due to spatial inhomogeneities, but also due to temporal jumps of the material parameters (ϵ, μ). Later studies proceeded in the integral representation of some examples with analytical solutions showing interesting electromagnetic radiation phenomena, i.e. longitudinal far field propagation, radiation by steady currents, etc. [2]–[5]. In addition, transmission and reflection studies have been made for time-periodic media showing interesting phenomena; in particular parametric amplification and frequency variance, by utilizing harmonic balance techniques or the solutions of the corresponding hypergeometric functions [6]–[13]. Time-modulation effects on transmission lines have also been investigated, indicating the possibility of perfect matching scenarios and wave amplification [14], [15]. In this paper, we expand the existing literature on the interaction of electromagnetic waves with time-varying media by considering the general case of arbitrary time-variations and providing a mathematical formulation of the electromagnetic field solution using the separation of variables technique. We utilize the momentum-Fourier integral transforms and deliver time-domain solutions, without presuming a certain temporal profile for the wave parameters. The determination of specific solutions requires the knowledge of the causality of the fields, we show thus their derivation as long as the fields are known for a given past observation time. Furthermore, we derive the appropriate scattering matrices, which deal with temporal material discontinuities. In the last part of this article, we provide a modern insight to these interesting electromagnetic phenomena, by connecting the uncommon energy transitions that transpire from the time-dynamic wave and material interactions with the exceptional point theory in the special case of a step variation of the medium (as was first established by Morgenthaler in [1]). Such analysis is done by formulating the time-transitioning state matrix and derive the proper stability conditions, which determine stable wave-states or parametrically amplifying and evanescent ones. Finally, we investigate the parity and time-reversal symmetries and report the possibility to induce parity-time wave states for time-symmetric modulations without the presence of material gain and loss [16], [17].

II. ELECTRIC DISPLACEMENT AND MAGNETIC INDUCTION ANALYSIS

We assume the case of electromagnetic wave propagation in a homogeneous time-varying medium. The medium's properties are defined by temporally dependent permittivity, conductivity and permeability: $\epsilon = \epsilon(t)$, $\sigma = \sigma(t)$ and $\mu = \mu(t)$. Such medium has been first considered by Morgenthaler (excluding the conductivity) in [1]. Maxwell's equations are: $\nabla \times \mathbf{H} = \mathbf{J} + \partial_t \mathbf{D} + \sigma \mathbf{E}$, $\nabla \times \mathbf{E} = -\partial_t \mathbf{B}$, $\nabla \cdot \mathbf{D} = \rho$ and $\nabla \cdot \mathbf{B} = 0$ while the constitutive relations of the medium are assumed:

$\mathbf{D} = \varepsilon \mathbf{E}$ and $\mathbf{B} = \mu \mathbf{H}$. The resulting second order differential equations are (derived in a similar way as the derivations of inhomogeneous stationary media in [18]).

$$\nabla \times \nabla \times \mathbf{E} + \frac{\partial}{\partial t} \left[\mu(t) \frac{\partial(\varepsilon(t) \mathbf{E})}{\partial t} \right] + \frac{\partial(\mu(t) \sigma(t) \mathbf{E})}{\partial t} = - \frac{\partial(\mu(t) \mathbf{J})}{\partial t}, \quad (1)$$

$$\nabla \times \nabla \times \mathbf{H} + \frac{\partial}{\partial t} \left[\varepsilon(t) \frac{\partial(\mu(t) \mathbf{H})}{\partial t} \right] + \sigma(t) \frac{\partial(\mu(t) \mathbf{H})}{\partial t} = \nabla \times \mathbf{J}. \quad (2)$$

(For the more general case which includes inhomogeneities see Appendix A). In the case of the stationary problem, inhomogeneities result overtly in transmitted and reflected fields [19]. The wave frequency is preserved whereas the wave vector changes. On the other hand, in the case of a time-dynamic homogeneous medium, which is derived in Eqs. (1) and (2), the wave vector is invariant, while the operating frequency of the wave is altered (the phenomenon is often called adiabatic wavelength conversion) [1]. (For an alternative proof based on the Poynting and the momentum conservation theorems see Appendix B). It is important to mention that these overwhelming wave-reconfiguration abilities come with a major cost, namely energy consumption. Such artificial media have to be externally supplied by energy to effectively change properties and should thus be considered active, depending on the modulation of the medium parameters (Appendix B). Although these media should be considered as active, they do not necessarily provide amplification to the electromagnetic fields. The mathematical modeling of such equations is easier handled, if we consider the electric displacement and the magnetic induction fields, which are required to be continuous under the time-variations of the medium [1]. The corresponding equations for the electric displacement and magnetic induction fields are:

$$\nabla \times \nabla \times \mathbf{D} + \varepsilon(t) \frac{\partial}{\partial t} \left[\mu(t) \frac{\partial \mathbf{D}}{\partial t} \right] + \varepsilon(t) \frac{\partial}{\partial t} \left[\mu(t) \sigma(t) \varepsilon^{-1}(t) \mathbf{D} \right] = - \varepsilon(t) \frac{\partial(\mu(t) \mathbf{J})}{\partial t}, \quad (3)$$

$$\nabla \times \nabla \times \mathbf{B} + \mu(t) \frac{\partial}{\partial t} \left[\varepsilon(t) \frac{\partial \mathbf{B}}{\partial t} \right] + \mu(t) \sigma(t) \frac{\partial \mathbf{B}}{\partial t} = \mu(t) \nabla \times \mathbf{J}. \quad (4)$$

An extension of the potential theory of time-varying media, with an appropriate gauge condition is shown in Appendix C. The radiation by currents, which satisfy Eqs. (3) and (4) for isotropic time-dynamic media has been studied extensively by Budko [2] using the volume integral equation method in combination with an appropriate variable transformation of the time variable t for specific functions of ε, μ . It was found that by taking into account the time-dynamics and causality, a time-varying medium can permit propagation of longitudinal electromagnetic waves, and furthermore can radiate waves from steady currents, as the electromagnetic disturbances from the sudden excitation of the currents continue to sway due to the time-dynamics of the medium.

For free-source regions Eqs. (3) and (4) have a zero right-hand side and become:

$$\nabla^2 \mathbf{D} - \varepsilon(t) \frac{\partial}{\partial t} \left[\mu(t) \frac{\partial \mathbf{D}}{\partial t} \right] - \varepsilon(t) \frac{\partial}{\partial t} \left[\mu(t) \sigma(t) \varepsilon^{-1}(t) \mathbf{D} \right] = 0, \quad (5)$$

$$\nabla^2 \mathbf{B} - \mu(t) \frac{\partial}{\partial t} \left[\varepsilon(t) \frac{\partial \mathbf{B}}{\partial t} \right] - \mu(t) \sigma(t) \frac{\partial \mathbf{B}}{\partial t} = 0. \quad (6)$$

We assume a solution for the magnetic induction or the electric displacement field $\mathbf{U} = \mathbf{B}, \mathbf{D}$ of the form: $\mathbf{U}(\mathbf{r}, t) = \mathbf{R}(\mathbf{r})T(t)$, since Eqs. (5) and (6) are fully separable [6]. The separation of variables method allows both real and complex solutions for $\mathbf{R}(\mathbf{r})$ and $T(t)$. Real solutions of $\mathbf{R}(\mathbf{r})$ and $T(t)$ represent a summation of standing waves, whereas complex solutions represent a summation of propagating waves (both solutions are valid). We proceed below by finding the propagating-wave solutions (complex functions of $\mathbf{R}(\mathbf{r})$ and $T(t)$) for which the actual field in time-domain is: $\text{Re}[\mathbf{U}(\mathbf{r}, t)] = \text{Re}[\mathbf{R}(\mathbf{r})T(t)]$.

The differential equation of $\mathbf{R}(\mathbf{r})$ can be easily shown to be the Helmholtz equation: $\nabla^2 \mathbf{R} = -k^2 \mathbf{R}$, where k is the wavenumber. The wavenumber remains constant despite any material temporal change as indicated by the separability of the equations [1]. The complex solution of $\mathbf{R}(\mathbf{r})$, which is far away from the sources has the form for a given k (imposed by the sources):

$$\mathbf{R}(\mathbf{r}) = \int_0^{\pi} \int_0^{2\pi} \mathbf{A}(\varphi, \theta) e^{i\mathbf{k} \cdot \mathbf{r}} d\varphi d\theta, \quad (7)$$

where \mathbf{A} is a vector dependent on the spherical coordinates θ, φ and $\mathbf{k} = k \sin \theta \cos \varphi \cdot \hat{x}_1 + k \sin \theta \sin \varphi \cdot \hat{x}_2 + k \cos \theta \cdot \hat{x}_3$ which is

the wavevector. We assume that for a substantial period of time there was no conductivity, and the field solutions filled the whole region. (Notice that an infinite number of wavenumbers can be propagating). On the other hand, the solution of the time-function is strongly dependent on the type of the time-variation of the medium (see Appendix D). It is though obvious that the resulting second order differential equations result in two independent solutions: $T_1(k, t)$ and $T_2(k, t)$ (which we assume complex as we formulate the system using propagating wave-bases). For slowly and continuously varying material-parameters the Liouville-Green approximation [20] can be directly applied and gives us an estimation of the fields (see Appendix D):

$$T_b(k, t) \approx \sqrt[4]{\frac{\mu}{\epsilon}} e^{-\frac{1}{2} \int \frac{\sigma}{\epsilon} dt} \left(C_1^b e^{-ik \int \frac{dt}{\sqrt{\epsilon\mu}}} + C_2^b e^{+ik \int \frac{dt}{\sqrt{\epsilon\mu}}} \right), \quad (8)$$

$$T_d(k, t) \approx e^{-\int \frac{\sigma}{\epsilon} dt} \int e^{\frac{1}{2} \int \frac{\sigma}{\epsilon} dt} \sqrt[4]{\frac{\mu}{\epsilon}} \left(C_1^d e^{-ik \int \frac{dt}{\sqrt{\epsilon\mu}}} + C_2^d e^{+ik \int \frac{dt}{\sqrt{\epsilon\mu}}} \right) dt, \quad (9)$$

where T_b is the solution for the magnetic induction, T_d is the solution for the electric displacement and C_1, C_2 represent the coefficients of the electromagnetic modes which propagate at the positive and negative direction, respectively. Notice that the presence of the conductivity results in the attenuation of the fields by a $\exp\left(-\frac{1}{2} \int \frac{\sigma}{\epsilon} dt\right)$ factor. The general solution, if $T(k, t)$ and $\mathbf{A}(\mathbf{k})$ are known, is:

$$\mathbf{U}(\mathbf{r}, t) = \int (\mathbf{A}_1(\mathbf{k})T_1(k, t) + \mathbf{A}_2(\mathbf{k})T_2(k, t)) e^{i\mathbf{k}\cdot\mathbf{r}} d^3k, \quad (10)$$

where $\mathbf{A}_1(\mathbf{k}) = C_1 \mathbf{A}(\mathbf{k})$, $\mathbf{A}_2(\mathbf{k}) = C_2 \mathbf{A}(\mathbf{k})$ and $C_{1,2}$ are the coefficients corresponding to the time-function $T_{1,2}(k, t)$ solutions. Obviously, the time-domain solution is $\text{Re}[\mathbf{U}(\mathbf{r}, t)]$.

A. Causality of the solutions: Determination of $\mathbf{A}_{1,2}(\mathbf{k})$ by the observation of the field at $t = \tau$

At $t = \tau$ we measure $\mathbf{U}(\mathbf{r}, \tau)$ and $\partial_t \mathbf{U}(\mathbf{r}, \tau)$. Intriguingly the time-domain observation of the fields gives us real values of $\mathbf{E}(\mathbf{r}, \tau)$ and $\mathbf{H}(\mathbf{r}, \tau)$ [which are functions of $\mathbf{r} = (x_1, x_2, x_3)$]. In order to apply them as temporal boundaries for the complex (propagating) \mathbf{U} we need somehow to convert them in the complex space. This is feasible by the direct application of the Hilbert transform, which leads to the analytic form of the signals. More precisely: if $\boldsymbol{\psi}(\mathbf{r})$ is $\mathbf{E}(\mathbf{r}, \tau)$ or $\mathbf{H}(\mathbf{r}, \tau)$, then its analytic

function is: $\tilde{\boldsymbol{\psi}}(\mathbf{r}) = \prod_{j=1}^3 \left[\delta(x_j) + \frac{i}{\pi x_j} \right] \text{***} \boldsymbol{\psi}(\mathbf{r})$, where $\delta(x_j)$ is the delta function with respect to the Cartesian coordinate x_j

and *** is the 3-fold convolution. For $\mathbf{U}(\mathbf{r}, \tau)$: $\tilde{\mathbf{D}}(\mathbf{r}, \tau) = \varepsilon(\tau) \tilde{\mathbf{E}}(\mathbf{r}, \tau)$ or $\tilde{\mathbf{B}}(\mathbf{r}, \tau) = \mu(\tau) \tilde{\mathbf{H}}(\mathbf{r}, \tau)$, and for $\partial_t \mathbf{U}(\mathbf{r}, \tau)$: $\partial_t \tilde{\mathbf{D}}(\mathbf{r}, \tau) = \nabla \times \tilde{\mathbf{H}}(\mathbf{r}, \tau) - \sigma(\tau) \tilde{\mathbf{E}}(\mathbf{r}, \tau)$ or $\partial_t \tilde{\mathbf{B}}(\mathbf{r}, \tau) = -\nabla \times \tilde{\mathbf{E}}(\mathbf{r}, \tau)$. The Wronski determinant $\Delta(t)$ has to be nonzero [21]. For the

magnetic induction $\Delta_b(t) = \Delta_b(\tau) \frac{\varepsilon(\tau)}{\varepsilon(t)} \exp\left(-\int_{\tau}^t \frac{\sigma}{\varepsilon} dt\right)$ and for the electric displacement $\Delta_d(t) = \Delta_d(\tau) \frac{\mu(\tau)}{\mu(t)} \exp\left(-\int_{\tau}^t \frac{\sigma}{\varepsilon} dt\right)$.

The solution of the temporal boundary problem comes down to the determination of $\mathbf{A}_1(\mathbf{k})$ and $\mathbf{A}_2(\mathbf{k})$. We apply the inverse Fourier integral on $\mathbf{U}(\mathbf{r}, \tau)$ and $\partial_t \mathbf{U}|_{t=\tau}$, which leads to the solutions:

$$\mathbf{A}_1(\mathbf{k}) = \frac{\frac{dT_2(k, \tau)}{dt} \int \mathbf{U}(\mathbf{r}, \tau) e^{-i\mathbf{k}\cdot\mathbf{r}} d^3r - T_2(k, \tau) \int \partial_t \mathbf{U}(\mathbf{r}, \tau) e^{-i\mathbf{k}\cdot\mathbf{r}} d^3r}{8\pi^3 \Delta(\tau)}, \quad (11)$$

$$\mathbf{A}_2(\mathbf{k}) = -\frac{\frac{dT_1(k, \tau)}{dt} \int \mathbf{U}(\mathbf{r}, \tau) e^{-i\mathbf{k}\cdot\mathbf{r}} d^3r - T_1(k, \tau) \int \partial_t \mathbf{U}(\mathbf{r}, \tau) e^{-i\mathbf{k}\cdot\mathbf{r}} d^3r}{8\pi^3 \Delta(\tau)}. \quad (12)$$

Notice that from the temporal conditions at $t = \tau$ we define the existing wavevectors (which are the k -content of $\mathbf{A}(\mathbf{k})$) that are propagating.

B. Temporal material discontinuities: Scattering matrix formulation

It is well-known [1], [22] that under temporal discontinuities the wave exhibits reflection. Therefore, we introduce in this

subsection the mathematical treatment to deal with them. In a hypothetical scenario, at a time $t = \tau$ the temporal functions of $\varepsilon(t), \mu(t), \sigma(t)$ or their derivatives exhibit a discontinuity. Then, by the observation of the differential equations (see Appendix D) it is clear that this discontinuity is carried to $d^2T(k, t)/dt^2$, leaving $T(k, t)$ and $dT(k, t)/dt$ to be continuous. Such condition is sufficient when either the permeability or the permittivity are continuous. More precisely, if the permeability is continuous the electric displacement field and its time derivative are continuous, whereas if the permittivity is continuous the magnetic induction field and its time derivative are continuous. (In any other case the time-function solutions would involve delta functions). If the solution for $t < \tau$ is:

$$T_<(k, t) = C_1^<T_1^<(k, t) + C_2^<T_2^<(k, t), \quad (13)$$

and for $t > \tau$:

$$T_>(k, t) = C_1^>T_1^>(k, t) + C_2^>T_2^>(k, t), \quad (14)$$

then the continuity relations at $t = \tau$ give us the temporal scattering matrix:

$$\begin{pmatrix} C_1^> \\ C_2^> \end{pmatrix} = S_\tau \cdot \begin{pmatrix} C_1^< \\ C_2^< \end{pmatrix} = \begin{pmatrix} \frac{\frac{dT_1^<(k, \tau)}{dt} T_2^>(k, \tau) - \frac{dT_2^>(k, \tau)}{dt} T_1^<(k, \tau)}{\frac{dT_1^>(k, \tau)}{dt} T_2^>(k, \tau) - \frac{dT_2^>(k, \tau)}{dt} T_1^<(k, \tau)}, & \frac{\frac{dT_2^<(k, \tau)}{dt} T_2^>(k, \tau) - \frac{dT_2^>(k, \tau)}{dt} T_2^<(k, \tau)}{\frac{dT_1^>(k, \tau)}{dt} T_2^>(k, \tau) - \frac{dT_2^>(k, \tau)}{dt} T_1^<(k, \tau)} \\ \frac{(T_1^<(k, \tau) - T_1^>(k, \tau)) \left(\frac{dT_1^<(k, \tau)}{dt} - \frac{d \ln T_2^>(k, \tau)}{dt} T_1^<(k, \tau) \right)}{\frac{dT_1^>(k, \tau)}{dt} T_2^>(k, \tau) - \frac{dT_2^>(k, \tau)}{dt} T_1^<(k, \tau)}, & \frac{(T_2^<(k, \tau) - T_1^>(k, \tau)) \left(\frac{dT_2^<(k, \tau)}{dt} - \frac{d \ln T_2^>(k, \tau)}{dt} T_2^<(k, \tau) \right)}{\frac{dT_1^>(k, \tau)}{dt} T_2^>(k, \tau) - \frac{dT_2^>(k, \tau)}{dt} T_1^<(k, \tau)} \end{pmatrix} \cdot \begin{pmatrix} C_1^< \\ C_2^< \end{pmatrix}, \quad (15)$$

where S_{11} and S_{22} are the parameters which correspond to the temporal transmission, whereas S_{21} and S_{12} are the parameters for the temporal reflection.

Let us assume the scenario that a wave propagates at a medium with $\varepsilon_1, \mu_1, \sigma_1$ (which are constant) and suddenly at $t = 0$ the medium changes its electromagnetic-material properties to $\varepsilon_2, \mu_2, \sigma_2$ (which are also constant). The ordinary differential equation that satisfies $T(k, t)$ for both \mathbf{B} and \mathbf{D} under constant values of ε, μ, σ is the same (see Appendix D). The time-domain solution (of either \mathbf{B} and \mathbf{D} depending on the continuity conditions) is of the form:

$$\zeta(\mathbf{r}, t) = \zeta_0 \cos \left[\mathbf{k} \cdot \mathbf{r} - \left(\frac{1}{2\varepsilon} \sqrt{4\varepsilon k^2 - \sigma^2 \mu} \right) t \right] \exp \left[-\frac{\sigma t}{2\varepsilon} \right], \quad \text{where we can assume that the wavevector has the direction of any of the}$$

Cartesian unit vectors. Additionally, losses effect the field in time since the fields have filled the whole space as assumed in Section II (contradictory to the stationary-medium plane-wave equivalent). The analytic signal analysis gives us the complex solutions of \mathbf{U} ($\tilde{\mathbf{B}}$ or $\tilde{\mathbf{D}}$):

$$\mathbf{U} = \begin{cases} \mathbf{U}_0 e^{i\mathbf{k} \cdot \mathbf{r} - \left(\frac{\sigma_1 + i}{2\varepsilon_1} + \frac{i}{2\varepsilon_1} \sqrt{\frac{4\varepsilon_1 k^2 - \sigma_1^2 \mu_1}{\mu_1}} \right) t}, & t < 0 \\ \mathbf{U}_0 S_{11} e^{i\mathbf{k} \cdot \mathbf{r} - \left(\frac{\sigma_2 + i}{2\varepsilon_2} + \frac{i}{2\varepsilon_2} \sqrt{\frac{4\varepsilon_2 k^2 - \sigma_2^2 \mu_2}{\mu_2}} \right) t} \\ + \mathbf{U}_0 S_{21} e^{i\mathbf{k} \cdot \mathbf{r} - \left(\frac{\sigma_2 - i}{2\varepsilon_2} - \frac{i}{2\varepsilon_2} \sqrt{\frac{4\varepsilon_2 k^2 - \sigma_2^2 \mu_2}{\mu_2}} \right) t}, & t > 0 \end{cases} \quad (16)$$

$$\text{From the continuity relations we get: } S_{11} = \frac{1}{2} \left(\frac{\sqrt{\varepsilon_1 \mu_1} + i}{\sqrt{\varepsilon_1 \mu_1}} + \frac{\sqrt{\varepsilon_2 \mu_2}}{2\varepsilon_1 k} + i \frac{(\sigma_2 \varepsilon_1 - \sigma_1 \varepsilon_2)}{2\varepsilon_1 k} \sqrt{\frac{\mu_2}{\varepsilon_2}} \right) \text{ and } S_{21} = \frac{1}{2} \left(\frac{\sqrt{\varepsilon_1 \mu_1} - i}{\sqrt{\varepsilon_1 \mu_1}} - \frac{\sqrt{\varepsilon_2 \mu_2}}{2\varepsilon_1 k} - i \frac{(\sigma_2 \varepsilon_1 - \sigma_1 \varepsilon_2)}{2\varepsilon_1 k} \sqrt{\frac{\mu_2}{\varepsilon_2}} \right).$$

The complete temporal scattering matrix of Eq. (15) is:

$$S_0 = \begin{pmatrix} \frac{1}{2} \left(\frac{\sqrt{\varepsilon_1 \mu_1} + \sqrt{\varepsilon_2 \mu_2}}{\sqrt{\varepsilon_1 \mu_1}} + i \frac{(\sigma_2 \varepsilon_1 - \sigma_1 \varepsilon_2)}{2\varepsilon_1 k} \sqrt{\frac{\mu_2}{\varepsilon_2}} \right), & \frac{1}{2} \left(\frac{\sqrt{\varepsilon_1 \mu_1} - \sqrt{\varepsilon_2 \mu_2}}{\sqrt{\varepsilon_1 \mu_1}} + i \frac{(\sigma_2 \varepsilon_1 - \sigma_1 \varepsilon_2)}{2\varepsilon_1 k} \sqrt{\frac{\mu_2}{\varepsilon_2}} \right) \\ \frac{1}{2} \left(\frac{\sqrt{\varepsilon_1 \mu_1} - \sqrt{\varepsilon_2 \mu_2}}{\sqrt{\varepsilon_1 \mu_1}} - i \frac{(\sigma_2 \varepsilon_1 - \sigma_1 \varepsilon_2)}{2\varepsilon_1 k} \sqrt{\frac{\mu_2}{\varepsilon_2}} \right), & \frac{1}{2} \left(\frac{\sqrt{\varepsilon_1 \mu_1} + \sqrt{\varepsilon_2 \mu_2}}{\sqrt{\varepsilon_1 \mu_1}} - i \frac{(\sigma_2 \varepsilon_1 - \sigma_1 \varepsilon_2)}{2\varepsilon_1 k} \sqrt{\frac{\mu_2}{\varepsilon_2}} \right) \end{pmatrix}. \quad (17)$$

This scattering matrix has interesting properties. We observe that: $S_{11} + S_{21} = 1$, $S_{12} + S_{22} = 1$, $\det(S_0) = \sqrt{\frac{\varepsilon_1 \mu_1}{\varepsilon_2 \mu_2}}$ and the inverse S_0^{-1} corresponds to the scattering by the time-reversed material transition (namely from $\varepsilon_2, \mu_2, \sigma_2$ to $\varepsilon_1, \mu_1, \sigma_1$). In addition, if $\eta = \sqrt{\frac{\mu_2}{\varepsilon_2}}$ and σ_2 remain constant S_{21} and S_{12} extinguish, i.e. the wave does not reflect.

III. EXCEPTIONAL POINTS AND OPERATOR SYMMETRIES ANALYSIS

The electromagnetic modes and the resulting parametric amplification from time-periodic media have been extensively studied by [6], [8] using the solutions of the corresponding hypergeometric differential equations [23], [24]. In this section, we consider the simple case of a temporal material jump and connect the parametric amplification phenomena with the exceptional-point analysis, that is often used in Hamiltonian physics, without assuming time-periodic modulation. In addition, we examine this time-domain scattering problem under parity and time-reversal operators offering extra physical insights to this wave problem. In the abrupt temporal jump Maxwell's equations permit the discontinuity of the \mathbf{E} and \mathbf{H} fields and temporal translational symmetry is broken (as first studied in [1]).

A. Exceptional points

In Hamiltonian physics, an exceptional point is an operating condition, in which (at least) two eigenvalues and eigenmodes collide and the effective Hamiltonian loses (at least) one of its dimensions and exhibits thus a degeneracy [25]. Such theory can be extended to time-varying systems by formulating a state matrix, which models the time-transitioning behavior of the problem under examination [26]. Let us assume that at $t = \tau$ there is an abrupt change in the medium from $\varepsilon_1, \mu_1, \sigma_1$ to $\varepsilon_2, \mu_2, \sigma_2$ that can be modeled by the scattering formulation of the previous Section. We define the phase transmission matrix:

$$\mathbf{T}_\kappa(t) = \begin{pmatrix} e^{\left(-\frac{\sigma_\kappa}{2\varepsilon_\kappa} - \frac{i}{2\varepsilon_\kappa} \sqrt{\frac{4\varepsilon_\kappa k^2 - \sigma_\kappa^2 \mu_\kappa}{\mu_\kappa}} \right) t} & 0 \\ 0 & e^{\left(-\frac{\sigma_\kappa}{2\varepsilon_\kappa} + \frac{i}{2\varepsilon_\kappa} \sqrt{\frac{4\varepsilon_\kappa k^2 - \sigma_\kappa^2 \mu_\kappa}{\mu_\kappa}} \right) t} \end{pmatrix}, \quad (18)$$

where $\kappa = 1, 2$ and the matrix of coefficients is $\mathbf{C}(t) = [C_1 \ C_2]^T$, where C_1 and C_2 are the amplitudes of $T_1(t)$ and $T_2(t)$ respectively [as shown in Eqs. (13)-(14)]. The matrix of coefficients is:

$$\mathbf{C}(\tau') = \mathbf{T}_1(\tau) S_0^{-1} \mathbf{T}_2(\tau' - \tau) S_0 \mathbf{C}(0) = \hat{H}(\tau') \mathbf{C}(0). \quad (19)$$

The time-transitioning state matrix of this system is $\hat{H}(\tau') = \mathbf{T}_1(\tau) S_0^{-1} \mathbf{T}_2(\tau' - \tau) S_0$, with $\det(\hat{H}(\tau')) = \exp \left[-\left(\frac{\sigma_1}{\varepsilon_1} \tau + \frac{\sigma_2}{\varepsilon_2} (\tau' - \tau) \right) \right]$, where τ' is the time of observation after the abrupt change of material properties ($\tau' > \tau$). If we consider a lossless medium $\det(\hat{H}(\tau')) = 1$ then its corresponding eigenvalues and eigenmodes are:

$$\lambda_\pm = b \pm \sqrt{b^2 - 1} \quad (20)$$

$$\mathbf{C}_+ = \begin{pmatrix} a \\ \lambda_+ + c \end{pmatrix} \quad (21)$$

$$\mathbf{C}_- = \begin{pmatrix} a \\ \lambda_- + c \end{pmatrix} \quad (22)$$

where:

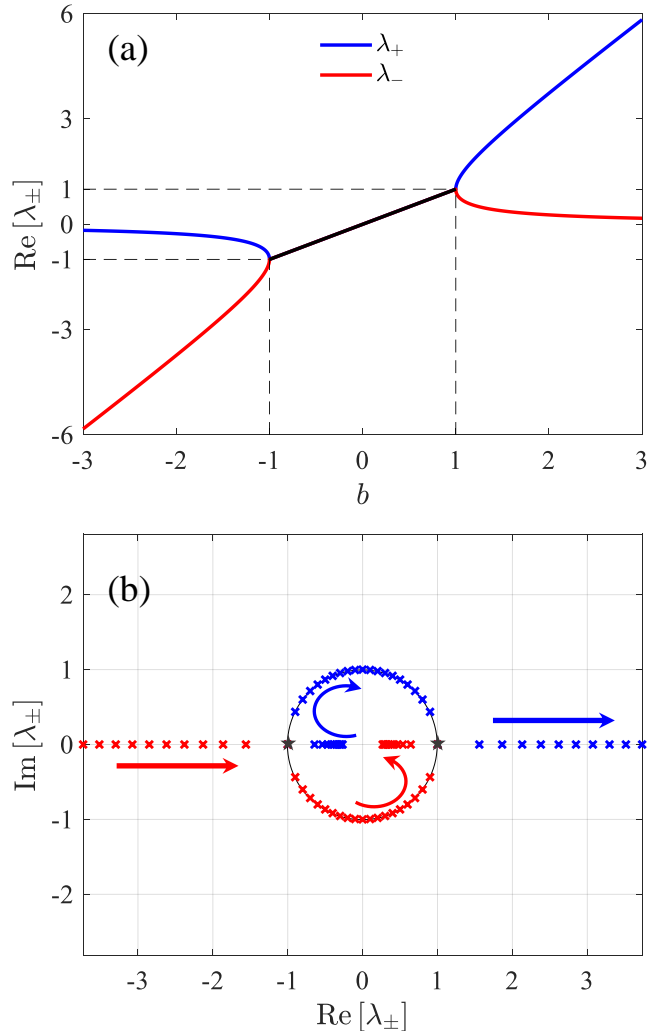


Fig. 1. Graphical representations of the transitions of the eigenvalues of the time-transitioning state matrix of a system in which an abrupt change of material parameters occurs. (a) Evolution of the real part of the eigenvalues and (b) chart showing both real and imaginary part of the eigenvalues as b shifts values. For $|b| < 1$ the eigenvalues are complex and the wave-states are stable, for $|b| > 1$ the eigenvalues become real representing amplification, while at $|b| = 1$ we observe the exceptional points ($\lambda_+ = \lambda_- = \pm 1$). Arrows at (b) show the quantitative change of the eigenvalues as b increases in value (from -3 to +3).

$$b(k, \varepsilon_1, \mu_1, \varepsilon_2, \mu_2, \tau, \tau') = \cos\left(\frac{k}{\sqrt{\varepsilon_1 \mu_1}} \tau\right) \cos\left(\frac{k}{\sqrt{\varepsilon_2 \mu_2}} (\tau' - \tau)\right) - \frac{(\varepsilon_1 \mu_1 + \varepsilon_2 \mu_2)}{2\sqrt{\varepsilon_1 \mu_1 \varepsilon_2 \mu_2}} \sin\left(\frac{k}{\sqrt{\varepsilon_1 \mu_1}} \tau\right) \sin\left(\frac{k}{\sqrt{\varepsilon_2 \mu_2}} (\tau' - \tau)\right), \quad (23)$$

and $a = -\frac{i(\varepsilon_1 \mu_1 - \varepsilon_2 \mu_2)}{2\sqrt{\varepsilon_1 \mu_1 \varepsilon_2 \mu_2}} \sin\left(\frac{k}{\sqrt{\varepsilon_2 \mu_2}} (\tau' - \tau)\right) \exp\left(-i \frac{k}{\sqrt{\varepsilon_1 \mu_1}} \tau\right)$, $c = \exp\left(-i \frac{k}{\sqrt{\varepsilon_1 \mu_1}} \tau\right) \left[-\cos\left(\frac{k}{\sqrt{\varepsilon_2 \mu_2}} (\tau' - \tau)\right) + \frac{i(\varepsilon_1 \mu_1 + \varepsilon_2 \mu_2)}{2\sqrt{\varepsilon_1 \mu_1 \varepsilon_2 \mu_2}} \sin\left(\frac{k}{\sqrt{\varepsilon_2 \mu_2}} (\tau' - \tau)\right)\right]$. b depends on multiple parameters as we observe from Eq. (23) and determines the energy transitions from the time-dynamic material and field interactions. The eigenvalues satisfy the condition: $\lambda_+ \lambda_- = 1$. The system supports two propagating modes when $|b| < 1$ (as both eigenvalues are complex and unitary), and one evanescent and one parametrically amplifying for $|b| > 1$ (as one is lower and the other higher than unity). The special transition case: $|b| = 1$ is associated with exceptional points since the eigenvalues and the eigenmodes collide: $\lambda_+ = \lambda_- = \pm 1$ and $\mathbf{C}_+ = \mathbf{C}_-$. A plot of the eigenvalue transitions is given in Fig. 1. In Fig. 1(a) the real part

of the eigenvalues is shown as a function of the parameter b , while in Fig. 1(b) the position of the eigenvalues on the complex

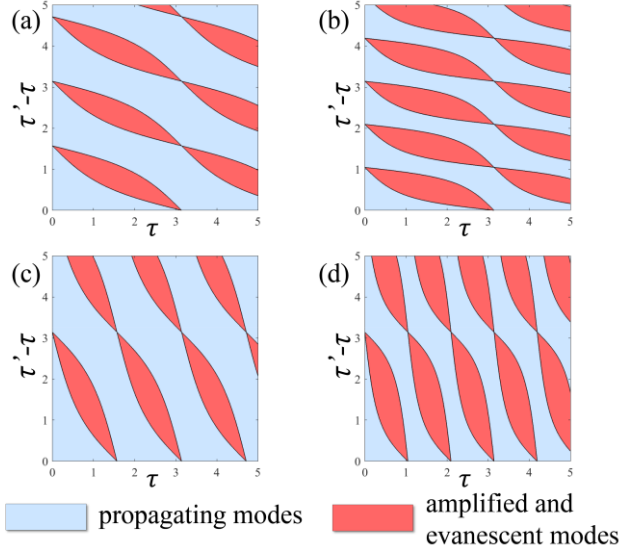


Fig. 2. Stability charts for fixed values of $k/\sqrt{\varepsilon_1\mu_1}$ and $k/\sqrt{\varepsilon_2\mu_2}$: (a) $k/\sqrt{\varepsilon_1\mu_1} = 1$, $k/\sqrt{\varepsilon_2\mu_2} = 2$, (b) $k/\sqrt{\varepsilon_1\mu_1} = 1$, $k/\sqrt{\varepsilon_2\mu_2} = 3$, (c) $k/\sqrt{\varepsilon_1\mu_1} = 2$, $\frac{k}{\sqrt{\varepsilon_2\mu_2}} = 1$ and (d) $k/\sqrt{\varepsilon_1\mu_1} = 3$, $k/\sqrt{\varepsilon_2\mu_2} = 1$.

plane are presented (arrows showing the position of the eigenvalues as b changes values from a negative value -3 to a positive value $+3$, as a combination of changes of its variables $k, \varepsilon_1, \mu_1, \varepsilon_2, \mu_2, \tau, \tau'$). The factor b determines the energy conversions that occur as the wave takes energy from the modulation or the modulation takes energy from the wave and their overall energy-transition characteristics. The detected exceptional points are connected with the marginal stability conditions of the hypergeometric equations which correspond to the associated parametrically amplifying modes in time-periodic media and Hamiltonians [6], [8], [26]–[28].

As proven in [1], a step temporal material jump results in a gain ratio of the electromagnetic energy density: $u_2/u_1 = (\varepsilon_1\mu_2 + \mu_1\varepsilon_2)/(2\varepsilon_2\mu_2)$, where $u = \varepsilon|\mathbf{E}|^2$, but this ratio is not the only quantitative value which defines the energy gain. Indeed the energy interactions depend also on the time variables [6], [8]. As presented in the stability charts of Fig. 2 where we fix $k/\varepsilon_1\mu_1$, $k/\varepsilon_2\mu_2$ and vary the time variables: τ and τ' , for a selected group of values of the time variables, the medium supports evanescent and amplified modes, even when we do not vary the material properties. If $k/\varepsilon_1\mu_1$ swaps value with $k/\varepsilon_2\mu_2$, then $\tau \leftrightarrow \tau' - \tau$. This property of the stability charts indicates certain operator symmetries in time and space, which are studied in the next subsection.

B. Parity, time-reversal and parity-time symmetries

The effect of the parity operator on the matrix of coefficients is $\mathcal{P}\mathbf{r} = -\mathbf{r}$. We can define the parity operator as:

$$\mathcal{P}\mathbf{C}(t) = \mathcal{P} \begin{pmatrix} C_1 \\ C_2 \end{pmatrix} = \begin{pmatrix} C_2^* \\ C_1^* \end{pmatrix}. \quad (24)$$

We obtain for real λ_{\pm} : $\mathcal{P}\mathbf{C}_+ = \mathbf{C}_+$ and $\mathcal{P}\mathbf{C}_- = \mathbf{C}_-$. Whereas for complex λ_{\pm} : $\mathcal{P}\mathbf{C}_+ = \mathbf{C}_-$ and $\mathcal{P}\mathbf{C}_- = \mathbf{C}_+$. The physical interpretation of these results is very interesting. In the case of real eigenvalues, the change of direction is not going to affect the amplified or evanescent electromagnetic modes. On the contrary, in the case of the complex eigenvalues, a change in the direction is very important as the direction plays an important role (shown also in a time-periodic medium by solving the Hill equation in [6]).

The time-reversal operator indicates that $\mathcal{T}t = -t$, is defined thus as:

$$\mathcal{T}\mathbf{C}(t) = \mathcal{T} \begin{pmatrix} C_1 \\ C_2 \end{pmatrix} = \begin{pmatrix} C_2 \\ C_1 \end{pmatrix}. \quad (25)$$

Notice that for time-varying homogeneous media, time-reversal is not the complex conjugate operator as it would have been if the problem was stationary [16]. The time-reversal relation of the state matrix is:

$$\left(\mathcal{T}\hat{H}^{-1}(\tau')\mathcal{T}\right)(\mathcal{TC}_{\pm}) = \lambda_{\pm}^{-1}(\mathcal{TC}_{\pm}), \quad (26)$$

where \mathcal{TC}_{\pm} are the new eigenvectors and $\mathcal{T}\hat{H}^{-1}(\tau')\mathcal{T}$ is the new state matrix. If the modulation is symmetric, meaning that we observe the waves at a time : $\tau' = 2\tau$ where the medium has spent equal time having ε_1, μ_1 and ε_2, μ_2 then $\mathcal{T}\hat{H}^{-1}(\tau')\mathcal{T}$ has interchanged eigenvalues and eigenvectors with $\hat{H}(\tau')$. This result can be physically interpreted by imagining that we could run time backwards. In that case, the amplified mode would look as if it attenuates and the evanescent one would look like it is amplified.

This analysis for parity and time-reversal operators shows that \mathcal{PT} -symmetry is achievable as a double interchange of eigenvalues and eigenmodes overtly brings back the system to its initial state. Such \mathcal{PT} -symmetric wave-states are exhibited without the presence of material gain and loss. The only necessary condition is a symmetric time-modulation of a dynamic medium [27].

IV. CONCLUSIONS

In this paper, we revised, reexamined and expanded the solutions derived in [1] for the electromagnetic field theory of a background time-modulated medium. We assumed time-dependent and non-dispersive $\varepsilon(t)$, $\mu(t)$, $\sigma(t)$ and derive the time-domain solutions of the fields based on the variable separation technique, the system's causality and the momentum-Fourier transforms (in contrast with the nomenclature in electromagnetics where it is convenient to work in the frequency domain). The momentum of the fields is conserved, while energy is not and we provided the appropriate theory to deal with temporal discontinuities. At last, we connected the intriguing energy transition phenomena that occur with the exceptional point theory used in Hamiltonian physics, examined the effects of parity and time-reversal operators and proved that parity-time symmetry can be present in a symmetrically time-modulated and time-a-periodic medium without a symmetrically combined distribution of gain and loss.

APPENDIX A: NONSTATIONARY AND INHOMOGENEOUS MEDIUM EQUATIONS

The electromagnetic equations for $\varepsilon = \varepsilon(\mathbf{r}, t)$, $\sigma = \sigma(\mathbf{r}, t)$ and $\mu = \mu(\mathbf{r}, t)$ are:

$$\nabla \times \left(\frac{1}{\mu}\right) \nabla \times \mathbf{E} + \varepsilon \frac{\partial^2 \mathbf{E}}{\partial t^2} + \left[\sigma + 2\frac{\partial \varepsilon}{\partial t} + \varepsilon \frac{\partial \ln \mu}{\partial t}\right] \frac{\partial \mathbf{E}}{\partial t} + \left[\frac{\partial \sigma}{\partial t} + \frac{\partial^2 \varepsilon}{\partial t^2} + \left(\frac{\partial \varepsilon}{\partial t} + \sigma\right) \frac{\partial \ln \mu}{\partial t}\right] \mathbf{E} = \mathbf{H} \times \nabla \left(\frac{\partial \ln \mu}{\partial t}\right) - \left(\frac{\partial \ln \mu}{\partial t} + \frac{\partial}{\partial t}\right) \mathbf{J}, \quad (27)$$

$$\nabla \times \left(\frac{1}{\varepsilon}\right) \nabla \times \mathbf{H} + \mu \frac{\partial^2 \mathbf{H}}{\partial t^2} + \left[2\frac{\partial \mu}{\partial t} + \left(\frac{\sigma}{\varepsilon} + \frac{\partial \ln \varepsilon}{\partial t}\right) \mu\right] \frac{\partial \mathbf{H}}{\partial t} + \left[\frac{\partial^2 \mu}{\partial t^2} + \left(\frac{\sigma}{\varepsilon} + \frac{\partial \ln \varepsilon}{\partial t}\right) \frac{\partial \mu}{\partial t}\right] \mathbf{H} = -\mathbf{E} \times \nabla \left(\frac{\sigma}{\varepsilon} + \frac{\partial \ln \varepsilon}{\partial t}\right) + \nabla \times \left(\frac{1}{\varepsilon}\right) \mathbf{J}. \quad (28)$$

Eqs. (27)-(28) describe the electrodynamic-wave interactive phenomena with material time-variation and inhomogeneities. In contrast with a regular inhomogeneous medium [18], the differential equations have added terms associated with the unusual properties imparted by the time-variation in the derivatives and in the sources. Not only does the current radiate differently in comparison with a stationary medium, but also an extra pseudo-source appears related to an unusual field coupling physically associated with equivalent charge distributions, which depend on both the inhomogeneity and the time-variation [3], [5]. A sufficient condition for any general medium to involve only \mathbf{E} for (27) is: $\nabla \cdot \left(\frac{\partial \ln \mu}{\partial t}\right) = 0$. Notice that such condition is naturally satisfied in stationary media. This condition implies, after elementary algebraic manipulation, that μ is a product of a function that depends only on space, μ_r , and a function that depends only on time, μ_t : $\mu = \mu_r \mu_t$. The electric field equation (27) becomes (in the absence of sources):

$$\nabla \times \mu_r^{-1} \nabla \times \mathbf{E} + \frac{\partial}{\partial t} \left[\mu_t \left(\frac{\partial(\varepsilon \mathbf{E})}{\partial t} + \sigma \mathbf{E} \right) \right] = 0. \quad (29)$$

For the magnetic field equation, the sufficient condition to decouple the Eq. (28) and involve only \mathbf{H} is: $\nabla \left[\frac{\sigma}{\varepsilon} + \frac{\partial \ln \varepsilon}{\partial t} \right] = 0$.

This condition is not naturally satisfied for a time-invariant medium, because the conductivity of the medium induces electric-displacement currents even for a stationary problem. Analogously with the electric field case the condition implies that ε is a function of the form: $\varepsilon = \varepsilon_r \varepsilon_t \exp\left(-\int_{\tau}^t \frac{\sigma}{\varepsilon} dt\right)$, for $t \geq \tau$, where ε_r only depends on space and ε_t only depends on time. In the special case that the value σ/ε is only time-dependent: $\sigma = \sigma_r \sigma_t$ with $\varepsilon_r = \sigma_r$. The magnetic field equation (28) becomes (in the absence of sources):

$$\nabla \times \varepsilon_r^{-1} \nabla \times \mathbf{H} + \frac{\partial}{\partial t} \left[\varepsilon_t e^{-\int_{\tau}^t \frac{\sigma}{\varepsilon} dt} \frac{\partial(\mu \mathbf{H})}{\partial t} \right] + \sigma_t \frac{\partial(\mu \mathbf{H})}{\partial t} = 0. \quad (30)$$

In special cases of space-time periodic media, the solutions are found using the Bloch-Floquet ansatz [29-34].

APPENDIX B: POYNTING AND MOMENTUM CONSERVATION THEOREMS

The conservation of energy takes the form [35]:

$$\frac{\partial W}{\partial t} + \nabla \cdot \mathbf{S} = -p, \quad (31)$$

where W is the total stored energy, \mathbf{S} the Poynting vector and p is the power supplied by an external agent. In the case of a homogeneous time-varying medium:

$$W = \frac{\varepsilon(t)}{2} |\mathbf{E}|^2 + \frac{\mu(t)}{2} |\mathbf{H}|^2, \quad (32)$$

$$\mathbf{S} = \mathbf{E} \times \mathbf{H}, \quad (33)$$

$$p = \mathbf{E} \cdot (\mathbf{J} + \sigma(t)\mathbf{E}) + \frac{1}{2} \frac{\partial \mu(t)}{\partial t} |\mathbf{H}|^2 + \frac{1}{2} \frac{\partial \varepsilon(t)}{\partial t} |\mathbf{E}|^2. \quad (34)$$

It is evident that W and \mathbf{S} remain the same as in any regular electromagnetic problem, but p has extra terms which depend on the time-derivative of ε, μ . The redefined p power factor can give us a quantitative proof that time-varying media have different energy-transfer characteristics and could possibly allow for amplification.

The momentum conservation theorem takes the form [35]:

$$\frac{\partial \mathbf{G}}{\partial t} + \nabla \cdot \mathbb{T} = -\mathbf{f}, \quad (35)$$

where \mathbf{G} is the momentum density vector, \mathbb{T} is the Maxwell stress tensor and $\mathbf{f} = \rho \mathbf{E} + (\mathbf{J} + \sigma(t)\mathbf{E}) \times \mathbf{B}$ is the Lorentz force. It is straightforward to show that under a time-varying homogeneous medium the momentum conservation theorem remains the same as in the stationary case, namely:

$$\mathbb{T} = \varepsilon(t) \mathbf{E} \mathbf{E} + \mu(t) \mathbf{H} \mathbf{H} - \frac{1}{2} \left(\varepsilon(t) |\mathbf{E}|^2 + \mu(t) |\mathbf{H}|^2 \right) \mathbb{I}, \quad (36)$$

$$\mathbf{G} = \varepsilon(t) \mu(t) \mathbf{E} \times \mathbf{H}. \quad (37)$$

The electromagnetic field momentum is invariant under homogeneous time-variations of the medium (in classical wave theory this means that the wavenumber is conserved) whereas its energy as shown from the Poynting theorem analysis alters (which also indicates a frequency shift, since from a quantum-mechanics point of view the energy is proportional to the frequency).

APPENDIX C: POTENTIALS, LORENTZ GAUGE AND HERTZ VECTOR

The electric and magnetic fields can be represented by the scalar V and the \mathbf{A} potentials:

$$\mathbf{E} = -\nabla V - \frac{\partial \mathbf{A}}{\partial t}, \quad \mathbf{B} = \nabla \times \mathbf{A}. \quad (38)$$

The two corresponding equations for the potentials in the homogeneous time-varying media are:

$$\begin{aligned} \nabla \cdot (\varepsilon(t) \nabla V) + \nabla \cdot \left(\varepsilon(t) \frac{\partial \mathbf{A}}{\partial t} \right) &= -\rho, \\ \nabla \times \nabla \times \mathbf{A} + \mu(t) \frac{\partial (\varepsilon(t) \nabla V)}{\partial t} + \mu(t) \frac{\partial (\varepsilon(t) \mathbf{A})}{\partial t} + \mu(t) \sigma(t) \nabla V + \mu(t) \sigma(t) \frac{\partial \mathbf{A}}{\partial t} &= \mu(t) \mathbf{J}. \end{aligned} \quad (39)$$

Since the potentials are not unique, we can choose a gauge so that the equations are decoupled. The gauge condition that may be used is:

$$\nabla \cdot \mathbf{A} + \mu(t) \frac{\partial (\varepsilon(t) V)}{\partial t} + \mu(t) \sigma(t) V = 0. \quad (40)$$

This gauge fixing resembles the Lorentz gauge condition for stationary media. Under this condition the decoupled equation is:

$$\nabla^2 \mathbf{A} - \mu(t) \frac{\partial}{\partial t} \left(\varepsilon(t) \frac{\partial \mathbf{A}}{\partial t} \right) - \mu(t) \sigma(t) \frac{\partial \mathbf{A}}{\partial t} = -\mu(t) \mathbf{J}. \quad (41)$$

Since we added the gauge condition the unknowns are three identities, we introduce thus the electric Hertz vector $\mathbf{\Pi}$: $\mathbf{A} = -\mu(t) \partial \mathbf{\Pi} / \partial t$ and $V = \nabla \cdot \mathbf{\Pi} / \varepsilon(t)$.

$$\nabla^2 \mathbf{\Pi} - \varepsilon(t) \frac{\partial}{\partial t} \left(\mu(t) \frac{\partial \mathbf{\Pi}}{\partial t} \right) - \int \sigma(t) \frac{\partial}{\partial t} \left(\mu(t) \frac{\partial \mathbf{\Pi}}{\partial t} \right) dt = \int \mathbf{J} dt, \quad (42)$$

where the electric and magnetic fields are: $\mathbf{H} = -\nabla \times \frac{\partial \mathbf{\Pi}}{\partial t}$ and $\mathbf{E} = -\frac{\nabla \nabla \cdot \mathbf{\Pi}}{\varepsilon(t)} + \frac{\partial}{\partial t} \left(\mu(t) \frac{\partial \mathbf{\Pi}}{\partial t} \right)$.

APPENDIX D: SECOND ORDER DIFFERENTIAL EQUATIONS OF $T(k, t)$ AND THE LIOUVILLE-GREEN APPROXIMATION

The differential equation of $T(k, t)$ is:

$$\frac{d^2 T(k, t)}{dt^2} + P(t) \frac{dT(k, t)}{dt} + Q(k, t) T(k, t) = 0, \quad (43)$$

where for \mathbf{B} : $P(t) = \frac{\sigma}{\varepsilon} + \frac{d \ln \varepsilon}{dt}$, $Q(k, t) = \frac{k^2}{\varepsilon \mu}$ and for \mathbf{D} : $P(t) = \frac{\sigma}{\varepsilon} + \frac{d \ln \mu}{dt}$ and $Q(k, t) = \frac{1}{\mu} \frac{d}{dt} \left(\frac{\mu \sigma}{\varepsilon} \right) + \frac{k^2}{\varepsilon \mu}$. Notice that if $x(k, t)$ is the homogeneous solution of the magnetic induction differential equation then the homogeneous solution $y(k, t)$ for the electric displacement differential equation is: $y(k, t) = \exp\left(-\int \gamma dt\right) \int x(k, t) \left[\exp\left(\int \gamma dt\right)\right] dt$, where $\gamma = \sigma / \varepsilon$. The Liouville-Green estimation is [20]:

$$T(k, t) \approx \frac{\sqrt{\exp\left(-\int P(t) dt\right)}}{\sqrt[4]{Q(k, t)}} \exp\left(\pm \int \sqrt{-Q(k, t)} dt\right). \quad (44)$$

Eq. (44) is applied directly for the magnetic induction $T_b(k, t)$ (as shown in Eq. (8)), whereas the relation between $x(k, t)$ and $y(k, t)$ and Eq. (8) are used to derive (9).

REFERENCES

- [1] F. R. Morgenthaler, "Velocity Modulation of Electromagnetic Waves," *IRE Trans. Microw. Theory Tech.*, vol. 6, no. 2, pp. 167–172, Apr. 1958.
- [2] N. V. Budko, "Electromagnetic radiation in a time-varying background medium," *Phys. Rev. A*, vol. 80, no. 5, p. 053817, Nov. 2009.
- [3] L. B. Felsen and G. M. Whitman, "Wave Propagation in Time-Varying Media," *IEEE Trans. Antennas Propag.*, vol. 18, no. 2, pp. 242–253, Mar. 1970.
- [4] V. L. Ginzburg and V. N. Tsytovich, "Several problems of the theory of transition radiation and transition scattering," *Phys. Rep.*, vol. 49, no. 1, pp. 1–89, Jan. 1979.

- [5] V. L. Ginzburg and V. N. Tsytovich, "On the theory of transition radiation in a nonstationary medium," *Zh. Eksp. Teor. Fiz.*, vol. 65, pp. 132–144, 1973.
- [6] T. T. Koutserimpas and R. Fleury, "Electromagnetic Waves in a Time Periodic Medium With Step-Varying Refractive Index," *IEEE Trans. Antennas Propag.*, vol. 66, no. 10, pp. 5300–5307, 2018.
- [7] R. L. Fante, "On the propagation of electromagnetic waves through a time-varying dielectric layer," *Appl. Sci. Res.*, vol. 27, no. 1, pp. 341–354, 1973.
- [8] D. E. Holberg and K. S. Kunz, "Parametric Properties of Fields in a Slab of Time-Varying Permittivity," *IEEE Transactions on Antennas and Propagation*, vol. 14, no. 2, pp. 183–194, Mar. 1966.
- [9] A. G. Hayrapetyan, J. B. Götte, K. K. Grigoryan, S. Fritzsche, and R. G. Petrosyan, "Electromagnetic wave propagation in spatially homogeneous yet smoothly time-varying dielectric media," *J. Quant. Spectrosc. Radiat. Transf.*, vol. 178, pp. 158–166, Jul. 2016.
- [10] J. S. Martínez-Romero, O. M. Becerra-Fuentes, and P. Halevi, "Temporal photonic crystals with modulations of both permittivity and permeability," *Phys. Rev. A*, vol. 93, no. 6, p. 063813, Jun. 2016.
- [11] J. R. Zurita-Sánchez, P. Halevi, and J. C. Cervantes-González, "Reflection and transmission of a wave incident on a slab with a time-periodic dielectric function $\epsilon(t)$," *Phys. Rev. A*, vol. 79, no. 5, p. 053821, May 2009.
- [12] J. S. Martínez-Romero and P. Halevi, "Standing waves with infinite group velocity in a temporally periodic medium," *Phys. Rev. A*, vol. 96, no. 6, p. 063831, Dec. 2017.
- [13] P. A. Pantazopoulos and N. Stefanou, "Layered optomagnonic structures: Time Floquet scattering-matrix approach," *Phys. Rev. B*, vol. 99, no. 14, p. 144415, Apr. 2019.
- [14] A. Shlivinski and Y. Hadad, "Beyond the Bode-Fano Bound: Wideband Impedance Matching for Short Pulses Using Temporal Switching of Transmission-Line Parameters," *Phys. Rev. Lett.*, vol. 121, no. 20, p. 204301, Nov. 2018.
- [15] M. S. Mirmoosa, G. A. Pitcyn, V. S. Asadchy, and S. A. Tretyakov, "Time-Varying Reactive Elements for Extreme Accumulation of Electromagnetic Energy," *Phys. Rev. Appl.*, vol. 11, no. 1, p. 014024, Jan. 2019.
- [16] C. M. Bender and S. Boettcher, "Real spectra in non-hermitian hamiltonians having PT symmetry," *Phys. Rev. Lett.*, vol. 80, no. 24, pp. 5243–5246, Jun. 1998.
- [17] R. El-Ganainy, K. G. Makris, M. Khajavikhan, Z. H. Musslimani, S. Rotter, and D. N. Christodoulides, "Non-Hermitian physics and PT symmetry," *Nature Physics*, vol. 14, no. 1. Nature Publishing Group, pp. 11–19, 01-Jan-2018.
- [18] W. C. Chew, *Waves and fields in inhomogeneous media*. IEEE Press, 1995.
- [19] M. Born and E. Wolf, *Principles of optics : electromagnetic theory of propagation, interference and diffraction of light*. Cambridge University Press, 1999.
- [20] R. Spigler and M. Vianello, "A Survey on the Liouville-Green (WKB) approximation for linear difference equations of the second order," in *Advances in difference equations : proceedings of the Second International Conference on Difference Equations : Veszprém, Hungary, August 7-11, 1995*, S. Elaydi, I. Györi, and G. E. Ladas, Eds. Gordon and Breach Science Publishers, 1997, pp. 567–577.
- [21] J. A. Richards, *Analysis of Periodically Time-Varying Systems*. Berlin, Heidelberg: Springer, 1983.
- [22] V. Bacot, M. Labousse, A. Eddi, M. Fink, and E. Fort, "Time reversal and holography with spacetime transformations," *Nat. Phys.*, vol. 12, no. 10, pp. 972–977, Oct. 2016.
- [23] N. W. MacLachlan, *Theory and Application of Mathieu Functions*. Dover, 1964.
- [24] W. Magnus and S. Winkler, *Hill's equation*. Dover Publications, 2004.
- [25] W. D. Heiss, "The physics of exceptional points," *J. Phys. A Math. Theor.*, vol. 45, no. 44, p. 444016, Nov. 2012.
- [26] H. Kazemi, M. Y. Nada, T. Mealy, A. F. Abdelshafy, and F. Capolino, "Exceptional Points of Degeneracy Induced by Linear Time-Periodic Variation," *Phys. Rev. Appl.*, vol. 11, no. 1, p. 014007, Jan. 2019.
- [27] T. T. Koutserimpas, A. Alù, and R. Fleury, "Parametric amplification and bidirectional invisibility in PT-symmetric time-Floquet systems," *Phys. Rev. A*, vol. 97, no. 1, p. 013839, Jan. 2018.
- [28] S. Longhi, "Floquet exceptional points and chirality in non-Hermitian Hamiltonians," *J. Phys. A Math. Theor.*, vol. 50, no. 50, p. 505201, Dec. 2017.
- [29] A. Hessel and A. A. Oliner, "Wave Propagation in a Medium with a Progressive Sinusoidal Disturbance," *IRE Trans. Microw. Theory Tech.*, vol. 9, no. 4, pp. 337–343, Jul. 1961.
- [30] C. Elachi, "Electromagnetic Wave Propagation and Wave-Vector Diagram in Space-Time Periodic Media," *IEEE Trans. Antennas Propag.*, vol. 20, no. 4, pp. 534–536, Jul. 1972.
- [31] J. T. Mendonça, K. Hizanidis, D. J. Frantzeskakis, L. Oliveira E Silva, and J. L. Vomvoridis, "Covariant formulation of photon acceleration," *J. Plasma Phys.*, vol. 58, no. PART 4, pp. 647–654, Dec. 1997.
- [32] S. Taravati, N. Chamanara, and C. Caloz, "Nonreciprocal electromagnetic scattering from a periodically space-time modulated slab and application to a quasisonic isolator," *Phys. Rev. B*, vol. 96, no. 16, p. 165144, Oct. 2017.
- [33] G. W. Milton and O. Mattei, "Field patterns: A new mathematical object," *Proc. R. Soc. A Math. Phys. Eng. Sci.*, vol. 473, no. 2198, p. 20160819, Feb. 2017.
- [34] P. A. Huidobro, E. Galiffi, S. Guenneau, R. V. Craster, and J. B. Pendry, "Fresnel drag in space-time-modulated metamaterials," *Proc. Natl. Acad. Sci.*, vol. 116, no. 50, pp. 24943–24948, Aug. 2019.
- [35] J. A. Kong, *Electromagnetic wave theory*. Wiley, 1986.