

Local Hamiltonians Whose Ground States are Hard to Approximate

Lior Eldar*

Aram W. Harrow*

March 2, 2022

Abstract

Ground states of local Hamiltonians can be generally highly entangled: any quantum circuit that generates them, even approximately, must be sufficiently deep to allow coupling (entanglement) between any pair of qubits. Until now this property was not known to be “robust” - the marginals of such states to a subset of the qubits containing all but a small constant fraction of them may be only locally entangled, and hence approximable by shallow quantum circuits. In this work we construct a family of 16-local Hamiltonians for which any marginal of a ground state to a fraction at least $1 - 10^{-9}$ of the qubits must be globally entangled.

This provides evidence that quantum entanglement is not very fragile, and perhaps our intuition about its instability is an artifact of considering local Hamiltonians which are not only local but *spatially local*. Formally, it provides positive evidence for two wide-open conjectures in condensed-matter physics and quantum complexity theory which are the qLDPC conjecture, positing the existence of “good” quantum LDPC codes, and the NLTS conjecture [19] positing the existence of local Hamiltonians in which any low-energy state is highly entangled.

Our Hamiltonian is based on applying the hypergraph product by Tillich-Zémor [43] to a classical locally testable code. A key tool in our proof is a new lower bound on the vertex expansion of the output of low-depth quantum circuits, which may be of independent interest.

1 Introduction

1.1 Background and main result

1.1.1 Multiparticle entanglement, trivial states and topological order

Quantum mechanics has overturned our classical intuitions about the nature of information, computing and knowledge. Perhaps the greatest departure from earlier notions of information is the phenomenon of entanglement in which a many-body quantum state cannot be reduced to a probabilistic mixture of descriptions of the state of each individual particle. For decades, entanglement was viewed in terms of its counterintuitive properties, e.g. the Bell and GHZ “paradoxes,” and only in recent years has quantum information theory begun a systematic program of quantifying, characterizing and finding ways to test entanglement.

However, in typical many-body systems, and from a complexity-theoretic point of view, the important question is not to establish the existence of entanglement, but rather to determine the *complexity* of the quantum circuit required to generate it. Many of the results of quantum

*Center for Theoretical Physics, MIT

information theory apply to the case of bipartite entanglement and often do not extend to this setting of large numbers of interacting systems. For example, a collection of $n/2$ singlets has high bipartite entanglement across most cuts but this entanglement is in a certain sense “local” and could be eliminated by a suitable coarse-graining.

The concept of a “trivial state” is meant to express the notion that states such as $n/2$ singlets have only *low-complexity* entanglement, and relates to the circuit complexity of generating quantum states:

Definition 1 (Depth- d Trivial States). *We say that an n -qubit state ρ is depth- d trivial if it can be prepared by applying a depth- d quantum circuit comprised of d layers of tensor-products of 2-local quantum gates, to $|0\rangle^{\otimes N}$ (for some $N \geq n$) and tracing out $N - n$ qubits.*

This is a special case of a more general classification of quantum phases of matter in which two states are said to be equivalent if they differ by an $O(1)$ -depth quantum circuit [14]; here trivial states correspond to the phase that includes product states. Nontrivial states are sometimes said to be topologically ordered, and examples include code states of the toric code, or indeed any QECC with distance more than a constant [9]. “Topological order” is an imprecisely defined term that we will not do justice to here, but trivial states have been shown to be equivalent to states without [various versions of] topological order in [9, 23, 32, 41, 31].

1.1.2 The Physical Perspective: Robustness of Entanglement

Arguably, the biggest barrier to building a quantum computer is quantum decoherence, which is the process by which long-range entanglement, i.e. the type that could be useful to solve hard computational problems, e.g. in Shor’s algorithm, evolves into classical distributions of trivial states, by interacting with the environment. With enough decoherence, classical computers can simulate the quantum one, thereby extinguishing all hope for a quantum speed-up.

To counter these environmental errors, one must then use quantum codes, which spread-out the quantum information over a larger space, and so the introduced redundancy then adds some resilience to the computation we are trying to perform. Indeed, the fault-tolerance theorem (see [38]) uses quantum codes to argue that universal quantum computation can be carried out efficiently under uniformly random error of sufficiently small constant rate.

However, in some cases the uniform random error model may be insufficient, and we would want to consider an error model that is much more adversarial than random. In particular, one might ask a much simpler question: how much entanglement is left in the system if we trace-out, or damage in some way, a small, yet constant fraction of the qubits. In general, when physicists have considered locally-defined quantum-mechanical systems, the immediate notion was to consider regular grids of 2 or 3 dimensions. It can be easily shown that the quantum codes considered on such lattices easily lose all long-range entanglement by acting on some small constant fraction of all qubits. This gave rise to the folklore notion that quantum systems cannot possess a robust form of quantum entanglement: namely the property that even quantum states that “pass as groundstates” on most qubits are non-trivial (highly entangled).

Hence, the above problem raises a fundamental question regarding quantum entanglement: could it be that our notion that entanglement is fragile is merely an artifact of building systems in low-dimensional grid? Could it be that, at least theoretically, quantum systems defined on more highly connected topologies could have entanglement which is more resilient? A conjecture of this form was formulated rigorously by Freedman and Hastings [19] and was called the NLTS conjecture (see definition 30).

Definition 2. No Low-Energy Trivial States (NLTS)

Let $\{H_n\}_{n \in \mathbb{N}}$ be a family of k -local Hamiltonians for $k = O(1)$. We say that $\{H_n\}_{n \in \mathbb{N}}$ is ε -NLTS if there exists a constant $\varepsilon > 0$ such that for any d and all sufficiently large n , the following holds: if $\{\rho_n\}$

is any family of d -trivial states then

$$\text{tr}[\rho_n H_n] > \lambda_{\min}(H_n) + \varepsilon. \quad (1)$$

Several works around the NLTS conjecture, and its parent conjecture (quantum PCP - see next section) have provided ambiguous evidence about its ultimate status. Indeed, the works of [12, 7, 27, 4] have suggested that the NLTS conjecture may be false by showing that large classes of local Hamiltonians have trivial states at very low energies. Moreover, some of these results study local Hamiltonians on topologies which are highly expanding, and correspond, in a sense, to classical problems which are hard-to-approximate, because they resist the trivial divide-and-conquer strategy above.

In this work, we provide a positive indication towards the NLTS conjecture, and hence the qPCP conjecture by resolving a weaker version of NLTS that considers errors instead of violations:

Definition 3. Ground-state impostors

Let H be a Hamiltonian. A quantum state ρ is said to be an ε -impostor for H , if there exists a set $S \subseteq [n]$, $|S| \geq (1 - \varepsilon)n$ and a ground state σ (i.e. satisfying $\text{tr}[H\sigma] = \lambda_{\min}(H)$) such that $\rho_S = \sigma_S$.

Definition 4. No Low-Error Trivial States (NLETS)

Let $\{H_n\}_{n \in \mathbb{N}}$ be a family of k -local Hamiltonians for $k = O(1)$. We say that $\{H_n\}_{n \in \mathbb{N}}$ is NLETS if there exists a constant $\varepsilon > 0$ such that the following holds: for any d and all sufficiently large n , if $\mathcal{F} = \{\rho_n\}$ is any family of ε -impostor states for $\{H_n\}_n$ then \mathcal{F} is not d -trivial.

By definition any family of bounded-degree local Hamiltonians that is NLTS is also NLETS: if a quantum state agrees with a ground state of the quantum system on “most” qubits, then the bounded-degree assumption means that such a state also has low-energy w.r.t. the Hamiltonian. We discuss the difference between NLTS and NLETS further in Section 1.1.3. Our main theorem is as follows:

Theorem 5. Explicit NLETS

There exists constants $\varepsilon = 10^{-9}$, $a, b > 0$ and an explicit infinite family of Hamiltonians $\{H_n\}_n$, each of the form

$$H_n = \frac{1}{m} \sum_{i=1}^m \frac{I + P_i}{2}, \quad (2)$$

for P_i equal to ± 1 times a tensor product of Pauli matrices on 16 qubits and identity elsewhere. These Hamiltonians have the property that

- There exists a state $|\phi_n\rangle$ such that $H_n|\phi_n\rangle = 0$.
- For any ε -impostor ρ_n for H_n and any quantum circuit U_n of depth at most $d = b \cdot \log(n)$, we have

$$\|\rho_n - U_n |0^{\otimes n}\rangle \langle 0^{\otimes n}| U_n^\dagger\|_1 > n^{-a}. \quad (3)$$

Despite being possibly weaker than NLTS in terms of the approximation criterion, our theorem is stronger than NLETS in the following ways:

1. The original definition of NLTS includes a restriction that the generating circuit U_n is allowed to couple qubits only if they are coupled via some local term of the Hamiltonian H_n . Here we remove this restriction, and show a lower-bound for circuits U_n even if they are allowed to couple *arbitrary* pairs of qubits.
2. We show that low-depth circuits not only are unable to produce ground states of residual Hamiltonians, they cannot even produce states that approximately match the classical probability distributions resulting from measuring these states in the X and Z bases.

3. We prove a depth lower bound that is not merely $\omega(1)$ but is $\Omega(\log(n))$. A circuit of depth $\Omega(\log(n))$ can potentially generate a non-zero correlation between every pair of qubits, hence it “saturates” all light-cone type arguments. Since the naive algorithm for estimating expectation values runs in time doubly exponential in d , our results imply that this algorithm will require time $2^{n^{\Omega(1)}}$.
4. We not only show that d -trivial states cannot be ε -impostors, but we show that these sets of quantum states are separated by a trace distance of $n^{-\Omega(1)}$.
5. We use a relatively simple form of Hamiltonian, consisting only of commuting 16-local Pauli terms.

NLETS. While previously known constructions of local Hamiltonians are not NLETS, this may in part be because they are either embedded on a regular grid in low dimensions, or depart from this in ways that allow for efficient classical description. Thus, our theorem suggests that the apparent fragility of many-body entanglement from these examples may be simply a sign of not considering a wide enough range of examples.

1.1.3 Robust Entanglement Zoo

Given the numerous open problems / conjectures mentioned in this paper, it may be useful to consider their interaction via a “zoo of robust entanglement” (see Figure 1). We first list for self-inclusiveness the relevant problems and their definitions. In what follows ε is a positive constant that can be arbitrarily small.

1. NLTS - There exist local Hamiltonians such that any low-energy state is non-trivial.
2. cNLTS - There exist local Hamiltonians such that any quantum state satisfying a $\geq 1 - \varepsilon$ fraction of all local terms is non-trivial.
3. NLETS - There exist local Hamiltonians such that any quantum state that is equal to a ground state up to a unitary incident on at most an ε fraction of qubits, is non-trivial.
4. qLTC - There exist local Hamiltonians for which the energy of a quantum state is proportional to its distance from the ground-space of the Hamiltonian.
5. qLDPC - There exist quantum codes with local checks, and minimal distance scaling linearly in the number of qubits.
6. qPCP - It is as hard to approximate the ground energy of a local Hamiltonian to a constant fraction accuracy, as it is to estimate it to inverse-polynomial accuracy.

In Theorem 46 we show that an affirmative resolution of the qLTC conjecture would imply NLTS. This connects two important conjectures in quantum Hamiltonian complexity, and as described in the next section, allows us to connect the NLTS conjecture, to open problems arising in algebraic topology in the context of high-dimensional expanders.

In our main Theorem 5, we will use a *residual* form of quantum local testability to show that our local Hamiltonian is NLETS. Essentially, the more restrictive error model of NLETS will allow us to leverage a weaker form of quantum local testability to argue a circuit lower-bound on ground-state impostors.

To stress the difference between NLTS and NLETS: States that are low energy w.r.t. some Hamiltonian may not necessarily corresponds to applying a small constant-weight error to some ground state of the system, or even to a superposition of such states. To make this logical step, one needs to argue that the Hamiltonian has some form of local testability, with qLTC being the strongest version thereof. In other words: while for any bounded-degree local Hamiltonian, small weight errors translate to small-weight violations, the converse only holds if the Hamiltonian (or code) is somewhat qLTC.

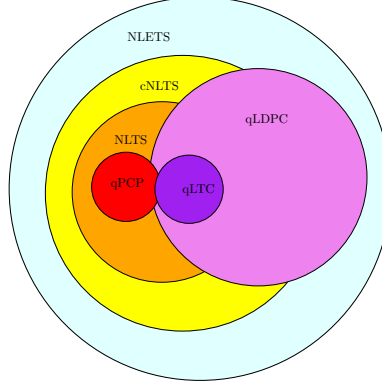


Figure 1: The Robust-Entanglement Zoo

On the other hand, NLETS is sufficiently general (or “weak”) to serve also as a necessary condition for the qLDPC (and qLTC) conjecture: if there exists a quantum code with linear distance δ_{\min} , then in particular any error of fractional weight, say $\delta_{\min}/2$, cannot make the state trivial. The qLDPC conjecture is still wide open despite some recent progress [10] so our Theorem 5 can be considered as progress towards qLDPC from a slightly different angle - that of robust entanglement as a weak form of proper quantum error correction. Hence NLETS is a step forward in two hierarchies: one is the hardness-of-approximation chain $\text{qPCP} \Rightarrow \text{NLTS} \Rightarrow \text{cNLETS} \Rightarrow \text{NLETS}$, and the other is the robust-coding chain $\text{qLTC} \Rightarrow \text{qLDPC} \Rightarrow \text{NLETS}$.

1.2 The Topological Perspective: High-Dimensional Expanders

The quest for robust forms of quantum entanglement (e.g. the qPCP conjecture) has raised intriguing questions about which interaction *topologies* may be suitable for such a phenomenon.

As mentioned above, at the very least one would like a topology that is “expanding”, i.e. one in which discarding a constant fraction of the terms would not break the local Hamiltonian in question into small disjoint components. However, previous works [27, 7, 4] have indicated that mere graph-expansion may be insufficient, and hence a more refined, high-dimensional property may be required.

This implies a connection to the nascent field of high-dimensional expanders: In an attempt to repeat the enormous success of expander graphs researchers have recently tried to provide a “standard” definition of a high-dimensional expander that would allow simultaneous characterization of these objects from both the combinatorial and spectral perspectives, as in expander graphs [33, 36, 22].

In this work, we consider a definition of high-dimensional expansion due to [30, 17] on complex chains over \mathbb{F}_2 . It is called co-systole expansion: Let C be a d -dimensional complex chain over \mathbb{F}_2 , $C = \{C_0, \dots, C_{d-1}\}$ with boundary maps $\delta_k : C_k \mapsto C_{k-1}$ for all $k \in [d]$. Each C_i is a vector space over \mathbb{F}_2 , and the (linear) boundary maps have the following defining property:

$$\delta_{k-1} \circ \delta_k = 0, \forall k. \quad (4)$$

Similarly, one can define the k -th co-chain C^k as the space of functions $C_k \mapsto \mathbb{F}_2$, and corresponding maps, called *co-boundary* maps, that map $\delta^k : C^k \mapsto C^{k+1}$, and likewise

$$\delta^{k+1} \circ \delta^k = 0, \forall k \quad (5)$$

Define $Z^k = \ker(\delta^k)$, $B^k = \text{im}(\delta^{k-1})$ for each k . By (5), we have $B^k \subseteq Z^k$. The complex C is

said to be an (ε, μ) -co-systole expander if for all $0 \leq k < d$:

$$\min_{a \in Z^k - B^k} |a| \geq \mu n_k \quad (6)$$

and

$$\min_{A \in C^k - Z^k} \frac{|\delta(A)|}{\min_{z \in Z^k} |A + z|} \geq \varepsilon n_k, \quad (7)$$

where $|x|$ is the Hamming weight of x , and $n_k = \dim(C^k)$. An infinite family of complexes $C^{(n)}$ is then said to be a co-systole expander if there exist ε, μ independent of n such that each $C^{(n)}$ is (ε, μ) co-systole. We usually further require that such families have bounded degree, i.e. where the boundary operator has only $O(1)$ non-zero entries in each row/column. We similarly define a systole expander, if the above properties hold also for the boundary maps. A family is then called a systole/co-systole expander if the property holds simultaneously for both boundary and co-boundary maps.

In the last two years there has been significant progress towards achieving bounded-degree co-systole expanders. Kazhdan, Kaufman and Lubotzky [30] constructed an infinite family of 2-dimensional co-systole expanders, and subsequent work of Evra and Kaufman [17], provided a construction an explicit d -dimensional co-systole expander of every dimension d , both of bounded degree.

This definition of co-boundary expansion has a natural interpretation in the context of quantum codes (see e.g. [42]). It is known that for every 3-dimensional complex chain $\{C_0, C_1, C_2\}$, one can associate a quantum code by canonically translating the boundary maps δ_2, δ_1 to tensor-product Pauli operators. Here C_1 corresponds to the set of qubits, C_2 correspond to the Z stabilizers and C_0 to the X stabilizers. In particular, the stabilizer group is defined to be

$$\{Z^{\delta_2 z} : z \in C_2\} \cup \{X^{(\delta_1)^T x} : x \in C_0\}. \quad (8)$$

(See Section 2.2 for background and definitions of stabilizer codes.) These operators in (8) commute because of (4) and they correspond to a quantum error-correcting code whose logical operators are isomorphic to the quotient Z^1/B^1 . The degree of the complex translates directly to the weight of the check operators of the quantum code. Finally, if $\{C_0, C_1, C_2\}$ is both a co-systole and a systole expander then this implies that the code is in fact a quantum locally testable code (qLTC) of linear minimal distance (defined formally in Definition 16 below).

Our first main result Theorem 46 shows that the Pauli check terms associated to any such qLTC comprise an NLTS local Hamiltonian - namely, one in which any low-energy state can only be approximated by large-depth quantum circuits. Hence, using the qLTC formalism, one can derive the following corollary which connects the existence of systole / co-systole expanders to the NLTS conjecture:

Corollary 6. *Let $C^{(n)}$ be a 3-dimensional complex that is an (ε, μ) systole/co-systole expander. Then the Pauli terms associated with $C^{(n)}$ via the CSS formalism, constitute an NLTS.*

Alternatively, if NLTS turned out to be false, it would imply a strong non-duality in the following sense: any 3-complex that is a co-systole expander, cannot be like wise a systole expander and vice versa.

It is interesting to point out that the recent construction by Evra and Kaufman [17] achieves only a one-sided expansion, namely of the co-boundary map, but is actually known *not* to possess this property for the boundary map. This is because the constructed complex has boundary / co-boundary maps which behave very differently. Notably, such an equivalence exists for the Toric Code, but such a code is very far from being a co-systole expander. We further note that a systole / co-systole expander of dimension 2 (namely a complex of triangles)

is actually known not to exist by considering these expanders as a system of 3-local commuting Hamiltonians [3].

A similar property of having boundaries and co-boundaries behave very differently was at the core of the behavior of the “one-sided” NLTS construction due to Freedman and Hastings [19]. In fact, one can check that the Evra-Kaufman construction [17] also implies a one-sided NLTS by applying Theorem 46 in this paper to one side of the checks, say the Pauli X operators, in the same way as in Corollary 6 above. Without including the precise definitions (found in [17]) one can then connect one-sided NLTS with certain classes of high-dimensional expanders called “Ramanujan complexes” as follows:

Corollary 7. [17] *For every d there exists an infinite family of Ramanujan complexes $\{C^{(n)}\}$ such that the Pauli operators corresponding to its boundary maps are d -local Hamiltonians that are one-sided NLTS.*

Hence, Theorem 46 of this paper presents a connection between two difficult problems, one in quantum complexity and another in algebraic topology: a qPCP-optimistic view calls for an attempt to construct such expanders, and resolve the NLTS conjecture in the affirmative, whereas a qPCP-pessimistic approach, would possibly rule out NLTS using quantum arguments, and by that provide a negative result to the systole/ co-systole conjecture.

1.3 Proof Outline

1.3.1 Circuit Lower-bounds

We begin by defining a “complexity witness”, i.e. a simple-to-verify property that can prove a state is nontrivial. The goal is then to show a local Hamiltonian system for which such a complexity witness can be found, not only for its ground state, but for any quantum state which is an ε -impostor.

Our complexity witness is chosen as the following geometric property of quantum states: we show that measuring a trivial state in any product basis results in a probability distribution over \mathbb{F}_2^n with high expansion. It is well known that the uniform measure on \mathbb{F}_2^n , or indeed any product measure, has good expansion properties. It is not hard to see this is also true for the output of low-depth classical circuits. We extend this to quantum circuits, by using Chebyshev polynomials in a way inspired by [20, 6].

Theorem 8 (informal version of Theorem 42). *Let $N \geq n > 0$ be some integers, and $|\psi\rangle = U|0^N\rangle$ for U a circuit of depth d . Let p be the probability distribution that results from measuring the first n qubits in the computational basis; i.e.*

$$p(x) = \sum_{y \in \{0,1\}^{N-n}} |\langle x, y | \psi \rangle|^2. \quad (9)$$

Then for any $\ell \geq \alpha \sqrt{n} 2^{1.5d} \geq 1$ with $\alpha \leq 1$, we have:

$$h_\ell(p) \geq \Omega(\alpha^2) \quad (10)$$

where $h_\ell(p)$ is the vertex expansion of \mathbb{F}_2^n endowed with measure p and edges between all x, y with $\text{dist}(x, y) \leq \ell$. Vertex expansion is defined precisely in Section 5 but roughly speaking measures the fraction of weight of any subset that should be near its boundary.

We refer to non-expanding distributions as “approximately partitioned”; meaning that we can identify two well-separated subsets S_0, S_1 each with large probability measure. A prototypical example of a state giving rise to an approximately partitioned distribution is the so-called “cat-state” $(|0^n\rangle + |1^n\rangle)/\sqrt{2}$. However, the cat state is not the unique ground state of any local Hamiltonian [13], so it is not a good candidate for an NLETS system. Another possibility,

the uniform distribution of any (classical) code with good distance, is also approximately partitioned, but simply using the check operators of a classical code is insufficient since any product string state corresponding to a code-word would pass this test, but is obviously a trivial state.

An example of a state which is both approximately partitioned *and* locally checkable is a state of a quantum error correcting code (QECC) with low-weight generators. QECCs protect quantum information by encoding a given Hilbert space into a larger Hilbert space in a non-local fashion, so they are natural candidates for creating robust forms of entanglement. We will show in Section 6 the “warm-up” result that Hamiltonians corresponding to a special subclass of QECCs (namely CSS codes) have no *zero-energy* trivial states. (Some version of this claim was folklore [9, 23].) Here if we want to consider local Hamiltonians then it is necessary to restrict to codes with low-weight check operators, also known as LPDC (low-density parity-check) codes.

1.3.2 Local Testability

Later we will construct a quantum code in Section 9 that is robust, meaning that even states that violate a small constant fraction of constraints would have a “complexity witness” to the fact that they are hard to generate using quantum circuits. A key ingredient is local testability, a property of significant interest in theoretical CS [21].

Definition 9. Classical locally testable code

A code $C \subseteq \mathbb{F}_2^n$ is said to be locally testable with parameters q, ρ , if there exists a set of q -local check terms $\{C_1, \dots, C_m\}$, such that

$$\text{Prob}_i [C_i(w) = 1] \geq \rho \cdot \frac{\text{dist}(w, C)}{n}.$$

This means that strings violating only a few checks must be close to the code.

In [5] the authors define a quantum analog of LTC’s, called qLTC (see Definition 16 below for a precise definition). It is an open question (the “qLTC conjecture”) whether there exist qLTCs with constant soundness $\rho > 0$ and $q = O(1)$. In Section 7 we show that the qLTC conjecture implies the NLTS conjecture. This is because low-energy quantum states are close to the encoded quantum space, which has provable circuit lower-bounds. However, our approach to NLTS will be instead will use the simplest classical LTCs, namely the repetition code, and use it to construct a quantum code with a residual form of local testability.

1.3.3 The Hypergraph Product

The Tillich-Zémor hypergraph product [43] provides a method for embedding a classical code into a CSS code. It does not preserve the minimal distance of the composing codes. Indeed its best distance parameter scales like $O(\sqrt{N})$ for N qubits, whereas we are interested in protecting against syndromes of linear weight. However, one lesson from our work is that distance may not always be the best measure for how well a quantum code resists error in the context of NLTS. As it turns out, there exists a subset of the logical words of the quantum product code that is isomorphic to the original LTC. While these words have weight only $O(\sqrt{N})$ each, they also inherit some form of local testability from the underlying classical LTCs.

Next, we note that even a residual form of local testability does not imply, on its own, that a low-energy quantum state is hard to generate. In particular, as mentioned before, classical bit-string assignments are trivially easy to generate. Here, we make use of the fact the quantum uncertainty principle. The fact that we use a quantum code means we can measure in either the X or Z basis. A standard uncertainty argument means that at least one of these should have high uncertainty. This forces the distribution of any low-violation quantum state not only to be clustered around the original code-space as with classical LTCs, but also to have considerable

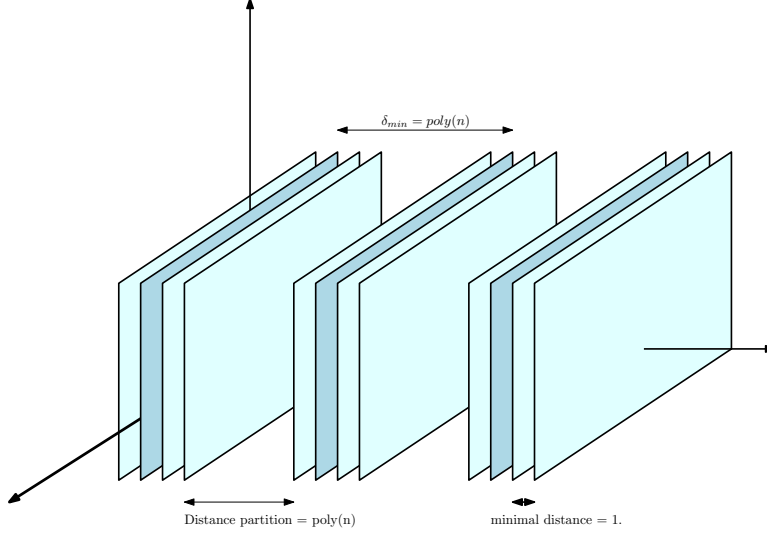


Figure 2: Depiction of the robustness of qLTC. The code space should be divided into linear subspaces that are separated by distance Δ_{\min} , and when noise is added it should still cause the state to be clustered near these subspaces. Thus even though distance drops to 1 when we allow low-energy states, there is still an approximate partition of the distribution when we measure in the X or Z basis. Our NLETS system will rely on a similar partition to achieve its circuit lower bound.

measure on at least two far-away subsets of the code, by the uncertainty principle. This places a lower bound on how dispersed the distribution is. In this context, the distance and local testability of the original LTC will imply that at least in one of the X or Z basis, the measured distribution must be approximately partitioned, and therefore that the state must be nontrivial.

1.3.4 The Construction

We provide full details of the construction in Section 9 and here we provide a high-level sketch. Consider a classical code with a parity-check matrix H , defined with rows corresponding to a set of m checks and columns corresponding to n bits, thus $\ker H \subseteq \mathbb{F}_2^n$. The hypergraph product of H with itself is a quantum code on $m^2 + n^2$ qubits with check matrices H_x, H_z (corresponding to Pauli X , Pauli Z operators) defined as follows:

$$H_x = (H \otimes I_n | I_m \otimes H^T) \quad \text{and} \quad H_z = (I_n \otimes H | H^T \otimes I_m) \quad (11)$$

To see that the usual orthogonality condition for CSS codes is satisfied, observe that

$$H_x H_z^T = (H \otimes I_n | I_m \otimes H^T) \cdot \begin{pmatrix} I_n \otimes H^T \\ H \otimes I_m \end{pmatrix} = H \otimes H^T + H \otimes H^T = 0. \quad (12)$$

We then start by choosing H as a check matrix of the repetition code, corresponding to the edges of a d -regular expander graph (e.g. from [35]) as equality constraints modulo \mathbb{F}_2 . One can check that the locality of the matrices H_x, H_z - i.e. the number of 1's in each row - is the sum of the right and left degree of the Tanner graph defined by H . In the case of the expander graph, this results in degree $d + 2$.

1.4 Previous Work

Most of the previous results established various settings in which NLTS was known not to hold. This is true even though in all of the following cases (except the first), the corresponding

classical instance is NP-hard to approximate. In the following list we identify Hamiltonians with the [hyper-]graph in which each qubit is a vertex and each interaction term defines a [hyper-]edge.

1. Non-expanding graphs, including $O(1)$ -dimensional lattices. This was folklore and holds even classically, but was formalized in [7].
2. Graphs where most vertices have $\omega(1)$ degree [7].
3. 2-local Hamiltonians with commuting terms [12].
4. 3-qubit Hamiltonians with commuting terms [3].
5. Sparse commuting $O(1)$ -local Hamiltonians corresponding to graphs with high girth [27].
6. Commuting $O(1)$ -local Hamiltonians with high local expansion [4].

The above results rule out topologies (such as high-degree graphs) which are known to be central to the classical PCP constructions. This combination of constraints (degree and expansion must be high but not too high, etc.) made it plausible that NLETS would be false, at least in the commuting case. Indeed Ref. [7] shows that if the gap-amplification step of Dinur’s PCP theorem [15] had a quantum analogue with similar behavior (as was proposed by [2]), it would actually *refute* the qPCP conjecture.

On the positive side, it was shown by Hastings [25] that the Toric Code satisfies a variant of NLTS in which we only consider states whose fractional energy is vanishing in n . Namely, any quantum state for which $\text{tr}(H\rho) = \varepsilon = o_n(1)$ can only be generated by circuits whose depth is $\Omega(\log(1/\varepsilon)) = \omega_n(1)$. This implies, in particular, that the Toric Code is also NLETS for any sub-constant function $\varepsilon = \varepsilon(n)$.

In proving the NLETS conjecture our proof will narrowly dodge the above no-go theorems by employing a Hamiltonian (a) on an expanding hypergraph, (b) albeit one with $O(1)$ degree, (c) by being $O(1)$ -local (although the terms do commute), and (d) by having much smaller local expansion than one would expect from a random graph, and specifically not being hyper-finite, in the language of [27, 19].

We also review the various incomplete attempts at establishing NLTS:

1. The “cat state” is nontrivial but not the ground state of any local Hamiltonian [13].
2. Freedman and Hastings [19] give an example with “one-sided NLTS.” Here the Hamiltonian contains X and Z terms and has the property that a state which satisfies most of the X terms and all of the Z terms must be nontrivial. This result is also implied by the bounded-degree co-systole expanders of [30, 17]. In particular this one-sided NLTS is known *not* to be even NLETS.
3. The uniform super-position over the code space of a classical code can be shown to require $\Omega(\log(n))$ depth to produce. (This is a new result of ours but not hard to prove, and arguably was implicit in previous works [9, 23].) If the code is an LDPC (low-density parity check) then this can be verified with $O(1)$ -weight checks. If it is an LTC (locally testable code; see Section 7 for details), then this claim becomes robust, i.e. it requires $\Omega(\log(n))$ depth to produce a distribution that even approximately matches the desired distribution. However, there is no way with classical constraints to force the distribution to be uniform. A single string in the support of the code space can be prepared in depth 1. Only in a quantum code with both X and Z terms (or more generally, non-diagonal terms in the code Hamiltonian) can we require a state to be in a non-trivial superposition. Thus the NLETS/cNLTS/NLTS conjectures do not have natural classical analogues, although our arguments for NLETS will rely on some techniques from classical coding.

1.5 Discussion and Open Questions

NLETS is a necessary condition for NLTS as well as qPCP¹, and qLTC. After a series of papers containing mostly bad news for the qPCP and qLTC conjectures, this result can be seen as a pro-qPCP/qLTC development. We conjecture that NLTS is also true, and leave it as an immediate, yet challenging open question.

Another open question is obtaining lower bounds on circuit depths that are asymptotically larger than $\log(n)$. Not only do our expansion lower bounds break down at this point, but in fact all stabilizer states can be prepared in $O(\log(n))$ depth [1]. Probabilistic arguments (cf. [8]) can establish a loose depth hierarchy for quantum circuits: circuits of depth n^k cannot distinguish random circuits of depth n^{11k+9} from Haar-random circuits. But it would be more useful to have concrete methods for lower bounding depth at levels above $\log(n)$.

Finally, one can consider our construction in the context of qPCP itself. Of course our Hamiltonians do not encode any particular problem and always have ground-state energy 0, so in this context, our result should be regarded as a state-generation lower-bound and not as a complexity-theoretic result per-se. Moving beyond commuting Pauli operators and encoding actual computational problems in the ground states of robust Hamiltonians will be one of many hurdles required to translate our result into a proof of the qPCP conjecture.

Acknowledgements

We thank Dorit Aharonov, and Jeongwan Haah for useful conversations, Fernando Brandão, Toby Cubitt, Isaac Kim, Anthony Leverrier, Cedric Lin and Kevin Thompson for useful and detailed comments and Alex Lubotzky for pointing out the fundamental importance of the Tillich-Zémor construction. We thank an anonymous reviewer for pointing out a fundamental flaw in our previous paper claiming the NLTS conjecture. We are both funded by the Templeton foundation, AWH is funded by NSF grants CCF-1111382 and CCF-1452616 and ARO contract W911NF-12-1-0486, and LE is funded by NSF grant CCF-1629809.

References

- [1] S. Aaronson and D. Gottesman. Improved simulation of stabilizer circuits. *Phys. Rev. A*, 70:052328, 2004, [arXiv:quant-ph/0406196](#).
- [2] D. Aharonov, I. Arad, Z. Landau, and U. Vazirani. The detectability lemma and quantum gap amplification. In *STOC '09*, pages 417–426, 2009, [arXiv:0811.3412](#).
- [3] D. Aharonov and L. Eldar. On the complexity of commuting local Hamiltonians, and tight conditions for topological order in such systems. In *FOCS '11*, pages 334–343, 2011, [arXiv:1102.0770](#).
- [4] D. Aharonov and L. Eldar. The commuting local Hamiltonian problem on locally expanding graphs is approximable in NP. *Quantum Information Processing*, 14(1):83–101, Jan. 2015, [arXiv:1311.7378](#).
- [5] D. Aharonov and L. Eldar. Quantum locally testable codes. *SIAM Journal on Computing*, 44(5):1230–1262, 2015, [arXiv:1310.5664](#).
- [6] I. Arad, A. Kitaev, Z. Landau, and U. Vazirani. An area law and sub-exponential algorithm for 1D systems. In *Proceedings of the 4th Innovations in Theoretical Computer Science (ITCS)*, 2013, [arXiv:1301.1162](#).

¹assuming $\text{QMA} \subsetneq \text{NP}$

- [7] F. G. S. L. Brandão and A. W. Harrow. Product-state approximations to quantum ground states. In *Proceedings of the 45th annual ACM Symposium on theory of computing*, STOC '13, pages 871–880, 2013, [arXiv:1310.0017](#).
- [8] F. G. S. L. Brandão, A. W. Harrow, and M. Horodecki. Local random quantum circuits are approximate polynomial-designs, 2012, [arXiv:1208.0692](#).
- [9] S. Bravyi, M. Hastings, and F. Verstraete. Lieb-Robinson bounds and the generation of correlations and topological quantum order. *Phys. Rev. Lett.*, 97:050401, 2006. [arXiv:quant-ph/0603121](#).
- [10] S. Bravyi and M. B. Hastings. Homological product codes. In *Proceedings of the 46th Annual ACM Symposium on Theory of Computing*, STOC '14, pages 273–282, New York, NY, USA, 2014. ACM.
- [11] S. Bravyi, M. B. Hastings, and F. Verstraete. Lieb-robinson bounds and the generation of correlations and topological quantum order. *Phys. Rev. Lett.*, 97:050401, Jul 2006.
- [12] S. Bravyi and M. Vyalyi. Commutative version of the local Hamiltonian problem and common eigenspace problem. *Quantum Inf. Comput.*, 5(3):187–215, May 2005, [arXiv:quant-ph/0308021](#).
- [13] J. Chen, Z. Ji, B. Zeng, and D. L. Zhou. From ground states to local hamiltonians. *Phys. Rev. A*, 86:022339, Aug 2012, [arXiv:1110.6583](#).
- [14] X. Chen, Z.-C. Gu, and X.-G. Wen. Local unitary transformation, long-range quantum entanglement, wave function renormalization, and topological order. *Phys. Rev. B*, 82:155138, Oct 2010, [arXiv:1004.3835](#).
- [15] I. Dinur. The pcg theorem by gap amplification. *J. ACM*, 54(3), June 2007.
- [16] L. Eldar. Local Hamiltonians with approximation-robust entanglement, 2015, [arXiv:1503.02269](#).
- [17] S. Evra and T. Kaufman. Bounded degree cosystolic expanders of every dimension. In *Proceedings of the 48th Annual ACM SIGACT Symposium on Theory of Computing*, STOC 2016, pages 36–48. ACM, 2016, [arXiv:1510.00839](#).
- [18] M. Freedman, D. Meyer, and F. Luo. \mathbb{Z}_2 -systolic freedom and quantum codes. In R. K. Brylinski and G. Chen, editors, *Math. of Quantum Computation*, pages 287–320. Chapman & Hall/CRC, 2002.
- [19] M. H. Freedman and M. B. Hastings. Quantum systems on non- k -hyperfinite complexes: A generalization of classical statistical mechanics on expander graphs, Jan. 2014, [arXiv:1301.1363](#).
- [20] J. Friedman and J.-P. Tillich. Laplacian eigenvalues and distances between subsets of a manifold. *J. Differential Geom.*, 56(2):285–299, 10 2000.
- [21] O. Goldreich. Short locally testable codes and proofs: A survey in two parts. In O. Goldreich, editor, *Property Testing*, volume 6390 of *Lecture Notes in Computer Science*, pages 65–104. Springer Berlin Heidelberg, 2010.
- [22] M. Gromov. Singularities, expanders and topology of maps. part 2: from combinatorics to topology via algebraic isoperimetry. *Geometric and Functional Analysis*, 20(2):416–526, 2010.
- [23] J. Haah. An invariant of topologically ordered states under local unitary transformations, 2014, [arXiv:1407.2926](#).
- [24] L. H. Harper. Optimal assignments of numbers to vertices. *Journal of the Society for Industrial and Applied Mathematics*, 12(1):131–135, 1964.

- [25] M. Hastings. Topological order at non-zero temperature. *Phys. Rev. Lett.*, 107:210501, 2011, [arXiv:1106.6026](#).
- [26] M. B. Hastings. Locality in quantum systems, 2010, [arXiv:1008.5137](#). lecture notes from Les Houches summer school.
- [27] M. B. Hastings. Trivial low energy states for commuting Hamiltonians, and the quantum PCP conjecture, 2012, [arXiv:1201.3387](#).
- [28] H. F. Hofmann and S. Takeuchi. Violation of local uncertainty relations as a signature of entanglement. *Phys. Rev. A*, 68:032103, Sep 2003, [arXiv:quant-ph/0212090](#).
- [29] S. Hoory, N. Linial, and A. Wigderson. Expander graphs and their applications. *Bulletin of the American Mathematical Society*, 43(4):439–562, 2006.
- [30] T. Kaufman, D. Kazhdan, and A. Lubotzky. Isoperimetric inequalities for Ramanujan complexes and topological expanders. *Geometric and Functional Analysis*, 26(1):250–287, 2016, [arXiv:1409.1397](#).
- [31] I. H. Kim. On the informational completeness of local observables, 2014, [arXiv:1405.0137](#).
- [32] A. Kitaev. On the classification of short-range entangled states, 2013. <http://scgp.stonybrook.edu/archives/7874>.
- [33] N. Linial and R. Meshulam. Homological connectivity of random 2-complexes. *Combinatorica*, 26(4):475–487, 2006, [arXiv:math/0609773](#).
- [34] S. Lovett and E. Viola. Bounded-depth circuits cannot sample good codes. *Computational Complexity*, 21(2):245–266, 2012.
- [35] A. Lubotzky, R. Phillips, and P. Sarnak. Ramanujan graphs. *Combinatorica*, 8(3):261–277, 1988.
- [36] R. Meshulam and N. Wallach. Homological connectivity of random k -dimensional complexes. *Random Structures & Algorithms*, 34(3):408–417, 2009.
- [37] M. Morgenstern. Existence and explicit constructions of $q + 1$ regular ramanujan graphs for every prime power q . *Journal of Combinatorial Theory, Series B*, 62(1):44 – 62, 1994.
- [38] M. A. Nielsen and I. L. Chuang. Quantum computation and quantum information: 10th anniversary edition. 2011.
- [39] T. J. Osborne. Efficient approximation of the dynamics of one-dimensional quantum spin systems. *Phys. Rev. Lett.*, 97:157202, Oct 2006, [arXiv:quant-ph/0508031](#).
- [40] H. P. Robertson. The uncertainty principle. *Phys. Rev.*, 34:163–164, Jul 1929.
- [41] B. Swingle and J. McGreevy. Renormalization group constructions of topological quantum liquids and beyond, 2014, [arXiv:1407.8203](#).
- [42] B. M. Terhal. Quantum error correction for quantum memories. *Rev. Mod. Phys.*, 87:307–346, Apr 2015, [arXiv:1302.3428](#).
- [43] J.-P. Tillich and G. Zémor. Quantum LDPC codes with positive rate and minimum distance proportional to $n^{1/2}$. In *Proceedings of the 2009 IEEE international conference on Symposium on Information Theory - Volume 2*, ISIT’09, pages 799–803, 2009, [arXiv:0903.0566](#).

Outline

2	Preliminary facts and definitions	14
3	Local Hamiltonians with Approximation-Robust Entanglement	19
	<i>Precise statement of main results</i>	
4	The Uncertainty Lemma and Noisy Quantum Code-States	21
5	Vertex expansion bounds for low-depth circuits	24
	<i>Proves Theorem 8, showing that trivial states have high vertex expansion.</i>	
6	Warm-up: Quantum CSS Code-States are QNC¹-hard	29
	<i>Non-robust circuit lower bounds for any CSS code</i>	
7	A Bit Further: Quantum Locally Testable Codes are NLTS	31
	<i>Another warmup: qLTCs (which are not known to exist) would yield a proof of NLTS.</i>	
8	The Hypergraph Product	32
	<i>Review of a quantum coding technique used in the following sections.</i>	
9	Explicit QNC¹-Robust Local Hamiltonians	37
	<i>We describe our construction of Hamiltonians with cNLTS.</i>	

2 Preliminary facts and definitions

2.1 Notation

- $\|M\|$ is the operator norm of M , i.e. its largest singular value.
- For $x, y \in \mathbb{F}_2^n$, let $\text{dist}(x, y)$ denote their Hamming distance, i.e. the number of positions in which they differ. For a point $x \in \mathbb{F}_2^n$ and a set $Y \subseteq \mathbb{F}_2^n$ define $\text{dist}(x, Y) := \min_{y \in Y} \text{dist}(x, y)$. For sets $X, Y \subseteq \mathbb{F}_2^n$, define

$$\text{dist}(X, Y) = \min_{x \in X} \text{dist}(x, Y).$$

For $x \in \mathbb{F}_2^n$, $|x|$ is the Hamming weight of x .

- A probability distribution p on \mathbb{F}_2^n is (η, D) -approximately partitioned if there exist sets S_1, S_2 with $\text{dist}(S_1, S_2) \geq D$ and $p(S_1) \geq \eta, p(S_2) \geq \eta$. We write simply *approximately partitioned* when $\eta = \Omega(1)$ and $D = \Omega(n)$.
- For subsets $A, B \subseteq \mathbb{F}_2^n$, let $A + B$ denote the set of all possible pairwise sums $x + y$ with $x \in A, y \in B$. In particular, when B has one element x , we may omit the set notation and write $A + x$.
- For a linear subspace $A \subseteq \mathbb{F}_2^n$ over \mathbb{F}_2 , its dual A^\perp is

$$A^\perp = \{x \in \mathbb{F}_2^n, \langle w, x \rangle = 0 \pmod{2}, \forall w \in A\}.$$

We say that $A \perp B$ if $A \subseteq B^\perp$ or equivalently if $B \subseteq A^\perp$.

- Let $C \subseteq \mathbb{F}_2^n$ be some code on n bits. The minimal distance of C , denoted by $\Delta_{\min}(C)$ is the minimal distance between any pair of unique words in the code

$$\Delta_{\min}(C) = \min_{x \neq y, x, y \in C} \text{dist}(x, y).$$

In this paper we study linear codes where C is a subspace and so

$$\Delta_{\min}(C) = \min_{x \in C - \{0\}} |x|.$$

We also define the *fractional* minimal distance of C by $\delta_{\min}(C) = \Delta_{\min}(C)/n$.

- Let \mathcal{C} be a linear code on n bits, defined by the hypergraph $G = (V, E)$ where V corresponds to the set of bits/vertices and the E corresponds to the set of checks/hyperedges. We also define the \mathbb{F}_2 -linear map ∂ from $\mathbb{F}_2^V \mapsto \mathbb{F}_2^E$ which sends a vertex v to the sum over all $e \in E$ that are incident upon v . The transpose of the code \mathcal{C} , denoted by \mathcal{C}^T , is defined by exchanging the roles of the bits and checks and replacing ∂ with ∂^T . Note that $\mathcal{C} = \ker \partial$ and $\mathcal{C}^T = \ker \partial^T$. We will find it convenient to overload notation so that ∂v denotes also the set of edges e incident upon v , and $\partial^T e$ is the set of vertices in hyperedge e .
- Let $S \subseteq T \subseteq \mathbb{F}_2^n$ denote some linear subspaces. Then T/S denotes the quotient space, meaning the set of cosets $\{t + S : t \in T\}$. Also, $T - S$ denotes the set of strings in T that are not in S . In particular, T/S has a representation in terms of elements of $T - S$, and the 0 element (representing S).
- For two positive-semidefinite matrices $A \succeq 0, B \succeq 0$ we say $A \succeq B$ if $A - B \succeq 0$.
- For a set S we denote by $U[S]$ the uniform distribution on the set S .

2.2 Quantum codes and local Hamiltonians

Definition 10. Pauli operators

$$X = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix} \quad \text{and} \quad Z = \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix} \quad (13)$$

For $e \in \mathbb{F}_2^n$, define $X^e = X^{e_1} \otimes X^{e_2} \otimes \dots \otimes X^{e_n}$, i.e. the tensor product of X operators in each position where $e_i = 1$; similarly define $Z^e = \bigotimes_i Z^{e_i}$.

Definition 11. CSS code

A $[[n, k, d]]$ quantum CSS code on n qubits is a subspace $\mathcal{C} \subseteq \mathcal{H} = (\mathbb{C}^2)^{\otimes n}$ of n qubits. It is defined by a pair of linear subspaces of $S_x, S_z \subseteq \mathbb{F}_2^n$ such that $S_x \perp S_z$. It is thus denoted $\mathcal{C} = \mathcal{C}(S_x, S_z)$. Explicitly the subspace is given by

$$\mathcal{C}(S_x, S_z) = \{|\psi\rangle \in (\mathbb{C}^2)^{\otimes n} : X^x|\psi\rangle = |\psi\rangle \forall x \in S_x, Z^z|\psi\rangle = |\psi\rangle \forall z \in S_z\} \quad (14)$$

$$= \text{Span} \left\{ \frac{1}{\sqrt{|S_x|}} \sum_{x \in S_x} |z + x\rangle : z \in S_z^\perp \right\}. \quad (15)$$

The code has $k = \log(|S_x^\perp/S_z|)$ logical qubits and distance $d = \min_{w \in S_x^\perp - S_z, S_z^\perp - S_x} |w|$.

The spaces of logical X, Z operators are respectively defined by the quotient spaces $S_z^\perp/S_x, S_x^\perp/S_z$. The logical X, Z operators that perform non-identity operations (also known as nontrivial logical operators) are given by $S_z^\perp - S_x, S_x^\perp - S_z$, respectively.

Definition 12. k -local Hamiltonian

A k -local n -qubit Hamiltonian $H \succeq 0$ is a positive semidefinite operator on the n -qubit space $(\mathbb{C}^2)^{\otimes n}$, that can be written as a sum $H = \frac{1}{m} \sum_{i=1}^m H_i$, where each H_i is a positive-semidefinite matrix, $0 \preceq H_i \preceq I$, and each H_i may be written as $H_i = h_i \otimes I$, where $h_i \succeq 0$ is a $2^k \times 2^k$ PSD matrix.

These choices of eigenvalue bounds are to some extent arbitrary, but are also designed to set the scale so that we can define “low-energy” states below in a natural way.

Definition 13. The Hamiltonian of the code

Suppose $\mathcal{C} = \mathcal{C}(S_x, S_z)$ is a CSS code and H_x, H_z are subsets of \mathbb{F}_2^n that generate S_x, S_z . Then we can define a Hamiltonian $H(\mathcal{C})$, whose terms correspond to the generators of the CSS code in the following way.

$$H = H(\mathcal{C}) = \frac{1}{2|H_x|} \sum_{e \in H_x} \frac{I + X^e}{2} + \frac{1}{2|H_z|} \sum_{e \in H_z} \frac{I + Z^e}{2}. \quad (16)$$

Observe that the CSS condition $S_x \perp S_z$ implies that the terms of $H(\mathcal{C})$ all commute. Thus the ground subspace of $H(\mathcal{C})$ is precisely the code-space \mathcal{C} . Moreover, if the generating sets H_x, H_z contain only terms with weight $\leq k$ then the corresponding Hamiltonian $H(\mathcal{C})$ is a k -local Hamiltonian.

We can think of H as checking whether a state is a valid code state with the energy equal to the expected fraction of violated constraints. However, in general, the number of violated constraints may not correspond to more conventional notions of “distance,” such as (for classical strings) the Hamming distance to the nearest codeword. In the next section we discuss a type of code that addresses this.

2.3 Locally Testable Codes

Definition 14. Classical locally testable code

A code $C \subseteq \mathbb{F}_2^n$ is said to be locally testable with soundness ρ and query q , if there exists a set of q -local check terms $\{C_1, \dots, C_m\}$, such that

$$\text{Prob}_{i \sim U[m]} [C_i(w) = 1] \geq \rho \cdot \frac{\text{dist}(w, C)}{n}.$$

In particular $w \in C$ iff $C_i(w) = 0$ for all i .

Similarly, a quantum locally testable code can be defined by the property that quantum states at distance d to the codespace have energy $\geq \Omega(d/n)$. (This normalization reflects the fact that the check Hamiltonian $H(\mathcal{C})$ has norm ≤ 1 .) Our definition is a slight variant of the one from [5].

Definition 15. If V is a subspace of $(\mathbb{C}^2)^{\otimes n}$ then define its t -fattening to be

$$V_t := \text{Span}\{(A_1 \otimes \dots \otimes A_n)|\psi\rangle : |\psi\rangle \in V, \#\{i : A_i \neq I\} \leq t\}. \quad (17)$$

Let Π_{V_t} project onto V_t . Then define the distance operator

$$D_V := \sum_{t \geq 1} t(\Pi_{V_t} - \Pi_{V_{t-1}}). \quad (18)$$

This reflects the fact that for quantum states, Hamming distance should be thought of as an observable, meaning a Hermitian operator where a given state can be a superposition of eigenstates.

Definition 16. Quantum locally testable code

An (q, ρ) -quantum locally testable code $\mathcal{C} \subseteq (\mathbb{C}^2)^{\otimes n}$, is a quantum code with q -local projection C_1, \dots, C_m such that

$$\frac{1}{m} \sum_{i=1}^m C_i \succeq \frac{\rho}{n} D_{\mathcal{C}}. \quad (19)$$

For stabilizer codes (which we will study exclusively in this paper) this can be seen to be equivalent to the definition in [5]. However we believe it gives a more generalizable definition of quantum Hamming distance.

We now state the following connection (proved in Claim 3 of [5]) between classical and quantum CSS locally testable codes:

Fact 17. Classical codes comprising a qLTC CSS code must also be locally testable

Let $\mathcal{C}(S_x, S_z)$ be a quantum CSS code corresponding to two linear codes $S_x^\perp, S_z^\perp \subseteq \mathbb{F}_2^n$. If \mathcal{C} is a (q, ρ) -qLTC then S_x^\perp and S_z^\perp are each q -LTCs with soundness at least $\rho/2$. Conversely, if S_x^\perp and S_z^\perp are each q -LTCs with soundness parameter ρ with $S_x \subseteq S_z^\perp$ then $\mathcal{C}(S_x, S_z)$ is a (q, ρ) -qLTC.

We now present a slight re-wording of the definition of LTC which would be useful later on:

Fact 18. The words of a residual LTC cluster around the original code

Let C be a locally testable code with parameter ρ . Any word w that violates a fraction at most ε of the checks of C is at fractional distance at most ε/ρ from C .

2.4 Expander Graphs

Expander graphs are by now ubiquitous in computer science, and have been shown to be a crucial element for many complexity theoretic results, most prominently, perhaps is the combinatorial version of the PCP theorem [15]. The term “expander” (or more precisely “edge expander”) refers to the fact that for a not-too-large subsets S of vertices a large fraction of the edges incident upon S leave S . (In Section 5 we will discuss the related but inequivalent phenomenon of vertex expansion.) Formally, we define a discrete analogue of the isoperimetric constant, known as the Cheeger constant

$$h(G) = \min_{S \subseteq [n], 0 < |S| \leq n/2} \frac{|\partial_G(S)|}{|S|}, \quad (20)$$

where $\partial_G(S)$ is the set of edges with one point in S and one in $V - S$.

Definition 19. Expander Graphs A family of d -regular graphs $\{G_n\}_n$ is said to be expanding, if there exists a constant $h > 0$ such that $h(G_n) \geq h$ for all sufficiently large n .

Expanders can be defined equivalently in terms of the spectrum of their adjacency matrix. For a graph G we define $\lambda_2(G)$ as the second eigenvalue of its adjacency matrix. Since the top eigenvalue of the adjacency matrix of a d -regular graph is d , we define the spectral gap to be $d - \lambda_2(G)$. We say a family $\{G_n\}$ is [spectrally] gapped if $\liminf d - \lambda_2(G_n) > 0$. It is shown by Tanner, Alon and Milman that spectrally gapped graphs have a large Cheeger constant:

Fact 20. [29] For any d -regular graph G we have:

$$h(G) \geq \frac{1}{2}(d - \lambda_2). \quad (21)$$

Following the seminal results of Magulis and Lubotzky, Philips and Sarnak it is known that there exist infinite families of expander graphs of degree $d = O(1)$, with $\lambda_2 \leq 2\sqrt{d-1}$. These are called Ramanujan graphs.

Definition 21. Ramanujan graphs

A family of graphs $\{G_n\}_n$ is said to be Ramanujan, if $\lambda_2(G_n) \leq 2\sqrt{d-1}$ for all sufficiently large n .

In [35, 37] it was shown how to construct Ramanujan graphs explicitly:

Fact 22. *There exists an explicit infinite family of d -regular Ramanujan graphs for every $d = q + 1$, where q is a prime power.*

We will use these expander graphs to construct an NLETS local Hamiltonian in Section 9. (In fact, we do not strictly need Ramanujan graphs, but will use specifically graphs where $h(G_n) \geq 3$. Ramanujan graphs are simply a convenient way to achieve this.)

Expander graphs of bounded-degree give rise naturally to *locally-testable codes* as follows. Given an expander graph $G = (V, E)$ we define the following code $C(G)$. It is the repetition code on $|V|$ bits, with equality constraints of the form $x_i \oplus x_j = 0$ for all $(i, j) \in E$. One can easily check that this code $C(G)$ is locally testable.

Fact 23. The repetition code from expander graphs is LTC

The code $C(G)$ is the repetition code with a set of checks that is locally testable with query size $q = 2$, and soundness $\rho = 2h(G)/d$. In particular, for d -regular Ramanujan graphs we have $\rho \geq 1 - \frac{2\sqrt{d-1}}{d}$.

In this paper we require a slightly more robust version of this fact where we allow the adversarial removal of a small fraction of the vertices and edges.

Definition 24. Maximal-connected residual graph

Let $G = (V, E)$, and subsets $V_\varepsilon \subseteq V, E_\varepsilon \subseteq E$. A connected residual graph of G w.r.t. these sets is a graph $G' = (V', E')$ where $V' \subseteq V_\varepsilon, E' \subseteq E_\varepsilon$ such that $G' = (V', E')$ is connected. A maximal-connected residual graph G_ε is a connected residual graph of maximal size $|V'|$.

Using the expander mixing lemma, it is easy to check that if G is a d -regular Ramanujan graph, then for sufficiently small constant $\varepsilon > 0$ there exists sufficiently large $d = O(1)$, such that for any $V_\varepsilon, E_\varepsilon$ there exists a maximal-connected residual graph $G_\varepsilon = (V', E')$ of large size

Fact 25. *Let $G = (V, E)$ be a d -regular Ramanujan graph, and let $\varepsilon > 0$. For any $V_\varepsilon, E_\varepsilon$, where $|V_\varepsilon| \geq (1 - \varepsilon)|V|, |E_\varepsilon| \geq (1 - \varepsilon)|E|$, any corresponding maximal-connected residual graph $G_\varepsilon = (V', E')$ satisfies: $|V'| \geq (1 - \varepsilon')|V|, |E'| \geq (1 - 2\varepsilon')|E|$, for*

$$\varepsilon' = \frac{\varepsilon(d+1)}{1 - \frac{2\sqrt{d-1}}{d}}. \quad (22)$$

Later we will choose $d = 14$, in which case (22) simplifies to

$$\varepsilon' \leq 31\varepsilon \quad (23)$$

Proof. Let $E'_\varepsilon \subseteq E_\varepsilon$ denote the subset of edges of E_ε incident on $V_\varepsilon \times V_\varepsilon$. By regularity of G we can upper-bound

$$|E'_\varepsilon| \geq |E|(1 - (d+1)\varepsilon).$$

Consider the graph $G' = (V, E'_\varepsilon)$ - any connected sub-graph of G' is by definition a connected residual graph of G_ε . Let $S \subseteq V$ be a maximal connected component in G' . Then $E'_\varepsilon(S, \bar{S}) = 0$, implying that

$$|E(S, \bar{S})| \leq \varepsilon(d+1)|E|. \quad (24)$$

Let $|S| := (1 - \alpha)n$. Then by Definition 21 and Fact 20, we have

$$|E(S, \bar{S})| \geq |\bar{S}| \frac{d - 2\sqrt{d-1}}{2} \quad (25)$$

$$\frac{|E(S, \bar{S})|}{|E|} \geq \alpha \left(1 - \frac{2}{\sqrt{d}}\right) \quad (26)$$

Combining (24) and (26) implies that $\alpha \leq \varepsilon'$, for ε' defined in (22).

Now define $V' = S$, and define E' to be the subset of the edges E_ε incident on S . Then $G' = (V', E')$ is a connected graph with $|V'| \geq (1 - \varepsilon')|V|$ and $|E'| \geq (1 - \varepsilon' - \varepsilon(d + 1))|E|$. \square

We use this property to derive the following:

Proposition 26. Robust LTC

Let $G = (V, E)$ be a d -regular Ramanujan graph. Let $G_\varepsilon = (V', E')$ denote a maximal connected residual graph of G induced by a subset $V_\varepsilon \subseteq V$, $|V_\varepsilon| \geq (1 - \varepsilon)|V|$ and $E_\varepsilon \subseteq E$, $|E_\varepsilon| \geq (1 - \varepsilon)|E|$. Then any assignment w' to the vertices of V' violating at most δ fraction of the checks of G_ε is $\frac{\delta + 2\varepsilon'}{(1 - \frac{2\sqrt{d-1}}{d})(1 - \varepsilon')}$ -close to either $\mathbf{1}_{V'}$ or $\mathbf{0}_{V'}$.

Proof. Any word w' defined on V' that violates at most δ fraction of the checks of E' can be extended with 0's to a word w defined on V that violates a fraction at most $\delta + 2\varepsilon'$ of the checks of E , with ε' defined in (22). Since G is Ramanujan then from Fact 23, w is at fractional distance at most $\frac{\delta + 2\varepsilon'}{1 - \frac{2\sqrt{d-1}}{d}}$ to either $\mathbf{1}_V$ or $\mathbf{0}_V$ on V . The fractional distance of w' to either $\mathbf{1}_{V'}$ or $\mathbf{0}_{V'}$ can be larger by a factor of $|V|/|V'| \leq 1/(1 - \varepsilon')$, which implies that w' is $\frac{\delta + 2\varepsilon'}{(1 - \frac{2\sqrt{d-1}}{d})(1 - \varepsilon')}$ close to either $\mathbf{1}_{V'}$ or $\mathbf{0}_{V'}$. \square

From the above one can derive the following corollary.

Corollary 27. Consider the maximal connected residual graph G_ε above. For all $d \geq 14$ and ε' defined in (22), the following holds:

$$\forall w \in \mathbb{F}_2^{V'}, \quad 100\varepsilon' \leq \frac{|w|}{|V'|} \leq \frac{1}{2} \quad \Rightarrow \quad |\partial_{G_\varepsilon} w| \geq 3|w|. \quad (27)$$

Proof. This follows from Proposition 26. We set $\frac{|w|}{|V'|} = \frac{\delta + 2\varepsilon'}{(1 - \frac{2\sqrt{d-1}}{d})(1 - \varepsilon')}$ (with $\varepsilon' \leq 31\varepsilon$ from (22)), solve for δ and (after some algebra) find that $\delta \geq 0.46 \frac{|w|}{|V'|}$. This calculation uses the fact that the LHS of (27) is only possible if $\varepsilon' \leq 1/200$. Thus the number of violated edges is

$$\geq \delta|E'| \geq 0.46 \frac{|w|}{|V'|} (1 - 2\varepsilon') \frac{dn}{2} \geq 3.15|w|. \quad (28)$$

\square

3 Local Hamiltonians with Approximation-Robust Entanglement

First, we will precisely define our model of quantum circuits. The following definition codifies some of the common-sense features of circuits that we will use.

Definition 28 (Circuits). A (unitary) quantum circuit C on n qubits of depth d is a product of d layers U_1, \dots, U_d , where each layer U_i can be written as a tensor-product of 2-local unitary gates $U_{i,(j,k)}$

$$U_i = \bigotimes_{(j,k) \in P_i} U_{i,(j,k)}, \quad (29)$$

where $U_{i,(j,k)} \in U(4)$ and each P_i is a (possibly incomplete) partition of $[n]$ into blocks of size 2.

Corresponding to a circuit C is a unitary operator $U \in U(2^n)$ representing its action on an input state; often we will simply refer to U as a circuit when there is no ambiguity.

Low-depth circuits generate a family of “simple” states, known also as trivial states ([19]).

Definition 29. Depth- d Trivial States (restated)

We say that an n -qubit state ρ is depth- d trivial if it can be prepared by applying a depth- d quantum circuit to $|0\rangle^{\otimes N}$ (for some $N \geq n$) and tracing out $N - n$ qubits.

An infinite family $\mathcal{F} = \{\rho_n\}_n$ of quantum states is said to be trivial if there exists a constant d such that ρ_n is depth- d trivial for all sufficiently large n . We now define a family of NLTS Hamiltonians using the notion of trivial states as follows:

Definition 30. No Low-Energy Trivial States (NLTS) (restated)

An infinite family of local Hamiltonians $\{H_n\}_{n \in \mathbb{N}}$ is ε -NLTS if for any d and a depth- d trivial state family \mathcal{F} and all sufficiently large n

$$\text{tr}[\rho_n H_n] > \lambda_{\min}(H_n) + \varepsilon. \quad (30)$$

We say that $\{H_n\}_{n \in \mathbb{N}}$ is NLTS if it is ε -NLTS for some constant $\varepsilon > 0$.

This definition was motivated, in part, to prevent the following form of NP-approximation of the ground-state energy of such system: a prover sends a (polynomial-size) description of the shallow quantum circuit, and the verifier computes the expectation value of the Hamiltonian, conjugated by this unitary circuit, on the all-zero state. The verifier is thus able to accept/reject correctly. Since the circuit has depth $O(1)$, and each term of H is local, each local term of UHU^\dagger is local, so this computation can be carried out efficiently. In general $\text{tr}[\rho H]$ can be estimated in $\text{DTIME}\left(2^{2^{O(d)}}\right)$ if d is a depth- d trivial state, since it requires estimating observables on neighborhoods of $2^{O(d)}$ qubits. (Similar but more complicated results hold when we replace a depth- d circuit with $e^{-iH'}$ for H' a sum of local terms in which each qubit participates in interactions with total operator norm $O(d)$. [9, 39])

Conjecture 31 (NLTS conjecture [19]). *There exists a family of $O(1)$ -local Hamiltonians with the NLTS property.*

Our main result will be stated in terms of hard-to-approximate classical probability distributions as follows. Recall that QNC^1 is the set of languages computable in quantum bounded-error log depth. We will use the term to describe classical distributions that can be approximately simulated with a quantum log-depth circuit.

Definition 32. QNC^1 -hard distribution

A family of distributions $\{\mathcal{D}_n\}$ on n bits is said to be QNC^1 -hard if there exist constants $a, c > 0$ such that for sufficiently large n any n -qubit depth- $c \cdot \log(n)$ trivial state ρ_n satisfies

$$\|\mathcal{D}_n - \text{diag}(\rho_n)\|_1 = \Omega(n^{-a}). \quad (31)$$

Here $\text{diag}(\rho)$ can be thought of as the probability distribution resulting from measuring ρ in the computational basis. Next, we define quantum states as QNC^1 -hard if the classical distribution induced by their measurement is hard to simulate *quantumly*:

Definition 33. QNC^1 -hard quantum states

A family of n -qubit quantum states $\mathcal{F} = \{\rho_n\}_n$ is said to be QNC^1 -hard if the corresponding family of distributions $\mathcal{D}_n = \text{diag}(\rho_n)$ is QNC^1 -hard.

Now, we can define local Hamiltonians as QNC^1 -hard if their ground states are QNC^1 -hard:

Definition 34. QNC^1 -hard local Hamiltonian

A family of local Hamiltonians $\{H_n\}_n$ is said to be QNC^1 -hard if any family of states $\mathcal{F} = \{\rho_n\}_n$, with $\rho_n \in \ker(H_n)$ is QNC^1 -hard.

As the final step we define a robust version thereof where we ask that even ground-state impostors are hard:

Definition 35. QNC¹-robust local Hamiltonian

A family of local Hamiltonians $\{H_n\}$ is QNC¹-robust if there exists $\varepsilon > 0$ such that any family $\mathcal{F} = \{\rho_n\}_n$, where ρ_n is an ε -impostor of H_n for all sufficiently large n , is QNC¹-hard.

We can now state our main result.

Theorem 36. NLETS (sketch)

There exists a family of $O(1)$ -local Hamiltonians that is QNC¹-robust.

Most of the remainder of the paper is devoted to the proof of Theorem 36. In Section 5 we will prove that the probability distributions resulting from low-depth circuits cannot be approximately partitioned.

Then we will show that the distribution resulting from measuring quantum code-states *can* be approximately partitioned. The canonical example of such a partition is the cat state, as we mentioned in the introduction, and indeed it is well known that the cat state cannot be prepared in sub-logarithmic depth. In Section 6 we will prove a “warm-up” result showing that any Hamiltonian corresponding to a CSS code with $n^{\frac{1}{2} + \Omega(1)}$ distance is QNC¹-hard.

To find a QNC¹-robust Hamiltonian we will need a CSS code with stronger properties. In Section 7 we show that a qLTC with linear distance (quantum locally testable code) gives rise to a QNC¹-robust Hamiltonian, and in fact, the NLTS property.

While no qLTCs are known, these ideas provide a sense of how our full proof works. Our construction is described in Section 8, where the Tillich-Zémor hypergraph product from [43] is reviewed, and in Section 9 where we use it together with classical LTCs to construct our family of codes. We then prove that this family is QNC¹-robust.

4 The Uncertainty Lemma and Noisy Quantum Code-States

We next present a version of the classic uncertainty principle [40] that implies that if two logical operators of a CSS codes anti-commute any state must have a high uncertainty (i.e. variance) in at least one of these operators. This “sum” version is due to Hoffman and Takeuchi [28].

Lemma 37. Let $|\psi\rangle$ be a quantum state, and A, B Hermitian observables satisfying $AB + BA = 0$ and $A^2 = B^2 = I$. Define

$$\Delta A^2 = \langle \psi | A^2 | \psi \rangle - \langle \psi | A | \psi \rangle^2.$$

Then

$$\Delta A^2 + \Delta B^2 \geq 1. \quad (32)$$

Since the proof is short and our assumptions are slightly different from those of [28], we present a proof here.

Proof. Define the operator

$$C = \langle A \rangle A + \langle B \rangle B$$

where $\langle X \rangle := \langle \psi | X | \psi \rangle$. Define $\lambda \equiv \langle A \rangle^2 + \langle B \rangle^2$. Then we can directly calculate

$$C^2 = \lambda I \quad \text{and} \quad \langle C \rangle = \lambda \quad (33)$$

For any random variable X , $\mathbb{E}[X]^2 \leq \mathbb{E}[X^2]$. Thus $\lambda = \langle C \rangle \leq \sqrt{\langle C^2 \rangle} = \sqrt{\lambda}$, implying that $\lambda \leq 1$. Together with the fact that $\langle A^2 \rangle = \langle B^2 \rangle = 1$ this implies (32). \square

Next, we require a simple fact that any CSS code has a pair of bases, one for each of the quotient logical spaces, that anti-commute in pairs. The proof can be found for example in [38].

Fact 38. Anti-commuting logical operators

Let \mathcal{C} be a $[[n, k, d]]$ -CSS code: $\mathcal{C} = \mathcal{C}(S_x, S_z)$. There exist sets

$$\mathcal{B}_x = \{b_1^x, \dots, b_k^x\} \subset S_z^\perp \quad (34a)$$

$$\mathcal{B}_z = \{b_1^z, \dots, b_k^z\} \subset S_x^\perp \quad (34b)$$

such that $\{b_i^x + S_x\}_{i \in [k]}$ and $\{b_i^z + S_z\}_{i \in [k]}$ are bases for S_z^\perp / S_x and S_x^\perp / S_z respectively and

$$\langle b_i^x, b_j^z \rangle = \delta_{i,j}. \quad (35)$$

Here we should think of $\{X^{b_i^x}\}$ and $\{Z^{b_i^z}\}$ as logical X and Z operators.

One useful property of CSS codes is that the value of the logical operators can be read off from measuring each qubit individually. If we measure a code state of $\mathcal{C}(S_x, S_z)$ in the Z (resp. X) basis then the outcomes will always lie in S_z^\perp (resp. S_x^\perp). The $+1/-1$ eigenvalues of the first logical Z operator $Z^{b_1^z}$ correspond to the outcomes $S_z^\perp \cap (b_1^z)^\perp$ and $b_1^z + S_z^\perp \cap (b_1^z)^\perp$ when measuring each qubit in the Z basis. Observe also that $S_z^\perp \cap (b_1^z)^\perp = (S_z \cup b_1^z)^\perp = S_x + \text{Span}(\mathcal{B}_x - b_1^x)$. Let us define accordingly the sets

$$C_0^Z = (S_z \cup b_1^z)^\perp \quad C_1^Z = b_1^x + C_0^Z \quad (36a)$$

$$C_0^X = (S_x \cup b_1^x)^\perp \quad C_1^X = b_1^z + C_0^X \quad (36b)$$

The sets C_0^Z, C_1^Z (resp. C_0^X, C_1^X) partition S_z^\perp (resp. S_x^\perp). Let \mathcal{D}_ψ^Z (resp. \mathcal{D}_ψ^X) denote the distribution on \mathbb{F}_2^n induced by measuring $|\psi\rangle$ in the tensor Z basis (resp. the tensor X basis), and define $\langle M \rangle := \langle \psi | M | \psi \rangle$ for any operator M . The above discussion implies that if $|\psi\rangle \in \mathcal{C}$ then

$$\langle Z^{b_1^z} \rangle = \mathcal{D}_\psi^Z(C_0^Z) - \mathcal{D}_\psi^Z(C_1^Z) \quad (37a)$$

$$\langle X^{b_1^x} \rangle = \mathcal{D}_\psi^X(C_0^X) - \mathcal{D}_\psi^X(C_1^X) \quad (37b)$$

Next we argue that uncertainty in the logical operators translates into uncertainty of measurement outcomes in either the X or Z product basis.

Proposition 39. Uncertainty for code-states in at least one basis

Let (S_x, S_z) be a CSS code with $\mathcal{B}_x, \mathcal{B}_z$ as in Fact 38. Let $|\psi\rangle$ be a quantum code-state, and D_ψ^X, D_ψ^Z be the distribution of the measurement of $|\psi\rangle$ in the Pauli- X or Pauli- Z basis, respectively. Then at least one of the following equations must hold:

$$D_\psi^Z(C_0^Z) \in \left[\frac{1}{2} - \frac{1}{2\sqrt{2}}, \frac{1}{2} + \frac{1}{2\sqrt{2}} \right] \quad (38a)$$

$$D_\psi^X(C_0^X) \in \left[\frac{1}{2} - \frac{1}{2\sqrt{2}}, \frac{1}{2} + \frac{1}{2\sqrt{2}} \right] \quad (38b)$$

Since $D_\psi^P(C_0^P) + D_\psi^P(C_1^P) = 1$ for $P = X, Z$ we could equivalently state (38) in terms of C_1^Z and C_1^X .

Proof. According to Lemma 37 any state $|\psi\rangle$ will have

$$1 \leq (\Delta X^{b_1^x})^2 + (\Delta Z^{b_1^z})^2 = 2 - \langle X^{b_1^x} \rangle^2 - \langle Z^{b_1^z} \rangle^2.$$

and therefore either $|\langle X^{b_1^x} \rangle|$ or $|\langle Z^{b_1^z} \rangle|$ must be $\leq 1/\sqrt{2}$. Assume w.l.o.g. (since the other case is similar) that

$$|\langle Z^{b_1^z} \rangle| \leq 1/\sqrt{2}. \quad (39)$$

The result now follows from (37).

□

In this paper, we will mostly consider noisy code-states, and not actual code-states. We will want to argue that even noisy code-states have an uncertainty property w.r.t. the original logical operators. To do that we consider pairs of Voronoi cells, corresponding to pairs of anti-commuting logical operators as in the proposition above. In geometry, “Voronoi cells” take a set of seeds and partition a space into the regions that are closer to one seed than any other. In classical coding theory, we can likewise partition the set of strings according to which code word they are closest to. Equivalently Voronoi cells are the preimages of the maximum-likelihood decoding map when a string is subjected to independent bit flip errors.

For quantum CSS codes we will partition the measurement outcomes in the X and Z bases into the following analog of Voronoi cells:

Proposition 40. Generalized uncertainty for unitary decoding

Let $\mathcal{C} = (S_x, S_z)$ be a $[[n, k, d]]$ -CSS code and $C_0^Z, C_1^Z, C_0^X, C_1^X$ are defined as in (36). Let E_x, E_z be some set of errors that satisfies:

$$S_0^z := C_0^Z + E_z \quad (40a)$$

$$S_1^z := C_1^Z + E_z \quad (40b)$$

$$S_0^z \cap S_1^z = \emptyset \quad (40c)$$

and similarly this holds for the sets S_0^x, S_1^x , defined in the same way w.r.t. E_x . Suppose further that

$$\text{supp}(D_\psi^Z) \subseteq S_0^z \cup S_1^z \quad \text{and} \quad \text{supp}(D_\psi^X) \subseteq S_0^x \cup S_1^x \quad (41)$$

Then there exists a constant $c_0 > 0.07$ such that

$$(D_\psi^Z(S_0^z) \geq c_0 \quad \text{and} \quad D_\psi^Z(S_1^z) \geq c_0) \quad \text{or} \quad (D_\psi^X(S_0^x) \geq c_0 \quad \text{and} \quad D_\psi^X(S_1^x) \geq c_0). \quad (42)$$

Proof. Define a decoding map for X errors $\mathcal{U}_{\text{Dec}}^X$ as follows:

$$\forall e \in E, w \in S_x^\perp \quad \mathcal{U}_{\text{Dec}}^X(|w + e\rangle_1 \otimes |0\rangle_2) = |w\rangle_1 \otimes |e\rangle_2, \quad (43)$$

Similarly, define a decoding map $\mathcal{U}_{\text{Dec}}^Z$ for Z errors:

$$\forall e \in E, w \in S_z^\perp \quad \mathcal{U}_{\text{Dec}}^Z(|w + e\rangle_1 \otimes |0\rangle_2) = |w\rangle_1 \otimes |e\rangle_2, \quad (44)$$

Since $S_0^z \cap S_1^z = \emptyset$ and $S_0^x \cap S_1^x = \emptyset$ then these maps are well-defined and can be extended to unitary operations. In addition, since $\text{supp}(D_\psi^Z) \subseteq S_0^z \cup S_1^z$ and $\text{supp}(D_\psi^X) \subseteq S_0^x \cup S_1^x$ then the decoded state

$$\rho = \text{tr}_2(\mathcal{U}_{\text{Dec}}^Z \circ \mathcal{U}_{\text{Dec}}^X |\psi\rangle_1 \otimes |0\rangle_2) \quad (45)$$

is supported entirely in \mathcal{C} . Let $\mathcal{D}_\rho^X, \mathcal{D}_\rho^Z$ denote the distribution on \mathbb{F}_2^n induced by measuring ρ in the X, Z basis, respectively.

By Proposition 39 for any code-state $|\phi\rangle \in \mathcal{C}$ the distribution \mathcal{D}_ϕ^X has a measure at least $1/2 - 1/(2\sqrt{2})$ on both sets C_0^X and C_1^X or \mathcal{D}_ϕ^Z has at least that measure on both sets C_0^Z and C_1^Z (defined in (36)).

By (45) the distributions $\mathcal{D}_\rho^X, \mathcal{D}_\rho^Z$ are each a convex combination of corresponding distributions $\mathcal{D}_\phi^X, \mathcal{D}_\phi^Z$, for code-states $|\phi\rangle \in \mathcal{C}$. Hence by the above at least one of $\mathcal{D}_\rho^X, \mathcal{D}_\rho^Z$ has a measure at least

$$c_0 := 1/2 \cdot (1/2 - 1/(2\sqrt{2})) > 0.07$$

on both C_0^X, C_1^X or on both C_0^Z, C_1^Z . Since by definition of the decoders $\mathcal{U}_{\text{Dec}}^X, \mathcal{U}_{\text{Dec}}^Z$ each $x \in C_0^X$ (or $x \in C_1^X$) could only have come from some $x' \in S_0^x$, or some $x' \in S_1^x$, and not from both, (and the same for the Z basis), this implies that $\mathcal{D}_\psi^X(S_0^x) \geq c_0$ and $\mathcal{D}_\psi^X(S_1^x) \geq c_0$, or this holds for the Z basis. \square

5 Vertex expansion bounds for low-depth circuits

As stated above, a central notion of this paper (following Lovett and Viola [34]) is that distributions over codewords of good codes look very different from the outputs of low-depth circuits. We will see in this section that these can be distinguished by comparing the different values of vertex expansion that they induce on a particular graph.

Consider \mathbb{F}_2^n to be the vertices of a graph with an edge between all pairs x, y with $\text{dist}(x, y) \leq \ell$. If $\ell = 1$ then this is the usual hypercube, but we will be interested in $\ell \approx \sqrt{n}$. For a set $S \subseteq \mathbb{F}_2^n$ define $\partial_\ell(S)$ to be the boundary of S , meaning points in S connected by an edge to a point in $S^c := \mathbb{F}_2^n - S$, along with points in S^c connected to a point in S . In other words

$$\partial_\ell(S) = \{x \in S : \exists y \in S^c, |x - y| \leq \ell\} \cup \{x \in S^c : \exists y \in S, |x - y| \leq \ell\}. \quad (46)$$

Let p be a probability distribution over \mathbb{F}_2^n . The p -weighted vertex expansion is defined to be

$$h_\ell(p) := \min_{S, 0 < p(S) \leq \frac{1}{2}} \frac{p(\partial_\ell(S))}{p(S)}. \quad (47)$$

In this section we argue that the outputs of low-depth circuits have high vertex expansion for a suitable value of ℓ . To get intuition for this, we consider first the case of the uniform distribution over \mathbb{F}_2^n . Here Harper's Theorem [24] implies that $h_\ell(U[\mathbb{F}_2^n]) \geq \Omega(1)$ when $\ell = \Omega(\sqrt{n})$. In fact it goes further and gives the exact isoperimetric profile, meaning it calculates $\min_{p(S)=\mu} p(\partial_\ell(S) \setminus S)$ for all μ , and shows that this minimization is achieved for the Hamming ball. Similar bounds are known for any product distribution p .

This can be extended to the case when p is the output of a classical depth- d circuit $C : \{0, 1\}^m \mapsto \mathbb{F}_2^n$ which accepts m uniformly random input bits and fan-in, fan-out both ≤ 2 . In this case each output bit depends on at most 2^d bits. Let $S \subset \mathbb{F}_2^n, T = C^{-1}(S) \subseteq \{0, 1\}^m$, and $p = U[\mathbb{F}_2^m]$. Since the output can depend on $\leq n2^d$ bits of the input, we can assume without loss of generality that $n \leq m \leq n2^d$, or if d is constant then $m = \Theta(n)$. Using, for example, Harper's Theorem, one can show that if $p(T) \leq 1/2$, x is drawn uniformly from T and z is drawn uniformly from the Hamming ball $\{|z| \leq \sqrt{m}\}$ then $x + z$ has $\Omega(1)$ probability of lying in T^c . Now we can use the assumption that the circuit is low depth to argue that

$$\text{dist}(C(x), C(x + z)) \leq |z|2^d \leq \sqrt{m}2^d \leq \sqrt{n}2^{1.5d}. \quad (48)$$

Since $C(x) \in S$ and $C(x + z) \in S^c$ this implies that $C(x) \in \partial_\ell(S)$ with $\ell = \sqrt{n}2^{1.5d}$. We conclude that $h_\ell(p) \geq \Omega(1)$. This argument is a restatement of Fact 4 from [16] (correcting a missing factor of \sqrt{n} there).

The main result of this section is that a similar bound also holds for the output of low-depth quantum circuits. We first formalize the fact that in sufficiently low depth circuits not all input bits can influence a given output bit.

Definition 41 (Light cone). *Given a depth- d quantum circuit C on n qubits we define a directed acyclic graph $G = (V, E)$ by considering $d + 1$ layers of n vertices,*

$$V = \{V_0, \dots, V_d\}, |V_i| = n \quad \forall i \in \{0, \dots, d\}, \quad (49)$$

where V_0 is the set of input qubits, and V_d is the set of output qubits. Recall from Definition 28 that the set of two-qubit gates at time t defines a partition P_t . Then define the edge set E by connecting for all $t \in [d], k, l \in [n]$ the vertex $V_{t-1,k}$ to $V_{t,l}$ if $(k, l) \in P_t$. For a subset $S \subseteq V_d$ of output qubits, the light cone of S is defined as the set $L(S) \subseteq V_0$ of input qubits from which there exists a directed path in G to some vertex in S . The "blow-up" $B = B(C)$ of the circuit C is defined as:

$$B = B(C) = \max_{v \in V} L(v).$$

For depth- d circuits comprised of k -qubit gates, the blow-up is at most k^d . If the gates are required to be spatially local in D dimensions then this is $\leq (ckd)^D$ for some universal constant c depending on the specific geometry. In this paper we mostly are interested in the case of constant-depth circuits of two-qubit gates with unrestricted geometry, although our results hold more generally.

We now state the main theorem of this section:

Theorem 42. *Let $|\psi\rangle = U|0^N\rangle$ for U a circuit with blow-up B . Let p be the probability distribution that results from measuring the first n qubits in the computational basis; i.e.*

$$p(x) = \sum_{y \in \{0,1\}^{N-n}} |\langle x, y | \psi \rangle|^2. \quad (50)$$

Then for $\ell = \frac{1}{4}B \cdot (Bn)^{1/2-\gamma}$ with $\gamma \in [0, 1/2]$ we have:

$$h_\ell(p) \geq \frac{1}{8}(nB)^{-2\gamma}. \quad (51)$$

Our proof is inspired by the use of Chebyshev polynomials by Friedman and Tillich [20] to relate the diameter of a graph to the spectral gap of its adjacency matrix, as well as by [6] to show that ground states of 1-d gapped Hamiltonians have bounded entanglement.

Proof. For $S \subseteq \mathbb{F}_2^n$ let $\chi_S(x)$ denote the characteristic function of S : it is -1 if $x \in S$ and 1 if not. Define the reflection operator

$$R = \sum_{\substack{x \in \mathbb{F}_2^n \\ y \in \{0,1\}^{N-n}}} \chi_S(x) |x, y\rangle \langle x, y|. \quad (52)$$

Now define $|\psi'\rangle = R|\psi\rangle$. To gain intuition, if $|\psi\rangle$ is analogous to the cat state $(|0^N\rangle + |1^N\rangle)/\sqrt{2}$ then $|\psi'\rangle$ would be $(|0^N\rangle - |1^N\rangle)/\sqrt{2}$. Our proof strategy will be to construct an operator K such that

$$\langle \psi | K | \psi \rangle = 0 \quad (53a)$$

$$\langle \psi' | K | \psi' \rangle \leq 4p(\partial_\ell(S)) \quad (53b)$$

$$\langle \psi' | K | \psi' \rangle \geq \frac{1}{2}(nB)^{-2\gamma}p(S) \quad (53c)$$

Proving (53b) will require that K cannot detect the phase flip far from the boundary, while proving (53c) will require that K can nevertheless distinguish $|\psi\rangle$ from $|\psi'\rangle$.

Let $L \subseteq [N]$ denote the qubits in the light cone of $[n]$. By the definition of blow-up,

$$|L| \leq nB. \quad (54)$$

Define the Hamiltonians

$$H_0 = \frac{1}{|L|} \sum_{i \in L} |1\rangle\langle 1|_i \quad \text{and} \quad H = UH_0U^\dagger. \quad (55)$$

Note that H_0 can be thought of as the code Hamiltonian (cf. (16)) for the subspace with $|0\rangle^{\otimes |L|}$ for the qubits in L and arbitrary states elsewhere. Both H_0 and H have all eigenvalues between 0 and 1, both have a $2^{N-|L|}$ -fold degenerate ground space and both have gap $1/|L|$ to the first non-zero eigenvalue. Define P_0 to project onto the states that are $|0\rangle$ in each of the qubits in L , i.e.

$$P_0 = |0\rangle\langle 0|^{\otimes L} \otimes I^{L^c}. \quad (56)$$

Similarly define $P = UP_0U^\dagger$. The idea of H_0 (resp. H) is to approximate $I - P_0$ (resp. $I - P$), and indeed they have the same 0-eigenspace. However, H_0 and H have other eigenvalues as small as $1/|L|$, making this a rather weak approximation. We will obtain a better approximation by taking polynomials of these operators, and will find that higher degree buys us a better approximation. Indeed $\lim_{m \rightarrow \infty} (I - H_0)^m = P_0$. But our proof will require the sharper degree/error tradeoff that comes from using Chebyshev polynomials, which we will see allows a degree of approximately $\sqrt{|L|}$.

Let $m = \frac{1}{2}(Bn)^{1/2-\gamma}$ so that $\frac{m^2}{L} \geq \frac{1}{4}(nB)^{-2\gamma}$. Following Lemma 4.1 of [6] we let $T_m(x)$ denote the degree- m Chebyshev polynomial defined implicitly by the equation $T_m(\cos(x)) = \cos(mx)$. One can also write $T_m(x) = \cos(m \cos^{-1}(x))$ for $|x| \leq 1$ and $\cosh(m \cosh^{-1}(x))$ for $|x| \geq 1$. Next define

$$C_m(x) := 1 - \frac{T_m(f(x))}{T_m(f(0))}, \quad \text{where } f(x) := \frac{1 + 1/|L| - 2x}{1 - 1/|L|}. \quad (57)$$

Our choice of $C_m(x)$ guarantees that

$$C_m(0) = 0, \quad (58)$$

and we have chosen f so that it maps the interval $[1/|L|, 1]$ to $[-1, 1]$, and thus $C_m([1/|L|, 1])$ takes values only in $[-1, 1]$. This implies that

$$C_m(x) \geq 1 - \frac{1}{T_m(f(0))} \quad \text{for } \frac{1}{|L|} \leq x \leq 1 \quad (59)$$

To evaluate this, follow again Lemma 4.1 of [6] to observe that

$$T_m(f(0)) = \cosh(m \cosh^{-1}(f(0))) \geq 1 + \frac{(m \cosh^{-1}(f(0)))^2}{2} \quad (60)$$

$$\cosh^{-1}(f(0)) \geq 2 \tanh\left(\frac{1}{2} \cosh^{-1}(f(0))\right) = 2\sqrt{\frac{f(0) - 1}{f(0) + 1}} = \frac{2}{\sqrt{|L|}} \quad (61)$$

$$C_m(x) \geq 1 - \frac{1}{1 + 2\frac{m^2}{|L|}} \geq 1 - \frac{1}{1 + \frac{1}{2}(nB)^{-2\gamma}} \quad (62)$$

From Taylor's Theorem $(1+x)^{-1} \leq 1 - x + x^2$ for $x \geq 0$, and so (62) yields

$$C_m(x) \geq \frac{1}{2}(nB)^{-2\gamma} - \frac{1}{4}(nB)^{-4\gamma} \geq \frac{1}{4}(nB)^{-2\gamma} \text{ for } \frac{1}{|L|} \leq x \leq 1 \quad (63)$$

Finally we would like to bound $C_m(x)$ throughout its range.

$$0 \leq C_m(x) \leq 1 + \frac{1}{T_m(f(0))} \leq 2 \quad \text{for } 0 \leq x \leq 1. \quad (64)$$

Define $K_0 = C_m(H_0)$ and $K = UK_0U^\dagger = C_m(H)$. Note that K_0 is m -local and K is ℓ -local for $\ell = Bm = \frac{1}{4}B^{1.5-\gamma}n^{1/2-\gamma}$. Since $C_m(H_0)$ consists only of powers of H_0 , it commutes with H_0 and can be evaluated by applying C_m to each eigenvalue of H_0 ; the same applies to $C_m(H)$ and H . Thus $0 \preceq K \preceq 2I$. By (58), the 0-eigenvalues of K are the same as the 0-eigenvalues of H , and from (63) and (64), all the other eigenvalues of K are between $\frac{1}{4}(nB)^{-2\gamma}$ and 2. Thus we establish (53a) as well as the operator inequality

$$\frac{1}{4}(nB)^{-2\gamma}(I - P) \preceq K \preceq 2(I - P). \quad (65)$$

Now we proceed to compute the upper and lower bounds on $\langle \psi' | K | \psi' \rangle$ claimed in (53). Partition \mathbb{F}_2^n into four sets S_1, S_2, S_3, S_4 as follows:

$$S_1 = (S \setminus \partial_\ell(S)) \times \{0, 1\}^{N-n} \quad (66a)$$

$$S_2 = (S \cap \partial_\ell(S)) \times \{0, 1\}^{N-n} \quad (66b)$$

$$S_3 = (S^c \cap \partial_\ell(S)) \times \{0, 1\}^{N-n} \quad (66c)$$

$$S_4 = (S^c \setminus \partial_\ell(S)) \times \{0, 1\}^{N-n} \quad (66d)$$

Decompose $|\psi\rangle$ accordingly as

$$|\psi\rangle = |\psi_1\rangle + |\psi_2\rangle + |\psi_3\rangle + |\psi_4\rangle,$$

where the $|\psi_i\rangle$ are sub-normalized states whose support is contained in S_i . Note that $p(\partial_\ell(S)) = \|\psi_2\|^2 + \|\psi_3\|^2$. Using this notation we can write

$$|\psi'\rangle = -|\psi_1\rangle - |\psi_2\rangle + |\psi_3\rangle + |\psi_4\rangle.$$

Let $K_{ij} := \langle \psi_i | K | \psi_j \rangle$.

The fact that K is ℓ -local means that $K_{13} = K_{14} = K_{24} = 0$. Additionally (53a) means that $\sum_{i,j \in [4]} K_{ij} = 0$. Together, and since K is Hermitian, these mean that

$$\langle \psi' | K | \psi' \rangle = -2K_{23} - 2K_{32} = -4\text{Re}K_{23}. \quad (67)$$

Since $\|K\| \leq 2$ we can use Cauchy-Schwarz to bound

$$|\langle \psi' | K | \psi' \rangle| \leq 8\|\psi_2\| \cdot \|\psi_3\| \leq 4(\|\psi_2\|^2 + \|\psi_3\|^2) = 4p(\partial_\ell(S)), \quad (68)$$

thus establishing (53b).

We now turn to the proof of (53c). Observe that $U^\dagger R U$ acts only on the qubits in L . Thus $U^\dagger R U |0\rangle^{\otimes N} = U^\dagger R |\psi\rangle = U^\dagger |\psi'\rangle$ is a superposition of states of the form $|x\rangle^L \otimes |0\rangle^{L^c}$, implying that

$$P_0 U^\dagger |\psi'\rangle \propto |0\rangle^{\otimes N}.$$

We can determine the proportionality constant by calculating

$$\langle 0 |^{\otimes N} P_0 U^\dagger |\psi'\rangle = \langle 0 |^{\otimes N} U^\dagger |\psi'\rangle = \langle \psi | \psi' \rangle = \sum_{x \in \mathbb{F}_2^n} \chi_S(x) p(x) = 1 - 2p(S).$$

Thus $P_0 U^\dagger |\psi'\rangle = (1 - 2p(S)) |0\rangle^{\otimes N}$. We can then calculate

$$\langle \psi' | P | \psi' \rangle = \langle \psi' | U P_0 U^\dagger | \psi' \rangle \quad (69a)$$

$$= \langle \psi' | U (1 - 2p(S)) | 0 \rangle^{\otimes N} \quad (69b)$$

$$= (1 - 2p(S)) \langle \psi' | \psi \rangle \quad (69c)$$

$$= (1 - 2p(S))^2 \quad (69d)$$

Finally we can bound

$$\langle \psi' | K | \psi' \rangle \geq \frac{1}{4} (nB)^{-2\gamma} \langle \psi' | (I - P) | \psi' \rangle \quad \text{using (65)} \quad (70a)$$

$$= \frac{1}{4} (nB)^{-2\gamma} (1 - (1 - 2p(S))^2) \quad (70b)$$

$$\geq \frac{1}{2} (nB)^{-2\gamma} p(S) \quad \text{using } p(S) \leq 1/2 \quad (70c)$$

Taking now the ratio with the upper bound from (68) implies

$$h_l(p) = \frac{p(\partial_l(S))}{p(S)} \geq \frac{1}{8}(nB)^{-2\gamma}. \quad (71)$$

□

Our proof that qLTCs of distance $\omega(\sqrt{n})$ are NLTS in Theorem 46 will require a slightly different graph property: upper bounds on the distance between large sets instead of lower bounds on the vertex expansion; i.e. showing that p cannot be approximately partitioned. The relation between these properties is a standard fact that does not involve any features of quantum circuits.

Corollary 43. *Let p be a probability distribution on n qubits generated by a quantum circuit with blow-up B , as in (50). If $S_1, S_2 \subset \mathbb{F}_2^n$ satisfy $p(S_1) \geq \mu$ and $p(S_2) \geq \mu$, then $\text{dist}(S_1, S_2) \leq 4\sqrt{n}B^{1.5}/\mu$.*

The contrapositive of this claim is that if p is (μ, D) -approximately partitioned for $D > 4\sqrt{n}B^{1.5}/\mu$ then it cannot result from measuring the state resulting from a circuit with blowup at least B . In terms of depth, p cannot result from a circuit with depth at most

$$\leq \frac{2}{3} \log \left(\frac{\mu D}{4\sqrt{n}} \right). \quad (72)$$

Proof. Let $D = \text{dist}(S_1, S_2)$ and $\ell = \sqrt{n}B^{1.5}/4$. Assume $\mu \leq 1/2$, since otherwise we would have $D = 0$. For $t = 0, 1, 2, \dots$ define the sets

$$U_t := \{x : (t-1)\ell < \text{dist}(x, S_1) \leq t\ell\}.$$

Then $S_1 = U_0$ and $S_2 \cap U_t = \emptyset$ for all $t < D/\ell$.

This implies that

$$\sum_{\substack{1 \leq t \leq \frac{D}{\ell} - 2 \\ t \text{ odd}}} p(U_t) + p(U_{t+1}) \leq 1 - 2\mu$$

and in turn that there exists a particular t_0 for which

$$p(U_{t_0}) + p(U_{t_0+1}) \leq \frac{1 - 2\mu}{\frac{D}{2\ell} - 1} \quad (73)$$

We will use t_0 to define a partition. Let

$$\bar{S}_1 = \bigcup_{t \leq t_0} U_t \quad \text{and} \quad \bar{S}_2 = \bigcup_{t > t_0} U_t.$$

Since $S_i \subseteq \bar{S}_i$ we have $p(\bar{S}_i) \geq \mu$ but now \bar{S}_1, \bar{S}_2 form a partition of \mathbb{F}_2^n . Thus by Theorem 42, $p(\partial_\ell(\bar{S}_1)) \geq \mu/8$. On the other hand $p(\partial_\ell(\bar{S}_1)) \leq p(U_{t_0}) + p(U_{t_0+1})$. From (73) we have

$$\frac{D}{2\ell} \leq 1 + \frac{1 - 2\mu}{\mu/8} \leq \frac{8}{\mu}. \quad (74)$$

□

Corollary 43 applies to any value of μ but the bounds become weak when μ is small or when $p(S_1), p(S_2)$ are not comparable. One plausible generalization of Corollary 43 would give upper bounds on $\text{dist}(S_1, S_2)$ that scale optimally in terms of both $p(S_1)$ and $p(S_2)$; see [20] for the precise statement. Since our main results in this paper do not make use of such a generalization we do pursue this further here.

6 Warm-up: Quantum CSS Code-States are QNC¹-hard

Circuit lower bounds for generating quantum code states *exactly* can be readily derived from the local indistinguishability property. In this section, we show that our techniques can be used to derive a robust version of this property, which is that quantum CSS codes cannot be approximated by bounded-depth quantum circuits, even up to constant l_2 error. Such robust versions have been shown for example by Bravyi, Hastings and Verstraete [11].

Notably, even such a hardness-of-approximation claim is by no means robust, because we still consider approximation of *perfect* ground states of the code Hamiltonian. In other words, while a code-state is QNC₁-hard, not every ε -impostor of a code-state is QNC₁-hard. In fact, many constructions of quantum CSS codes are known to be *not* QNC₁-robust: i.e. one can find ε -impostors of such codes that are trivial (see Section 1.4).

The claims in this section demonstrate our techniques by improving the approximation bounds on *perfect* code-states from 0 error to constant l_2 error. In subsequent sections we will then strengthen these bounds even further and demonstrate a quantum code for which *every* ε -impostor is QNC₁-hard - which amounts to the NLETS theorem. Hence, the following claim on CSS codes relates only to code-states and not code-state impostors:

Proposition 44. *Code-states of quantum CSS codes with large distance are QNC¹-hard*

Let $\mathcal{C} = [[n, k, \Delta_{\min}]]$ be a quantum CSS code. Preparing any $|\psi\rangle \in \mathcal{C}$ up to l_2 error at most 0.14 requires depth $\Omega(\log(\Delta_{\min}/\sqrt{n}))$. In particular, if $\Delta_{\min} \geq n^{1/2+\Omega(1)}$ then $|\psi\rangle$ is QNC¹-hard.

Proof of Proposition 44. Let $|\psi\rangle$ be some code-state of \mathcal{C} . By Fact 38 above, one can find bases $\mathcal{B}_x, \mathcal{B}_z$ satisfying (35). Choose, say, the first pair $b^x := b_1^x \in \mathcal{B}_x, b^z := b_1^z \in \mathcal{B}_z$.

Let C_0 denote the linear space $C_0 = S_z^\perp \cap (b^z)^\perp \subset \mathbb{F}_2^n$, and define the affine space $C_1 = C_0 + b^x$. If $s_0 \in C_0, s_1 \in C_1$ then $s_0 + s_1 \in C_1 \subseteq S_z^\perp - S_x$, implying that $|s_0 + s_1| \geq \Delta_{\min}$, and so

$$\text{dist}(C_0, C_1) \geq \Delta_{\min}. \quad (75)$$

Let \mathcal{D}_ψ^Z denote the distribution on \mathbb{F}_2^n induced by measuring $|\psi\rangle$ in the tensor Z basis. Then by Proposition 39 we either have

$$\mathcal{D}_\psi^Z(C_0) \geq \frac{1}{2} - \frac{1}{2\sqrt{2}} \quad \text{and} \quad \mathcal{D}_\psi^Z(C_1) \geq \frac{1}{2} - \frac{1}{2\sqrt{2}}, \quad (76)$$

or a similar statement holds for measuring in the X basis. WLOG assume that (76) holds. Thus \mathcal{D}_ψ^Z is approximately partitioned with measure at least $\mu = \frac{1}{2} - \frac{1}{2\sqrt{2}}$ and distance Δ_{\min} . Hence, any distribution p that is ε -close to \mathcal{D}_ψ^Z for $\varepsilon < \mu$ is $(\mu - \varepsilon, \Delta_{\min})$ -approximately partitioned. Therefore, by Corollary 43 (and specifically (72)) producing $|\psi\rangle$ to error ε requires depth

$$\geq \frac{2}{3} \log \left(\frac{(\mu - \varepsilon) \Delta_{\min}}{4\sqrt{n}} \right). \quad (77)$$

Since $\mu \geq 0.142\dots$, if we take $\varepsilon = 0.14$ then this implies a depth lower bound of $\frac{2}{3} \log \frac{\Delta_{\min}}{\sqrt{n}} - O(1)$. If $\Delta_{\min} = n^{1/2+\Omega(1)}$ then this bound is $\Omega(\log n)$ and so $|\psi\rangle$ is QNC¹-hard. \square

Implications for known quantum codes Proposition 44 provides a nontrivial quantum circuit lower bound on the quantum LDPC codes due to [18]. These codes are CSS codes and have distance $\Omega(\sqrt{n \log(n)})$ which corresponds to a circuit depth lower bound of $\Omega(\log \log(n))$.

One can also consider the toric code which has distance $\Theta(\sqrt{n})$. In such a case, while one cannot apply directly Proposition 44 - one can still show a similar proposition where the distribution is approximated to within distance $\varepsilon = n^{-1-\delta}$ for some constant $\delta > 0$.

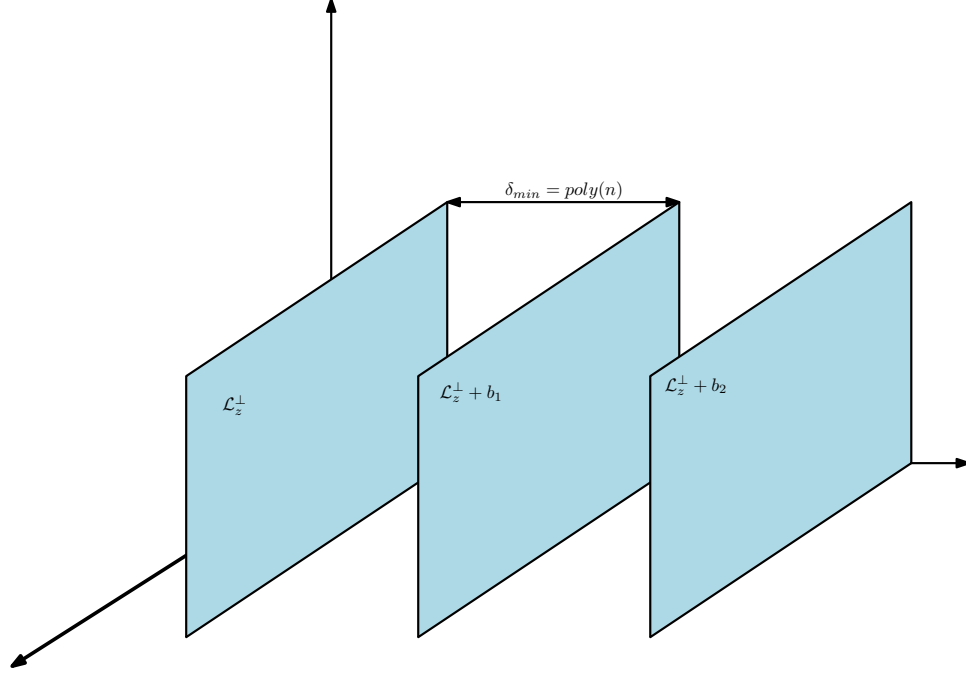


Figure 3: Depiction of the approximate partition of a quantum CSS code with large distance. Any code state must superpose non-negligibly in at least one of the two bases, on two distinct affine spaces separated by a large distance.

Proposition 45. *Let $\mathcal{C} = [[n, k, \Delta_{\min}]]$ be a quantum CSS code with $\Delta_{\min} \geq n^\alpha$ for $\alpha > 0$ and $k \geq 1$. If $|\psi\rangle \in \mathcal{C}$ and $\|\rho - |\psi\rangle\langle\psi|\| \leq n^{-1-\beta}$ for $\beta > 0$ then preparing ρ requires depth $\Omega(\log(n))$.*

We note that other methods are known [9, 26, 23] for showing that QECC ground states, and even low-temperature thermal states of the 4-d toric code [25], are nontrivial. Indeed our proof can be viewed as a certain way of generalizing the argument of [9]. Since the proof is very similar to that of Proposition 44 we provide only a brief sketch of the proof here.

Proof. Setting $\gamma = 1/2$ in Theorem 42 yields²

$$h_B(p) = \Omega(1/nB). \quad (78)$$

Next we follow the proof of Proposition 44 and construct the same pair of sets C_0, C_1 , with $D_\psi^Z(C_0), D_\psi^Z(C_1) \geq \Omega(1)$, where D_ψ^Z is the probability distribution resulting from measuring $|\psi\rangle$ in the Z basis. Additionally observe that $D_\psi^Z(C_0 \cup C_1) = 1$ and $\text{dist}(C_0, C_1) \geq \Delta_{\min}$.

Let $p := \text{diag}(\rho)$. By hypothesis

$$\frac{1}{2}\|p - D_\psi^Z\|_1 := \varepsilon \leq n^{-1-\beta}. \quad (79)$$

Suppose that ρ can be generated by a circuit of depth d and define $B = 2^d$, so that (78) holds. We will argue that (79) implies that B is large.

If $B \geq \frac{1}{2}\Delta_{\min}$ then we immediately have $d \geq \alpha \log(n) - 1$. Otherwise, assume $\text{dist}(C_0, C_1) > 2B$, and let S be the B -fattening of C_0 . Then $D_\psi^Z(\partial_B(S)) = 0$, implying that $p(\partial_B(S)) \leq \varepsilon$. On

²We observe that for these parameters the proof of Theorem 42 does not need to make use of any Chebyshev polynomials and could simply set $K = H$.

the other hand, $p(S) = \Omega(1)$, so by (78) we have $p(\partial_B(S)) = \Omega(1/nB)$. Combining these we have $B = \Omega(\frac{1}{n\varepsilon}) = \Omega(n^\beta)$, which again implies the $\Omega(\log(n))$ circuit lower bound. \square

We remark that these arguments never made use of the LDPC property of codes, and would apply equally well to say, a random stabilizer code with linear distance and linear-weight stabilizers. Rather the claims are only nontrivial when applied to LDPC codes since it would not be surprising if n -local stabilizers forced a system into an n -partite entangled state.

Non-CSS codes. It is tempting to speculate that Proposition 44 should hold for any quantum code (i.e. not only CSS) with distance $\omega(n^{1/2})$ and at least one logical qubit. While we believe this is likely to be true, we would need new techniques to prove it. It is possible for such codes to yield a nearly uniform distribution when measured in any local basis (e.g. consider a random 2-dimensional subspace of $(\mathbb{C}^2)^{\otimes n}$) which cannot be approximately partitioned. We note that using a proof similar to that of Proposition 44 one can show QNC¹-hardness for general (i.e. non-Pauli) stabilizer codes, but we omit this here for simplicity.

7 A Bit Further: Quantum Locally Testable Codes are NLTS

We now connect between quantum locally testable codes (see definition of qLTC's in Definition 16) and local Hamiltonians with approximation-robust entanglement: For a qLTC with large minimal distance, all low-energy states are non-trivial. This implies that the corresponding Hamiltonians have the NLTS property.

Theorem 46. *Let $\mathcal{C} = [[n, k, \Delta_{\min}]]$ be a quantum locally testable CSS code with soundness $\rho > 0$, $k \geq 1$, and $\Delta_{\min} = \Omega(n)$. Then the local Hamiltonian of \mathcal{C} , $H(\mathcal{C})$, is NLTS.*

However, no qLTCs with the required properties are known. In fact, we do not even know of quantum LDPC codes (i.e. $O(1)$ -weight check operators) with distance greater than $O(\sqrt{n} \log^{1/4}(n))$. Still the proof is conceptually a bridge between the proof of the exact case in Proposition 44 and our proof of NLTS in Theorem 5.

Proof. Let $|\psi\rangle$ be some quantum state with:

$$\langle \psi | H(\mathcal{C}) | \psi \rangle \leq \varepsilon, \quad (80)$$

for $\varepsilon > 0$ a constant we will choose later.

From Fact 38, there exist a pair of logical operators b_1^x, b_1^z . Define $C_{0,1}^{X,Z}$ as in (36). We will apply Proposition 40 with error sets $E_x = E_z = \{w \in \mathbb{F}_2^n : |w| < \frac{1}{2} \Delta_{\min}\}$. This implies the existence of sets $S_0^x, S_1^x, S_0^z, S_1^z$ defined as in (40) such that $|\psi\rangle$ has projection at least c_0 on either both S_0^x and S_1^x or both S_0^z and S_1^z . Assume w.l.o.g. that

$$\mathcal{D}_\psi^Z(S_0^z) \geq c_0 \quad \text{and} \quad \mathcal{D}_\psi^Z(S_1^z) \geq c_0. \quad (81)$$

Now we cannot directly use the distance guarantees of the code since $|\psi\rangle$ is not necessarily a code state. However, by Fact 17, S_x^\perp is locally testable with parameter $\rho/2$. Moreover, by (80) the expected fraction of violated clauses in H_Z is at most 2ε . Thus

$$\mathbb{E}_{z \sim \mathcal{D}_\psi^Z} \text{dist}(z, S_x^\perp) \leq \frac{4\varepsilon n}{\rho} \quad (82)$$

So by a Markov argument:

$$\mathcal{D}_\psi^Z \left(\{z : \text{dist}(z, S_X^\perp) \geq \frac{8\varepsilon n}{\rho c_0}\} \right) \leq c_0/2 \quad (83)$$

We now define the restriction of the Voronoi cells $S_0^x, S_1^x, S_0^z, S_1^z$ to the set of words that violate few parity checks:

$$\tilde{S}_i^z = \{z \in S_i^z : \text{dist}(z, S_z^\perp) \leq \frac{8\varepsilon n}{\rho c_0}\}, \quad (84)$$

for $i = 0, 1$. By (81) and (83), we have for all $i \in \{0, 1\}$, $\mathcal{D}_\psi^Z(\tilde{S}_i^z) \geq c_0 - c_0/2 = c_0/2$.

On the other hand, we claim that $\text{dist}(\tilde{S}_0^z, \tilde{S}_1^z)$ is large: Let $s_0 \in \tilde{S}_0^z, s_1 \in \tilde{S}_1^z$. Then we can write $s_i = t_i + u_i$ with $t_0, t_1 \in S_z^\perp$ and $|u_i| \leq \frac{8\varepsilon n}{\rho c_0}$. In addition, since $s_0 \in \tilde{S}_0^z, s_1 \in \tilde{S}_1^z$ then their respective closest codewords are in *different* cosets modulo S_x , i.e.: $t_0 \in C_0^Z$ and $t_1 \in C_1^Z$. Hence by the minimal distance of the code: $\text{dist}(t_0, t_1) \geq \Delta_{\min}$. Then $\text{dist}(s_0, s_1) \geq \Delta_{\min} - 16\frac{\varepsilon n}{\rho c_0}$. Thus

$$\text{dist}(\tilde{S}_0^z, \tilde{S}_1^z) \geq \Delta_{\min} - 16\frac{\varepsilon n}{\rho c_0}. \quad (85)$$

Thus, \mathcal{D}_ψ^Z is approximately partitioned with parameters each of which is at least $(c_0/2, \Delta_{\min} - 16\frac{\varepsilon n}{\rho c_0})$. For sufficiently small constant $\varepsilon > 0$, Corollary 43 then implies an $\Omega(\log n)$ lower bound on the depth required to prepare $|\psi\rangle$. \square

8 The Hypergraph Product

8.1 General

In this section, we survey the hypergraph product due to Tillich-Zémor [43]. We provide here only the very basic definitions that are required to prove our main theorem, and refer the reader to the original paper [43] for an in-depth view. The hypergraph-product code takes in two classical codes defined by their Tanner constraint graphs and generates a product of these codes as hypergraphs. Then it attaches a CSS code to the product graph. Formally stated:

Definition 47. The Hypergraph Product

Let $(V_1, E_1), (V_2, E_2)$ be two constraint hypergraphs with corresponding edge-vertex incidence operators ∂_1, ∂_2 and codes $\mathcal{C}_1 = \ker \partial_1, \mathcal{C}_2 = \ker \partial_2$. Then the Tillich-Zémor hypergraph product of these codes, denoted by

$$\mathcal{C}_\times = \mathcal{C}_1 \times_{TZ} \mathcal{C}_2, \quad (86)$$

is defined by the hypergraph product of the corresponding graphs. Specifically, its Hilbert space is comprised of qubits corresponding to

$$(V_1 \times V_2) \cup (E_1 \times E_2),$$

and check matrices are

$$H_x = (\partial_1 \otimes I_{V_2} | I_{E_1} \otimes \partial_2^T) \quad H_z = (I_{V_1} \otimes \partial_2 | \partial_1^T \otimes I_{E_2}) \quad (87)$$

These matrices have rows indexed by qubits and columns indexed by checks. The X constraints, for example, are labeled by elements of $E_1 \times V_2$, with constraint (e_1, v_2) is connected to all elements $(u, v_2) \in V_1 \times V_2$ for $u \in \partial^T e_1$ and also to all elements $(e_1, f) \in E_1 \times E_2$ for $f \in \partial v_2$. (Here we view $\partial^T e_1, \partial v_2$ equivalently both as vectors in $\mathbb{F}_2^{V_1}, \mathbb{F}_2^{E_2}$ respectively and as

subsets of V_1, E_2 .) It follows from this definition that \mathcal{C}_\times is a CSS code $\mathcal{C}_\times(S_x, S_z)$, where as usual $S_x = \text{Im } H_x$ and $S_z = \text{Im } H_z$. For $|V_1| = n_1, |V_2| = n_2, |E_1| = m_1, |E_2| = m_2$, the code \mathcal{C}_\times is a quantum CSS code on $n_1 n_2 + m_1 m_2$ qubits, with $n_1 m_2 + n_2 m_1$ local checks. One can check that \mathcal{C}_\times is determined only by $\mathcal{C}_1, \mathcal{C}_2$ and not the specific choices of ∂_1, ∂_2 , so (86) is well defined.

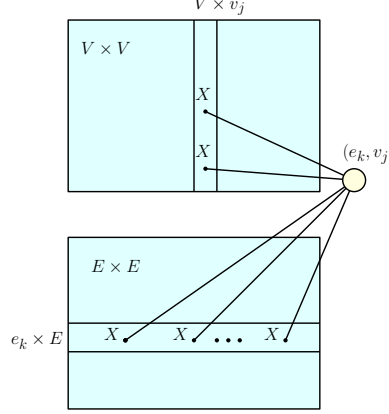


Figure 4: An example of a check term (e_k, v_j) of H_x . It is a parity check on all bits (v_m, v_j) in the j -th column of $V \times V$ such that v_m is examined by e_k in the original code \mathcal{C} , and on all bits in the k -th row of $E \times E$ that corresponds to checks incident on v_j in \mathcal{C} . If we specialize to the case when \mathcal{C} is the repetition code with checks corresponding to a d -local graph (as in Section 8.3) then each check examines two bits in the $V \times V$ block and d bits in the $E \times E$ block.

We now state several useful facts on this construction, which can all be found in [43]:

Fact 48. Basic Properties of the hypergraph product[43]

1. If $\mathcal{C}_1, \mathcal{C}_2$ have locality parameters l_1, l_2, l_1^T, l_2^T , respectively, (l_i^T is the maximum number of checks incident upon any bit in code \mathcal{C}_i) then \mathcal{C}_\times has locality parameter $l_1 + l_2^T$ for H_x , and $l_2 + l_1^T$ for H_z .
2. $\delta_{\min}(\mathcal{C}_\times) \geq \min \{ \delta_{\min}(\mathcal{C}_1), \delta_{\min}(\mathcal{C}_2), \delta_{\min}(\mathcal{C}_1^T), \delta_{\min}(\mathcal{C}_2^T) \}$
3. Let $r(\mathcal{C})$ denote the number of qubits in a code \mathcal{C} . Then $r(\mathcal{C}_\times) = r(\mathcal{C}_1) \cdot r(\mathcal{C}_2) + r(\mathcal{C}_1^T) \cdot r(\mathcal{C}_2^T)$.

These logical operators of \mathcal{C}_\times can assume very complex forms, due in part, to the fact that the rate of the code scales like $r(\mathcal{C}_1) \cdot r(\mathcal{C}_2)$. Hence, the hypergraph product of codes with linear rate is linear itself, i.e. scales like $\Omega(|V|^2)$.

8.2 Column-wise logical operators

A particularly interesting subset of the logical operators, which is a subgroup w.r.t. addition modulo \mathbb{F}_2 , has a very succinct and useful form. We exploit the structure of this group to inherit, in some sense, the classical property of local testability.

Fact 49. Group of logical operators isomorphic to the original code

For any $x \in \mathcal{C}_1$, and $y \notin \mathcal{C}_2^\perp$, the word

$$((x \otimes y)_{V_1 \times V_2}, \mathbf{0}_{E_1 \times E_2}) \in S_x^\perp - S_z \quad (88)$$

Similarly, for $x \notin \mathcal{C}_1^\perp, y \in \mathcal{C}_2$,

$$((x \otimes y)_{V_1 \times V_2}, \mathbf{0}_{E_1 \times E_2}) \in S_z^\perp - S_x. \quad (89)$$

One can also show that

$$(\mathbf{0}_{V_1 \times V_2}, \mathcal{C}_2^T \otimes (\mathcal{C}_1^{T\perp})^c) \subset S_x^\perp - S_z \quad (90a)$$

$$(\mathbf{0}_{V_1 \times V_2}, (\mathcal{C}_2^{T\perp})^c \otimes \mathcal{C}_1^T) \subset S_z^\perp - S_x \quad (90b)$$

In particular, if $\mathcal{C}_1, \mathcal{C}_2, \mathcal{C}_1^T, \mathcal{C}_2^T$ are linear codes in which each bit appears at least once as 0 and once as 1 in some non-zero word, then

$$\left((\mathcal{C}_1 \otimes \mathbb{F}_2^{V_2})_{V_1 \times V_2}, \mathbf{0}_{E_1 \times E_2} \right) \subset S_x^\perp - S_z \quad (91a)$$

$$\left((\mathbb{F}_2^{V_1} \otimes \mathcal{C}_2)_{V_1 \times V_2}, \mathbf{0}_{E_1 \times E_2} \right) \subset S_z^\perp - S_x \quad (91b)$$

The proof of this fact is straightforward and can be found in [43].

8.3 The Hypergraph Product of a Connected Graph

Proposition 50. *The hypergraph product of a connected graph*

Let $G = (V, E)$ denote a d -regular connected graph on n vertices. Let $\mathcal{C} = \mathcal{C}(G)$ denote the repetition code on n bits defined by treating the edges of G as equality constraints. Let $\mathcal{C}_\times(G)$ denote the hypergraph product of $\mathcal{C} \times_{TZ} \mathcal{C}$. Then:

1. Denote $|V| = n$, $|E| = m = dn/2$, and so $|V \times V| = n^2$, $|E \times E| = d^2 n^2/4$, $|V \times E| = |E \times V| = dn^2/2$. The number of qubits is $N = (1 + d^2/4)n^2$ and the number of checks is dn^2 .
2. \mathcal{C}_\times is a quantum code on the space of $\mathbb{F}_2^{V \times V} \oplus \mathbb{F}_2^{E \times E} = \mathbb{F}_2^N$, constrained by the $d+2$ -local checks from the columns of $\{H_x, H_z\}$.
3. The following set of vectors, indexed by $v \in V, e \in E$, generates S_z ,

$$s_z(v, e) = H_z^T(v \otimes e) = v \otimes \partial^T e + \partial v \otimes e \quad (92)$$

Likewise S_x is generated by the vectors

$$s_x(e, v) = H_x^T(e \otimes v) = \partial^T e \otimes v + e \otimes \partial v. \quad (93)$$

4. $\dim(S_x^\perp/S_z) = 1 + \dim(\mathcal{C}^T)^2$. This follows from Proposition 14 in [43].
5. The distance of the code is given by the minimum of the distance of the code \mathcal{C} and the transposed code \mathcal{C}^T .

We can also specialize our characterization of logical operators from Fact 49 to the repetition code with 2-bit check operators.

Proposition 51. Let $\mathcal{C}_\times = \mathcal{C} \times \mathcal{C} = \mathcal{C}_\times(G)$, where G is a connected graph, and $\mathcal{C}(G)$ is the repetition code constrained by parity checks corresponding to the edges of G . There exists a spanning set \mathcal{B}_z of S_x^\perp , and a spanning set \mathcal{B}_x of S_z^\perp , as follows:

$$\mathcal{B}_z := \{b_1^z\} \cup \{e \otimes c\}_{e \in E, c \in \mathcal{C}^T} \cup S_z \quad (94a)$$

$$\mathcal{B}_x := \{b_1^x\} \cup \{c \otimes e\}_{e \in E, c \in \mathcal{C}^T} \cup S_x \quad (94b)$$

where $\mathcal{C}^T = \ker \partial^T$ denotes the linear span of all indicator vectors of edges corresponding to cycles in G .

Proof. This follows from [43] as follows. From the proof of Lemma 17 of [43] we have that b_1^z and $e \otimes c$, for each $c \in \mathcal{C}^T$ are in $S_x^\perp - S_z$. By Proposition 14 of [43] it follows that these words, with S_z , span the entire S_x^\perp space. The argument for \mathcal{B}_x is the same. \square

8.3.1 Fractal Structure

Another important property of the hypergraph product of a connected graph, is that the hypergraph product exhibits a fractal structure as follows:

Proposition 52. *Let $G = (V, E)$ be some graph, and let $\mathcal{C}_\times(G)$ denote the hypergraph product of the repetition code induced by equality constraints of E , with itself. Let $V_l \subseteq V, E_l \subseteq E$ denote some subsets. Then there exists a graph $G' = (V_l, E_l \cap V_l \times V_l)$ such that $\mathcal{C}_\times(G')$ is supported on $V_l \times V_l \cup E_l \times E_l$.*

Proof. By definition, the checks of \mathcal{C}_\times are the Cartesian product $E \times V$ for S_x and $V \times E$ for S_z . Define $G' = (V', E')$ as in the statement of the proposition, i.e. with E' the set of edges in E_l that have both endpoints in V_l . Hence $E' \subseteq E, V' \subseteq V$, and so in particular $E' \times V' \cup V' \times E' \subseteq E \times V \cup V \times E$. \square

8.4 The Hypergraph Product of an Expander Graph

In this section, we consider the hypergraph product $\mathcal{C}_\times(G) = \mathcal{C}(G) \times \mathcal{C}(G)$, where G is a d -regular Ramanujan expander graph. We note that while the minimal distance of \mathcal{C} is exactly n , as it is the repetition code, the minimal distance of \mathcal{C}^T is much smaller, i.e. $O(\log(n))$ - given by the minimum length cycle in the expander graph. Hence

$$\delta_{\min}(\mathcal{C}_\times) = \min\{\delta_{\min}(\mathcal{C}), \delta_{\min}(\mathcal{C}^T)\} = \min\{O(n), O(\log(n))\} = O(\log(n)).$$

8.4.1 Comparison to the Toric Code

One can first compare $\mathcal{C}_\times(G)$ to the Toric Code. The Toric Code can be seen as the hypergraph product of the repetition code, with equality constraints in a cycle, i.e. $x_1 = x_2, x_2 = x_3, \dots, x_n = x_1$. (By contrast our code has equality constraints $x_i = x_j$ for (i, j) running over the set of edges in an expander graph.) It follows from the hypergraph product, that the distance of such a code is precisely n (out of n^2 total qubits), which is larger than the $O(\log n)$ minimum distance of our code. However, the toric code also has low-error trivial states, since we can delete an $O(\varepsilon)$ fraction of constraints and leave it disconnected into blocks of $1/\varepsilon^2$ qubits.

8.4.2 Localized Minimal Distance

As stated above we have $\delta_{\min}(\mathcal{C}_\times) = O(\log(n))$. However, not all logical qubits are equally protected: we focus on the logical qubit with distance n , meaning that all elements of C_1^Z and C_1^X have weight $\geq n$. It turns out, that for this logical qubit, an even stronger property is true: we will show that any element of C_1^Z or C_1^X must have weight $\Omega(n)$ in some row or column of $V \times V$ or $E \times E$. In other words, the minimal distance of this logical qubit is manifested *locally*:

Lemma 53. Locally-manifested minimal distance

Let $\mathcal{C}_\times(V' \times V' \cup E' \times E') = \mathcal{C}(G')$ denote the hypergraph product of a graph $G' = (V', E')$, which is a connected ε -residual graph of a Ramanujan graph of degree d . If $d \geq 14$ and $\varepsilon \leq \frac{1}{6200d}$ then

$$\forall w \in C_1^Z \quad \left(\exists v \in V' \quad |w_{V' \times v}| \geq \frac{1}{2}n' \quad \text{or} \quad \exists e \in E' \quad |w_{E' \times e}| \geq \frac{3}{8d}n' \right). \quad (95)$$

where $n' = |V'|$. Similarly,

$$\forall w \in C_1^X \quad \left(\exists v \in V' \quad |w_{v \times V'}| \geq \frac{1}{2}n' \quad \text{or} \quad \exists e \in E' \quad |w_{e \times E'}| \geq \frac{3}{8d}n' \right). \quad (96)$$

Proof. Consider $w \in C_1^Z$. The proof for C_1^X is essentially the same so we omit it. Since $\mathcal{C}_\times = \mathcal{C}_\times(G')$ for a connected graph $G' = (V', E')$ then by Proposition 51, we can represent w as the following sum:

$$w = b_1^z + s + c, \quad b_1^z = \mathbf{1}_{V' \times v_1}, \quad s \in S_z, \quad c \in (\mathbf{0}_{V' \times V'}, \mathbb{F}_2^{E'} \otimes \ker \partial^T), \quad (97)$$

and we assume w.l.o.g. that c has minimal weight modulo S_z . By the hypergraph product we can write s as

$$s = \sum_{v \in V', e \in E'} \alpha_{ve} s_z(v, e) = (I_{V'} \otimes \partial^T + \partial \otimes I_E') \alpha, \quad (98)$$

for some $\alpha \in \mathbb{F}_2^{V' \times E'}$. Let us focus initially on the $V' \times V'$ block:

$$w_{V' \times V'} = \mathbf{1}_{V' \times v_1} + (I \otimes \partial^T) \alpha. \quad (99)$$

Hence,

$$\forall v \in V' \quad w_{V' \times v} = \delta_{v, v_1} \mathbf{1}_{V'} + \bigoplus_{e \in \partial v} \alpha_{V' \times e}. \quad (100)$$

Suppose that for all $v \in V'$, this column has low weight, i.e.

$$|w_{V' \times v}| < \frac{1}{2} n', \quad (101)$$

(Otherwise we are done.) For each edge e , we consider $|\alpha_{V' \times e}|$ and define as follows:

$$\begin{array}{ll} e \text{ is light} & \frac{|\alpha_{V' \times e}|}{n'} < \frac{1}{2d} \\ e \text{ is medium} & \frac{1}{2d} \leq \frac{|\alpha_{V' \times e}|}{n'} \leq 1 - \frac{1}{2d} \\ e \text{ is heavy} & 1 - \frac{1}{2d} < \frac{|\alpha_{V' \times e}|}{n'} \end{array}$$

We claim that there exists at least one medium edge. Suppose, towards a contradiction, that all edges are light or heavy. For each v , let $\xi(v)$ denote the number of heavy edges incident upon v .

We now focus on the second term in the RHS of (100). From the triangle inequality,

$$\left\{ \begin{array}{ll} \left| \sum_{e \in \partial v} \alpha_{V' \times e} \right| > \frac{n'}{2} & \text{if } \xi(v) \text{ odd} \\ \left| \sum_{e \in \partial v} \alpha_{V' \times e} \right| < \frac{n'}{2} & \text{if } \xi(v) \text{ even} \end{array} \right. \quad (102)$$

Since by (101) the Hamming weight in *each* column is $< \frac{n'}{2}$ we conclude that $\xi(v_1)$ is odd and all other vertices have an even value of $\xi(v)$. On the other hand, since each heavy edge is incident upon two vertices we have that $\sum_{v \in V'} \xi(v)$ is even. This is a contradiction, and so we conclude that there exists at least one medium edge. Let e_0 denote a medium edge.

$$\exists e_0 \in E' \quad \frac{n'}{2d} \leq |\alpha_{V' \times e_0}| \leq \left(1 - \frac{1}{2d}\right) n'. \quad (103)$$

We turn now to the $E' \times E'$ block. By the hypergraph product and (98):

$$|s_{E' \times e_0}| = |\partial \alpha_{V' \times e_0}|. \quad (104)$$

By minimality of c modulo S_z we claim that

$$|(s+c)_{E' \times e_0}| \geq \frac{1}{4} |\partial \alpha_{V' \times e_0}|, \quad (105)$$

Suppose, towards contradiction, that $c_{E' \times e_0}$ is $|\partial \alpha_{V' \times e_0}|/4$ -close to $\partial \alpha_{V' \times e_0}$, and let

$$\tilde{\alpha} := \begin{cases} \alpha_{V' \times e_0} & |\alpha_{V' \times e_0}| \leq n'/2 \\ \mathbf{1}_{V'} + \alpha_{V' \times e_0} & \text{o/w.} \end{cases}$$

By (103) we have $|\tilde{\alpha}| \in [n'/2d, n'/2]$. By Corollary 27 for $d = 14$, and $\varepsilon \leq 1/6200$ we have:

$$\forall x \in \mathbb{F}_2^{V'}, \quad 3100\varepsilon n' \leq |x| \leq n'/2, \quad |\partial x| \geq 3 \cdot |x|, \quad (106)$$

Choosing $\varepsilon \leq \frac{1}{6200d}$ (here $\varepsilon = 10^{-9}$, $d = 14$ works) implies that Corollary 27 applies to $\tilde{\alpha}$:

$$|\partial \tilde{\alpha}| \geq 3 \cdot |\tilde{\alpha}| \quad (107)$$

Consider now the following stabilizer word:

$$s = \sum_{v, \tilde{\alpha}(v)=1} s_z(v, e_0) \in S_z$$

We claim it reduces the weight of c , by contradiction to c 's minimality modulo S_z , as follows:
By the triangle inequality:

$$\left| c + \sum_{v, \tilde{\alpha}(v)=1} s_z(v, e_0) \right| \leq |c| + \frac{1}{4} |\partial \tilde{\alpha}| - |\partial \tilde{\alpha}| + 2|\tilde{\alpha}| \quad (108)$$

where the first three terms come from our assumption that $c_{E' \times e_0}$ is $|\partial \tilde{\alpha}|/4$ -close to $\partial \tilde{\alpha}$, and the last term from the fact that $s_z(v, e_0)_{V' \times V'}$ has weight exactly 2, By (107) we upper-bound the above by:

$$|c| - \frac{1}{3} |\partial \tilde{\alpha}| + \frac{1}{4} |\partial \tilde{\alpha}| < |c|. \quad (109)$$

Hence (105) holds, and so:

$$|w_{E' \times e_0}| = |(s+c)_{E' \times e_0}| \geq \frac{1}{4} |\partial \alpha_{V' \times e_0}| \geq \frac{3}{4} |\tilde{\alpha}| \geq \frac{3}{8d} n'. \quad (110)$$

□

9 Explicit QNC¹-Robust Local Hamiltonians

9.1 The construction

In this section, we show how to construct QNC¹-robust local Hamiltonians based on CSS codes. Let \mathcal{G} be an explicit family of d -regular Ramanujan graphs, for $d = q + 1$, where q is prime, following Fact 22. We define

$$\mathcal{C}_\times = \mathcal{C}(G). \quad (111)$$

9.2 NLETS Theorem Statement

Theorem 54. NLETS

Let $\mathcal{C}_\times^{(N)}$ denote the hypergraph product above that is defined on a space of $N = (1 + d^2/4)n^2$ qubits. The family of local Hamiltonian $\left\{ H \left(\mathcal{C}_\times^{(N)} \right) \right\}_N$ is NLETS for $d = 14$ and $\varepsilon = 10^{-9}$.

(Our proof applies to any $d \geq 14$ and sufficiently small $\varepsilon > 0$, which may depend on d .)

The proof has 3 steps.

1. In the first part of the proof we show that any quantum state $|\psi\rangle$ that is an ε -impostor of $H(\mathcal{C}_\times)$ obeys, in fact, a more stringent constraint on a *subsystem* of the full Hilbert space, which is the uniform low-weight error condition: there exists some large subset $V_l \subseteq V$ and large subset $E_l \subseteq E$ such that for *each* $v \in V_l$ at most an $O(\sqrt{\varepsilon})$ fraction of the qubits $V \times v$ have errors, and the same holds for a large fraction of columns $E \times e$, for $e \in E_l$.
A certain “fractal” property of the hypergraph product of the repetition code defined by an expander graph, allows us to argue that inside \mathcal{C}_\times there exists a complete smaller product-hypergraph of a connected sub-graph (V', E') induced by (V_l, E_l) . Hence, we can reduce the problem of an ε -impostor to the hypergraph product code of G to the problem of an ε -impostor to the hypergraph product code of G_l , with the extra condition of uniform low-weight error.
2. In the second part we show that this “uniform low-weight error condition” implies that there exists a distance partition in either the X or Z basis.
3. In the third part, we finish the proof by using the distance partition above to argue that the $|\psi\rangle$ has low vertex expansion in at least the X or Z basis.

Part 1: Uniform Low-weight Error on a Sub-code

Fix some integer $N > 0$. We think of N as being sufficiently large given any choice of the other parameters. We denote $\mathcal{C}_\times = \mathcal{C}_\times^{(N)}$ for simplicity. We are given a quantum state ρ that is an ε -impostor to $H(\mathcal{C}_\times)$. To establish the theorem we show that ρ is QNC₁-hard.

The fact that ρ is an ε -impostor means that there exists a state σ with $\text{tr}[H\sigma] = 0$ and a set $S \subseteq (V \times V) \cup (E \times E)$ such that $|S| \geq N(1 - \varepsilon)$ and $\rho_S = \sigma_S$. Here we use the convention that $\rho_S := \text{tr}_{\bar{S}} \rho$.

Now define sets $V_l \subseteq V, E_l \subseteq E$ by

$$V_l = \{v : |V \times v \cap S| \geq (1 - d\sqrt{\varepsilon})n \quad \wedge \quad |v \times V \cap S| \geq (1 - d\sqrt{\varepsilon})n\} \quad (112)$$

$$E_l = \{e : |E \times e \cap S| \geq (1 - d\sqrt{\varepsilon})m \quad \wedge \quad |e \times E \cap S| \geq (1 - d\sqrt{\varepsilon})m\} \quad (113)$$

By Markov’s inequality we can bound $|V_l| \geq (1 - d\sqrt{\varepsilon})n$ and $|E_l| \geq (1 - d\sqrt{\varepsilon})m$.

Let $G' = (V', E')$ denote the *maximal connected* residual graph of G (see Definition 24) induced by the vertices V_l , and edges E_l . By Fact 25, (23) and the fact that $d = 14$, V', E' satisfy $|V'| \geq (1 - 31d\sqrt{\varepsilon})n$ and $|E'| \geq (1 - 62d\sqrt{\varepsilon})m$. Let $S' := (V' \times V') \cup (E' \times E')$ be the corresponding qubits.

By Proposition 52 the full hypergraph product \mathcal{C}_\times contains *all* parity checks of the following hypergraph product:

$$\mathcal{C}_\times^{(\text{low})} = \mathcal{C}(G') \times_{TZ} \mathcal{C}(G'). \quad (114)$$

Now decompose the Hilbert space \mathcal{H} of \mathcal{C}_\times according to the uniform low-violation condition:

$$\mathcal{H} = \mathcal{H}_h \otimes \mathcal{H}_l, \quad \text{where} \quad \mathcal{H}_l := \mathbb{C}_2^{S'} \quad (115)$$

In words, \mathcal{H}_l is the support of $\mathcal{C}_\times^{(\text{low})}$ and contains only (though not all) qubits that belong to columns/rows of $V \times V$ or $E \times E$ with individually low-weight error, and \mathcal{H}_h contains qubits in high-error columns/rows over which we have no control.

When we restrict our attention to the qubits in S' , we find that $\rho_{S'}$ satisfies a stronger version of the impostor condition for $H(\mathcal{C}_\times^{(\text{low})})$. Define $\nu := \frac{d\sqrt{\varepsilon}}{1-62d\sqrt{\varepsilon}}$. Since $S \cap S'$ contains a $\geq 1-\nu$ fraction of the bits of each row and column of S' , then $\rho_{S'}$ agrees with some ground state of $H(\mathcal{C}_\times^{(\text{low})})$ (namely $\sigma_{S'}$) for a $\geq 1-\nu$ fraction of each row and column.

Part 2: Distance Partition on the Subcode

Let $n' = |V'|$ and $m' = |E'|$. Let $S_{x,\text{low}}, S_{z,\text{low}}$ denote the set of generators of $\mathcal{C}_\times^{(\text{low})}$, and let $b_{1,\text{low}}^x$ be the corresponding element of $S_{x,\text{low}}^\perp - S_{z,\text{low}}$, associated with the first column of the register \mathcal{H}_l : i.e. $b_{1,\text{low}}^x = \mathbf{1}_{V' \times v_1}$ - namely - the word which is 1 in $V' \times v_1$ and zero otherwise, for some arbitrary $v_1 \in V'$. Let N_{low} denote the number of qubits in $\mathcal{C}_\times^{(\text{low})}$. Let $\partial_{G'} : \mathbb{F}_2^{V'} \mapsto \mathbb{F}_2^{E'}$ denote the vertex-edge incidence operator corresponding to the sub-graph G' defined above.

Definition 55. Uniform low-weight errors

Define the sets of uniform low-weight errors in the X and Z bases to be the following subsets of $\mathbb{F}_2^{V'}$

$$U^{z,\nu} := \{t : |t_{E' \times e}| \leq \nu m' \forall e \in E' \quad \wedge \quad |t_{V' \times v}| \leq \nu n' \forall v \in V'\} \quad (116a)$$

$$U^{x,\nu} := \{t : |t_{e \times E'}| \leq \nu m' \forall e \in E' \quad \wedge \quad |t_{v \times V'}| \leq \nu n' \forall v \in V'\} \quad (116b)$$

We can formalize the uniform low-weight error condition from Part 1 by observing that

$$x \in \mathbb{F}_2^N, \text{supp}(x) \subseteq \bar{S} \cap S' \quad \Rightarrow \quad x \in U^{z,\nu} \cap U^{x,\nu}. \quad (117)$$

Definition 56. Distance partition

We define $S_0^{z,\nu}, S_1^{z,\nu}$ as the strings obtained by adding uniform low weight error to a code state as follows. For $a = 0, 1$ define

$$S_a^{z,\nu} = C_a^Z + U^{z,\nu} \quad (118a)$$

$$S_a^{x,\nu} = C_a^X + U^{x,\nu} \quad (118b)$$

Since $C_{0,1}^Z$ partitions $S_{x,\text{low}}^\perp$ (and likewise for $C_{0,1}^X$) we have

$$S_{x,\text{low}}^\perp + U^{z,\nu} = S_0^{z,\nu} \sqcup S_1^{z,\nu} \quad (119a)$$

$$S_{z,\text{low}}^\perp + U^{x,\nu} = S_0^{x,\nu} \sqcup S_1^{x,\nu} \quad (119b)$$

Here $C_{0,1}^{X,Z}$ are defined as in (36) but with respect to the code $\mathcal{C}_\times^{(\text{low})}$.

We claim that these sets are far apart:

Fact 57. Uniform low-weight errors preserve the distance partition.

$$\Delta(S_0^{z,\nu}, S_1^{z,\nu}) = \Omega(n), \quad (120)$$

and the same holds for $S_0^{x,\nu}, S_1^{x,\nu}$.

Proof. Let $x_0 \in S_0^{z,\nu}, x_1 \in S_1^{z,\nu}$. By the definition of $S_{0,1}^{z,\nu}$ there exist $\hat{x}_0 \in C_0^Z, \hat{x}_1 \in C_1^Z$ such that $x_0 - \hat{x}_0, x_1 - \hat{x}_1 \in U^{z,\nu}$.

We note that $\hat{x}_0 \in C_0^Z, \hat{x}_1 \in C_1^Z$ where $\mathcal{C}(G')$ is the hypergraph product of G' which is a (maximal) connected residual graph (see Definition 24) of a d -regular Ramanujan graph. Thus, we can invoke Lemma 53 which implies that either there exists $v \in V'$ such that $|(\hat{x}_0)_{V' \times v} +$

$(\hat{x}_1)_{V' \times v} \geq \frac{n'}{2}$ or there exists some $e \in E'$ such that $|(\hat{x}_0)_{E' \times e} + (\hat{x}_1)_{E' \times e}| \geq \frac{3}{8d}n'$. The triangle inequality then implies

$$|x_0 + x_1| \geq \min \left\{ \frac{1}{2}n' - \nu n', \frac{3}{8d}n' - \nu m' \right\} = \Omega(n), \quad (121)$$

for any constant $\nu < \frac{3/8d}{m'/n'}$. This last bound is satisfied if we take $\varepsilon \leq 10^{-9}$. \square

Part 3: Quantum Circuit Lower-bound

Let p_Z denote the distribution induced by measuring all N_{low} qubits of $\rho_{S'}$ in the Z basis. If we had measured $\sigma_{S'}$ instead then the measurement outcomes would have been entirely in $C_0^Z \cup C_1^Z$. From Part 1, we have that the outcomes from measuring $\rho_{S'}$ are the same on a $\geq 1 - \nu$ fraction of the bits of each row and column. Therefore these outcomes differ by an element of $U^{z,\nu}$ and we have:

$$\text{supp}(p_Z) \subseteq S_0^{z,\nu} \cup S_1^{z,\nu}. \quad (122)$$

(We can define p_X similarly and likewise observe that $\text{supp}(p_X) \subseteq S_0^{x,\nu} \cup S_1^{x,\nu}$.) Our goal is now to show that either p_Z or p_X is QNC¹-hard.

By Fact 57 we have:

$$\Delta(S_0^{z,\nu}, S_1^{z,\nu}) = \Omega(n) \quad (123)$$

In particular $S_0^{z,\nu} \cap S_1^{z,\nu} = \emptyset$, where $S_0^{z,\nu} = C_0^Z + U^{z,\nu}$, $S_1^{z,\nu} = C_1^Z + U^{z,\nu}$, and the same holds for $S_0^{x,\nu}$. Hence, we can invoke Proposition 40 choosing the error sets as $E_z = U^{z,\nu}$, $E_x = U^{x,\nu}$. This implies we have uncertainty in either the X or Z bases. Without loss of generality, assume that we have uncertainty in the Z basis, i.e.:

$$p_Z(S_0^{z,\nu}) \geq c_0, \quad p_Z(S_1^{z,\nu}) \geq c_0. \quad (124)$$

Now let \tilde{p} be a distribution that approximates p_Z :

$$\|\tilde{p} - p_Z\|_1 \leq N_{\text{low}}^{-a}.$$

so that

$$\tilde{p}(S_0^{z,\nu} \cup S_1^{z,\nu}) \geq 1 - N_{\text{low}}^{-a} \quad (125)$$

$$\tilde{p}(S_0^{z,\nu}) \geq c_0 - N_{\text{low}}^{-a} \geq c_0/2, \quad (126)$$

$$\tilde{p}(S_1^{z,\nu}) \geq c_0 - N_{\text{low}}^{-a} \geq c_0/2. \quad (127)$$

Eqs. (125), (126) and (123) imply together in particular that $S_0^{z,\nu}$ has a very low vertex expansion for some $l = \Omega(n)$:

$$\frac{\tilde{p}(\partial_l(S_0^{z,\nu}))}{\tilde{p}(S_0^{z,\nu})} \leq N_{\text{low}}^{-a}, \quad (128)$$

Hence, the vertex expansion of the distribution \tilde{p} is upper-bounded by:

$$h_\ell(\tilde{p}) \leq N_{\text{low}}^{-a}, \quad \text{for } \ell = \Omega(n). \quad (129)$$

We now invoke Theorem 42. By the theorem for any $\alpha \in [0, 1/2)$ there is some $\ell > 0$ at most

$$\ell \leq B \cdot (BN_{\text{low}})^{1/2-\alpha/2}, \quad (130)$$

for which $h_\ell(\tilde{p}) \geq \frac{1}{2}(BN_{\text{low}})^{-\alpha}$. Since $a > 0$ is a constant independent of n then we can choose a constant $\alpha > 0$ so that

$$n^{-a/2} \leq \frac{1}{2}(BN_{\text{low}})^{-\alpha} \leq h_\ell(\tilde{p}). \quad (131)$$

Hence ℓ is upper-bounded by (130) but must surpass the distance partition of (123), i.e.:

$$\Omega(n) \leq \ell \leq B \cdot (BN_{\text{low}})^{1/2-\alpha/2} = B^{1.5-\alpha/2} \cdot O(n^{1-\alpha}) \quad (132)$$

Therefore by (130), $B^{1.5-\alpha/2} \geq n^\alpha$. Hence any quantum circuit U of depth d for which $|\psi\rangle = U|0^{\otimes N}\rangle$, has $d = \Omega(\log(n)) = \Omega(\log(N))$. Thus $|\psi\rangle$ is QNC₁-hard.