

On Equivalence of Likelihood Maximization of Stochastic Block Model and Constrained Nonnegative Matrix Factorization

Zhong-Yuan Zhang*, Yujie Gai, Yu-Fei Wang, Hui-Min Cheng, Xin Liu
*School of Statistics and Mathematics, Central University of Finance and Economics,
Haidian District, Beijing 100081, China*

Abstract

Community structures detection in complex network is important for understanding not only the topological structures of the network, but also the functions of it. Stochastic block model and nonnegative matrix factorization are two widely used methods for community detection, which are proposed from different perspectives. In this paper, the relations between them are studied. The logarithm of likelihood function for stochastic block model can be reformulated under the framework of nonnegative matrix factorization. Besides the model equivalence, the algorithms employed by the two methods are different. Preliminary numerical experiments are carried out to compare the behaviors of the algorithms.

1. Introduction

One of the fundamental problems in network analysis is community structures detection ([1, 2]). In most cases, a community is a group of nodes which connect with each other tightly while connect loosely with the rest of the network. There are other types of communities as well. Communities often correspond to functional units. For example, in a social network, a commu-

[☆]This work was supported by Program for Innovation Research in Central University of Finance and Economics and Young Elite Teacher Project of Central University of Finance and Economics.

*Corresponding author.

Email address: zhyuanzh@gmail.com (Zhong-Yuan Zhang)

nity might correspond to a group of people brought together by a common interest. Detection of communities is very important for understanding not only the topological structures of the network, but also the functions of it, such as how the nodes communicate with each other, or how new ideas diffuse in the network ([3]), etc.

Many kinds of methods have been proposed to detect community structures in the literature recently. One group of methods is based on generative model. The basic motivation is that the network we observed is an instance generated by a set of hidden parameters, and we can detect the community structures in the network by revealing the parameters. Among them, the most representative one is the stochastic block model (SBM, [4, 5, 6, 7, 8, 9, 10, 11, 12, 13]). SBM provides a well-founded principled approach for understanding the network structures, and is very flexible such that not only the traditional type of community structures, but also a wide variety of structures in networks can be formulated into the model and be detected ([11, 14]). In this paper, our focus is on the stochastic block models proposed by Karrer and Newman ([12]), and its variants ([15, 16, 17, 14]).

Another group of methods for community detection is based on optimization of some global criteria over all possible network partitions, including graph partitioning ([18]), spectral clustering([19]), modularity maximization ([2, 20]) and nonnegative matrix factorization([21]), etc. Nonnegative matrix factorization (NMF) was originally proposed as a method for finding matrix factors with parts-of-whole interpretations ([21, 22]), and has become a powerful tool for data analysis with enhanced interpretability. By accommodating a variety of objective functions, NMF has been successfully applied to a lot of distinct areas ([23, 24, 25, 26, 27, 28]). Specifically, NMF has been successfully adopted to community structures detection recently ([29, 30, 31, 32, 33]). Both spectral clustering and probabilistic latent semantic indexing can be reformulated under the framework of NMF ([34, 35]).

Although there were so many crucial researches of community detection based on SBM and NMF respectively, few attempt has been made to build the connections between them while emphasizing their differences in community detection. In this paper we prove that the likelihood functions to be maximized for SBM are equivalent to the objective functions for nonnegative matrix factorization model with constraints. To the best of our knowledge, this is the first time establishing the connections between SBM and NMF. Empirical experiments are carried out to compare the difference between the algorithms employed by the two models.

The rest of the paper is organized as follows. From Sect. 2 to Sect. 7, we give the connections between six types of block models and nonnegative matrix factorizations, respectively. The six block models are the standard SBM, the degree-corrected SBM, the bipartite SBM, the normal distributed SBM, the directed SBM, and the signed SBM. Experimental results are given in Sect. 8. And Sect. 9 concludes.

2. Equivalence of likelihood maximization of standard stochastic block model and constrained nonnegative matrix factorization

Let \mathcal{G} be an undirected multigraph with n vertices, possibly including self-edges. Each vertex i belongs to one of c latent communities and assume the number of edges between each two nodes (or self-edges) to be independently Poisson distributed. Let A be the adjacency matrix of \mathcal{G} , with its element A_{ij} denoting the number of edges between vertices i and j , and W be a $c \times c$ matrix with its element w_{rs} the expected value of A_{ij} for vertices i and j lying in community r and s respectively. Also, we introduce community membership matrix G to record the community assignment of vertices in the network \mathcal{G} , where $G_{ir} = 1$ if vertex i belongs to community r ; 0 otherwise.

According to Karrer and Newman ([12]), the probability $P(\mathcal{G}|W, G)$ of graph \mathcal{G} given the parameters W and the community assignment matrix G is

$$P(\mathcal{G}|W, G) = \frac{1}{\prod_{i < j} A_{ij}!} \prod_i 2^{A_{ii}/2} (A_{ii}/2)! \times \prod_{r, s} w_{rs}^{m_{rs}/2} \exp(-\frac{1}{2} n_r n_s w_{rs}), \quad (1)$$

where n_r is the number of vertices in community r and $\sum_{r=1}^c n_r = n$, m_{rs} is the total number of edges between community r and s , or twice that number if $r = s$ and $\sum_{k=1}^c G_{ik} = 1$. The goal is to maximize this probability (1) with respect to the unknown model parameters W and the community membership matrix G . By neglecting constants which are independent of the parameter W and the community assignment matrix G , the problem above is reduced to

$$\max_{W, G} \log P(\mathcal{G}|W, G) = \max_{W, G} \sum_{r, s} (m_{rs} \log w_{rs} - n_r n_s w_{rs}),$$

which is equivalent to

$$\min_{W, G} \sum_{r, s} - (m_{rs} \log w_{rs} - n_r n_s w_{rs}). \quad (2)$$

The first term in equation (2) is

$$\begin{aligned} - \sum_{r, s} m_{rs} \log w_{rs} &= - \sum_{r, s} \sum_{i, j} A_{ij} G_{ir} G_{js} \log w_{rs} \\ &= - \sum_{i, j} A_{ij} \left(\sum_r G_{ir} \sum_s G_{js} \log w_{rs} \right) \\ &= - \sum_{i, j} A_{ij} (G_{ir^*} G_{js^*} \log w_{r^* s^*}) \\ &= - \sum_{i, j} A_{ij} (\log(G_{ir^*} G_{js^*} w_{r^* s^*})) \\ &= - \sum_{i, j} A_{ij} \log \left(\sum_{r, s} G_{ir} G_{js} w_{rs} \right) \\ &= - \sum_{i, j} A_{ij} \log (GWG^T)_{ij} \\ &= \sum_{i, j} A_{ij} \log \frac{1}{(GWG^T)_{ij}}, \end{aligned}$$

the third equality above holds because there is only one 1 in each row of matrix G , which is denoted by G_{ir^*} and G_{js^*} , respectively.

The second term in equation (2) is

$$\sum_{r, s} n_r n_s w_{rs} = \mathbf{n}^T W \mathbf{n} = \mathbf{1}^T GWG^T \mathbf{1} = \sum_{i, j} (GWG^T)_{ij}, \quad (3)$$

where $\mathbf{n} = (n_1, \dots, n_c)^T$ is a $c \times 1$ column vector, and $\mathbf{1}$ is a $c \times 1$ vector with all elements 1. A^T is the transpose of a matrix (or a vector) A .

Hence, the optimal problem (2) is equivalent to

$$\min_{W, G} \left[\sum_{i, j} A_{ij} \log \frac{1}{(GWG^T)_{ij}} + \sum_{i, j} (GWG^T)_{ij} \right].$$

By adding some constants which are independent of W and G , we have the following binary matrix factorization problem

$$\left\{ \begin{array}{l} \min_{W, G} \sum_{i, j} \left[A_{ij} \log \frac{A_{ij}}{(GWG^T)_{ij}} + (GWG^T)_{i, j} - A_{ij} \right] \\ s.t. \sum_{r=1}^c G_{ir} = 1, \quad i = 1, 2, \dots, n, \\ G_{ir} = 0 \text{ or } 1, \quad i = 1, 2, \dots, n; \quad r = 1, 2, \dots, c, \\ w_{rs} \geq 0, \quad i = 1, 2, \dots, n; \quad r, s = 1, 2, \dots, c. \end{array} \right. \quad (4)$$

which is typically a constrained nonnegative matrix factorization model, and can be naturally extended to overlapping community structures detection by relaxing the constraints on G from binary to non-negativity: $\sum_{r=1}^c G_{ir} = 1, \quad i = 1, 2, \dots, n, \quad G_{ir} \geq 0, \quad i = 1, 2, \dots, n; \quad r = 1, 2, \dots, c.$

In the following sections from Sect. 3 to Sect. 5, without loss of generality, we wrote out the relaxed nonnegative matrix factorization model directly. Note that although the relaxed NMF model is an approximation, it outputs the same results for nonoverlapping community detection problem by discretizing G [31].

3. Equivalence of likelihood maximization of degree-corrected stochastic block model and constrained nonnegative matrix factorization

In the standard SBM mentioned in Sect. 2, vertices in the same community are identical, i.e., vertices in the same community have equal probability connecting to others, and thus are supposed to have the same degree distribution, which is not realistic, since real networks are often degree heterogeneity. Karrer and Newman ([12]) proposed the degree-corrected SBM to take degree heterogeneity into account when generating a network. In this section, we will prove the equivalence of degree-corrected SBM and NMF.

When considering the degree-corrected SBM, the generation of \mathcal{G} depends not only on the parameters introduced previously, but also on a new set of parameters $\theta_i, i = 1, 2, \dots, n$, which is the degree weight of vertex i satisfying

the condition $\sum_{i=1}^n \theta_i G_{ir} = 1$, $r = 1, 2, \dots, c$. The expected value of the edge number between two vertices i and j is $\theta_i \theta_j w_{rs}$, instead of w_{rs} , where r, s are the communities that vertex i and j belong to respectively.

For the degree-corrected SBM, the goal is to maximize the probability (5) below with respect to the unknown parameters θ , W and the community membership matrix G , where $\theta = (\theta_1, \dots, \theta_n)^T$:

$$P(\mathcal{G}|\theta, W, G) = \frac{1}{\prod_{i<j} A_{ij}! \prod_i 2^{A_{ii}/2} (A_{ii}/2)!} \times \prod_{i<j} (\theta_i \theta_j)^{A_{ij}} \prod_i (\theta_i^2)^{A_{ii}/2} \prod_{r,s} w_{rs}^{m_{rs}/2} \exp\left(-\frac{1}{2} w_{rs}\right), \quad (5)$$

or

$$\begin{aligned} & \log P(\mathcal{G}|\theta, W, G) \\ &= 2 \sum_{i<j} A_{ij} \log(\theta_i \theta_j) + 2 \sum_i \frac{A_{ii}}{2} \log \theta_i^2 + \sum_{r,s} (m_{rs} \log w_{rs} - w_{rs}) \\ &= \sum_{i,j} A_{ij} \log(\theta_i \theta_j) + \sum_{r,s} (m_{rs} \log w_{rs} - w_{rs}). \end{aligned} \quad (6)$$

Hence the problem is

$$\max_{\theta, W, G} \log P(\mathcal{G}|\theta, W, G) = \max_{\theta, W, G} \left[\sum_{i,j} A_{ij} \log(\theta_i \theta_j) + \sum_{r,s} (m_{rs} \log w_{rs} - w_{rs}) \right], \quad (7)$$

which is equivalent to

$$\min_{\theta, W, G} \left(\sum_{i,j} A_{ij} \log \frac{1}{\theta_i \theta_j} + \sum_{r,s} m_{rs} \log \frac{1}{w_{rs}} + \sum_{r,s} w_{rs} \right). \quad (8)$$

The first two terms in (8) can be combined together as

$$\begin{aligned}
& \sum_{i,j} A_{ij} \log \frac{1}{\theta_i \theta_j} + \sum_{r,s} m_{rs} \log \frac{1}{w_{rs}} \\
&= \sum_{i,j} A_{ij} \log \frac{1}{\theta_i \theta_j} + \sum_{i,j} A_{ij} \log \frac{1}{(GWG^T)_{ij}} \\
&= \sum_{i,j} A_{ij} \log \frac{1}{\theta_i \theta_j (GWG^T)_{ij}} \\
&= \sum_{i,j} A_{ij} \log \frac{1}{((\theta\theta^T) \otimes (GWG^T))_{ij}}. \tag{9}
\end{aligned}$$

The third term in (8) is

$$\begin{aligned}
\sum_{r,s} w_{rs} &= \mathbf{1}^T W \mathbf{1} \\
&= \theta^T G W G^T \theta \\
&= \sum_{i,j} \theta_i \theta_j (GWG^T)_{ij} \\
&= \sum_{i,j} ((\theta\theta^T) \otimes (GWG^T))_{ij}, \tag{10}
\end{aligned}$$

where \otimes denotes the dot product of two matrices (or vectors) with the same dimensions. And the second equality above holds because sum of weights in one community equals 1, that is, $\sum_{i=1}^n \theta_i G_{ir} = 1$, $r = 1, 2, \dots, c$.

By combining (9) and (10) together, the optimal problem (7) is then

equivalent to

$$\left\{ \begin{array}{l} \min_{\theta, W, G} \sum_{i, j} \left[A_{ij} \log \frac{A_{ij}}{((\theta\theta^T) \otimes (GWG^T))_{ij}} + ((\theta\theta^T) \otimes (GWG^T))_{ij} - A_{ij} \right] \\ s.t. \sum_{i=1}^n \theta_i G_{ir} = 1, \quad r = 1, 2, \dots, c. \\ \sum_{r=1}^c G_{ir} = 1, \quad i = 1, 2, \dots, n. \\ G_{ir}, \theta_i, w_{rs} \geq 0, \quad i = 1, 2, \dots, n; r, s = 1, 2, \dots, c. \end{array} \right.$$

That is, optimization problem over the degree-corrected SBM is equivalent to the weighted NMF model.

4. Equivalence of likelihood maximization of bipartite stochastic block model and constrained nonnegative matrix factorization

In this section, we consider the equivalence of bipartite SBM and NMF. \mathcal{G} is an undirected bipartite multigraph with n vertices, possibly including self-edges. There are two types of vertices, i.e. type I and type II, and only vertices of different types may be connected. Each community contains vertices of a single type. The number of vertices in type I and type II are n_1 and n_2 , respectively. Let B be a $n_1 \times n_2$ bipartite adjacency matrix with $B_{ij} = 1$ if there is an edge between i and j from type I and type II respectively; 0 otherwise, and A be a $n \times n$ adjacency matrix related to B as

$$A = \begin{pmatrix} 0 & B \\ B^T & 0 \end{pmatrix}.$$

We assume that the number of edges between each pair of vertices (including self-edges) is independently Poisson distributed, similar to that in Sect. 2, and define w_{rs} to be the expected value of A_{ij} for vertices i and j lying in community r and s respectively. Since vertices of the same type cannot be connected, we have

$$w_{rs} = 0 \quad \text{when} \quad T_{rs} = 0,$$

where T is a $c \times c$ matrix with its element $T_{rs} = 1$ if the types of community r and s are different; 0 otherwise. Other notations are defined in Sect. 2.

According to Larremore *et al.* ([17]), the probability of the network \mathcal{G} is that,

$$P(\mathcal{G}|W, G, T) = \prod_{i < j, i \in r, j \in s, T_{rs}=1} \frac{(w_{rs})^{A_{ij}}}{A_{ij}!} \exp(-w_{rs}), \quad (11)$$

where $i \in r$ stands for vertex i belonging to community r . After a small amount of manipulation, and neglecting constants, taking the logarithm, (11) is equivalent to

$$\log P(\mathcal{G}|W, G, T) = \sum_{r, s, T_{rs}=1} (m_{rs} \log w_{rs} - n_r n_s w_{rs}). \quad (12)$$

The goal is to maximize (12) with respect to W , G and T .

Since

$$\sum_{r, s, T_{rs}=1} n_r n_s w_{rs} = \mathbf{1}^T G(T \otimes W) G^T \mathbf{1},$$

and

$$\begin{aligned}
\sum_{r,s, T_{rs}=1} m_{rs} \log w_{rs} &= - \sum_{r,s, T_{rs}=1} m_{rs} \log \frac{1}{w_{rs}} \\
&= - \sum_{r,s, T_{rs}=1} \sum_{i,j} A_{ij} G_{ir} G_{js} \log \frac{1}{w_{rs}} \\
&= - \sum_{r,s} T_{rs} \left(\sum_{i,j} A_{ij} G_{ir} G_{js} \right) \log \frac{1}{(T \otimes W)_{rs}} \\
&= - \sum_{i,j} A_{ij} \left(\sum_{r,s} T_{rs} G_{ir} G_{js} \log \frac{1}{(T \otimes W)_{rs}} \right) \\
&= - \sum_{i,j} A_{ij} \log \frac{T_{r^*s^*} G_{ir^*} G_{js^*}}{(T \otimes W)_{r^*s^*}} \\
&= \sum_{i,j} A_{ij} \log \sum_{r,s} (T_{rs} G_{ir} G_{js} (T \otimes W)_{rs}) \\
&= \sum_{i,j,r,s} A_{ij} \log \sum_{r,s} (G_{ir} G_{js} (T \otimes W)_{rs}) \\
&= \sum_{i,j} A_{ij} \log (G(T \otimes W)G^T)_{ij},
\end{aligned}$$

the maximization of expression (12) is equivalent to the following weighted nonnegative matrix factorization model:

$$\left\{ \begin{array}{l} \min_{H,W} \sum_{i,j} \left[A_{ij} \log \frac{A_{ij}}{(G(T \otimes W)G^T)_{ij}} + (G(T \otimes W)G^T)_{ij} - A_{ij} \right] \\ s.t. \sum_{r=1}^c G_{ir} = 1, \quad i = 1, 2, \dots, n. \\ G_{ir}, w_{rs} \geq 0, \quad i = 1, 2, \dots, n; \quad r, s = 1, 2, \dots, c. \\ T_{rs} = 0, 1, \quad r, s = 1, 2, \dots, c. \end{array} \right.$$

Similarly, for the bipartite degree-corrected SBM, it's easy to obtain the equivalence to NMF, too.

5. Equivalence of likelihood maximization of normal distributed edge-weighted stochastic block model and constrained nonnegative matrix factorization

Aicher, Jacobs and Clauset ([14]) studied the weighted stochastic block model, and the normal distributed edge weight, as one case, was provided. In this section, we will prove that it is also equivalent to NMF. The model is defined as follows. For an undirected multigraph \mathcal{G} on n vertices, the weight of edge between two vertices i, j is supposed to drawn from a normal distribution $N(\mu_{rs}, \sigma_{rs}^2)$, where r, s are the community assignments of vertices i and j respectively. In this case, the likelihood function is

$$P(\mathcal{G}|\mu, \sigma^2) = \prod_{i,j} \prod_{i \in r, j \in s} \frac{1}{\sqrt{2\pi}\sigma_{rs}} \exp\left(-\frac{(A_{ij} - \mu_{rs})^2}{2\sigma_{rs}^2}\right), \quad (13)$$

with $i \in r$ standing for vertex i lying in community r . The goal is to maximize (13) with respect to parameters μ and σ . Fixing σ , the maximization of (13) is equivalent to minimizing the following expression over μ_{rs} ,

$$\sum_{i,j} \prod_{i \in r, j \in s} (A_{ij} - \mu_{rs})^2. \quad (14)$$

Meanwhile, note that the expectation

$$\mu_{rs} = \sum_{r,s} G_{ir} G_{js} w_{rs} = (GWG^T)_{ij}, \quad (15)$$

where w_{rs} is the expected edge weight between two vertices belonging to community r and s , respectively, and G again is the community membership matrix with $G_{ir} = 1$ if vertex i belongs to group r ; 0 otherwise. The equation (15) is very critical, because it reveals the relationship between parameter μ_{rs} and the community assignment G .

Then the optimization problem (14) is reduced to the following NMF model:

$$\left\{ \begin{array}{l} \min_{G,W} \sum_{i,j} (A_{ij} - (GWG^T)_{ij})^2 \\ s.t. \sum_{r=1}^c G_{ir} = 1, \quad i = 1, 2, \dots, n. \\ G_{ir}, w_{rs} \geq 0, \quad i = 1, 2, \dots, n; \quad r, s = 1, 2, \dots, c. \end{array} \right. \quad (16)$$

6. Equivalence of likelihood maximization of directed stochastic block model and constrained nonnegative matrix factorization

In this section, we turn to consider the directed SBM setting. In a directed SBM, an edge is an ordered pair of vertices, that is, an edge from vertex i to j is different with an edge from vertex j to i . This differs from the standard (undirected) SBM introduced in Sect. 2, in that the latter is defined in terms of unordered pairs of vertices.

Notations given in Sect. 2 and Sect. 3 have to be redefined and some new notations are provided here. \mathcal{G} is a directed graph with n vertices. A is still an $n \times n$ adjacency matrix but is not symmetric, $A_{ij} = 1$ if there is an edge from node i to node j and 0 otherwise, where i is named tail node and j is named head node. For weighted networks, A_{ij} is generalized to represent the weight of the edge from i to j . W is a $c \times c$ matrix with w_{rs} denoting the probability that a randomly selected edge, of which the tail node is from group r and the head node is from group s . F and H are the community membership matrices, where F is a $n \times c$ matrix with its element F_{ir} denoting the probability that the tail node i is from community r , and H is a $n \times c$ matrix with its element H_{js} denoting the probability that the head node j is from s , respectively.

According to Shen, Cheng and Guo ([15]), the goal is to maximize the probability $P(\mathcal{G}|F, W, H)$, which is the profile likelihood of the observed network, or equally to maximize the logarithm of the probability, with respect to the parameter W , and the community membership matrices F and H . That is,

$$\max_{F, W, H} \log P(\mathcal{G}|F, W, H) = \max_{F, W, H} \sum_{i, j} A_{ij} \log \left(\sum_{r, s} w_{rs} F_{ir} H_{js} \right),$$

with respect to the constraints $\sum_{r, s=1}^c w_{rs} = 1$, $\sum_{i=1}^n F_{ir} = 1$, $\sum_{j=1}^n H_{js} = 1$, $r, s = 1, 2, \dots, c$ ([15]), which is equivalent to

$$\left\{ \begin{array}{l} \min_{F, W, H} \sum_{i, j} A_{ij} \log \frac{1}{\sum_{r, s} w_{rs} F_{ir} H_{js}} \\ \text{s.t.} \quad \sum_{r, s=1}^c w_{rs} = 1, \sum_{i=1}^n F_{ir} = 1, \sum_{j=1}^n H_{js} = 1, r, s = 1, 2, \dots, c. \end{array} \right. \quad (17)$$

Since

$$\sum_{r, s} w_{rs} F_{ir} H_{js} = (FWH^T)_{ij}$$

and

$$\begin{aligned} \sum_{i, j} \sum_{r, s} w_{rs} F_{ir} H_{js} &= \sum_{i, r, s} w_{rs} F_{ir} \sum_j H_{js} \\ &= \sum_{i, r, s} w_{rs} F_{ir} \\ &= \sum_{r, s} w_{rs} \sum_i F_{ir} \\ &= \sum_{r, s} w_{rs} = 1, \end{aligned}$$

we have that the optimal problem (17) has the following equivalent non-negative matrix factorization form

$$\left\{ \begin{array}{l} \min_{F, W, H} \left[\sum_{i, j} A_{ij} \log \frac{A_{ij}}{(FWH^T)_{ij}} + \sum_{i, j} (FWH^T)_{ij} - \sum_{i, j} A_{ij} \right] \\ \text{s.t.} \quad \sum_{r, s=1}^c w_{rs} = 1, \sum_{i=1}^n F_{ir} = 1, \sum_{j=1}^n H_{js} = 1, r, s = 1, 2, \dots, c. \\ F_{ir}, H_{js}, w_{rs} \geq 0, i, j = 1, 2, \dots, n; r, s = 1, 2, \dots, c. \end{array} \right.$$

which is actually also equivalent to probabilistic latent semantic indexing ([35]).

7. Equivalence of likelihood maximization of signed stochastic block model and constrained nonnegative matrix factorization

Networks possessing both positive and negative links are called signed networks. In signed networks, most edges within a community are positive links, and most edges across communities are negative links. Signed networks exist in many occasions. For example, in a social network, positive links may denote agreement whereas negative links may denote disagreement. Chen *et al.* ([16]) studied the signed SBM. In this section, we will prove the equivalence of signed SBM and NMF.

Firstly, we update some notations. \mathcal{G} is a signed network with n vertices, and A is the adjacency matrix. We use A^+ and A^- to denote the positive and negative parts in the signed network, respectively. That is, $A_{ij}^+ = A_{ij}$ if $A_{ij} > 0$, 0 otherwise; $A_{ij}^- = -A_{ij}$ if $A_{ij} < 0$, 0 otherwise. Let H be the community membership matrix with its element H_{ir} denoting the probability that the node i is in the community r . W is a $c \times c$ matrix with its element w_{rs} denoting the probability of an edge choosing between community r and s . The normalization constraints on H and W are $\sum_i H_{ir} = 1$ and $\sum_{r,s} w_{rs} = 1$.

Let $W_1 = \text{diag}(W)$, which is a diagonal matrix, with its diagonal elements corresponding to those of W , and $W_2 = W - W_1$.

According to Chen *et al.* ([16]), the goal is to maximize the logarithm of the likelihood of the signed network below with respect to the unknown parameters W and the community membership matrix H .

$$\begin{aligned} & \max_{H,W} \log P(\mathcal{G}|H, W) \\ &= \max_{H,W} \sum_{i,j=1}^n \left[A_{ij}^+ \log \left(\sum_{r,r} w_{rr} H_{ir} H_{jr} \right) + A_{ij}^- \log \left(\sum_{r,s(r \neq s)} w_{rs} H_{ir} H_{js} \right) \right], \end{aligned}$$

which is equivalent to

$$\min_{H,W} \sum_{i,j=1}^n \left(A_{ij}^+ \log \frac{1}{\sum_{r,r} w_{rr} H_{ir} H_{js}} + A_{ij}^- \log \frac{1}{\sum_{r,s(r \neq s)} w_{rs} H_{ir} H_{js}} \right). \quad (18)$$

Firstly,

$$\begin{aligned}
& \sum_{i,j=1}^n \left(A_{ij}^+ \log \frac{1}{\sum_{r,r} w_{rr} H_{ir} H_{js}} + A_{ij}^- \log \frac{1}{\sum_{r,s(r \neq s)} w_{rs} H_{ir} H_{js}} \right) \\
&= \sum_{i,j=1}^n \left[A_{ij}^+ \log \frac{1}{(HW_1 H^T)_{ij}} + A_{ij}^- \log \frac{1}{(HW_2 H^T)_{ij}} \right]. \tag{19}
\end{aligned}$$

Also, note that

$$\begin{aligned}
\sum_{i,j} (HW H^T)_{ij} &= \sum_{i,j} \sum_{r,s} w_{rs} H_{ir} H_{js} \\
&= \sum_{r,s} w_{rs} \sum_i H_{ir} \sum_j H_{js} = \sum_{r,s} w_{rs} = 1, \tag{20}
\end{aligned}$$

and on the other side,

$$\begin{aligned}
\sum_{i,j} (HW H^T)_{ij} &= \sum_{i,j} (H(W_1 + W_2) H^T)_{ij} \\
&= \sum_{i,j} (HW_1 H^T)_{ij} + \sum_{i,j} (HW_2 H^T)_{ij}. \tag{21}
\end{aligned}$$

By combining (19) (20) and (21), and adding the constraints on H and W , we have that the optimal problem (18) is equivalent to the following joint non-negative matrix factorization model:

$$\left\{ \begin{array}{l}
\min_{H, W} \left\{ \sum_{i, j=1}^n \left[A_{ij}^+ \log \frac{1}{(HW_1H^T)_{ij}} + (HW_1H^T)_{ij} - A_{ij}^+ \right] \right. \\
\left. + \sum_{i, j=1}^n \left[A_{ij}^- \log \frac{1}{(HW_2H^T)_{ij}} + (HW_2H^T)_{ij} - A_{ij}^- \right] \right\} \\
s.t. \quad \sum_{i=1}^n H_{ir} = 1, \quad \sum_{r, s} (W_1 + W_2)_{rs} = 1. \\
\\
W_1 \text{ is nonnegative and diagonal,} \\
\\
W_2 \text{ is nonnegative and its diagonal elements are zeros.} \\
\\
H_{ir} \geq 0, i = 1, 2, \dots, n; r = 1, 2, \dots, c.
\end{array} \right.$$

8. Experimental Results

Although the likelihood function of SBM can be reformulated as the objective function of NMF, their algorithms are different. In this section, we use synthetic networks to compare the effectiveness of the algorithms employed by SBM and NMF, respectively.

8.1. Algorithms for SBM and NMF

There is a package “blockmodels” ([36]) in **R**, which uses variational EM algorithm to estimate the parameters in SBM with some common probability distribution functions including Bernoulli distribution, Poisson distribution and Gaussian distribution ([37]), and explore the community number by the ICL criterion ([38]). We use the command `BM_poisson` in the package, and fix the community number by setting both the parameters `explore_min` and `explore_max` to be the true community number.

We designed the multiplicative update rules for the nonnegative matrix factorization model (4) and (16) ([22, 34]), which are summarized in Algorithm 1 and Algorithm 2, respectively. We set the iteration number `iter` to 500 for each of the algorithms.

Algorithm 1 NMF with Kullback-Leibler Divergence, model (4)

Input: A , iter

Output: G, W

1: **for** $t = 1 : \text{iter}$ **do**

$$2: G_{ij} := G_{ij} \frac{\left(\frac{A}{GWG^T} GW \right)_{ij}}{\sum_l (WG^T)_{jl}}$$

$$3: W_{ij} := W_{ij} \frac{\left(G^T \frac{A}{(GWG^T)} G \right)_{ij}}{\sum_{k,l} G_{ki} G_{lj}}$$

$$4: G_{ij} := \frac{G_{ij}}{\sum_j G_{ij}}$$

5: **end for**

Algorithm 2 NMF with Least Squares Error, model (16)

Input: A , iter

Output: U

1: **for** $t = 1 : \text{iter}$ **do**

$$2: G_{ij} := G_{ij} \frac{(AGW)_{ij}}{(GWG^T GW)_{ij}}$$

$$3: W_{ij} := W_{ij} \frac{(G^T AG)_{ij}}{(G^T GWG^T G)_{ij}}$$

$$4: G_{ij} := \frac{G_{ij}}{\sum_j G_{ij}}$$

5: **end for**

8.2. Datasets Description

In this paper we use the computer-generated networks for comparison.

1. The Girvan-Newman benchmark network (GN, [1]). The GN network contains four communities with 32 vertices each. On average, the number of edges between two vertices from the same community is Z_{in} , and

that from different communities is Z_{out} . As expected, the communities become less clear as Z_{out} increases. Here $Z_{in} + Z_{out}$ is set to be 16.

2. The Lancichinetti-Fortunato-Radicchi benchmark network (LFR, [39]). The LFR network was proposed to cover most characteristics of real networks, such as size of the network and heterogeneous degree distribution, which the GN networks did not capture. In LFR benchmarks, distributions of both the degree and the community size obey power laws with exponents α and β respectively. With probability μ , a vertex connects to another vertex from different communities, and in its own community with probability $1 - \mu$.

In this paper, the parameters of the LFR benchmark are set as follows: The number of vertices is 1000, the maximum of degree is 50, the exponents are $\alpha = 2$, $\beta = 1$, the average degree of the nodes is 20 and the range of the mixing parameter p is from 0.1 to 0.9.

8.3. Simulation Results

In this subsection, we compare the numerical results of the algorithms employed by SBM and NMF on GN and LFR networks. We use the normalized mutual information (NMI, [40]) to evaluate the quality of the results, which can be formulated as follows:

$$I(M_1, M_2) = \frac{\sum_{i=1}^k \sum_{j=1}^k n_{ij} \log \frac{n_{ij}n}{n_i^{(1)}n_j^{(2)}}}{\sqrt{\left(\sum_{i=1}^k n_i^{(1)} \log \frac{n_i^{(1)}}{n}\right) \left(\sum_{j=1}^k n_j^{(2)} \log \frac{n_j^{(2)}}{n}\right)}}$$

where M_1 and M_2 are the implanted community label and the computed community label, respectively; k is the true community number; n is the number of nodes; n_{ij} is the number of nodes in the implanted community i that are assigned to the computed community j ; $n_i^{(1)}$ is the number of nodes in the implanted community i ; $n_j^{(2)}$ is the number of nodes in the computed community j ; and \log here is the natural logarithm. The larger the NMI value, the better the community partition.

The results are averaged over ten trials and are shown in Fig. 1. From the figure, one can conclude the following: (1) The algorithms employed by SBM and NMF are different, although their models to be optimized are equivalent.

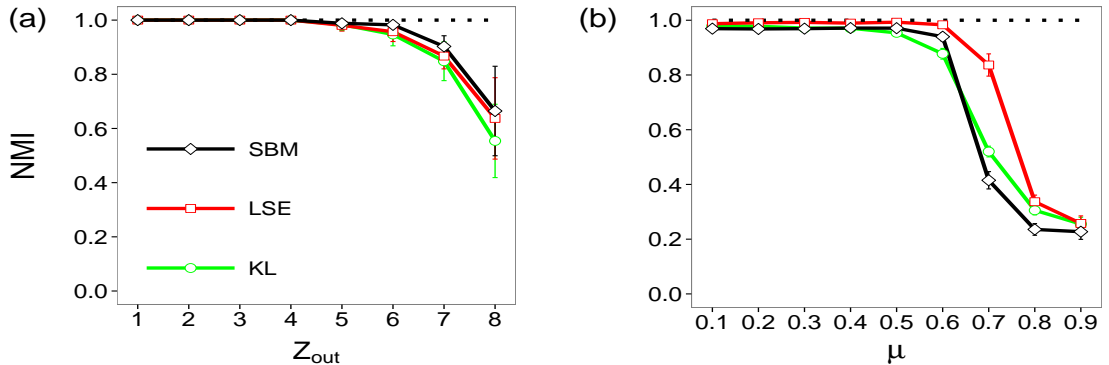


Figure 1: Averaged NMI with the standard deviation of SBM and NMF on (a) GN networks and (b) LFR networks. SBM stands for stochastic block model, LSE stands for nonnegative matrix factorization with Least Square Error, and KL stands for nonnegative matrix factorization with KL divergence.

(2) There is no single winner. SBM works slightly better when the community structures are clear, and NMF with Least Square Error performs better when the degree heterogeneity is included, especially when the community structures are fuzzy.

9. Conclusion

In this paper, we give the detailed analysis on the connections between likelihood maximization of different stochastic block models and nonnegative matrix factorization. The studied stochastic block models include the standard SBM, the degree-corrected SBM, the bipartite SBM, the normal distributed SBM, the directed SBM, and the signed SBM. Preliminary numerical experiments are also performed on synthetic networks to compare the difference between the algorithms for SBM and NMF.

The connections have several immediate implications: Firstly, it provides a rigorous statistical interpretation of NMF. NMF has been successfully applied to community detection, but it is still not very clear that why the model works. The equivalence results give us a preliminary interpretation. Secondly, an interesting point is that the principled statistical models can be reduced to optimization problems, making it possible to design algorithms from different perspectives. Finally, the relations among SBM, NMF and modularity maximization is an interesting problem for future work, since it

is proved that the degree corrected SBM model is equivalent with modularity maximization recently [41]. Other interesting problems for future work include the general relations between the generative models and NMF, a systematic comparison among the algorithms employed by SBM and NMF, how to combine the algorithms to make them profit from each other and make up for each other's deficiencies.

References

References

- [1] M. Girvan, M. E. Newman, Community structure in social and biological networks, *Proceedings of the national academy of sciences* 99 (12) (2002) 7821–7826.
- [2] M. E. Newman, M. Girvan, Finding and evaluating community structure in networks, *Physical Review E* 69 (2) (2004) 026113.
- [3] A. Nematzadeh, E. Ferrara, A. Flammini, Y.-Y. Ahn, Optimal network modularity for information diffusion, *Physical review letters* 113 (8) (2014) 088701.
- [4] P. W. Holland, K. B. Laskey, S. Leinhardt, Stochastic blockmodels: First steps, *Social networks* 5 (2) (1983) 109–137.
- [5] T. A. Snijders, K. Nowicki, Estimation and prediction for stochastic blockmodels for graphs with latent block structure, *Journal of classification* 14 (1) (1997) 75–100.
- [6] K. Nowicki, T. A. B. Snijders, Estimation and prediction for stochastic blockstructures, *Journal of the American Statistical Association* 96 (455) (2001) 1077–1087.
- [7] M. E. Newman, E. A. Leicht, Mixture models and exploratory analysis in networks, *Proceedings of the National Academy of Sciences* 104 (23) (2007) 9564–9569.
- [8] A. Goldenberg, A. X. Zheng, S. E. Fienberg, E. M. Airoldi, A survey of statistical network models, *Foundations and Trends® in Machine Learning* 2 (2) (2010) 129–233.

- [9] E. M. Airoldi, D. M. Blei, S. E. Fienberg, E. P. Xing, Mixed membership stochastic blockmodels, in: *Advances in Neural Information Processing Systems*, 2009, pp. 33–40.
- [10] P. J. Bickel, A. Chen, A nonparametric view of network models and newman–girvan and other modularities, *Proceedings of the National Academy of Sciences* 106 (50) (2009) 21068–21073.
- [11] M. E. Newman, Communities, modules and large-scale structure in networks, *Nature Physics* 8 (1) (2012) 25–31.
- [12] B. Karrer, M. E. Newman, Stochastic blockmodels and community structure in networks, *Physical Review E* 83 (1) (2011) 016107.
- [13] A. Decelle, F. Krzakala, C. Moore, L. Zdeborová, Asymptotic analysis of the stochastic block model for modular networks and its algorithmic applications, *Physical Review E* 84 (6) (2011) 066106.
- [14] C. Aicher, A. Z. Jacobs, A. Clauset, Learning latent block structure in weighted networks, *Journal of Complex Networks* (2014) cnu026.
- [15] H.-W. Shen, X.-Q. Cheng, J.-F. Guo, Exploring the structural regularities in networks, *Physical Review E* 84 (5) (2011) 056111.
- [16] Y. Chen, X. Wang, B. Yuan, B. Tang, Overlapping community detection in networks with positive and negative links, *Journal of Statistical Mechanics: Theory and Experiment* 2014 (3) (2014) P03021.
- [17] D. B. Larremore, A. Clauset, A. Z. Jacobs, Efficiently inferring community structure in bipartite networks, *Physical Review E* 90 (1) (2014) 012805.
- [18] S. E. Schaeffer, Graph clustering, *Computer Science Review* 1 (1) (2007) 27–64.
- [19] F. Krzakala, C. Moore, E. Mossel, J. Neeman, A. Sly, L. Zdeborová, P. Zhang, Spectral redemption in clustering sparse networks, *Proceedings of the National Academy of Sciences* 110 (52) (2013) 20935–20940.
- [20] M. E. Newman, Modularity and community structure in networks, *Proceedings of the national academy of sciences* 103 (23) (2006) 8577–8582.

- [21] D. D. Lee, H. S. Seung, Learning the parts of objects by non-negative matrix factorization, *Nature* 401 (6755) (1999) 788–791.
- [22] D. D. Lee, H. S. Seung, Algorithms for non-negative matrix factorization, in: *Advances in neural information processing systems*, 2001, pp. 556–562.
- [23] S. Z. Li, X. W. Hou, H. Zhang, Q. Cheng, Learning spatially localized, parts-based representation, in: *Computer Vision and Pattern Recognition, 2001. CVPR 2001. Proceedings of the 2001 IEEE Computer Society Conference on*, Vol. 1, IEEE, 2001, pp. I–207.
- [24] M. Cooper, J. Foote, Summarizing video using non-negative similarity matrix factorization, in: *Multimedia Signal Processing, 2002 IEEE Workshop on*, IEEE, 2002, pp. 25–28.
- [25] J.-P. Brunet, P. Tamayo, T. R. Golub, J. P. Mesirov, Metagenes and molecular pattern discovery using matrix factorization, *Proceedings of the national academy of sciences* 101 (12) (2004) 4164–4169.
- [26] V. P. Pauca, F. Shahnaz, M. W. Berry, R. J. Plemmons, Text mining using non-negative matrix factorizations., in: *SDM*, Vol. 4, SIAM, 2004, pp. 452–456.
- [27] S. Sra, I. S. Dhillon, Generalized nonnegative matrix approximations with bregman divergences, in: *Advances in neural information processing systems*, 2005, pp. 283–290.
- [28] A. Shashua, T. Hazan, Non-negative tensor factorization with applications to statistics and computer vision, in: *Proceedings of the 22nd international conference on Machine learning*, ACM, 2005, pp. 792–799.
- [29] M. Zarei, D. Izadi, K. A. Samani, Detecting overlapping community structure of networks based on vertex–vertex correlations, *Journal of Statistical Mechanics: Theory and Experiment* 2009 (11) (2009) P11013.
- [30] I. Psorakis, S. Roberts, M. Ebdon, B. Sheldon, Overlapping community detection using bayesian non-negative matrix factorization, *Physical Review E* 83 (6) (2011) 066114.

- [31] Z.-Y. Zhang, Y. Wang, Y.-Y. Ahn, Overlapping community detection in complex networks using symmetric binary matrix factorization, *Physical Review E* 87 (6) (2013) 062803.
- [32] X. Cao, X. Wang, D. Jin, Y. Cao, D. He, Identifying overlapping communities as well as hubs and outliers via nonnegative matrix factorization, *Scientific reports* 3.
- [33] Z.-Y. Zhang, Y.-Y. Ahn, Community detection in bipartite networks using weighted symmetric binary matrix factorization, *International Journal of Modern Physics C* 26 (09) (2015) 1550096.
- [34] C. H. Ding, X. He, H. D. Simon, On the equivalence of nonnegative matrix factorization and spectral clustering, in: *SDM*, Vol. 5, SIAM, 2005, pp. 606–610.
- [35] C. Ding, T. Li, W. Peng, On the equivalence between non-negative matrix factorization and probabilistic latent semantic indexing, *Computational Statistics & Data Analysis* 52 (8) (2008) 3913–3927.
- [36] J.-B. Leger, Blockmodels: A R-package for estimating in latent block model and stochastic block model, with various probability functions, with or without covariates (2016). [arXiv:1602.07587](https://arxiv.org/abs/1602.07587).
- [37] M. Mariadassou, S. Robin, C. Vacher, Uncovering latent structure in valued graphs: a variational approach, *The Annals of Applied Statistics* (2010) 715–742.
- [38] C. Biernacki, G. Celeux, G. Govaert, Assessing a mixture model for clustering with the integrated completed likelihood, *Pattern Analysis and Machine Intelligence, IEEE Transactions on* 22 (7) (2000) 719–725.
- [39] A. Lancichinetti, S. Fortunato, Benchmarks for testing community detection algorithms on directed and weighted graphs with overlapping communities, *Physical Review E* 80 (1) (2009) 016118.
- [40] A. Strehl, J. Ghosh, Cluster ensembles—a knowledge reuse framework for combining multiple partitions, *The Journal of Machine Learning Research* 3 (2003) 583–617.

- [41] M. Newman, Community detection in networks: Modularity optimization and maximum likelihood are equivalent, arXiv preprint arXiv:1606.02319.