Towards Label Imbalance in Multi-label Classification with Many Labels

Li Li Houfeng Wang

Key Laboratory of Computational Linguistics(Peking University), Ministry of Education, China {li.l, wanghf}@pku.edu.cn

Abstract

In multi-label classification, an instance may be associated with a set of labels simultaneously. Recently, the research on multi-label classification has largely shifted its focus to the other end of the spectrum where the number of labels is assumed to be extremely large. The existing works focus on how to design scalable algorithms that offer fast training procedures and have a small memory footprint. However they ignore and even compound another challenge - the label imbalance problem. To address this drawback, we propose a novel Representation-based Multilabel Learning with Sampling (RMLS) approach. To the best of our knowledge, we are the first to tackle the imbalance problem in multi-label classification with many labels. Our experimentations with realworld datasets demonstrate the effectiveness of the proposed approach.

1 Introduction

Multi-label classification is supervised learning, where an instance may be associated with multiple labels simultaneously. Multi-label classification attracted increasing attention from various domains (Vens et al., 2008; Nicolas et al., 2013; Sun et al., 2014; Li et al., 2014) in these years. Due to several motivating real-life applications, such as image/video annotation (Weston et al., 2011; Kong et al., 2012) and query/keyword suggestions (Agrawal et al., 2013), the recent research on multi-label classification has largely shifted its focus to the other end of the spectrum where the number of labels is assumed to be extremely large (Chen and Lin, 2012; Agrawal et al., 2013; Bi and Kwok, 2013; Lin et al., 2014).

Multi-label classification with many labels encounters the scalability challenge: how to design scalable algorithms that offer fast training procedures and have a small memory footprint. The standard multi-label classification approaches are computationally infeasible, when the number of labels is extremely large. For example, the simplest standard multi-label classification approach Binary Relevance (BR) is not applicable for a multi-label classification problem with 10^4 labels. BR trains a classifier for each label so that it need train 10^4 classifiers. The high training time complexity makes it computationally infeasible. BR is not applicable, not to mention the more sophisticated and computationally demanding ap-There exists some works for multiproaches. label classification with many labels. The mainstream approaches are called Label Space Dimension Reduction (LSDR) (Hsu et al., 2009; Tai and Lin, 2012; Chen and Lin, 2012; Lin et al., 2014; Bi and Kwok, 2013). LSDR encodes the high-dimensional label vectors into low dimensional code vectors. Then predictive models are trained from instances to code vectors. To predict an unseen instance, a low-dimensional code vector is firstly obtained with the predictive models, and then be decoded for the label vector. Besides LSDR, there are another approaches with different style, and we call them Representation-Based Learning (RBL) (Weston et al., 2011; Yu et al., 2014; Rai et al., 2015) approaches. RBL learns representations for the instances and labels, and produces the predictions with these representations.

However the above-mentioned approaches ignore and even compound an important problem: the label imbalance problem. The label imbalance problem is that the irrelevant labels of an instance are much more than relevant labels, and that some labels are irrelevant to more instances than other labels. As the papers (Spyromitros-Xioufis, 2011; Charte et al., 2013; Zhang et al., 2015) pointed out, the label imbalance problem exists in the standard multi-label classification, and harms the performance. The label imbalance problem becomes more serious in multi-label classification with many labels. Because more labels are irrelevant to an instance when the number of labels is large. To show the phenomenon, we can use the imbalance ratio defined in (Zhang et al., 2015) to evaluate the label imbalance degree. For a label, the imbalance ratio is the ratio of the number of irrelevant instances to the number of relevant instances.

$$ImR_{j} = \frac{num_{o}f_{i}rrelevant_{i}nstances}{num_{o}f_{relevant_{i}nstances}}$$
$$ImR = \frac{1}{m}\sum_{j=1}^{m}ImR_{j}$$

where ImR_i denotes the imbalance ratio for the *j*-th label, ImR denotes the average of the imbalance ratios. The high imbalance ratio indicates the serious label imbalance problem. The Enron dataset (Goldstein et al., 2006) has 45 labels and its average imbalance ratio is 3. 34. The Eurlex_desc dataset (Mencia and Fürnkranz, 2008) has 3993 labels and its average imbalance ratio is 1,378.58, much larger than the Enron dataset's. The label imbalance problem in the Eurlex_desc dataset is more serious than that in the Enron dataset. Hence we need attach more importance to the label imbalance problem in multi-label classification with many labels. However the existing approaches ignore the label imbalance problem. Even LSDR compounds this problem. The labels with very little relevant instances contain little information. So the lossy compression in LSDR may consider these labels as noisy and drop information about them.

To address this drawback, we propose a novel Representation-based Multi-label Learning with Sampling (RMLS) approach, which can tackles the label imbalance problem in multi-label classification with many labels. To the best of our knowledge, we are the first to tackle the imbalance problem in multi-label classification with many labels. RMLS is a RBL approach and employs a representation learning framework with a sampling strategy.

2 Related Works

2.1 Multi-label Classification with Many Labels

We categorize the existing approaches for multilabel classification with many labels into two types: Label Space Dimension Reduction (LSDR) and Representation-Based Learning (RBL). Figure 1 (it is from (Lin et al., 2014)) is the schematic diagram of LSDR. LSDR encodes the high-dimensional label vectors into low dimensional code vectors. Then predictive models are trained from instances to code vectors. To predict an unseen instance, a low-dimensional code vector is firstly obtained with the learnt predictive models, and then be decoded for the label vector.




Figure 1: An illustration of the principles of multilabel classification approaches (red) and those with LSDR (blue).

Compressive Sensing (CS) (Hsu et al., 2009) is the first LSDR approach. Specifically, CS linearly encodes the original label space as compressed sensing and uses standard recovery algorithms for decoding. Principle Label Space Transformation (PLST) (Tai and Lin, 2012) performs PCA on the label matrix Y to get the compressing matrix V

$$\boldsymbol{V}^* = \operatorname*{argmax}_{\boldsymbol{V}^T \boldsymbol{V} = \boldsymbol{I}} Tr(\boldsymbol{V}^T \boldsymbol{Y}^T \boldsymbol{Y} \boldsymbol{V})$$
(1)

Using the compressing matrix, we can obtain code vector c = yV. CS and PLST aim to find the compressing matrix with high recoverability. However they don't consider the predictability of the code vector. With high predictability, it will is easy to train the model to predict the code vector. Conditional Principal Label Space Transformation (CPLST) (Chen and Lin, 2012) considers the predictability, and optimizes the following problem to

get the compressing matrix.

$$\boldsymbol{V}^* = \operatorname*{argmax}_{\boldsymbol{V}^T \boldsymbol{V} = \boldsymbol{I}} Tr(\boldsymbol{V}^T \boldsymbol{Y}^T \boldsymbol{X} \boldsymbol{X}^+ \boldsymbol{Y} \boldsymbol{V}) \qquad (2)$$

CPLST argues that the compressing matrix obtained by this way can balances the predictability with recoverability. Feature-aware Implicit label space Encoding (FaIE) (Lin et al., 2014) balances predictability with recoverability, and optimize the following problem.

$$\boldsymbol{V}^* = \operatorname*{argmax}_{\boldsymbol{V}^T \boldsymbol{V} = \boldsymbol{I}} Tr(\boldsymbol{V}^T(\boldsymbol{Y}\boldsymbol{Y}^T + \alpha \boldsymbol{X}\boldsymbol{X}^+))\boldsymbol{V}) \quad (3)$$

where α denotes a parameter specified by users. Column Subset Selection for Multi-Label (CSS_ML) (Bi and Kwok, 2013) seeks to select exactly k representative labels so as to span all labels as much as possible. Then CSS_ML learns k classifiers for these selected labels. For unseen instance, CSS_ML predicts k selected labels and spans the predictions for all labels. CSS_ML can be considered as a special LSDR approach.

RBL learns representations for instances and labels, and produces the predictions with these representations. Web Scale Annotation by Image Embedding (WSABIE) (Weston et al., 2011) trains the representation model by minimizing the Weighted Approximate-Rank Pairwise (WARP) loss function. Low rank Empirical risk minimization for Multi-Label Learning (LEML) (Yu et al., 2014) develops a fast optimization scheme for the representation model with different loss functions, and analyses the representation model's generalization error. Bayesian Multi-label Learning via Positive Labels (BMLPL) (Rai et al., 2015) uses the topic model to represent instance, and learns the model with only relevant labels

2.2 Label Imbalance Problem

The label imbalance problem has attracted some attention from the multi-label classification community. One solution to label-imbalance multilabel learning is to train a classifier for a label and deal with the skewness in each classifier via popular binary imbalance techniques such as random or synthetic undersampling/oversampling (Spyromitros-Xioufis, 2011; Tahir et al., 2012; Charte et al., 2013; Charte et al., 2015). The paper (Zhang et al., 2015) improves this approach by aggregating one binary-class imbalance learner corresponding to the current label and several multi-class imbalance learners coupling with other




Figure 2: An illustration of the representations learning framwork.

labels for prediction. Besides integrating binary decomposition, Petterson et al (Petterson and Caetano, 2010) and Dembczynski et al (Dembczynski et al., 2013) address the label imbalance problem by directly optimizing imbalance-specific metric.

All of the above-mentioned approach solve the label imbalance problem by incorporating more correlations or designing more complex algorithms. These approaches are so complex that they are only applicable to the multi-label learning with the number of labels assumed to be small. In this paper, we aim to addressing the label imbalance problem in multi-label classification with many labels.

3 Models

3.1 Preliminaries

Let \mathcal{X} denote the instance feature space, and $\mathcal{Y} = \{0,1\}^m$ denote label space with m labels. A instance $\boldsymbol{x} \in \mathcal{X}$ is associated with a label vector $\boldsymbol{y} = (y^1, y^2, ..., y^m)$, where $y^j = 1$ denotes the j-th label is relevant to the instance and $y^j = 0$ otherwise. The goal of multi-label learning is to learn a function $\mathbf{f} : \mathcal{X} \to \mathcal{Y}$. In general, the function \mathbf{f} consists of m functions, one for a label, i.e., $\mathbf{f}(\boldsymbol{x}) = [f^1(\boldsymbol{x}), f^2(\boldsymbol{x}), ..., f^m(\boldsymbol{x})]$, where $f^j(\boldsymbol{x})$ is the prediction of the relevance between the instance \boldsymbol{x} and the j-th label.

3.2 Representation Learning

The architecture of RMLS is as shown in figure 2. The feature vector \boldsymbol{x} is mapped to a low-dimension feature representation vector \boldsymbol{h} with a mapping matrix \boldsymbol{W}

$$\boldsymbol{h} = \theta(\boldsymbol{x}\boldsymbol{W}) \tag{4}$$

where θ is an activation function. Each label corresponds a low-dimension label representation vector, denoted by $l_1, l_2, ..., l_m$. The dimension of the

feature representation vector and the label representation vector are identical. The prediction for the *j*-th label, denoted by $f^{j}(\boldsymbol{x})$, is produced by the inner dot of the feature representation vector \boldsymbol{h} and the *j*-th label representation vector $\boldsymbol{l_j}$. We add an activation function σ to the inner dot, for example, the logistic function.

$$f^{j}(\boldsymbol{x}) = \sigma(\boldsymbol{h}^{T}\boldsymbol{l}_{j})$$
 (5)

where σ is an activation function. our family of models have constrained norms:

$$\begin{aligned} ||W||_F^2 &\leq C_1 \\ ||l_j||_2^2 &\leq C_2, j = 1, ..., m \end{aligned}$$
(6)

The constrained norms acts as a regularizer in the same way as is used in lasso (Tibshirani, 1996)

If we set the dimension of the feature representation vector to be k, the number of parameters mapping an instance \boldsymbol{x} to an feature representation vector \boldsymbol{h} is $d \times k$, the number of parameters of all label representation vectors is $k \times m$. So the total number of parameters of RMLS is $d \times k + k \times m$. The simplest standard multilabel classification model BR trains m classifiers. If the classifier in BR is a linear model with d parameters, the total number of parameters of BR is $d \times m$. Generally speaking, k is much less than min(d, m), so that the number of parameters of RMLS is much less than that of BR. The less parameters mean less training cost.

Both of LSDR and RBL reduce the number of parameters by this way. LSDR encodes the label vectors into the code vectors and generates a recovery matrix $\mathbf{R}_{k \times m}$ ¹. Then LSDR learns regression models $G_{d \times k}$ mapping from the instances to the code vectors. The total number of parameters of LSDR is $d \times k + k \times m$. RBL learns a model $W_{d \times k}$ mapping instances to lowdimension instance representation vectors. The number of parameters of label representation vectors is $k \times m$. The total number of parameters of RBL is $d \times k + k \times m$ too. The number of parameters of LSDR and RBL are the same, since the architecture of them are identical. For an unseen instance x, LSDR produces the code vectors with $\boldsymbol{c} = \boldsymbol{x}\boldsymbol{G}_{d\times k}$, and then produces the prediction p with $p = cG_{d \times k} = xG_{d \times k}R_{k \times m}$.

RBL produces the instance representation vector with $h = xW_{d \times k}$. If we treat the label representation vectors as the columns of a label matrix $L_{k \times m}$, and set the activation function to the linear function, the prediction is produced with $p = hL_{k \times m} = xW_{d \times k}L_{k \times m}$. Hence the linear regression model $G_{d \times k}$ in LSDR is the equal of the mapping matrix $\boldsymbol{W}_{d \times k}$ in RBL, and the recovery matrix $\boldsymbol{R}_{k \times m}$ in LSDR is equal of the label matrix $L_{k \times m}$ in RBL. The difference between LSDR and RBL is how to obtain the parameters. LDSR obtains parameters by linear algebra approaches, and RBL learns the model by gradient descent approaches. RMLS is not the first RBL approach, however we are the first to point out that LSDR and RBL have identical architectures and the same number of parameters.

3.3 Sampling Strategy

Our goal is to identify relevant labels from irrelevant labels. To obtain this goal, we minimize a loss function over the training set to get the model parameters W and l_j . The loss function \mathcal{L} is as shown in the following formula.

$$\mathcal{L} = \sum_{j=1}^{m} \ell(f^j(\boldsymbol{x}), y^j) \tag{7}$$

 ℓ denotes the classification loss function. Different classification loss functions can be used as ℓ , for example, cross entropy loss, least square loss and L2 hinge loss.

With the serious label imbalance problem, the cost of classifying relevant labels as irrelevant is higher than that of classifying irrelevant labels as relevant. Incorporating this consideration into the loss function, the loss function becomes as follows.

$$\mathcal{L} = \sum_{j \in P} \ell(f^j(\boldsymbol{x}), y^j) + \frac{1}{C} \sum_{j \in N} \ell(f^j(\boldsymbol{x}), y^j) \quad (8)$$

Where $P = \{j | y^j = 1\}$ is the set of relevant labels and $N = \{j | y^j = 0\}$ is the set of irrelevant labels.

With the loss function, the overall risk we want to minimize is

$$R(\boldsymbol{f}) = \int \sum_{j \in P} \ell(f^j(\boldsymbol{x}), y^j) + \frac{1}{C} \sum_{j \in N} \ell(f^j(\boldsymbol{x}), y^j) d_{p(\boldsymbol{x}, \boldsymbol{y})}$$
(9)

An unbiased estimator of this risk can be obtained by stochastically sampling $\frac{|N|}{C}$ irrelevant labels with the uniform distribution, and minimizing the

¹In this paragraph, we show the size of matrixes with subscripts

loss function over the relevant labels and the chosen irrelevant labels. Then the loss function becomes as follows.

$$\mathcal{L} = \sum_{j \in \mathbf{P}} \ell(f^j(\mathbf{x}), y^j) + \sum_{j \in \mathbf{S}} \ell(f^j(\mathbf{x}), y^j) \quad (10)$$

Where S denotes the set of the chosen irrelevant labels. Minimization the formula 10 approximates to obtain the minimizer of risk 9.

We think, an instance with more relevant labels contains more information so that C in the formula 8 should be less. The number of an instance's relevant labels is denoted by $|\mathbf{P}|$, and the number of an instance's irrelevant labels is denoted by $|\mathbf{N}|$. We set $C = \frac{1}{\alpha} \frac{|\mathbf{N}|}{|\mathbf{P}|}$ and get the number of the chosen irrelevant labels $|\mathbf{S}| = \alpha \times |\mathbf{P}|$. We sample $\alpha \times |\mathbf{P}|$ irrelevant labels with the uniform distribution, where α is the sampling coefficient. The sampling coefficient α is an important parameter specified by the user, and we suggest to set it to be 5.

Our family of models have constrained norm so that the ℓ_2 norm is added to the minimization objective. The final minimization problem becomes as follows.

$$\begin{split} \boldsymbol{W}, \boldsymbol{l} &= \operatorname{argmin}_{\boldsymbol{W}, \boldsymbol{l}} \{ \sum_{j \in \boldsymbol{P}} \ell(f^{j}(\boldsymbol{x}), y^{j}) + \sum_{j \in \boldsymbol{S}} \ell(f^{j}(\boldsymbol{x}), y^{j}) + \sum_{j$$

where λ denotes the regularization coefficient.

3.4 Training Our Models

The mini-batch Stochastic Gradient Descent (SGD) is performed to the above-mentioned optimization problem. We use the Adagrad (Duchi et al., 2011) to adapt the learning rate.

The sampling labels may be biased and unstable. The straightforward approach to this problem is to train different models with different sampling results and employ the ensemble strategy. However, it is very expensive to train different models for the large scale multi-label classification with many labels. A practical solution to this problem is to sample different labels in every batch of minibatch SGD. Let B denote the index of the labelled training data in a batch, the pseudocode for training RLML with a batch of labelled data is given in Algorithm 1. Algorithm 1 Mini-batch SGD with a batch of labelled data

Input: $(\boldsymbol{x}_i, \boldsymbol{y}_i)$ where $i \in B$, α 1: for $i \in B$ do $S_i = \{\}$ 2: count = $\alpha \times |\mathbf{P}_i|$ 3: 4: repeat Pick a random irrelevant label $\overline{y} \in N_i$ 5: $\boldsymbol{S}_i = \boldsymbol{S}_i \cup \{\overline{y}\}$ 6: $\operatorname{count} -= 1$ 7: **until** count == 08: 9: end for

10: Make a gradient step to minimize Eq.(11)

Table 1: Multi-label datasets and associated statistics.

dataset	n	d	m
Enron	1702	1001	53
Delicious	16105	500	983
$Eurlex_desc$	19348	5000	3993
Wiki	28596	23495	50341

4 **Experiments**

4.1 Datasets

*y*We perform experiments on four real world datasets. These datasets are available online ². To reduce the time cost, we only use the accessible labelled training part of the Wiki dataset and select the labels with at least 5 relevant instances. Table 1 D shows these multi-label datasets and associated statistics where *n* denotes the number of instances, *d* denotes the number of features, *m* denotes the number of labels.

4.2 Evaluation Criteria

Compared with the single-label classification, the multi-label setting introduces the additional degrees of freedom, so that we need various multi-label evaluation metrics. We use three common evaluation metrics in our experiments. Let p denotes the prediction vector. The *Hammingloss* is defined as the percentage of the wrong labels to the total number of labels.

$$Hammingloss = \frac{1}{m} |\boldsymbol{p} \Delta \boldsymbol{y}| \qquad (12)$$

datasets.html and http://mlkd.csd.auth. gr/multilabel.html and https://www.kaggle. com/c/lshtc/data

where Δ denotes the symmetric difference of two sets, equivalent to XOR operator in Boolean logic.

Let p_i and r_i denote the precision and recall for the *i*-th instance, which means that $p_i = \frac{|\mathbf{p}_i \cap \mathbf{y}_i|}{|\mathbf{p}|}$ and that $r_i = \frac{|\mathbf{p} \cap \mathbf{y}_i|}{|\mathbf{y}_i|}$. The *Fscore* is defined as follows.

$$Fscore = \frac{1}{n} \sum_{i=1}^{n} \frac{2p_i r_i}{p_i + r_i}$$
(13)

The Fscore is a harmonic mean between precision and recall, and the higher F score means the better performance.

The Accuracy in multi-label classification is the size of the intersection of predicted label set pand true label set y divided by the size of the union of this two set. The Accuracy in multi-label classification is defined as follows:

$$Accuracy = \frac{|\boldsymbol{y} \cap \boldsymbol{p}|}{|\boldsymbol{y} \cup \boldsymbol{p}|} \tag{14}$$

4.3 Experimentation Results

4.3.1 Performance Comparison

We compare RMLS to some state-of-the-art appoaches and a baseline approach.

- Principle Label Space Transformation (PLST) (Tai and Lin, 2012). PLST performs PCA on the label matrix to get the compressing matrix.
- Feature-aware Implicit label space Encoding (FaiE) (Lin et al., 2014). FaiE balances predictability with recoverability.
- Column Subset Selection for Multi-Label (CSS_ML) (Bi and Kwok, 2013). CSS_ML seeks to select exactly k representative labels so as to span all labels as much as possible.
- Web Scale Annotation by Image Embedding (WSABIE) (Weston et al., 2011). WSABIE trains the representation model by minimizing the Weighted Approximate-Rank Pairwise (WARP) loss function.
- Low rank Empirical risk minimization for Multi-Label Learning (LEML) (Yu et al., 2014). LEML develops a fast optimization scheme for the representation model with different loss functions.
- Baseline. The baseline classifies all labels as irrelevant labels.

PLST, FaiE and ML_CSSP are the LSDR approaches. We use the open-source code mlc_lsdr ³ for them. The project mlc_lsdr is developed by the author of PLST and CPLST. In experiments, we use *mlc_lsdr*'s default settings. WSABIE, LEML and our RMLS are the RBL approaches. We implement the code for WSABIE and LEML. When implementing LEML, we replace the gradient optimization scheme by the least square minimization scheme. Since the least square minimization is more effective in the linear model. For our RMLS, we set the sampling coefficient α to 5, as suggested above. The regularization coefficients for WSABIE, LEML and our RMLS are set to 0.001. The dimension of the latent vectors k (the dimension of the code vectors in LSDR and the dimension of the representation vectors in RBL) is an important parameter. We perform all algorithms on the Enron dataset with k = 25 and k = 50, and other datasets with k = 250 and k = 500. The experiments are done in *five-fold* cross validation.

Table 2, table 3 and table 4 show detail comparison results and we can draw two conclusions: 1) RMLS shows clear majorities of winning over the state-of-the-art approaches in terms of Fscore and Accuracy, which demonstrates its effectiveness. In terms of Hammingloss, RMLS doesn't show superiorities. However, the winner in terms of Hammingloss is the baseline, which predicts all labels as irrelevant labels. This implies that Hammingloss is not a reasonable evaluation criteria for multi-label classification with the label imbalance, just like the predictive accuracy isn't a good evaluation criteria for imbalance classification. 2) RBL approaches outperform LSDR approaches. The reason for it may be that the LSDR approaches make assumptions about compressing label space, and that RBL approaches learn the label representations without making any assumptions.

4.3.2 Time Cost

We also record the training time of each approach in table 5. We have some conclusions about the training time: 1) The training time of RBL approaches on small datasets (*Enron*, *Delicious*, *Eurlex_desc*) are similar. But WS-ABIE and LEML spend much more time training on the *Wiki* dataset than RMLS. Because the

³https://github.com/hsuantien/mlc_lsdr

			.,		<u> </u>
Algorithm	k	Enron	Delicious	$Eurlex_desc$	Wiki
RMLS 25(0) 50(0)	0.063 ± 0.001	0.024 ± 0.000	0.002 ± 0.000	0.00049	
	$\textbf{0.055} \pm \textbf{0.001}$	0.024 ± 0.000	0.002 ± 0.000	0.00049	
PLST 25(0) 50(0)	0.082 ± 0.003	$\textbf{0.018} \pm \textbf{0.000}$	0.002 ± 0.000	-	
	0.090 ± 0.003	$\textbf{0.018} \pm \textbf{0.000}$	0.003 ± 0.000	-	
FaiE	25(0)	0.082 ± 0.003	$\textbf{0.018} \pm \textbf{0.000}$	0.002 ± 0.000	-
Fail: 50(0)	0.091 ± 0.003	$\textbf{0.018} \pm \textbf{0.000}$	0.003 ± 0.000	-	
ML_CSSP	25(0)	0.079 ± 0.001	$\textbf{0.019} \pm \textbf{0.000}$	0.002 ± 0.000	0.00005
ML_CSSP 50(0)	0.090 ± 0.003	$\textbf{0.018} \pm \textbf{0.000}$	0.002 ± 0.000	0.00033	
WSABIE 25(0) 50(0)	0.070 ± 0.008	0.038 ± 0.005	0.015 ± 0.000	0.00146	
	0.063 ± 0.002	0.091 ± 0.012	0.044 ± 0.000	0.00299	
LEML 25(0) 50(0)	0.102 ± 0.004	0.026 ± 0.001	0.002 ± 0.000	0.00011	
	0.103 ± 0.004	0.026 ± 0.001	0.003 ± 0.000	0.00011	
Baseline	-	0.063 ± 0.002	$\textbf{0.019} \pm \textbf{0.000}$	$\textbf{0.001} \pm \textbf{0.000}$	0.00005

Table 2: Performance (mean±std.) of each approach in terms of *Hammingloss*.

Table 3: Performance (mean \pm std.) of each approach in terms of *Fscore*.

Algorithm	k	Enron	Delicious	$Eurlex_desc$	Wiki
RMLS 25(0) 50(0)	0.512 ± 0.004	$\textbf{0.329} \pm \textbf{0.007}$	$\textbf{0.318} \pm \textbf{0.005}$	0.10209	
	$\textbf{0.587} \pm \textbf{0.011}$	$\textbf{0.327} \pm \textbf{0.003}$	0.309 ± 0.003	0.12154	
PLST 25(0) 50(0)	0.450 ± 0.011	0.167 ± 0.002	0.201 ± 0.003	-	
	0.442 ± 0.011	0.169 ± 0.002	0.230 ± 0.004	-	
FaiE	E-:E 25(0)	0.451 ± 0.011	0.166 ± 0.002	0.201 ± 0.003	-
Fail: 50(0)	0.442 ± 0.011	0.169 ± 0.002	0.230 ± 0.004	-	
ML_CSSP	ML CSSD 25(0)	0.421 ± 0.006	0.100 ± 0.001	0.085 ± 0.010	0.00039
ML_CSSP 50(0)	0.442 ± 0.011	0.134 ± 0.002	0.135 ± 0.010	0.00043	
WSABIE 25(0) 50(0)	0.436 ± 0.052	0.238 ± 0.009	0.131 ± 0.002	0.10928	
	0.498 ± 0.022	0.181 ± 0.012	0.052 ± 0.000	0.09631	
LEML 25(0) 50(0)	0.429 ± 0.007	0.278 ± 0.003	0.246 ± 0.005	0.10505	
	50(0)	0.424 ± 0.007	0.277 ± 0.003	0.255 ± 0.005	0.11022
Baseline	-	0.000 ± 0.000	0.000 ± 0.000	0.000 ± 0.000	0.00000

Table 4: Performance (mean±std.) of each approach in terms of Accuracy.

Algorithm	k	Enron	Delicious	$Eurlex_desc$	Wiki
RMLS 25(0) 50(0)	0.380 ± 0.007	$\textbf{0.208} \pm \textbf{0.006}$	$\textbf{0.207} \pm \textbf{0.004}$	0.06162	
	$\textbf{0.456} \pm \textbf{0.013}$	$\textbf{0.208} \pm \textbf{0.003}$	0.196 ± 0.002	0.07457	
PLST 25(0) 50(0)	0.344 ± 0.008	0.107 ± 0.001	0.141 ± 0.002	-	
	0.338 ± 0.008	0.109 ± 0.001	0.163 ± 0.002	-	
FaiE 25(0) 50(0)	0.346 ± 0.009	0.107 ± 0.001	0.142 ± 0.003	-	
	0.338 ± 0.008	0.110 ± 0.001	0.164 ± 0.003	-	
ML CSSP	ML CEED 25(0)	0.321 ± 0.007	0.062 ± 0.008	0.057 ± 0.006	0.00024
ML_CSSP 50(0)	0.338 ± 0.008	0.086 ± 0.001	0.096 ± 0.007	0.00032	
WSABIE 25(0) 50(0)	0.313 ± 0.044	0.141 ± 0.006	0.071 ± 0.001	0.06990	
	0.369 ± 0.020	0.102 ± 0.008	0.027 ± 0.000	0.06282	
LEML 25(0) 50(0)	0.316 ± 0.009	0.179 ± 0.003	0.167 ± 0.004	0.07006	
	0.326 ± 0.006	0.178 ± 0.002	0.174 ± 0.004	0.07381	
Baseline	-	0.000 ± 0.000	0.000 ± 0.000	0.000 ± 0.000	0.00000

Table 5: The training time (seconds) of each approach.

There existing time (see chas) of each approach.				
k	Enron	Delicious	$Eurlex_desc$	Wiki
RMLS 25(0) 50(0)	9.85 ± 1.24	351.32 ± 10.56	1226.50 ± 34.51	9558.50 ± 43.51
	10.90 ± 0.95	575.45 ± 16.40	2436.35 ± 58.84	15173.62 ± 74.74
PLST 25(0) 50(0)	0.39 ± 0.02	6.73 ± 1.38	220.14 ± 10.34	-
	0.41 ± 0.05	7.43 ± 1.56	246.95 ± 11.84	-
FaiE 25(0) 50(0)	1.34 ± 0.11	112.84 ± 15.47	408.18 ± 23.14	-
	1.51 ± 0.21	183.53 ± 21.56	567.92 ± 31.97	-
ML_CSSP 25(0) 50(0)	0.28 ± 0.01	35.95 ± 1.85	330.87 ± 30.51	10693.83 ± 134.04
	0.53 ± 0.03	36.84 ± 2.18	334.89 ± 32.14	22207.16 ± 189.30
WSABIE 25(0) 50(0)	10.75 ± 2.35	477.34 ± 58.15	767.40 ± 81.36	22974.65 ± 203.71
	11.78 ± 3.51	755.44 ± 61.91	1300.11 ± 91.02	41842.08 ± 398.98
LEML 25(0)	55.20 ± 7.15	39.34 ± 4.51	1231.34 ± 18.95	55847.23 ± 481.56
50(0)	55.34 ± 8.01	77.41 ± 7.12	1337.13 ± 21.69	57849.32 ± 523.17
	$\begin{array}{c} 25(0) \\ 50(0) \\ \hline 25(0) \\ \hline 50(0) \\ \hline 25(0) \\ \hline 25(0) \\ \hline 25(0) \\ \hline \end{array}$	$\begin{array}{c cccc} 25(0) & 9.85 \pm 1.24 \\ 50(0) & 10.90 \pm 0.95 \\ 25(0) & 0.39 \pm 0.02 \\ 50(0) & 0.41 \pm 0.05 \\ 25(0) & 1.34 \pm 0.11 \\ 50(0) & 1.51 \pm 0.21 \\ 25(0) & 0.28 \pm 0.01 \\ 50(0) & 0.53 \pm 0.03 \\ 25(0) & 10.75 \pm 2.35 \\ 50(0) & 11.78 \pm 3.51 \\ 25(0) & 55.20 \pm 7.15 \\ \end{array}$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c c c c c c c c c c c c c c c c c c c $

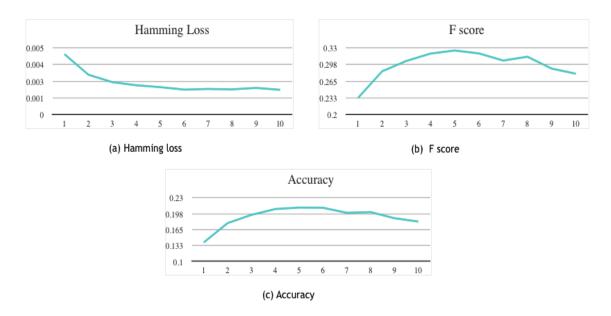


Figure 3: Performance in terms of different evaluation criteria with different sampling coefficient α .

sampling scheme in RMLS will reduce the time cost dramatically, when the number of labels is very large. 2) PLST and FaiE spend little time training on the small datasets (*Enron*, *Delicious*, *Eurlex_desc*). But they run out of the memory and consume too much time on the *Wiki* dataset, since both of them perform a partial SVD on the dense $50k \times 50k$ matrix. 3) ML_CSSP is the only LSDR approach that is applicable on the *Wiki* dataset. But the performance is very poor.

4.3.3 Influence of the Sampling Ratio

To examine the influence of the sampling ratio , i.e., the parameter α , we run RMLS with α varying from 1 to 10 with step size of 1. Due to the page limit, we only report results on the *Eurlex_desc* dataset, whereas experiments on other datasets get similar results. The detail results are shown in thefigure 3

The *Fscore* and *Accuracy* are poor when the sampling ratio is small. As the sampling ratio grows large, these two evaluation criteria go up first and then down. When the sampling ratio is small, too many irrelevant labels are dropped, resulting the poor performance. When the sampling ratio is large, the number of irrelevant labels is much larger than the number of relevant labels, the label imbalance problem results in the poor performance. This implies that the sampling scheme with the proper sampling ratio α can handle the label imbalance problem and improve the performance.

The *Hammingloss* goes down when the sampling ratio grows up. When the sampling ratio is large, we achieve good performance in terms of *Hammingloss* with the serious label imbalance problem. The reason for it may be that *Hammingloss* is not a reasonable evaluation criteria, which has been uncovered in the performance comparison experiments.

5 Conclusions

In multi-label classification, an instance is associated with with a set of labels simultaneously. Recently, the researchers on multi-label classification focused on the multi-label learning with many labels. The existing approaches for multi-label learning with many labels ignore and even compound the label imbalance problem. To address this problem, we propose a novel Representation-based Multi-label Learning with Sampling (RMLS) approach. Our experimentations demonstrate the effectiveness of the proposed approach.

References

[Agrawal et al.2013] Rahul Agrawal, Archit Gupta, Yashoteja Prabhu, and Manik Varma. 2013. Multilabel learning with millions of labels: Recommending advertiser bid phrases for web pages. In *Proceedings of the 22nd international conference on World Wide Web*, pages 13–24. International World Wide Web Conferences Steering Committee.

[Bi and Kwok2013] Wei Bi and James Kwok. 2013.

Efficient multi-label classification with many labels. In *Proceedings of the 30th International Conference on Machine Learning (ICML-13)*, pages 405–413.

- [Charte et al.2013] Francisco Charte, Antonio Rivera, María José del Jesus, and Francisco Herrera. 2013. A first approach to deal with imbalance in multilabel datasets. In *Hybrid Artificial Intelligent Systems*, pages 150–160. Springer.
- [Charte et al.2015] Francisco Charte, Antonio J Rivera, María J del Jesus, and Francisco Herrera. 2015. Addressing imbalance in multilabel classification: Measures and random resampling algorithms. *Neurocomputing*, 163:3–16.
- [Chen and Lin2012] Yao-Nan Chen and Hsuan-Tien Lin. 2012. Feature-aware label space dimension reduction for multi-label classification. In Advances in Neural Information Processing Systems, pages 1529–1537.
- [Dembczynski et al.2013] Krzysztof Dembczynski, Arkadiusz Jachnik, Wojciech Kotlowski, Willem Waegeman, and Eyke Hüllermeier. 2013. Optimizing the f-measure in multi-label classification: Plug-in rule approach versus structured loss minimization. In *Proceedings of the 30th International Conference on Machine Learning*, pages 1130–1138.
- [Duchi et al.2011] John Duchi, Elad Hazan, and Yoram Singer. 2011. Adaptive subgradient methods for online learning and stochastic optimization. *The Journal of Machine Learning Research*, 12:2121–2159.
- [Goldstein et al.2006] Jade Goldstein, Andres Kwasinksi, Paul Kingsbury, Roberta Evans Sabin, and Albert McDowell. 2006. Annotating subsets of the enron email corpus. In *CEAS*.
- [Hsu et al.2009] Daniel Hsu, Sham Kakade, John Langford, and Tong Zhang. 2009. Multi-label prediction via compressed sensing. In *NIPS*, volume 22, pages 772–780.
- [Kong et al.2012] Deguang Kong, Chris Ding, Heng Huang, and Haifeng Zhao. 2012. Multi-label relieff and f-statistic feature selections for image annotation. In *Computer Vision and Pattern Recognition* (CVPR), 2012 IEEE Conference on, pages 2352– 2359. IEEE.
- [Li et al.2014] Li Li, Longkai Zhang, and Houfeng Wang. 2014. Muli-label text categorization with hidden components. In Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP), pages 1816– 1821, Doha, Qatar, October. Association for Computational Linguistics.
- [Lin et al.2014] Zijia Lin, Guiguang Ding, Mingqing Hu, and Jianmin Wang. 2014. Multi-label classification via feature-aware implicit label space encoding. In *Proceedings of the 31st International Conference on Machine Learning (ICML-14)*, pages 325–333.

- [Mencia and Fürnkranz2008] Eneldo Loza Mencia and Johannes Fürnkranz. 2008. Efficient pairwise multilabel classification for large-scale problems in the legal domain. In *Machine Learning and Knowledge Discovery in Databases*, pages 50–65. Springer.
- [Nicolas et al.2013] Ruben Nicolas, Andreu Sancho-Asensio, Elisabet Golobardes, Albert Fornells, and Albert Orriols-Puig. 2013. Multi-label classification based on analog reasoning. *Expert Systems with Applications*, 40(15):5924–5931.
- [Petterson and Caetano2010] James Petterson and Tibério S Caetano. 2010. Reverse multi-label learning. In Advances in Neural Information Processing Systems, pages 1912–1920.
- [Rai et al.2015] Piyush Rai, Changwei Hu, Ricardo Henao, and Lawrence Carin. 2015. Large-scale bayesian multi-label learning via topic-based label embeddings. In *Advances in Neural Information Processing Systems*, pages 3204–3212.
- [Spyromitros-Xioufis2011] Eleftherios Spyromitros-Xioufis. 2011. Dealing with concept drift and class imbalance in multi-label stream classification. Ph.D. thesis, Department of Computer Science, Aristotle University of Thessaloniki.
- [Sun et al.2014] Fuming Sun, Jinhui Tang, Haojie Li, Guo-Jun Qi, and Thomas S Huang. 2014. Multilabel image categorization with sparse factor representation. *Image Processing, IEEE Transactions on*, 23(3):1028–1037.
- [Tahir et al.2012] Muhammad Atif Tahir, Josef Kittler, and Fei Yan. 2012. Inverse random under sampling for class imbalance problem and its application to multi-label classification. *Pattern Recognition*, 45(10):3738–3750.
- [Tai and Lin2012] Farbound Tai and Hsuan-Tien Lin. 2012. Multilabel classification with principal label space transformation. *Neural Computation*, 24(9):2508–2542.
- [Tibshirani1996] Robert Tibshirani. 1996. Regression shrinkage and selection via the lasso. *Journal of the Royal Statistical Society. Series B (Methodological)*, pages 267–288.
- [Vens et al.2008] Celine Vens, Jan Struyf, Leander Schietgat, Sašo Džeroski, and Hendrik Blockeel. 2008. Decision trees for hierarchical multi-label classification. *Machine Learning*, 73(2):185–214.
- [Weston et al.2011] Jason Weston, Samy Bengio, and Nicolas Usunier. 2011. Wsabie: Scaling up to large vocabulary image annotation. In *IJCAI*, volume 11, pages 2764–2770.
- [Yu et al.2014] Hsiang-fu Yu, Prateek Jain, Purushottam Kar, and Inderjit Dhillon. 2014. Large-scale multi-label learning with missing labels. In *Proceedings of the 31st International Conference on Machine Learning (ICML-14)*, pages 593–601.

[Zhang et al.2015] Min-Ling Zhang, Yu-Kun Li, and Xu-Ying Liu. 2015. Towards class-imbalance aware multi-label learning. In *Proceedings of the* 24th International Joint Conference on Artificial Intelligence (IJCAI'15).