A Case for Data Commons Towards Data Science as a Service

Robert L. Grossman Allison Heath Mark Murphy Maria Patterson University of Chicago

> Walt Wells Open Commons Consortium

> > January 1, 2016

Abstract

As the amount of scientific data continues to grow at ever faster rates, the research community is increasingly in need of flexible computational infrastructure that can support the entirety of the data science lifecycle, including long-term data storage, data exploration and discovery services, and compute capabilities to support data analysis and re-analysis, as new data are added and as scientific pipelines are refined. We describe our experience developing data commons– interoperable infrastructure that co-locates data, storage, and compute with common analysis tools– and present several cases studies. Across these case studies, several common requirements emerge, including the need for persistent digital identifier and metadata services, APIs, data portability, pay for compute capabilities, and data peering agreements between data commons. Though many challenges, including sustainability and developing appropriate standards remain, interoperable data commons bring us one step closer to effective Data Science as Service for the scientific research community.

Keywords: data commons, software as services, science as a service, data as a service, cloud computing

1 Introduction

With the amount of available scientific data far larger than the ability of the research community to analyze it, there is a critical need for new algorithms, software applications, software services, and cyber-infrastructure to support data throughout its lifecycle in data science. In this paper, we make a case for the role of data commons in meeting this need. We describe the design and architecture of several data commons that we have developed and operated for the research community in conjunction with the Open Science Data Cloud (OSDC), a multi-petabyte science cloud that the not-for-profit Open Commons Consortium (OCC) has managed and operated since 2009 [1].

One of the distinguishing characteristics of the OSDC is that it interoperates with a data commons containing over 1 PB of public research data through a service-based architecture. This is an example of what is sometimes called "Data as a Service," which play an important role in some Science as as Service frameworks.

There are at least two definitions for *Science as a Service*. The first is analogous to the Software as a Service [2] model in which instead of managing data and software locally using your own storage and computing resources, one uses the storage, computing, and software services offered by a Cloud Service Provider (CSP). With this approach, instead of setting up your own storage and computing infrastructure and installing the required software, a scientist uploads data to a CSP and uses pre-installed software for data analysis. Note that a trained scientist is still required to run the software and analyze the data.

Science as a Service can also refer more generally to a service model that relaxes the requirement of needing a trained scientist to process and analyze the data. With this service model, specific software and analysis tools are available for specific types of scientific data. Data are uploaded to the Science as a Service Provider, processed using the appropriate pipelines, and then made available to the researcher for further analysis if required.

Obviously these two definitions are closely connected in that a scientist can set up the required Science as a Service framework as in the first definition so that less trained technicians can use the service to process their research data as in the second definition. By and large, we focus on the first definition in this paper.

We close this section by discussing Science as a Service more generally and how data commons fit in. There are various Science as a Service frameworks, including variants of the types of clouds formalized by NIST in [2] (Infrastructure as a Service, Platform as a Service, and Software as a Service), as well as some more specialized services that are relevant for data science (data science support services and data commons). These Science as a Service frameworks include the following:

- Data science infrastructure and platform services, in which virtual machines, containers, or platform environments containing commonly used applications, tools, services, and datasets are made available to researchers. The OSDC is an example of this service model [1].
- Data science Software as a Service, in which data are uploaded and processed by one or more pipelines, with the results being downloaded or stored in a cloud. There are general purpose platforms offering data science as a service, such as Agave [3], as well as more specialized services, such as those designed to process genomics data. For example, there are

several commercial companies that enable a researcher to upload genomic sequence data, select a bioinformatics pipeline, and download the processed data.

- Data science support services, including data storage services, data sharing services, data transfer services, data collaboration services, etc. A prominent example of this model is Globus [4].
- Data commons, in which data, data science computing infrastructure, and data science applications and services are co-located. We describe data commons in more detail in Section 2.1 below.

The paper is organized as follows. In Section 2, we introduce data commons. In Section 3, we introduce the Open Science Data Cloud and some of the data commons associated with it. In Section 4, we describe the design and architecture of the OSDC, which includes the services required to set up, manage, and operate data commons. Section 5 contains two case studies of OSDC data commons, and Section 6 contains some challenges related to data commons.

2 Data Commons

2.1 What is a Data Commons?

By a *data commons* we mean cyber-infrastructure that co-locates data, storage, and computing infrastructure with commonly used tools for analyzing and sharing data to create an interoperable resource for the research community.

In the discussion below, we distinguish between several stakeholders that are involved in data commons: 1) the *data commons service provider* (*DCSP*), the entity operating the data commons; 2) the *data contributor* (*DC*), the individual or organization providing the data to the DCSP; and 3) the *data user* (*DU*), the researcher or organization that accesses the data. Note that often there is a fourth stakeholder: the DCSP associated with the researcher accessing the data. In general, there will be an agreement, often called the Data Contributors Agreement (DCA), governing the terms by which the data is managed by the DCSP and the researchers accessing the data, and an agreement, often called the Data Access Agreement (DAA), governing the terms of any researcher that accesses the data.

As we describe in more detail below, we have built several data commons since 2009. Based upon this experience we have identified six main requirements that, if followed, would enable data commons to interoperate with other data commons, with science clouds [1], and with other cyber-infrastructure supporting Science as a Service.

Requirement 1: Permanent Digital IDs. The first requirement is that the data commons must have a digital ID service and that datasets in the data commons must have permanent, persistent digital IDs. Digital IDs are described in more detail in Section 4.2. Associated with digital IDs are i) access controls

specifying who can access the data and ii) metadata specifying additional information about the data (see Requirement 2). Part of this requirement is that data can be accessed from the data commons through an API by specifying its digital ID.

Requirement 2: Permanent Metadata. The second requirement is that there is a metadata service that for each digital ID returns the associated metadata. Since the metadata can be indexed, this provides a basic mechanism for the data to be discoverable.

Requirement 3: API-based Access. The third requirement is that data can be accessed by an application programming interface (API), not just by browsing through a portal. Part of this requirement is that there is a metadata service that can be queried that returns a list of digital IDs that can then be retrieved via the API. For those data commons that contain controlled access data, another component of the requirement is that there is an authentication and authorization service so that users can first be authenticated and the data commons can check whether they are authorized to have access to the data.

Requirement 4: Data Portability. The fourth main requirement is that data be portable in the sense that a dataset that has been contributed to a data commons can be transported to another data commons so that in the future it is hosted by the second data commons. In general, if data access is through digital IDs (versus referencing the physical location of data), then software that references data should not have to be changed when data is re-hosted by a second data commons.

Requirement 5: Data Peering. By data peering, we mean an agreement between two data commons service providers to transfer data *at no cost* so that a researcher at data commons 1 can access data stored at data commons 2. In other words, the two data commons agree to transport research data between them with no access charges, no egress charges, and no ingress charges.

Requirement 6: Pay for Compute. The final requirement co-located with the data commons is computing infrastructure that is available to researchers. Since, in practice, researchers' demand for computing resources is larger than the available computing resources, computing resources must be rationed, either through allocations or by charging for the use of computing resources. Notice that there is an asymmetry in how a data commons treats the storage and computing infrastructure. When data are accepted into a data commons, there is a commitment to store the data and make it available for a certain period of time, often indefinitely. In other words, the rationing decision for initial storage is made when data are accepted. In contrast, computing storage, and the storage required for derived data products, either by providing computing and storage. For simplicity, we refer to this requirement as "pay for computing," even though the model is more complicated than that.

Although very important for many applications, we view other services, such as services providing data provenance [5], data replication [6], and data collaboration [7], as optional additional services, and not as core services.

3 Open Science Data Cloud and OCC Data Commons

3.1 About the Open Science Data Cloud and the OCC

The Open Science Data Cloud (OSDC) is a multi-petabyte science cloud that serves the research community by co-locating a multidisciplinary data commons containing approximately 1 PB of scientific data with cloud-based computing, high performance data transport services, and virtual machine images and shareable snapshots containing common data analysis pipelines and tools.

The OSDC is designed to provide a long term persistent home for scientific data, as well as a platform for data intensive science allowing new types of data intensive algorithms to be developed, tested, and used over large sets of heterogeneous scientific data. Recently, OSDC researchers have logged about 2 million core hours each month, which translates to over \$800,000 worth of cloud computing services if purchased through Amazon's AWS public cloud. This is over 12,000 core hours per user or, a 16 core machine continuously used by each researcher on average.

OSDC researchers used a total of over 18 million core hours in 2015. We currently target operating OSDC computing resources at approximately 85% of capacity and storage resources at 80% of capacity. Given these constraints, we determine how many researchers to support and what size allocations to provide them. Since the OSDC specializes in supporting data intensive research projects, we have chosen to target researchers who need larger scale resources (relative to our total capacity) for data intensive science. In other words, rather than support more researchers with smaller allocations, we support fewer researchers with larger allocations. Table 1 shows the number of times researchers exceeded the indicated number of core hours in a single month during 2015.

The OSDC is developed and operated by the Open Commons Consortium (OCC), which is a 501(c)(3) not-for-profit supporting the scientific community by operating data commons and cloud computing infrastructure to support scientific, environmental, medical, and healthcare related research. OCC Members and Partners include universities (e.g., University of Chicago, Northwestern University, University of Michigan); companies (e.g., Yahoo!, Cisco, Infoblox); U.S. government agencies and national laboratories (e.g., NASA, NOAA); and international partners (e.g., Edinburgh University, University of Amsterdam, AIST in Japan). The OSDC is a joint project with the University of Chicago, which provides the data center used by the OSDC. Much of the support for the OSDC came from the Moore Foundation and from corporate donations.

# core hours during month	# of users
20,000	120
50,000	34
100,000	23
200,000	5

Table 1: Data intensive users supported by the OSDC

The estimated cost of 100,000 core hours on a commercial cloud service provider like AWS is 40,000 per month.

3.2 The OSDC Community

The OSDC has a wide-reaching, multi-campus, multi-institutional, interdisciplinary user base and has supported over 760 research projects since its inception. In November 2015, 186 researchers used the OSDC, out of a total of 470 allocation recipients from 54 universities and research organizations in 14 countries who were active sometime during 2015. The most computational intensive group projects in 2015 included projects around biological sciences and genomics research, analysis of earth science satellite imagery data, analysis of text data in historical and scientific literature, and a computationally intensive project in sociology.

3.3 OCC Data Commons

OSDC Data Commons. We introduced our first data commons in 2009. It currently holds approximately 800 TB of public open access research data, including earth science data, biological data, social science data, and digital humanities data.

Matsu Data Commons. The Open Cloud Consortium has collaborated with NASA since 2009 in Project Matsu. Project Matsu's data commons contains 6 years of EO-1 data with new data added daily, as well as selected datasets from other NASA satellites, including MODIS and the Landsat Global Land Surveys.

The OCC NOAA Data Commons. In April, 2015, NOAA announced 5 data alliance partnerships that would have broad access to NOAA's data and help make these data more accessible to the public. The NOAA Data Alliance Partners are Amazon, Google, IBM, Microsoft, and the OCC. Currently, only a small fraction of the over 20 PB of data that NOAA has available in its archives is available to the public. The NOAA Data Alliance Partners have broader access to the data in the NOAA repositories. The focus of the OCC data alliance is to work with the environmental research community to build an environmental data commons. Currently the OCC NOAA Data Commons contains NEXRAD data. Additional datasets will be added in 2016.

National Cancer Institute's Genomic Data Commons (GDC). Through a contract between NCI and the University of Chicago and in collaboration with the OCC, we have developed a data commons for cancer data called the Genomic Data Commons (GDC). The GDC contains genomic data and the associated clinical data from NCI funded projects. Currently the GDC contains about 2 PB of data, but this is expected to grow rapidly over the next few years. The GDC is in beta testing now (January, 2016) and will be accessible to the public in May, 2016.

Bionimbus Protected Data Cloud. We also operate two private cloud computing platforms that are designed to hold human genomic data and other sensitive biomedical data. These two clouds contain a variety of sensitive controlled access biomedical data that we make available to the research community following the requirements of the relevant data access committees.

Common software stack. The core software stack for the various data commons and clouds described above is all open source. Many of the components are developed by third parties, but some key services described below are developed and maintained by the OCC and other working groups. Although there are some differences between them, we try to keep the software stack as close as possible across the various data commons. In practice, as we develop new versions of the basic software stack, it usually takes a year or so until the changes can percolate throughout our entire infrastructure.

4 Design and Architecture

4.1 OSDC Architecture

The architecture of the OSDC is shown in Figure 1. We are currently transitioning from version 2 of the OSDC software stack [1] to version 3. Both versions of the software stack are based upon OpenStack [8] for Infrastructure as a Service. Version 2 uses GlusterFS [9] for storage, while version 3 uses Ceph [10] for block and object storage.

The OSDC has a portal called the Tukey Portal, which provides a front-end web portal interface for users to access, launch, and manage VMs and storage. The Tukey Portal interfaces with the Tukey Middleware, which provides a secure authentication layer and interface between various software stacks. OSDC uses federated login for authentication so that academic institutions with InCommon, CANARIE, or the UK Federation can use those credentials. We have worked with 145 academic universities and research institutions so far to release the appropriate attributes for authentication. We also support Gmail and Yahoo logins, but only for approved projects, and when other authentication options are not available.

We instrument all of the resources that we operate so that we can meter and collect the data required for accounting and billing for each user. We use Salesforce.com, one of the components of the OSDC that is not open source, to send out invoices. Even when computing resources are allocated and no payment is required, we have found that receipt of these invoices promotes responsible

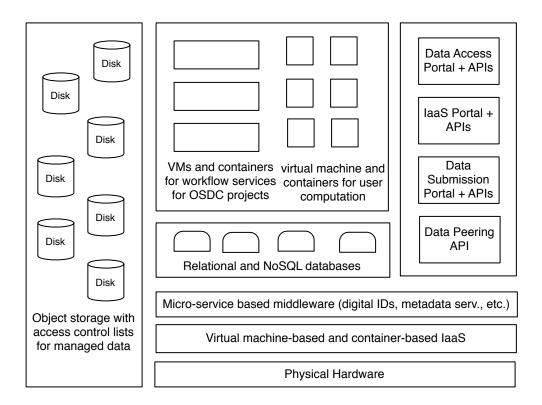


Figure 1: The OSDC architecture

usage of OSDC community resources. We also operate an interactive support ticketing system that tracks user support requests and systems team responses for technical questions. Collecting these data enables us to track usage statistics and to build a comprehensive assessment of how researchers use our services.

While adding to our resources, we have developed an infrastructure automation tool called Yates to simplify bringing up new computing, storage, and networking infrastructure. We also try to automate as much of the security required to operate the OSDC as is practical.

The core OSDC software stack is open source, enabling those interested to set up their own science cloud or data commons. The core software stack consists of third party open source software, such as OpenStack and Ceph, and open source software developed by the OSDC community. The latter is licensed under the open source Apache license. The OSDC does use some proprietary software, such as Salesforce.com to do the accounting and billing, as was mentioned above.

4.2 OCC Digital ID and Metadata Services

In this section, we describe the digital ID service and the associated metadata service used in the data commons. The digital ID service is accessible via an API that generates digital IDs, assigns key-value attributes to DIDs, and returns key-value attributes associated with digital IDs. We have also developed a metadata service that is accessible via an API and can assign and retrieve metadata associated with a digital ID. Users can also edit metadata associated with digital IDs if they have write access to the digital ID. These are described in more detail below. Currently, due to different release schedules, there are some differences in the digital ID and metadata services between several of the data commons that we operate, but over time we plan to converge these services.

Persistent identifier strategies. Although the necessity of assigning digital IDs to data is well recognized [11, 12], there is not yet a widely accepted service for this purpose, especially for large datasets [13]. This is in contrast to the generally accepted use of digital object identifiers (DOI) or handles for referencing digital publications. An alternative to a DOI is an ARK, which is a Uniform Resource Locator (URL) that is a multi-purpose identifier for information objects of any type [14, 15]. In practice, DOIs or ARKs are generally used to assign IDs to datasets, with individual communities sometimes developing their own IDs. DataCite is an international consortium that manages DOIs for datasets and supports services for finding, accessing, and reusing data [16]. There are also services such as EZID that support both DOIs and ARKs [17].

Given the challenges the community is facing coming to a consensus about which digital IDs to use, our approach has been to build an open source digital ID service that can support multiple digital IDs and that can scale to large datasets. This approach also has the advantage that we can deal with issues like "suffix pass-through" [13] and associating availability zones [18] and support multiple access methods with the digital ID service that are helpful with petabyte-scale data archives.

Benefits of digital IDs. From the viewpoint of researchers, the need for digital IDs associated with datasets is well appreciated [19, 20]. Here we discuss some of the reasons that digital IDs are important for a data commons from an operational point of view.

First, with digital IDs, data can be moved from one physical location or storage system within a data commons to another without the necessity of changing any code that references the data. As the amount of data grows, moving data between zones within a data commons or between storage systems becomes more and more common and digital IDs allow this to take place without impacting researchers.

Second, digital IDs are an important component of the data portability requirement. More specifically, datasets can be moved between data commons, and, again, researchers do not need to change their code. In practice, datasets can be migrated over time, with the digital IDs references updated as the migration proceeds. **Signpost digital ID service.** Signpost is the digital ID service for the OSDC. Instead of using a hardcoded URL, the primary way to access managed data via the OSDC is through a digital ID. Signpost is an implementation of this concept via JSON documents.

The Signpost digital ID service integrates a mutable ID that is assigned to the data along with an immutable hash-based ID that is computed from the data. Both IDs are accessible through a REST API interface. With this approach, data contributors can may make updates to the data and retain the same ID, while the data commons service provider can use the hash-based ID to facilitate the management of the data. In order to prevent unauthorized editing of digital IDs, an access control list (ACL) is kept by each digital ID specifying the read/write permissions for different users and groups.

The top layer utilizes *user-defined identifiers*. These are flexible, may be of any format, including Archival Resource Keys (ARKs) and Digital Object Identifiers (DOIs), and provide a layer of human readability. These identifiers map to hashes of the identified data objects. The bottom layer utilizes *hashbased identifiers*. Hash-based identifiers guarantee immutability of the data, allow for identification of duplicated data via hash collisions, and allow for verification upon retrieval. These map to known locations of the identified data.

Below, we show an implementation of the two-layer identifier service. A researcher who has a human-readable identifier, for example, provided by a collaborating researcher or publication or returned by a metadata search service can query Signpost to return the requested data. Alternatively, a researcher who knows the exact hash of a piece of data (e.g., a scientist who is given a data file directly by a collaborator) can also query that way.

```
curl http://<signpost>/alias/ark:/31807/DC0-7b2c1002-e3c4-41ea-8edc-8fcee4ff3f47
{"hashes": { "md5": "1e24480435408b664b756be0822028a3" },
"authority": "noaa-commons",
"metadata": <metadata-record-id>,
"name": "ark:/31807/DC0-7b2c1002-e3c4-41ea-8edc-8fcee4ff3f47",
"release": "public",
"rev": "e1407bdd",
"size": 45893621760,
"urls": [ "https://<osdc>/noaa-nexrad-12/NWS_NEXRAD_NXL2DP_KDVN_201509_01.tar",
"https://<osdc>/noaa-nexrad-12/NWS_NEXRAD_NXL2DP_KDVN_201509_02.tar", ... ] }
```

In the next example, a curl request directly to the hash-based layer of the identifier service returns a list of urls to the data object.

```
curl http://<signpost>/urls/?hash=md5:1e24480435408b664b756be0822028a3&size=45893621760
{ "hashes": { "md5": "1e24480435408b664b756be0822028a3" },
"size": 45893621760,
"urls": [ "https://<osdc>/noaa-nexrad-12/NWS_NEXRAD_NXL2DP_KDVN_201509_01.tar",
    "https://<osdc>/noaa-nexrad-12/NWS_NEXRAD_NXL2DP_KDVN_201509_02.tar", ... ] }
```

In either case, the data can be moved and the urls updated without affecting any code that interfaces with data in the commons using the indexing service. The concept is simple and lightweight enough that it can be easily used in many existing environments.

OSDC metadata service. The OSDC metadata service is called Sightseer. Sightseer allows users to create, modify and access searchable JSON documents containing metadata about digital IDs. The primary data can be accessed using Signpost and the digital ID. At its core, Sightseer provides no restrictions on the JSON documents it can store. However, it has the ability to specify metadata types and associate them with JSON schemas. This helps prevent unexpected errors in metadata with defined schemes. Sightseer has similar abilities as Signpost to provide access control lists to specify users that have write/read access to the specific JSON document.

5 Case Studies

5.1 Matsu

Project Matsu is an OCC data commons that has been operational since 2009. It is a collaboration between NASA and the OCC that is hosted by the University of Chicago, processes the data produced each day by NASA's Earth Observing-1 (EO-1) satellite, and makes a variety of data products available to the research community, including flood maps. The raw data, processed data, and data products are all available through OSDC. Project Matsu uses a framework called the OSDC Wheel to ingest raw data, process and analyze it, and deliver reports with actionable information to the community in near real time [21].

As part of Project Matsu, we host several focused analytic products with value-added data. In Figure 2 we show a screenshot from one of these focused analytic products, the Project Matsu Namibia Flood Dashboard [21]. The Namibia Flood Dashboard was developed as a tool for aggregating and rapidly presenting data and sources of information about ground conditions, rainfall, and other hydrological information to citizens and decision makers in the flood prone areas of water basins in Namibia and the surrounding areas. The tool features a bulletin system producing a short daily written report, a geospatial data visualization display using Google Maps/Earth and OpenStreetMap, methods for retrieving NASA images in a region of interest, and analytics for projecting flood potential using hydrological models. The Namibia Flood Dashboard is an important tool for developing better situational awareness and enabling fast decision making and is a model for the types of focused analytics products made possible by co-locating related datasets with each other and with computational and analytic capabilities.

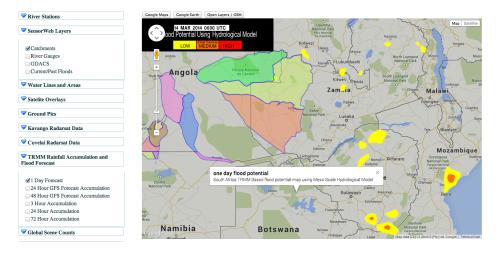


Figure 2: A screenshot of part of the Namibia Flood Dashboard from March 14, 2014 showing water catchments (outlined and colored regions) and a one day flood potential forecast of the area from hydrological models using data from the Tropical Rainfall Measuring Mission (TRMM), a joint space mission between NASA and the Japan Aerospace Exploration Agency (JAXA).

5.2 Bionimbus

The Bionimbus Protected Data Cloud is a petabyte scale private cloud and data commons that has been operational since March 13, 2013. Since going online in 2013, Bionimbus has supported more than 152 allocation recipients from over 35 different projects at 29 different institutions. Each month, Bionimbus provides over 2.5 million core hours to researchers, which at standard Amazon AWS pricing would cost over \$500,000. One of the largest users of Bionimbus is The Cancer Genome Atlas (TCGA) / International Cancer Genome Consortium (ICGC) PanCancer Analysis of Whole Genomes working group (PCAWG). PCAWG is currently undertaking a large scale analysis of most of the world's whole genome cancer data available to the cancer community through the TCGA and ICGA consortia using several clouds, including Bionimbus.

Bionimbus is an NIH Trusted Partner [22] that interoperates with eRA commons to authenticate researchers and with dbGaP to authorize users access to specific controlled access datasets, such as the TCGA dataset.

The design and architecture for Bionimbus is described in [23]. The current architecture uses OpenStack for providing virtualized infrastructure, containers for providing a platform as a service capability, and object-based storage with an AWS compatible interface. See Figure 1.

6 Discussion

6.1 Data Commons and Science as a Service

With the appropriate services, data commons support three different, but related, functions. First, data commons can serve as a data repository or digital library for data that is associated with published research. Second, data commons can store data, along with computational environments in virtual machines or containers, so that computations supporting scientific discoveries can be reproducible. Third, data commons can service as a platform enabling future discoveries, as more data, new algorithms, or new software applications are added to the commons.

Data commons fit well with a Science as a Service model: although data commons allow researchers to download data, host it themselves, and analyze it locally, they also support a Science as a Service model, in which i) current data can be reanalyzed with new methods and new tools and applications using co-located computing infrastructures; ii) new data can be uploaded for an integrated analysis; and iii) hosted data can be made available to other resources and applications using a data-as-a-service model in which data in a data commons is accessed through an API. A data-as-a-service model is enhanced when multiple data commons and science clouds peer so that data may be moved between them at no cost.

6.2 Challenges

Sustainability challenges. Perhaps the biggest challenge for data commons, especially large scale data commons, is developing long-term sustainability models that support operations year after year.

Over the past several years, funding agencies have required data management plans for the dissemination and sharing of research results, but, by and large, have not provided funding to support this requirement. What this means is that there are a lot of data searching for data commons and similar infrastructure, but very little funding available to support this type of infrastructure.

Research Challenges. Data centers are sometimes divided into several "pods" to facilitate their management and build out. For lack of better name, we sometimes use the term *cyberpod* to refer to the scale of a pod at a data center. A pod might contain 50 to several hundred racks of computing infrastructure. Large scale Internet companies, such as Google [24] and Amazon [25], have software that scales to cyberpods, but this proprietary software is not available to the research community. Although there are software applications, such as Hadoop [26], that are available to the research community and scale across multiple racks, there is not a complete open source software stack containing all the services required to build a large scale data commons, including the infrastructure automation and management services, security services, etc. [27] that are required to operate a data commons at scale.

We single out three research challenges related to building data commons at the scale of cyberpods.

Software stacks for cyberpods. The first research challenge is to develop a scalable open source software stack that the provides that infrastructure automation and monitoring, computing, storage, security services and related services required to operate computing services at the scale of a cyberpod [27].

Datapods. The second research challenge is to develop data management services that scale out to cyberpods. We sometimes use the term *datapods* for data management infrastructure at this scale.

AnalyticOps. The third challenge is to develop an integrated development and operations methodology to support large scale analysis and re-analysis of data. You might think of this as the analogy of DevOps for large scale data analysis.

Community challenges. The final category of challenges is the lack of consensus within the research community for a core set of standards that would support data commons. There are not yet widely accepted standards for indexing data, APIs for accessing data, and authentication and authorization protocols for accessing controlled access data.

6.3 Lessons Learned

Data re-analysis is an important capability. For many research projects, large datasets are periodically re-analyzed using new algorithms or new software applications. Data commons are a convenient and cost effective way to provide this service, especially as the size of the data grows and it becomes more expensive to transfer the data.

Important discoveries are made at all computing resource levels. As mentioned, computing resources are rationed in a data commons (either directly through allocations or indirectly through charge backs). Typically, there is a range of requests for computing allocations in a data commons spanning 6 to 7 or more orders of magnitude, ranging from hundreds of core hours to tens of millions of core hours. The challenge is that important discoveries are usually made across the entire range of resource allocations, from the smallest to the largest. This is because when large datasets, especially multiple large datasets, are co-located it is possible to make interesting discoveries even with relatively small amounts of compute.

Higher order services. Over the past several years, much of the research focus has been designing and operating data commons and science clouds that are scalable, contain interesting datasets, and offer computing infrastructure as a service. We expect that as these types of Science as a Service offerings become more common, there will be a variety of more interesting higher order services, including discovery, correlation, and other analysis services that are offered within a commons or cloud and across several that interoperate.

Cross-commons services. Today, web mashups are quite common, but analysis mashups in which data are left in place but continuously analyzed as a distributed service are relatively rare. As data commons and science clouds become more common, these types of services can be more easily built.

Hybrid clouds will become the norm. At the scale of a several dozen racks (a cyberpod), a highly utilized data commons in a well-run data center is less expensive than using today's public clouds [23]. For this reason, hybrid clouds consisting of privately run cyberpods hosting data commons that interoperate with public clouds seem to have certain advantages.

7 Summary and Conclusion

In this paper, we have described a core set of requirements for data commons and some of our experiences developing and operating data commons with this design as part of the Open Science Data Cloud. Properly designed data commons can serve several roles in Science as Service: First, they can serve as an active, accessible, citable repository for research data in general, and research data associated with published research papers in particular. Second, by co-locating computing resources, they can serve as a platform for reproducing research results. Third, they can support future discoveries as more data are added to the commons, as new algorithms are developed and implemented in the commons, and as new software applications and tools are integrated into the commons. Fourth, they can serve as a core component in an interoperable "web of data," as the number of data commons begins to grow, as standards for data commons and their interoperability begin to mature, and as data commons begin to peer.

Acknowledgments

This material is based in part upon work supported by the National Science Foundation under Grant Numbers OISE 1129076, CISE 1127316 and CISE 1251201 and by NIH/Leidos Biomedical Research, Inc. through contracts 14X050 and 13XS021 / HHSN261200800001E.

References

- [1] R. L. Grossman, M. Greenway, A. P. Heath, R. Powell, R. D. Suarez, W. Wells, K. White, M. Atkinson, I. Klampanos, H. L. Alvarez, C. Harvey, and J. J. Mambretti, "The design of a community science cloud: The open science data cloud perspective," in *Proceedings of the 2012 SC Companion: High Performance Computing, Networking Storage and Analysis.* IEEE Computer Society, 2012. Also available via arxiv.org/abs/1512.xxxxx.
- P. Mell and T. Grance, "The NIST definition of cloud computing, special publication 800-145," http://csrc.nist.gov/publications/nistpubs/800-145/SP800-145.pdf, September, 2011.
- R. Dooley, M. Vaughn, D. Stanzione, S. Terry, and E. Skidmore, "Software-as-a-service: The iplant foundation api," in 5th IEEE Workshop on Many-Task Computing on Grids and Supercomputers, Nov. 2012. [Online]. Available: http://datasys.cs.iit.edu/events/MTAGS12/p07.pdf
- [4] I. Foster, "Globus online: Accelerating and democratizing science through cloud-based services," *IEEE Internet Computing*, no. 3, pp. 70–73, 2011.
- [5] Y. L. Simmhan, B. Plale, and D. Gannon, "A survey of data provenance in e-science," ACM Sigmod Record, vol. 34, no. 3, pp. 31–36, 2005.
- [6] A. Chervenak, R. Schuler, C. Kesselman, S. Koranda, and B. Moe, "Wide area data replication for scientific collaborations," *International journal of high performance computing and networking*, vol. 5, no. 3, pp. 124–134, 2008.
- [7] J. Alameda, M. Christie, G. Fox, J. Futrelle, D. Gannon, M. Hategan, G. Kandaswamy, G. von Laszewski, M. A. Nacar, M. Pierce *et al.*, "The open grid computing environments collaboration: portlets and services for science gateways," *Concurrency and Computation: Practice and Experience*, vol. 19, no. 6, pp. 921–942, 2007.
- [8] K. Pepple, *Deploying openstack*. O'Reilly Media, Inc., 2011.
- [9] A. Davies and A. Orsaria, "Scale out with glusterfs," *Linux Journal*, vol. 2013, no. 235, p. 1, 2013.
- [10] S. A. Weil, S. A. Brandt, E. L. Miller, D. D. Long, and C. Maltzahn, "Ceph: A scalable, high-performance distributed file system," in *Proceedings of the* 7th symposium on Operating systems design and implementation. USENIX Association, 2006, pp. 307–320.
- [11] M. S. Mayernik, "Data citation initiatives and issues," Bulletin of the American Society for Information Science and Technology, vol. 38, no. 5, pp. 23–28, 2012.

- [12] R. E. Duerr, R. R. Downs, C. Tilmes, B. Barkstrom, W. C. Lenhardt, J. Glassy, L. E. Bermudez, and P. Slaughter, "On the utility of identification schemes for digital earth science data: an assessment and recommendations," *Earth Science Informatics*, vol. 4, no. 3, pp. 139–160, 2011.
- [13] C. Lagoze, L. Vilhuber, J. Williams, B. Perry, and W. C. Block, "Ced 2 ar: The comprehensive extensible data documentation and access repository," in *Digital Libraries (JCDL), 2014 IEEE/ACM Joint Conference on*. IEEE, 2014, pp. 267–276.
- [14] J. Kunze, "Towards electronic persistence using ark identifiers," in Proceedings of the 3rd ECDL Workshop on Web Archives, 2003.
- [15] J. Kunze and R. Rodgers, "The ARK identifier scheme," www.ietf.org/internet-drafts/draft-kunze-ark-15.txt.
- [16] T. J. Pollard and J. M. Wilkinson, "Making datasets visible and accessible: Datacites first summer meeting," Ariadne, July, 2010.
- [17] J. Starr, P. Willett, L. Federer, C. Horning, and M. L. Bergstrom, "A collaborative framework for data management services: The experience of the university of california," *Journal of eScience Librarianship*, vol. 1, no. 2, p. 7, 2012.
- [18] J. Varia, "Architecting for the cloud: Best practices," Amazon Web Services, 2010.
- [19] A. Ball and M. Duke, How to cite datasets and link to publications. Digital Curation Centre, 2011.
- [20] T. Green, "We need publishing standards for datasets and data tables," *Learned publishing*, vol. 22, no. 4, pp. 325–327, 2009.
- [21] D. Mandl, S. Frye, P. Cappelaere, M. Handy, F. Policelli, M. Katjizeu, G. Van Langenhove, G. Aube, J. Saulnier, R. Sohlberg *et al.*, "Use of the earth observing one (eo-1) satellite for the namibia sensorweb flood early warning pilot," *Selected Topics in Applied Earth Observations and Remote Sensing, IEEE Journal of*, vol. 6, no. 2, pp. 298–308, 2013.
- [22] NIH, "Genomic Data Sharing (GDS)," Retrieved from https://gds.nih.gov on December 10, 2015.
- [23] A. P. Heath, M. Greenway, R. Powell, J. Spring, R. Suarez, D. Hanley, C. Bandlamudi, M. E. McNerney, K. P. White, and R. L. Grossman, "Bionimbus: a cloud for managing, analyzing and sharing large genomics datasets," *Journal of the American Medical Informatics Association*, vol. 21, no. 6, pp. 969–975, 2014.
- [24] J. Dean and S. Ghemawat, "Mapreduce: a flexible data processing tool," Communications of the ACM, vol. 53, no. 1, pp. 72–77, 2010.

- [25] G. DeCandia, D. Hastorun, M. Jampani, G. Kakulapati, A. Lakshman, A. Pilchin, S. Sivasubramanian, P. Vosshall, and W. Vogels, "Dynamo: amazon's highly available key-value store," in ACM SIGOPS Operating Systems Review, vol. 41, no. 6. ACM, 2007, pp. 205–220.
- [26] T. White, *Hadoop: The definitive guide*. O'Reilly Media, Inc., 2012.
- [27] L. A. Barroso, J. Clidaras, and U. Hölzle, "The datacenter as a computer: An introduction to the design of warehouse-scale machines," *Synthesis lectures on computer architecture*, vol. 8, no. 3, pp. 1–154, 2013.