

Asynchronous Stochastic Gradient Descent with Variance Reduction for Non-Convex Optimization

Zhouyuan Huo
zhouyuan.huo@mavs.uta.edu

Heng Huang
heng@uta.edu

February 8, 2022

Abstract

We provide the first theoretical analysis on the convergence rate of asynchronous stochastic gradient descent with variance reduction (AsySVRG) for non-convex optimization. Asynchronous stochastic gradient descent (AsySGD) has been broadly used in solving neural network and it is proved to converge with $O(1/\sqrt{T})$. Recent studies have shown that asynchronous SGD method with variance reduction technique converges with a linear convergence rate on convex problem. However, there is no work to analyze asynchronous SGD with variance reduction technique on non-convex problem. In this paper, we consider two asynchronous parallel implementations of SVRG: one is on distributed-memory architecture and the other is on shared-memory architecture. We prove that both methods can converge with a rate of $O(1/T)$, and a linear speedup is achievable when we increase the number of workers. Experimental results on neural network with real data (MNIST and CIFAR-10) also demonstrate our statements.

1 Introduction

With the boom of data, training machine learning models with large datasets is a critical problem. Researchers extend batch gradient descent (GD) method to stochastic gradient descent (SGD) method or mini-batch gradient descent method to relieve the complexity of computation in each iteration and reduce the total time complexity of optimization [4]. However, when data is very large, serial algorithm is time-consuming. Asynchronous parallelism has been successfully applied to speed up many state-of-the-art optimization algorithms [18, 16, 15, 22] because there is no need of synchronization between workers. Two different types of parallelism have been widely researched, one is distributed-memory parallelism on multiple machines [2, 15, 22, 5, 23, 9, 8] and the other one is shared-memory parallelism on a multi-core machine [18, 24, 12, 7]. Deep learning is a typical case where asynchronous SGD has gained great success [13, 5, 15, 17]. Deep neural network always has large set of parameters and trains with large datasets.

Due to efficiency, SGD method has been widely used to solve different kinds of machine learning models, both convex and non-convex. However, because we use stochastic gradient to approximate full gradient, a decreasing learning rate has to be applied to guarantee convergence. Thus, SGD leads to a slow convergence rate $O(1/T)$ on strongly convex smooth problem and $O(1/\sqrt{T})$ on non-convex smooth problem. Recently, variance reduced SGD algorithms [21, 10, 6] have gained many attentions to solve machine learning problem. These methods can reduce the variance of stochastic gradient during optimization and are proved to have linear convergence rate on strongly convex smooth problem. In [3, 19], the stochastic variance reduced gradient (SVRG) method is analyzed on non-convex smooth problem, and a faster sublinear convergence rate $O(1/T)$ is proved to be achievable.

Although a faster convergence rate can be achieved by using variance reduction technique, sequential method on a single machine may still be not enough to solve large-scale problem efficiently. Recently,

asynchronous SVRG method has been implemented and studied on both distributed-memory architecture [23] and shared-memory architecture [24]. It is proved that asynchronous SVRG method has linear convergence rate on strongly convex smooth problem. However, there is no theoretical analysis of asynchronous SVRG on non-convex problem yet.

In this paper, we focus on asynchronous SVRG method for non-convex optimization. Two different algorithms and analysis are proposed in this paper on two different distributed architectures, one is shared-memory architecture and the other is distributed-memory architecture. The key difference between these two categories lies on that distributed-memory architecture can ensure the atomicity of reading and writing the whole vector of x , while the shared-memory architecture can usually just ensure atomic reading and writing on a single coordinate of x [15]. We implement asynchronous SVRG on two different architectures and analyze their convergence rate. We prove that asynchronous SVRG can get an ergodic convergence rate $O(1/T)$ on both two different architectures. Besides, we also prove that a linear speedup is achievable when we increase the number of workers.

We list our main contributions as follows:

- We extend asynchronous shared-memory SVRG method to non-convex smooth problem. Our asynchronous SVRG on shared-memory architecture has faster convergence rate than ASYSG-INCON in [15]. We prove that asynchronous SVRG has a convergence rate of $O(1/T)$ for non-convex optimization.
- We extend asynchronous distributed-memory SVRG method to non-convex smooth problem. Our asynchronous SVRG on distributed-memory architecture has faster convergence rate than ASYSG-CON in [15]. We prove that asynchronous SVRG has a convergence rate of $O(1/T)$ for non-convex optimization.

2 Notation

In this paper, we consider the following non-convex finite-sum problem:

$$\min_{x \in \mathbb{R}^d} f(x) = \frac{1}{n} \sum_{i=1}^n f_i(x), \quad (1)$$

where $f(x)$ and $f_i(x)$ are just Lipschitz smooth.

Following [15, 19], in non-convex optimization, we use the weighted average of the ℓ_2 norm of all gradients $\|\nabla f(x)\|^2$ as metric to analyze its convergence property. For further analysis, throughout this paper, we make the following assumptions for problem (1). All of them are very common assumptions in the theoretical analysis of stochastic gradient descent method.

Assumption 1 *We assume that following conditions hold,*

- **Independence:** *All random samples i are selected independently to each other.*
- **Unbiased Gradient:** *The stochastic gradient $\nabla f_i(x)$ is unbiased,*

$$\mathbb{E}[\nabla f_i(x)] = \nabla f(x) \quad (2)$$

- **Lipschitz Gradient:** *We say $f(x)$ is L -smooth if there is a constant L such that*

$$\|\nabla f(x) - \nabla f(y)\| \leq L\|x - y\| \quad (3)$$

Throughout, we also assume that the function $f_i(x)$ is L -smooth, so that $\|\nabla f_i(x) - \nabla f_i(y)\| \leq L\|x - y\|$

- **Bounded Delay:** Time delay variable τ is upper bounded, namely $\max \tau \leq \Delta$. In practice, Δ is related with the number of workers.

3 Asynchronous Stochastic Gradient Descent with Variance Reduction for Shared-memory Architecture

In this section, we propose asynchronous SVRG method for shared-memory architecture, and prove that it converges with rate $O(1/T)$. In [19, 3], it is proved that SVRG has a convergence rate of $O(1/T)$ on non-convex problem. In this section, we follow the convergence analysis in [19], and extends it to asynchronous convergence analysis on shared-memory architecture.

3.1 Algorithm Description

Following the setting in [15], we define one iteration as a modification on any single component of x in the shared memory. We use x_t^{s+1} to denote the value of parameter x in the shared-memory after $(ms + t)$ iterations, and Equation (4) represents the update rule of parameter x in iteration t ,

$$(x_{t+1}^{s+1})_{k_t} = (x_t^{s+1})_{k_t} - \eta(v_t^{s+1})_{k_t}, \quad (4)$$

where $k_t \in \{1, \dots, d\}$ is the index of component in x , and learning rate η is constant. v_t^{s+1} is defined as follows,

$$v_t^{s+1} = \frac{1}{|I_t|} \sum_{i_t \in I_t} \left(\nabla f_{i_t}(\hat{x}_{t,i_t}^{s+1}) - \nabla f_{i_t}(\tilde{x}^s) + \nabla f(\tilde{x}^s) \right) \quad (5)$$

where \tilde{x}^s denotes a snapshot of x after every m iterations. \hat{x}_{t,i_t}^{s+1} denotes the parameter in a worker used to compute gradient with sample i_t , i_t denotes the index of a sample, and I_t is index set of mini-batch samples. The definition of \hat{x}_{t,i_t}^{s+1} follows the analysis in [15], where \hat{x}_{t,i_t}^{s+1} is assumed to be some earlier state of x in the shared memory.

$$\hat{x}_{t,i_t}^{s+1} = x_t^{s+1} - \sum_{j \in J(t)} (x_{j+1}^{s+1} - x_j^{s+1}) \quad (6)$$

where $J(t) \in \{t-1, \dots, t-\Delta\}$ is a subset of index numbers in previous iterations, Δ is the upper bound of time delay. In Algorithm 1, we summarize the asynchronous SVRG on shared-memory architecture.

3.2 Convergence Analysis

Corollary 1 For the definition of the variance reduced gradient v_t^{s+1} in Equation (5), and as per [20] we define,

$$u_t^{s+1} = \frac{1}{|I_t|} \sum_{i_t \in I_t} \left(\nabla f_{i_t}(x_t^{s+1}) - \nabla f_{i_t}(\tilde{x}^s) + \nabla f(\tilde{x}^s) \right) \quad (7)$$

We have the following inequality,

$$\sum_{t=0}^{m-1} \mathbb{E} [\|v_t^{s+1}\|^2] \leq \frac{2d}{d - 2L^2\Delta^2\eta^2} \sum_{t=0}^{m-1} \mathbb{E} [\|u_t^{s+1}\|^2] \quad (8)$$

Algorithm 1 Shared-AsySVRG

Initialize $x^0 \in \mathbb{R}^d$.
for $s = 0, 1, 2, \dots, S - 1$ **do**
 $\tilde{x}^s \leftarrow x^s$;
 Compute full gradient $\nabla f(\tilde{x}^s) \leftarrow \frac{1}{n} \sum_{i=1}^n \nabla f_i(\tilde{x}^s)$;
 Parallel Computation on Multiple Threads
 for $t = 0, 1, 2, \dots, m - 1$ **do**
 Randomly select mini-batch I_t from $\{1, \dots, n\}$;
 Compute the gradient: $v_t^{s+1} \leftarrow \frac{1}{|I_t|} \sum_{i_t \in I_t} \left(\nabla f_{i_t}(\hat{x}_{t,i_t}^{s+1}) - \nabla f_{i_t}(\tilde{x}^s) + \nabla f(\tilde{x}^s) \right)$
 Randomly select k_t from $\{1, \dots, d\}$
 Update $(x_{t+1}^{s+1})_{k_t} \leftarrow (x_t^{s+1})_{k_t} - \eta(v_t^{s+1})_{k_t}$
 end for
 $x^{s+1} \leftarrow x_m^{s+1}$
end for

where $\mathbb{E} [\|u_t^{s+1}\|^2]$ is upper bounded in [20].

$$\mathbb{E} [\|u_t^{s+1}\|^2] \leq 2\mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] + \frac{2L^2}{b} \mathbb{E} [\|x_t^{s+1} - \tilde{x}^s\|^2] \quad (9)$$

Then, we follow the convergence proof of SVRG for non-convex optimization in [19], and extends it to asynchronous case.

Theorem 1 Let $c_m = 0$, learning rate $\eta > 0$ is constant, $\beta_t = \beta > 0$, b denotes the size of mini-batch. We define:

$$c_t = c_{t+1} \left(1 + \frac{\eta\beta_t}{d} + \frac{4L^2\eta^2}{(d - 2L^2\Delta^2\eta^2)b} \right) + \frac{4L^2}{(d - 2L^2\Delta^2\eta^2)b} \left(\frac{L^2\Delta^2\eta^3}{2d} + \frac{\eta^2L}{2} \right) \quad (10)$$

$$\Gamma_t = \frac{\eta}{2d} - \frac{4}{d - 2L^2\Delta^2\eta^2} \left(\frac{L^2\Delta^2\eta^3}{2d} + \frac{\eta^2L}{2} + c_{t+1}\eta^2 \right) \quad (11)$$

such that $\Gamma_t > 0$ for $0 \leq t \leq m - 1$. Define $\gamma = \min_t \Gamma_t$, x^* is the optimal solution. Then, we have the following ergodic convergence rate for iteration T ,

$$\frac{1}{T} \sum_{s=0}^{S-1} \sum_{t=0}^{m-1} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] \leq \frac{\mathbb{E} [f(x^0) - f(x^*)]}{T\gamma} \quad (12)$$

Theorem 2 Let $\eta = \frac{u_0b}{Ln^\alpha}$, where $0 < u_0 < 1$ and $0 < \alpha \leq 1$, $\beta = 2L$, $m = \lfloor \frac{dn^\alpha}{6u_0b} \rfloor$ and T is total iteration. If time delay Δ is upper bounded by

$$\Delta^2 < \min \left\{ \frac{d}{2u_0b}, \frac{3d - 28u_0bd}{28u_0^2b^2} \right\} \quad (13)$$

Then there exists universal constant u_0, σ , such that it holds that $\gamma \geq \frac{\sigma b}{dLn^\alpha}$ in Theorem 1 and

$$\frac{1}{T} \sum_{s=0}^{S-1} \sum_{t=0}^{m-1} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] \leq \frac{dLn^\alpha \mathbb{E} [f(x^0) - f(x^*)]}{bT\sigma} \quad (14)$$

Since the convergence rate does not depend on the delay parameter Δ , the negative effect of using old values of x for stochastic gradient evaluation vanishes asymptotically. Thus, linear speedup is achievable if Δ^2 is upper bounded.

4 Asynchronous Stochastic Gradient Descent with Variance Reduction for Distributed-memory Architecture

In this section, we propose asynchronous SVRG algorithm for distributed-memory architecture, and prove that it converges with rate $O(1/T)$.

4.1 Algorithm Description

In each iteration, parameter x is updated through the following update rule,

$$x_{t+1}^{s+1} = x_t^{s+1} - \eta v_t^{s+1} \quad (15)$$

where learning rate η is constant, v_t^{s+1} represents the variance reduced gradient,

$$v_t^{s+1} = \frac{1}{|I_t|} \sum_{i_t \in I_t} (\nabla f_{i_t}(x_{t-\tau_i}^{s+1}) - \nabla f_{i_t}(\tilde{x}^s) + \nabla f(\tilde{x}^s)) \quad (16)$$

where \tilde{x}^s means a snapshot of x after every m iterations, and $x_{t-\tau_i}^{s+1}$ denotes the current parameter used to compute gradient in a worker. i_t denotes the index of a sample, τ_i denotes time delay for each sample i , and mini-batch size is $|I_t|$. We summarize the asynchronous SVRG on distributed-memory architecture in the Algorithm 2 and Algorithm 3, Algorithm 2 shows operations in server node, and Algorithm 3 shows operations in worker node.

Algorithm 2 Distributed-AsySVRG Server Node

```

Initialize  $x^0 \in \mathbb{R}^d$ .
for  $s = 0, 1, 2, \dots, S - 1$  do
     $\tilde{x}^s \leftarrow x^s$ ;
    Broadcast  $\tilde{x}^s$  to all workers.
    Receive gradient from all workers and compute full gradient  $\nabla f(\tilde{x}^s) \leftarrow \frac{1}{n} \sum_{i=1}^n \nabla f_i(\tilde{x}^s)$ ;
    for  $t = 0, 1, 2, \dots, m - 1$  do
        Receive gradients  $\frac{1}{|I_t|} \sum_{i_t \in I_t} \nabla f_{i_t}(x_{t-\tau_i}^{s+1})$  and  $\frac{1}{|I_t|} \sum_{i_t \in I_t} \nabla f_{i_t}(\tilde{x}^s)$  from a specific worker.
        Compute gradient:  $v_t^{s+1} \leftarrow \frac{1}{|I_t|} \sum_{i_t \in I_t} (\nabla f_{i_t}(x_{t-\tau_i}^{s+1}) - \nabla f_{i_t}(\tilde{x}^s) + \nabla f(\tilde{x}^s))$ 
        Update  $x_{t+1}^{s+1} \leftarrow x_t^{s+1} - \eta v_t^{s+1}$ 
    end for
     $x^{s+1} \leftarrow x_m^s$ 
end for

```

Algorithm 3 Distributed-AsySVRG Worker Node

```

Receive parameter  $x_{t-\tau_i}^{s+1}$  from server.
Compute gradient  $\frac{1}{|I_t|} \sum_{i_t \in I_t} \nabla f_{i_t}(x_{t-\tau_i}^{s+1})$  and send it to server.
Compute gradient  $\frac{1}{|I_t|} \sum_{i_t \in I_t} \nabla f_{i_t}(\tilde{x}^s)$  and send it to server.

```

4.2 Convergence Analysis

Our idea of convergence analysis and techniques come from [19], and we use it to analyze the convergence rate of distributed algorithm.

Theorem 3 *Let $c_m = 0$, learning rate $\eta > 0$ is constant, $\beta_t = \beta > 0$, b denotes the size of mini-batch. We define*

$$c_t = c_{t+1} \left(1 + \eta\beta_t + \frac{4L^2\eta^2}{(1 - 2L^2\Delta^2\eta^2)b} \right) + \frac{4L^2}{(1 - 2L^2\Delta^2\eta^2)b} \left(\frac{L^2\Delta^2\eta^3}{2} + \frac{\eta^2L}{2} \right) \quad (17)$$

$$\Gamma_t = \frac{\eta}{2} - \frac{4}{(1 - 2L^2\Delta^2\eta^2)} \left(\frac{L^2\Delta^2\eta^3}{2} + \frac{\eta^2L}{2} + c_{t+1}\eta^2 \right) \quad (18)$$

such that $\Gamma_t > 0$ for $0 \leq t \leq m - 1$. Define $\gamma = \min_t \Gamma_t$, x^* is the optimal solution. Then, we have the following ergodic convergence rate for iteration T :

$$\frac{1}{T} \sum_{s=0}^{S-1} \sum_{t=0}^{m-1} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] \leq \frac{\mathbb{E} [f(x^0) - f(x^*)]}{T\gamma} \quad (19)$$

Theorem 4 *Suppose $f \in \mathcal{F}$. Let $\eta_t = \eta = \frac{u_0 b}{Ln^\alpha}$, where $0 < u_0 < 1$ and $0 < \alpha \leq 1$, $\beta = 2L$, $m = \lfloor \frac{n^\alpha}{6u_0b} \rfloor$ and T is total iteration. If the time delay Δ is upper bounded by*

$$\Delta^2 < \min \left\{ \frac{1}{2u_0b}, \frac{3 - 28u_0b}{28u_0^2b^2} \right\} \quad (20)$$

then there exists universal constant u_0 , σ , such that it holds that: $\gamma \geq \frac{\sigma b}{Ln^\alpha}$ in Theorem 3 and

$$\frac{1}{T} \sum_{s=0}^{S-1} \sum_{t=0}^{m-1} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] \leq \frac{Ln^\alpha \mathbb{E} [f(x^0) - f(x^*)]}{bT\sigma} \quad (21)$$

Because the convergence rate has nothing to do with Δ , linear speedup is achievable.

5 Experiments

In this section, we perform experiments on distributed-memory architecture and shared-memory architecture respectively. One of the main purpose of our experiments is to validate the faster convergence rate of asynchronous SVRG method, and the other purpose is to demonstrate its linear speedup property. The speedup we consider in this paper is running time speedup when they reach similar performance, e.g. training loss function value. Given T workers, running time speedup is defined as,

$$\text{Running time speedup of } T \text{ workers} = \frac{\text{Running time for the serial computation}}{\text{Running time of using } T \text{ workers}} \quad (22)$$

5.1 Shared-memory Architecture

We conduct experiment on a machine which has 2 sockets, and each socket has 18 cores. OpenMP library¹ is used to handle shared-memory parallelism, We consider the multi-class problem on MNIST dataset [14], and use 10,000 training samples and 2,000 testing samples in the experiment. Each image sample is a vector of 784 pixels. We construct a toy three-layer neural network ($784 \times 100 \times 10$), where ReLU activation function is used in the hidden layer and there are 10 classes in MNIST dataset. We train this neural network with softmax loss function, and ℓ_2 regularization with weight $C = 10^{-3}$. We set mini-batch size $|I_t| = 10$, and inner iteration length $m = 1,000$. Updating only one component in x in each iteration is too time consuming, therefore we randomly select and update 1,000 components in each iteration.

We compare following three methods in the experiment:

- SGD: We implement stochastic gradient descent (SGD) algorithm and train with the best tuned learning rate. In our experiment, we use polynomial learning rate $\eta = \frac{\alpha}{(1+s)^\beta}$, where α denotes initial learning rate and we tune it from $\{1e^{-2}, 5e^{-2}, 1e^{-3}, 5e^{-3}, 1e^{-4}, 5e^{-4}, 1e^{-5}, 5e^{-5}\}$, β is a variable in $\{0, 0.1, \dots, 1\}$ and s denotes the epoch number.
- SVRG: We also implement stochastic gradient descent with variance reduction (SVRG) method and train with the best tuned constant learning rate α .
- SGD-SVRG: SVRG method is sensitive to initial point, and we apply SVRG on a pre-trained model using SGD. In the experiment, we use the pre-trained model after 10 iterations of SGD method.

We test three compared methods on MNIST dataset, and each method trained with best tuned learning rate. Figure 1 shows the convergence rate of each method. We compare three criterion in this experiment, loss function value on training dataset, training error rate, and testing error rate. Figure 1a shows the curves of loss function on training dataset, it is clear that SGD method converges faster than SVRG method in the first 20 iterations, and after that, SVRG method outperforms SGD. SGD_SVRG method initializes with a pre-trained model, it has the best convergence rate. We are able to draw the same conclusion from Figure 1b and Figure 1c.

We also evaluate SVRG method with different number of threads, and Figure 2 presents the result of our experiment. In Figure 2a, we plot curves for each method when they get similar training loss value. As we can see, the more threads we use in the computation, the less time we need to achieve a similar performance. This phenomenon is reasonable, because iterations in a loop can be divided into multiple parts, and each thread handles one subset independently. The ideal result of parallel computation is linear speedup, namely if we use K threads, its working time should be $\frac{1}{K}$ of the time when we just use a single thread. Figure 2c shows the ideal speedup and actual speedup in our experiment. We can find out that a almost linear speedup is achievable when we increase thread numbers. When the number of threads exceeds a threshold, performance tends to degrade.

5.2 Distributed-memory Architecture

We conduct distributed-memory architecture experiment on Amazon AWS platform², and each node is a t2.micro instance with one CPU. Each server and worker takes a single node. The point to point communication between server and workers are handled by MPICH library³. CIFAR-10 dataset [11] has 10 classes of color image $32 \times 32 \times 3$. We use 20000 samples as training data and 4000 samples as testing data. We use a pre-trained CNN model in TensorFlow tutorial [1], and extract features from second fully connected

¹<https://openmp.org>

²<https://aws.amazon.com/>

³<http://www.mpich.org/>

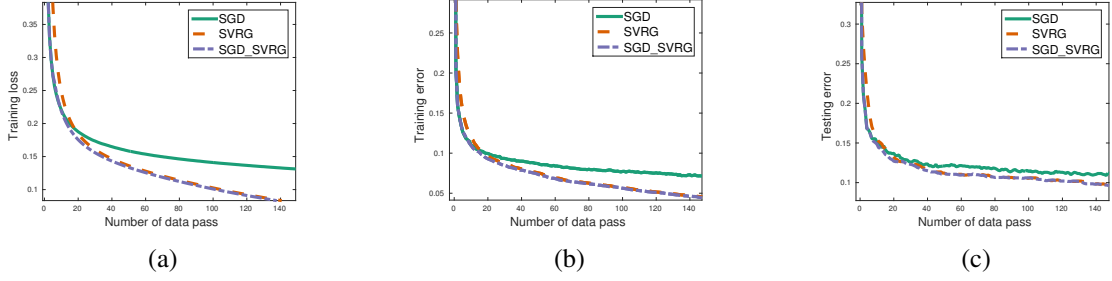


Figure 1: Comparison of three methods (SGD, SVRG, SGD_SVRG) on MNIST dataset. Figure 1a shows the convergence of loss function value on training dataset. Figure 1a shows the convergence of training error rate and Figure 1c shows the convergence of test error rate.

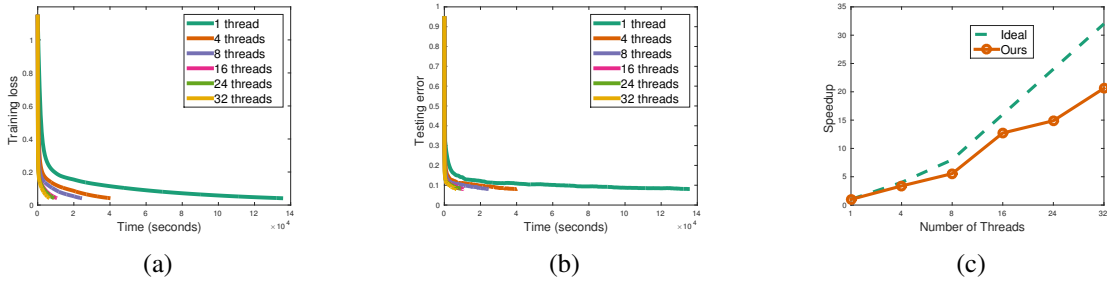


Figure 2: Asynchronous stochastic gradient descent method with variance reduction runs on a machine using different number of threads from 1 to 32. The curves in Figure 2a shows the convergence of training loss value with respect to time. The curves in Figure 2b shows the convergence of error rate on testing data. Figure 2c represents the running time speedup when we use different workers, where the dashed line represents ideal linear speedup.

layer. Thus, each sample is a vector of size 384. We construct a three-layer fully connected neural network ($384 \times 50 \times 10$). We train this model with softmax loss function, and ℓ_2 regularization with weight $C = 1e^{-4}$. In this experiment, mini-batch size $|I_t| = 10$, and the inner loop length $m = 2,000$. Similar to the compared methods in shared-memory architecture, we implement SGD method with polynomial learning rate, SVRG with constant learning rate. SGD_SVRG method is initialized with parameters learned after 1 epoch of SGD method.

At first, we train our model on CIFAR-10 dataset with three compared methods, and each method is with a best tuned learning rate. Performances of all three methods are presented in Figure 3. In Figure 3a, the curves show that SGD is fast in the first few iterations, and then, SVRG-based method will outperform it due to learning rate issue. As mentioned in [19], SVRG is more sensitive than SGD to the initial point, so using a pre-trained model is really helpful. It is obvious that SGD_SVRG has better convergence rate than SVRG method. We can also draw the same conclusion from training error curves with respect to data passes in Figure 3b. Figure 3c represents that the test error performances of three compared methods are comparable.

We also test SVRG method with different number of workers, and Figure 4 illustrates the results of our experiment. It is easy to draw a conclusion that when the number of workers increases, we can get a near linear speedup, and when the number gets larger, the speedup tends to be worse.

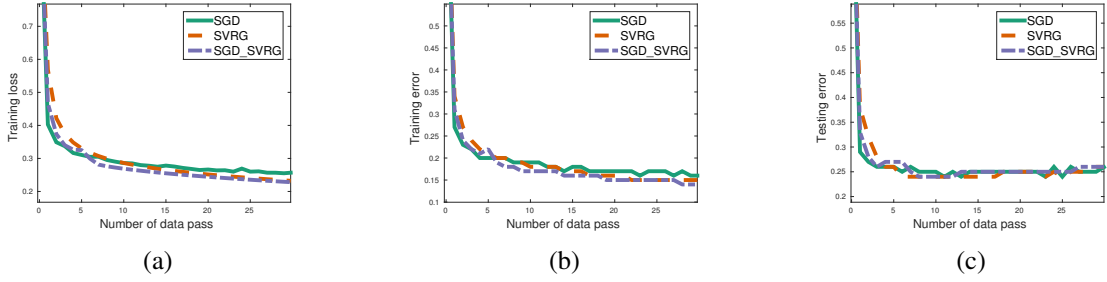


Figure 3: Comparison of three methods (SGD, SVRG, SGD_SVRG) on CIFAR-10 dataset. Figure 3a shows loss function value on training dataset. Figure 3a shows the training error and Figure 3c shows the test error.

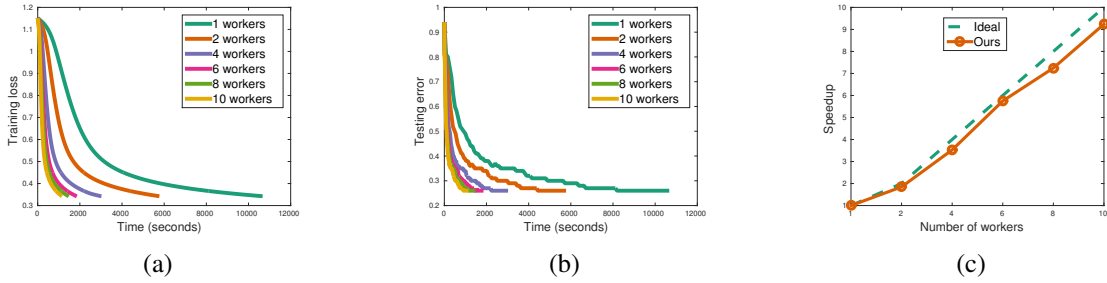


Figure 4: Asynchronous stochastic gradient descent method with variance reduction runs on multiple machines from 1 to 10. The curves in Figure 4a shows the convergence of training loss value with respect to time. The curves in Figure 4b shows the convergence of error rate on testing data. Figure 4c represents the running time speedup when using different workers, where the dashed line denotes ideal linear speedup.

6 Conclusion

In this paper, we propose and analyze two different asynchronous stochastic gradient descent with variance reduction for non-convex optimization on two different distributed categories, one is shared-memory architecture and the other one is distributed-memory architecture. We analyze their convergence rate and prove that both of them can get an ergodic convergence rate $O(1/T)$. Linear speedup is achievable if we increase the number of workers. Experiment results on real dataset also demonstrate our statements.

References

- [1] Martin Abadi, Ashish Agarwal, Paul Barham, Eugene Brevdo, Zhifeng Chen, Craig Citro, Greg S Corrado, Andy Davis, Jeffrey Dean, Matthieu Devin, et al. Tensorflow: Large-scale machine learning on heterogeneous distributed systems. *arXiv preprint arXiv:1603.04467*, 2016.
- [2] Alekh Agarwal and John C Duchi. Distributed delayed stochastic optimization. In *Advances in Neural Information Processing Systems*, pages 873–881, 2011.
- [3] Elad Allen-Zhu, Zeyuan; Hazan. Variance reduction for faster non-convex optimization. *arXiv preprint arXiv:1603.05643*, 2016.
- [4] Léon Bottou. Large-scale machine learning with stochastic gradient descent. In *Proceedings of COMPSTAT'2010*, pages 177–186. Springer, 2010.

- [5] Jeffrey Dean, Greg Corrado, Rajat Monga, Kai Chen, Matthieu Devin, Mark Mao, Andrew Senior, Paul Tucker, Ke Yang, Quoc V Le, et al. Large scale distributed deep networks. In *Advances in Neural Information Processing Systems*, pages 1223–1231, 2012.
- [6] Aaron Defazio, Francis Bach, and Simon Lacoste-Julien. Saga: A fast incremental gradient method with support for non-strongly convex composite objectives. In *Advances in Neural Information Processing Systems*, pages 1646–1654, 2014.
- [7] Bin Gu, Zhouyuan Huo, and Heng Huang. Asynchronous stochastic block coordinate descent with variance reduction. *arXiv preprint arXiv:1610.09447*, 2016.
- [8] Zhouyuan Huo, Bin Gu, and Heng Huang. Decoupled asynchronous proximal stochastic gradient descent with variance reduction. *arXiv preprint arXiv:1609.06804*, 2016.
- [9] Zhouyuan Huo and Heng Huang. Distributed asynchronous dual free stochastic dual coordinate ascent. *arXiv preprint arXiv:1605.09066*, 2016.
- [10] Rie Johnson and Tong Zhang. Accelerating stochastic gradient descent using predictive variance reduction. In *Advances in Neural Information Processing Systems*, pages 315–323, 2013.
- [11] Alex Krizhevsky and Geoffrey Hinton. Learning multiple layers of features from tiny images, 2009.
- [12] John Langford, Alexander Smola, and Martin Zinkevich. Slow learners are fast. *arXiv preprint arXiv:0911.0491*, 2009.
- [13] Yann LeCun, Yoshua Bengio, and Geoffrey Hinton. Deep learning. *Nature*, 521(7553):436–444, 2015.
- [14] Yann LeCun, Léon Bottou, Yoshua Bengio, and Patrick Haffner. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324, 1998.
- [15] Xiangru Lian, Yijun Huang, Yuncheng Li, and Ji Liu. Asynchronous parallel stochastic gradient for nonconvex optimization. In *Advances in Neural Information Processing Systems*, pages 2719–2727, 2015.
- [16] Ji Liu, Stephen J Wright, and Srikrishna Sridhar. An asynchronous parallel randomized kaczmarz algorithm. *arXiv preprint arXiv:1401.4780*, 2014.
- [17] Jiquan Ngiam, Adam Coates, Ahbik Lahiri, Bobby Prochnow, Quoc V Le, and Andrew Y Ng. On optimization methods for deep learning. In *Proceedings of the 28th International Conference on Machine Learning (ICML-11)*, pages 265–272, 2011.
- [18] Benjamin Recht, Christopher Re, Stephen Wright, and Feng Niu. Hogwild: A lock-free approach to parallelizing stochastic gradient descent. In *Advances in Neural Information Processing Systems*, pages 693–701, 2011.
- [19] Sashank J Reddi, Ahmed Hefny, Suvrit Sra, Barnabás Póczós, and Alex Smola. Stochastic variance reduction for nonconvex optimization. *arXiv preprint arXiv:1603.06160*, 2016.
- [20] Sashank J Reddi, Ahmed Hefny, Suvrit Sra, Barnabás Póczos, and Alex J Smola. On variance reduction in stochastic gradient descent and its asynchronous variants. In *Advances in Neural Information Processing Systems*, pages 2629–2637, 2015.

- [21] Nicolas L Roux, Mark Schmidt, and Francis R Bach. A stochastic gradient method with an exponential convergence _rate for finite training sets. In *Advances in Neural Information Processing Systems*, pages 2663–2671, 2012.
- [22] Ruiliang Zhang and James Kwok. Asynchronous distributed admm for consensus optimization. In *Proceedings of the 31st International Conference on Machine Learning (ICML-14)*, pages 1701–1709, 2014.
- [23] Ruiliang Zhang, Shuai Zheng, and James T Kwok. Fast distributed asynchronous sgd with variance reduction. *arXiv preprint arXiv:1508.01633*, 2015.
- [24] Shen-Yi Zhao and Wu-Jun Li. Fast asynchronous parallel stochastic gradient descent: A lock-free approach with convergence guarantee. 2016.

A Proof of Corollary 1

Proof 1 (Proof of Corollary 1) *As per the definitions of v_t^{s+1} (5) and u_t^{s+1} (7):*

$$\begin{aligned}
\mathbb{E} [\|v_t^{s+1}\|^2] &= \mathbb{E} [\|v_t^{s+1} - u_t^{s+1} + u_t^{s+1}\|^2] \\
&\leq 2\mathbb{E} [\|v_t^{s+1} - u_t^{s+1}\|^2] + 2\mathbb{E} [\|u_t^{s+1}\|^2] \\
&= 2\mathbb{E} \left[\left\| \frac{1}{b} \sum_{i_t \in I_t} \nabla f_{i_t}(\hat{x}_{t,i_t}^{s+1}) - \nabla f_{i_t}(x_t^{s+1}) \right\|^2 \right] + 2\mathbb{E} [\|u_t^{s+1}\|^2] \\
&\leq \frac{2L^2}{b} \sum_{i_t \in I_t} \mathbb{E} [\|\hat{x}_{t,i_t}^{s+1} - x_t^{s+1}\|^2] + 2\mathbb{E} [\|u_t^{s+1}\|^2] \\
&\leq \frac{2L^2}{b} \sum_{i_t \in I_t} \mathbb{E} \left[\left\| \sum_{j \in J(t,i_t)} (x_j^{s+1} - x_{j+1}^{s+1})_{k_j} \right\|^2 \right] + 2\mathbb{E} [\|u_t^{s+1}\|^2] \\
&\leq \frac{2L^2 \Delta \eta^2}{bd} \sum_{i_t \in I_t} \sum_{j \in J(t,i_t)} \mathbb{E} [\|v_j^{s+1}\|^2] + 2\mathbb{E} [\|u_t^{s+1}\|^2]
\end{aligned} \tag{23}$$

where the first, third and last inequality follows from $\|a_1 + \dots + a_n\|^2 \leq n \sum_{i=1}^n \|a_i\|^2$. Second inequality follows from Lipschitz smoothness of $f(x)$. Then sum over $\mathbb{E} [\|v_t^{s+1}\|^2]$ in one epoch, we get the following inequality,

$$\begin{aligned}
\sum_{t=0}^{m-1} \mathbb{E} [\|v_t^{s+1}\|^2] &\leq \sum_{t=0}^{m-1} \left[\frac{2L^2 \Delta \eta^2}{bd} \sum_{i_t \in I_t} \sum_{j \in J(t,i_t)} \mathbb{E} [\|v_j^{s+1}\|^2] + 2\mathbb{E} [\|u_t^{s+1}\|^2] \right] \\
&\leq \frac{2L^2 \Delta^2 \eta^2}{d} \sum_{t=0}^{m-1} \mathbb{E} [\|v_t^{s+1}\|^2] + 2 \sum_{t=0}^{m-1} \mathbb{E} [\|u_t^{s+1}\|^2]
\end{aligned} \tag{24}$$

Thus, if $d - 2L^2 \Delta^2 \eta^2 > 0$, then $\|v_t^{s+1}\|^2$ is upper bounded by $\|u_t^{s+1}\|^2$,

$$\sum_{t=0}^{m-1} \mathbb{E} [\|v_t^{s+1}\|^2] \leq \frac{2d}{d - 2L^2 \Delta^2 \eta^2} \sum_{t=0}^{m-1} \mathbb{E} [\|u_t^{s+1}\|^2] \tag{25}$$

We follow the proof in [20], however, because our update step is different, our result is also a little different.

B Proof of Theorem 1

Proof 2 (Proof of Theorem 1) *At first, we derive the upper bound of $\mathbb{E} [\|x_{t+1}^{s+1} - \tilde{x}^s\|^2]$:*

$$\begin{aligned}
\mathbb{E} [\|x_{t+1}^{s+1} - \tilde{x}^s\|^2] &= \mathbb{E} [\|x_{t+1}^{s+1} - x_t^{s+1} + x_t^{s+1} - \tilde{x}^s\|^2] \\
&= \mathbb{E} [\|x_{t+1}^{s+1} - x_t^{s+1}\|^2 + \|x_t^{s+1} - \tilde{x}^s\|^2 + 2 \langle x_{t+1}^{s+1} - x_t^{s+1}, x_t^{s+1} - \tilde{x}^s \rangle] \\
&= \mathbb{E} \left[\frac{\eta^2}{d} \|v_t^{s+1}\|^2 + \|x_t^{s+1} - \tilde{x}^s\|^2 - \frac{2\eta}{d} \left\langle \frac{1}{b} \sum_{i_t \in I_t} \nabla f(\hat{x}_{t,i_t}^{s+1}), x_t^{s+1} - \tilde{x}^s \right\rangle \right] \\
&\leq \frac{\eta^2}{d} \mathbb{E} [\|v_t^{s+1}\|^2] + \frac{2\eta}{d} \mathbb{E} \left[\frac{1}{2\beta_t} \left\| \frac{1}{b} \sum_{i_t \in I_t} \nabla f(\hat{x}_{t,i_t}^{s+1}) \right\|^2 + \frac{\beta_t}{2} \|x_t^{s+1} - \tilde{x}^s\|^2 \right] \\
&+ \mathbb{E} [\|x_t^{s+1} - \tilde{x}^s\|^2] \\
&= \frac{\eta^2}{d} \mathbb{E} [\|v_t^{s+1}\|^2] + \frac{\eta}{d\beta_t} \mathbb{E} \left[\left\| \frac{1}{b} \sum_{i_t \in I_t} \nabla f(\hat{x}_{t,i_t}^{s+1}) \right\|^2 \right] + (1 + \frac{\eta\beta_t}{d}) \mathbb{E} [\|x_t^{s+1} - \tilde{x}^s\|^2] \tag{26}
\end{aligned}$$

where the inequality follows from $\langle a, b \rangle \leq \frac{1}{2}(a^2 + b^2)$. Then we know that $\mathbb{E} [f(x_{t+1}^{s+1})]$ is also upper bounded:

$$\begin{aligned}
\mathbb{E} [f(x_{t+1}^{s+1})] &\leq \mathbb{E} \left[f(x_t^{s+1}) + \langle \nabla f(x_t^{s+1}), x_{t+1}^{s+1} - x_t^{s+1} \rangle + \frac{L}{2} \|x_{t+1}^{s+1} - x_t^{s+1}\|^2 \right] \\
&= \mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{d} \mathbb{E} \left[\left\langle \nabla f(x_t^{s+1}), \frac{1}{b} \sum_{i_t \in I_t} \nabla f(\hat{x}_{t,i_t}^{s+1}) \right\rangle \right] + \frac{\eta^2 L}{2d} \mathbb{E} [\|v_t^{s+1}\|^2] \\
&= \mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2d} \mathbb{E} \left[\|\nabla f(x_t^{s+1})\|^2 + \left\| \frac{1}{b} \sum_{i_t \in I_t} \nabla f(\hat{x}_{t,i_t}^{s+1}) \right\|^2 \right. \\
&\quad \left. - \|\nabla f(x_t^{s+1}) - \frac{1}{b} \sum_{i_t \in I_t} \nabla f(\hat{x}_{t,i_t}^{s+1})\|^2 \right] + \frac{\eta^2 L}{2d} \mathbb{E} [\|v_t^{s+1}\|^2] \tag{27}
\end{aligned}$$

where the first inequality follows from Lipschitz continuity of $f(x)$.

$$\begin{aligned}
\mathbb{E} \left[\left\| \nabla f(x_t^{s+1}) - \frac{1}{b} \sum_{i_t \in I_t} \nabla f(\hat{x}_{t,i_t}^{s+1}) \right\|^2 \right] &\leq \frac{L^2}{b} \sum_{i_t \in I_t} \mathbb{E} [\|x_t^{s+1} - \hat{x}_{t,i_t}^{s+1}\|^2] \\
&= \frac{L^2}{b} \sum_{i_t \in I_t} \mathbb{E} \left[\left\| \sum_{j \in J(t, i_t)} (x_j^{s+1} - x_{j+1}^{s+1}) \right\|^2 \right] \\
&\leq \frac{L^2 \Delta}{b} \sum_{i_t \in I_t} \sum_{j \in J(t, i_t)} \mathbb{E} [\|x_j^{s+1} - x_{j+1}^{s+1}\|^2] \\
&\leq \frac{L^2 \Delta \eta^2}{bd} \sum_{i_t \in I_t} \sum_{j \in J(t, i_t)} \mathbb{E} [\|v_j^{s+1}\|^2] \tag{28}
\end{aligned}$$

where the first inequality follows from Lipschitz continuity of $f(x)$. Δ denotes the upper bound of time delay.

From (27) and (28), it is to derive the following inequality:

$$\begin{aligned} \mathbb{E} [f(x_{t+1}^{s+1})] &\leq \mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2d} \mathbb{E} [||\nabla f(x_t^{s+1})||^2] - \frac{\eta}{2d} \mathbb{E} \left[\left| \frac{1}{b} \sum_{i_t \in I_t} \nabla f(\hat{x}_{t,i_t}^{s+1}) \right|^2 \right] \\ &\quad + \frac{\eta^2 L}{2d} \mathbb{E} [||v_t^{s+1}||^2] + \frac{L^2 \Delta \eta^3}{2bd^2} \sum_{i_t \in I_t} \sum_{j \in J(t, i_t)} \mathbb{E} [||v_j^{s+1}||^2] \end{aligned} \quad (29)$$

Following the proof in [19], we define Lyapunov function (this nice proof approach was first introduced in [19]):

$$R_t^{s+1} = \mathbb{E} [f(x_t^{s+1}) + c_t ||x_t^{s+1} - \tilde{x}^s||^2] . \quad (30)$$

From the definition of Lyapunov function, and inequalities in (26) and (29):

$$\begin{aligned} R_{t+1}^{s+1} &= \mathbb{E} [f(x_{t+1}^{s+1}) + c_{t+1} ||x_{t+1}^{s+1} - \tilde{x}^s||^2] \\ &\leq \mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2d} \mathbb{E} [||\nabla f(x_t^{s+1})||^2] - \frac{\eta}{2d} \mathbb{E} \left[\left| \frac{1}{b} \sum_{i_t \in I_t} \nabla f(\hat{x}_{t,i_t}^{s+1}) \right|^2 \right] \\ &\quad + \frac{\eta^2 L}{2d} \mathbb{E} [||v_t^{s+1}||^2] + \frac{L^2 \Delta \eta^3}{2bd^2} \sum_{i_t \in I_t} \sum_{j \in J(t, i_t)} \mathbb{E} [||v_j^{s+1}||^2] \\ &\quad + c_{t+1} \left[\frac{\eta^2}{d} \mathbb{E} [||v_t^{s+1}||^2] + (1 + \frac{\eta \beta_t}{d}) \mathbb{E} [||x_t^{s+1} - \tilde{x}^s||^2] + \frac{\eta}{d \beta_t} \mathbb{E} \left[\left| \frac{1}{b} \sum_{i_t \in I_t} \nabla f(\hat{x}_{t,i_t}^{s+1}) \right|^2 \right] \right] \\ &= \mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2d} \mathbb{E} [||\nabla f(x_t^{s+1})||^2] - (\frac{\eta}{2d} - \frac{c_{t+1} \eta}{d \beta_t}) \mathbb{E} \left[\left| \frac{1}{b} \sum_{i_t \in I_t} \nabla f(\hat{x}_{t,i_t}^{s+1}) \right|^2 \right] \\ &\quad + \frac{L^2 \Delta \eta^3}{2bd^2} \sum_{i_t \in I_t} \sum_{j \in J(t, i_t)} \mathbb{E} [||v_j^{s+1}||^2] + (\frac{\eta^2 L}{2d} + \frac{c_{t+1} \eta^2}{d}) \mathbb{E} [||v_t^{s+1}||^2] \\ &\quad + c_{t+1} (1 + \frac{\eta \beta_t}{d}) \mathbb{E} [||x_t^{s+1} - \tilde{x}^s||^2] \\ &\leq \mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2d} \mathbb{E} [||\nabla f(x_t^{s+1})||^2] + \frac{L^2 \Delta \eta^3}{2bd^2} \sum_{i_t \in I_t} \sum_{j \in J(t, i_t)} \mathbb{E} [||v_j^{s+1}||^2] \\ &\quad + (\frac{\eta^2 L}{2d} + \frac{c_{t+1} \eta^2}{d}) \mathbb{E} [||v_t^{s+1}||^2] + c_{t+1} (1 + \frac{\eta \beta_t}{d}) \mathbb{E} [||x_t^{s+1} - \tilde{x}^s||^2] \end{aligned} \quad (31)$$

In the final inequality, we assume $\frac{1}{2} \geq \frac{c_{t+1}}{\beta_t}$. As per Corollary 1, we sum up R_{t+1}^{s+1} from $t = 0$ to $m - 1$,

$$\begin{aligned}
\sum_{t=0}^{m-1} R_{t+1}^{s+1} &\leq \sum_{t=0}^{m-1} \left[\mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2d} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] + \frac{L^2 \Delta \eta^3}{2bd^2} \sum_{i_t \in I_t} \sum_{j \in J(t, i_t)} \mathbb{E} [\|v_j^{s+1}\|^2] \right. \\
&\quad \left. + \left(\frac{\eta^2 L}{2d} + \frac{c_{t+1} \eta^2}{d} \right) \mathbb{E} [\|v_t^{s+1}\|^2] + c_{t+1} \left(1 + \frac{\eta \beta_t}{d} \right) \mathbb{E} [\|x_t^{s+1} - \tilde{x}^s\|^2] \right] \\
&\leq \sum_{t=0}^{m-1} \left[\mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2d} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] + c_{t+1} \left(1 + \frac{\eta \beta_t}{d} \right) \mathbb{E} [\|x_t^{s+1} - \tilde{x}^s\|^2] \right. \\
&\quad \left. + \left(\frac{L^2 \Delta^2 \eta^3}{2d^2} + \frac{\eta^2 L}{2d} + \frac{c_{t+1} \eta^2}{d} \right) \mathbb{E} [\|v_t^{s+1}\|^2] \right] \\
&\leq \sum_{t=0}^{m-1} \left[\mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2d} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] + c_{t+1} \left(1 + \frac{\eta \beta_t}{d} \right) \mathbb{E} [\|x_t^{s+1} - \tilde{x}^s\|^2] \right. \\
&\quad \left. + \frac{2d}{d - 2L^2 \Delta^2 \eta^2} \left(\frac{L^2 \Delta^2 \eta^3}{2d^2} + \frac{\eta^2 L}{2d} + \frac{c_{t+1} \eta^2}{d} \right) \mathbb{E} [\|u_t^{s+1}\|^2] \right] \\
&\leq \sum_{t=0}^{m-1} R_t^{s+1} - \sum_{t=0}^{m-1} [\Gamma_t \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2]]
\end{aligned} \tag{32}$$

where

$$c_t = c_{t+1} \left(1 + \frac{\eta \beta_t}{d} \right) + \frac{4L^2}{(d - 2L^2 \Delta^2 \eta^2)b} \left(\frac{L^2 \Delta^2 \eta^3}{2d} + \frac{\eta^2 L}{2} + c_{t+1} \eta^2 \right) \tag{33}$$

$$\Gamma_t = \frac{\eta}{2d} - \frac{4}{d - 2L^2 \Delta^2 \eta^2} \left(\frac{L^2 \Delta^2 \eta^3}{2d} + \frac{\eta^2 L}{2} + c_{t+1} \eta^2 \right) \tag{34}$$

Setting $c_m = 0$, $\tilde{x}^{s+1} = x_m^{s+1}$, and $\gamma = \min \Gamma_t$, then $R_m^{s+1} = \mathbb{E} [f(x_m^{s+1})] = \mathbb{E} [f(\tilde{x}^{s+1})]$ and $R_0^{s+1} = \mathbb{E} [f(x_0^{s+1})] = \mathbb{E} [f(\tilde{x}^s)]$. Thus we can get,

$$\sum_{t=0}^{m-1} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] \leq \frac{\mathbb{E} [f(\tilde{x}^s) - f(\tilde{x}^{s+1})]}{\gamma} \tag{35}$$

Summing up all epochs, and define x^0 as initial point and x^* as optimal solution, we have the final inequality:

$$\frac{1}{T} \sum_{s=0}^{S-1} \sum_{t=0}^{m-1} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] \leq \frac{\mathbb{E} [f(x^0) - f(x^*)]}{T\gamma} \tag{36}$$

C Proof of Theorem 2

Proof 3 (Proof of Theorem 2) Following the proof in [19], we set $c_m = 0$, $\eta = \frac{u_0 b}{Ln^\alpha}$, $\beta_t = \beta = 2L$, $0 < u_0 < 1$, and $0 < \alpha < 1$.

$$\begin{aligned}\theta &= \frac{\eta\beta}{d} + \frac{4L^2\eta^2}{(d - 2L^2\Delta^2\eta^2)b} \\ &= \frac{2u_0b}{dn^\alpha} + \frac{4u_0^2b}{dn^{2\alpha} - 2\Delta^2u_0^2b^2} \\ &\leq \frac{6u_0b}{dn^\alpha}\end{aligned}\tag{37}$$

In the final inequality, we constrain that $dn^\alpha \leq dn^{2\alpha} - 2\Delta^2u_0^2b^2$, and it is easy to satisfy when n is large. We set $m = \lfloor \frac{dn^\alpha}{6u_0b} \rfloor$, and from the recurrence formula of c_t , we have:

$$\begin{aligned}c_0 &= \frac{2L^2}{(d - 2L^2\Delta^2\eta^2)b} \left(\frac{L^2\Delta^2\eta^3}{d} + \eta^2L \right) \frac{(1 + \theta)^m - 1}{\theta} \\ &= \frac{2L \left(\frac{u_0^3\Delta^2b^3}{n^{3\alpha}} + \frac{u_0^2b^2d}{n^{2\alpha}} \right)}{(d - 2L^2\Delta^2\eta^2) \left(\frac{2u_0b^2}{dn^\alpha} + \frac{4u_0^2b^2}{dn^{2\alpha} - 2\Delta^2u_0^2b^2} \right) d} ((1 + \theta)^m - 1) \\ &\leq \frac{L(u_0b\Delta^2 + d)}{3d} ((1 + \theta)^m - 1) \\ &\leq \frac{L(u_0b\Delta^2 + d)}{3d} (e - 1)\end{aligned}\tag{38}$$

where the final inequality follows from that $(1 + \frac{1}{l})^l$ is increasing for $l > 0$, and $\lim_{l \rightarrow \infty} (1 + \frac{1}{l})^l = e$. From the proof in Theorem 1, we know that $c_0 \leq \frac{\beta}{2} = L$, thus $\Delta^2 \leq \frac{d}{2u_0b}$. c_t is decreasing with respect to t , and c_0 is also upper bounded.

$$\begin{aligned}\gamma &= \min_t \Gamma_t \\ &\geq \frac{\eta}{2d} - \frac{4}{d - 2L^2\Delta^2\eta^2} \left(\frac{L^2\Delta^2\eta^3}{2d} + \frac{\eta^2L}{2} + c_0\eta^2 \right) \\ &\geq \frac{\eta}{2d} - \frac{4n^\alpha}{d} \left(\frac{L^2\Delta^2\eta^3}{2d} + \frac{\eta^2L}{2} + c_0\eta^2 \right) \\ &\geq \left(\frac{1}{2} - \frac{14u_0^2b^2\Delta^2 + 14u_0bd}{3d} \right) \frac{\eta}{d} \\ &\geq \frac{\sigma b}{dLn^\alpha}\end{aligned}\tag{39}$$

There exists a small value σ , and it is independent of n . The final inequality holds if $\frac{1}{2} > \frac{14u_0^2b^2\Delta^2 + 14u_0bd}{3d}$. Above all, if $\Delta^2 < \min\{\frac{d}{2u_0b}, \frac{3d - 28u_0bd}{28u_0^2b^2}\}$, we have the conclusion that,

$$\frac{1}{T} \sum_{s=0}^{S-1} \sum_{t=0}^{m-1} \mathbb{E} [||\nabla f(x_t^{s+1})||^2] \leq \frac{dLn^\alpha \mathbb{E} [f(\hat{x}^0) - f(\hat{x}^*)]}{T\sigma b}\tag{40}$$

D Proof of Theorem 3

Proof 4 (Proof of Theorem 3)

$$\begin{aligned}
& \mathbb{E} [||x_{t+1}^{s+1} - \tilde{x}^s||^2] = \mathbb{E} [||x_{t+1}^{s+1} - x_t^{s+1} + x_t^{s+1} - \tilde{x}^s||^2] \\
& = \mathbb{E} [||x_{t+1}^{s+1} - x_t^{s+1}||^2 + ||x_t^{s+1} - \tilde{x}^s||^2 + 2 \langle x_{t+1}^{s+1} - x_t^{s+1}, x_t^{s+1} - \tilde{x}^s \rangle] \\
& = \mathbb{E} \left[\eta^2 ||v_t^{s+1}||^2 + ||x_t^{s+1} - \tilde{x}^s||^2 - 2\eta \left\langle \frac{1}{b} \sum_{i_t \in I_t} \nabla f(x_{t-\tau_i}^{s+1}), x_t^{s+1} - \tilde{x}^s \right\rangle \right] \\
& \leq \eta^2 \mathbb{E} [||v_t^{s+1}||^2] + 2\eta \mathbb{E} \left[\frac{1}{2\beta_t} \left\| \frac{1}{b} \sum_{i_t \in I_t} \nabla f(x_{t-\tau_i}^{s+1}) \right\|^2 + \frac{\beta_t}{2} ||x_t^{s+1} - \tilde{x}^s||^2 \right] \\
& + \mathbb{E} [||x_t^{s+1} - \tilde{x}^s||^2] \\
& = \eta^2 \mathbb{E} [||v_t^{s+1}||^2] + (1 + \eta\beta_t) \mathbb{E} [||x_t^{s+1} - \tilde{x}^s||^2] + \frac{\eta}{\beta_t} \mathbb{E} \left[\left\| \frac{1}{b} \sum_{i_t \in I_t} \nabla f(x_{t-\tau_i}^{s+1}) \right\|^2 \right] \tag{41}
\end{aligned}$$

where the first inequality follows $2 \langle a, b \rangle \leq ||a||^2 + ||b||^2$

$$\begin{aligned}
& \mathbb{E} [f(x_{t+1}^{s+1})] \leq \mathbb{E} \left[f(x_t^{s+1}) + \langle \nabla f(x_t^{s+1}), x_{t+1}^{s+1} - x_t^{s+1} \rangle + \frac{L}{2} ||x_{t+1}^{s+1} - x_t^{s+1}||^2 \right] \\
& = \mathbb{E} [f(x_t^{s+1})] - \eta \mathbb{E} \left[\left\langle \nabla f(x_t^{s+1}), \frac{1}{b} \sum_{i_t \in I_t} \nabla f(x_{t-\tau_i}^{s+1}) \right\rangle \right] + \frac{\eta^2 L}{2} \mathbb{E} [||v_t^{s+1}||^2] \\
& = -\frac{\eta}{2} \mathbb{E} \left[||\nabla f(x_t^{s+1})||^2 + \left\| \frac{1}{b} \sum_{i_t \in I_t} \nabla f(x_{t-\tau_i}^{s+1}) \right\|^2 - \left\| \nabla f(x_t^{s+1}) - \frac{1}{b} \sum_{i_t \in I_t} \nabla f(x_{t-\tau_i}^{s+1}) \right\|^2 \right] \\
& + \mathbb{E} [f(x_t^{s+1})] + \frac{\eta^2 L}{2} \mathbb{E} [||v_t^{s+1}||^2] \tag{42}
\end{aligned}$$

where the first inequality follows from Lipschitz continuity of $f(x)$.

$$\begin{aligned}
||\nabla f(x_t^{s+1}) - \frac{1}{b} \sum_{i_t \in I_t} \nabla f(x_{t-\tau_i}^{s+1})||^2 & \leq \frac{1}{b} \sum_{i_t \in I_t} ||\nabla f(x_t^{s+1}) - \nabla f(x_{t-\tau_i}^{s+1})||^2 \\
& \leq \frac{L^2}{b} \sum_{i_t \in I_t} ||x_t^{s+1} - x_{t-\tau_i}^{s+1}||^2 \\
& = \frac{L^2}{b} \sum_{i_t \in I_t} \left\| \sum_{j=t-\tau_i}^{t-1} (x_j^{s+1} - x_{j+1}^{s+1}) \right\|^2 \\
& \leq \frac{L^2 \Delta}{b} \sum_{i_t \in I_t} \sum_{j=t-\tau_i}^{t-1} ||x_j^{s+1} - x_{j+1}^{s+1}||^2 \\
& = \frac{L^2 \Delta \eta^2}{b} \sum_{i_t \in I_t} \sum_{j=t-\tau_i}^{t-1} ||v_j^{s+1}||^2 \tag{43}
\end{aligned}$$

where the second inequality follows from Lipschitz continuity of $f(x)$. Δ denotes the upper bound of time delay. $\tau \leq \Delta$. Above all, we have the following inequality,

$$\begin{aligned} \mathbb{E} [f(x_{t+1}^{s+1})] &\leq \mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] - \frac{\eta}{2} \mathbb{E} \left[\left\| \frac{1}{b} \sum_{i \in I_t} \nabla f(x_{t-\tau_i}^{s+1}) \right\|^2 \right] \\ &\quad + \frac{\eta^2 L}{2} \mathbb{E} [\|v_t^{s+1}\|^2] + \frac{L^2 \Delta \eta^3}{2b} \sum_{i \in I_t} \sum_{j=t-\tau_i}^{t-1} \mathbb{E} [\|v_j^{s+1}\|^2] \end{aligned} \quad (44)$$

Following the definition of R_{t+1}^{s+1} in [19],

$$\begin{aligned} R_{t+1}^{s+1} &= \mathbb{E} [f(x_{t+1}^{s+1}) + c_{t+1} \|x_{t+1}^{s+1} - \tilde{x}^s\|^2] \\ &\leq \mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] - \frac{\eta}{2} \mathbb{E} \left[\left\| \frac{1}{b} \sum_{i \in I_t} \nabla f(x_{t-\tau_i}^{s+1}) \right\|^2 \right] \\ &\quad + \frac{\eta^2 L}{2} \mathbb{E} [\|v_t^{s+1}\|^2] + \frac{L^2 \Delta \eta^3}{2b} \sum_{i \in I_t} \sum_{j=t-\tau_i}^{t-1} \mathbb{E} [\|v_j^{s+1}\|^2] \\ &\quad + c_{t+1} \left[\eta^2 \mathbb{E} [\|v_t^{s+1}\|^2] + (1 + \eta \beta_t) \mathbb{E} [\|x_t^{s+1} - \tilde{x}^s\|^2] + \frac{\eta}{\beta_t} \mathbb{E} \left[\left\| \frac{1}{b} \sum_{i \in I_t} \nabla f(x_{t-\tau_i}^{s+1}) \right\|^2 \right] \right] \\ &= \mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] - \left(\frac{\eta}{2} - \frac{c_{t+1} \eta}{\beta_t} \right) \mathbb{E} \left[\left\| \frac{1}{b} \sum_{i \in I_t} \nabla f(x_{t-\tau_i}^{s+1}) \right\|^2 \right] \\ &\quad + \frac{L^2 \Delta \eta^3}{2b} \sum_{i \in I_t} \sum_{j=t-\tau_i}^{t-1} \mathbb{E} [\|v_j^{s+1}\|^2] + \left(\frac{\eta^2 L}{2} + c_{t+1} \eta^2 \right) \mathbb{E} [\|v_t^{s+1}\|^2] \\ &\quad + c_{t+1} (1 + \eta \beta_t) \mathbb{E} [\|x_t^{s+1} - \tilde{x}^s\|^2] \\ &\leq \mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2} \mathbb{E} [\|\nabla f(x_t^{s+1})\|^2] + \frac{L^2 \Delta \eta^3}{2b} \sum_{i \in I_t} \sum_{j=t-\tau_i}^{t-1} \mathbb{E} [\|v_j^{s+1}\|^2] \\ &\quad + \left(\frac{\eta^2 L}{2} + c_{t+1} \eta^2 \right) \mathbb{E} [\|v_t^{s+1}\|^2] + c_{t+1} (1 + \eta \beta_t) \mathbb{E} [\|x_t^{s+1} - \tilde{x}^s\|^2] \end{aligned} \quad (45)$$

In the final inequality, we make $(\frac{\eta}{2} - \frac{c_{t+1}\eta}{\beta_t}) > 0$. Then we sum over R_{t+1}^{s+1}

$$\begin{aligned}
\sum_{t=0}^{m-1} R_{t+1}^{s+1} &\leq \sum_{t=0}^{m-1} \left[\mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2} \mathbb{E} [||\nabla f(x_t^{s+1})||^2] + \frac{L^2 \Delta \eta^3}{2b} \sum_{i \in I_t} \sum_{j=t-\tau_i}^{t-1} \mathbb{E} [||v_j^{s+1}||^2] \right. \\
&\quad \left. + (\frac{\eta^2 L}{2} + c_{t+1} \eta^2) \mathbb{E} [||v_t^{s+1}||^2] + c_{t+1} (1 + \eta \beta_t) \mathbb{E} [||x_t^{s+1} - \tilde{x}^s||^2] \right] \\
&\leq \sum_{t=0}^{m-1} \left[\mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2} \mathbb{E} [||\nabla f(x_t^{s+1})||^2] + c_{t+1} (1 + \eta \beta_t) \mathbb{E} [||x_t^{s+1} - \tilde{x}^s||^2] \right. \\
&\quad \left. + (\frac{L^2 \Delta^2 \eta^3}{2} + \frac{\eta^2 L}{2} + c_{t+1} \eta^2) \mathbb{E} [||v_t^{s+1}||^2] \right] \\
&\leq \sum_{t=0}^{m-1} \left[\mathbb{E} [f(x_t^{s+1})] - \frac{\eta}{2} \mathbb{E} [||\nabla f(x_t^{s+1})||^2] + c_{t+1} (1 + \eta \beta_t) \mathbb{E} [||x_t^{s+1} - \tilde{x}^s||^2] \right. \\
&\quad \left. + \frac{2}{1 - 2L^2 \Delta^2 \eta^2} (\frac{L^2 \Delta^2 \eta^3}{2} + \frac{\eta^2 L}{2} + c_{t+1} \eta^2) \mathbb{E} [||u_t^{s+1}||^2] \right] \\
&= \sum_{t=0}^{m-1} R_t^{s+1} - \sum_{t=0}^{m-1} [\Gamma_t \mathbb{E} [||\nabla f(x_t^{s+1})||^2]]
\end{aligned} \tag{46}$$

where the last inequality follows the upper bound of v_t^{s+1} in [20], and we define

$$c_t = c_{t+1} \left(1 + \eta \beta_t + \frac{4L^2 \eta^2}{(1 - 2L^2 \Delta^2 \eta^2)b} \right) + \frac{4L^2}{(1 - 2L^2 \Delta^2 \eta^2)b} \left(\frac{L^2 \Delta^2 \eta^3}{2} + \frac{\eta^2 L}{2} \right) \tag{47}$$

$$\Gamma_t = \frac{\eta}{2} - \frac{4}{(1 - 2L^2 \Delta^2 \eta^2)} \left(\frac{L^2 \Delta^2 \eta^3}{2} + \frac{\eta^2 L}{2} + c_{t+1} \eta^2 \right) \tag{48}$$

We set $c_m = 0$, and $\tilde{x}^{s+1} = x_m^{s+1}$, and $\gamma = \min_t \Gamma_t$, thus $R_m^{s+1} = \mathbb{E} [f(x_m^{s+1})] = \mathbb{E} [f(\tilde{x}^{s+1})]$, and $R_0^{s+1} = \mathbb{E} [f(x_0^{s+1})] = \mathbb{E} [f(\tilde{x}^s)]$. Summing up all epochs, the following inequality holds,

$$\frac{1}{T} \sum_{s=0}^{S-1} \sum_{t=0}^{m-1} \mathbb{E} [||\nabla f(x_t^{s+1})||^2] \leq \frac{\mathbb{E} [f(x^0) - f(x^*)]}{T\gamma} \tag{49}$$

E Proof of Theorem 4

Proof 5 (Proof of Theorem 4) Following the proof of Theorem 3, we let $c_m = 0$, $\eta_t = \eta = \frac{u_0 b}{Ln^\alpha}$, $\beta_t = \beta = 2L$, $0 < u_0 < 1$, and $0 < \alpha < 1$. We define θ , and get its upper bound,

$$\begin{aligned}
\theta &= \eta \beta + \frac{4L^2 \eta^2}{(1 - 2L^2 \Delta^2 \eta^2)b} \\
&= \frac{2u_0 b}{n^\alpha} + \frac{4u_0^2 b}{n^{2\alpha} - 2\Delta^2 u_0^2 b^2} \\
&\leq \frac{6u_0 b}{n^\alpha}
\end{aligned} \tag{50}$$

where we assume $n^{2\alpha} - 2\Delta^2 u_0^2 b^2 \geq n^\alpha$. We set $m = \lfloor \frac{n^\alpha}{6u_0 b} \rfloor$, from the recurrence formula between c_t and c_{t+1} , c_0 is upper bounded,

$$\begin{aligned}
c_0 &= \frac{2L^2}{(1 - 2L^2\Delta^2\eta^2)b} (L^2\Delta^2\eta^3 + \eta^2L) \frac{(1 + \theta)^m - 1}{\theta} \\
&\leq \frac{2L \left(\frac{u_0^3\Delta^2b^3}{n^{3\alpha}} + \frac{u_0^2b^2}{n^{2\alpha}} \right)}{(1 - 2L^2\Delta^2\eta^2) \left(\frac{2u_0b^2}{n^\alpha} + \frac{4u_0^2b^2}{n^{2\alpha} - 2\Delta^2u_0^2b^2} \right)} ((1 + \theta)^m - 1) \\
&\leq \frac{L(u_0b\Delta^2 + 1)}{3} ((1 + \theta)^m - 1) \\
&\leq \frac{L(u_0b\Delta^2 + 1)}{3} (e - 1)
\end{aligned} \tag{51}$$

where the final inequality follows from that $(1 + \frac{1}{l})^l$ is increasing for $l > 0$, and $\lim_{l \rightarrow \infty} (1 + \frac{1}{l})^l = e$. From Theorem 3, we know that $c_0 < \frac{\beta}{2} = L$, then $u_0b\Delta^2 < \frac{1}{2}$. c_t is decreasing with respect to t , and c_0 is also upper bounded. Now, we can get a lower bound of γ ,

$$\begin{aligned}
\gamma &= \min_t \Gamma_t \\
&\geq \frac{\eta}{2} - \frac{4}{(1 - 2L^2\Delta^2\eta^2)} \left(\frac{L^2\Delta^2\eta^3}{2} + \frac{\eta^2L}{2} + c_0\eta^2 \right) \\
&\geq \frac{\eta}{2} - 4n^\alpha \left(\frac{L^2\Delta^2\eta^3}{2} + \frac{\eta^2L}{2} + c_0\eta^2 \right) \\
&\geq \left(\frac{1}{2} - \frac{14\Delta^2u_0^2b^2 + 14u_0b}{3} \right) \eta \\
&\geq \frac{\sigma b}{Ln^\alpha}
\end{aligned} \tag{52}$$

There exists a small value σ that the final inequality holds if $\frac{1}{2} > \frac{14\Delta^2u_0^2b^2 + 14u_0b}{3}$. So, if Δ^2 has an upper bound $\Delta^2 < \min\{\frac{1}{2u_0b}, \frac{3-28u_0b}{28u_0^2b^2}\}$, we can prove the final conclusion,

$$\frac{1}{T} \sum_{s=0}^{S-1} \sum_{t=0}^{m-1} \mathbb{E} [||\nabla f(x_t^{s+1})||^2] \leq \frac{Ln^\alpha \mathbb{E} [f(\tilde{x}^0) - f(\tilde{x}^*)]}{bT\sigma} \tag{53}$$