

Induction of dc voltage, proportional to the persistent current, by external ac current on system of inhomogeneous superconducting loops

S. V. Dubonos, V. I. Kuznetsov, I. N. Zhilyaev, A. V. Nikulov, and A. A. Firsov

Institute of Microelectronics Technology and High Purity Materials, Russian Academy of Sciences, 142432 Chernogolovka, Moscow District, RUSSIA

A dc voltage induced by an external ac current is observed in system of asymmetric mesoscopic superconducting loops. The value and sign of this dc voltage, like the one of the persistent current, depend in a periodical way on a magnetic field with period corresponded to the flux quantum within the loop. The amplitude of the oscillations does not depend on the frequency of the external ac current (in the investigated region 100 Hz - 1 MHz) and depends on its amplitude. The latter dependence is not monotonous. The observed phenomenon of rectification is interpreted as a consequence of a dynamic resistive state induced by superposition of the external current and the persistent current. It is shown that the dc voltage can be added in system of loops connected in series: the dc voltage oscillations with amplitude up to 10 μV were observed in single loop, up to 40 μV in a system of 3 loops and up to 300 μV in a system of 20 loops.

PACS numbers: 74.20.De, 73.23.Ra, 64.70.-p

It is well known that the persistent current $j_p = 2en_s v_s$ is observed in superconductor [1] because of the quantization of the momentum circulation

$$\oint_l dl p = \oint_l dl (mv + 2eA) = m \oint_l dl v + 2e\Phi = n2\pi\hbar \quad (1)$$

Its value and sign are periodical function of the magnetic flux Φ inside a superconducting loop with weak screening $LI_p = Lsj_p < \Phi_0$ since the quantum value of the velocity circulation

$$\oint_l dl v_s = \frac{2\pi\hbar}{m} \left(n - \frac{\Phi}{\Phi_0} \right) \quad (2)$$

should satisfy the requirements of the energy minimum, i.e. the $n - \Phi/\Phi_0$ value changes between -1/2 and 1/2 with $\Phi = BS + LI_p \simeq BS$ variation [1]. Here B is the magnetic induction induced by an external magnet; $S = \pi r^2$ is the area of the loop.

The persistent current can exist permanently only in the closed superconducting state, when the phase coherence is not broken along the whole of loop l and its resistance $R_l = 0$. But according to the Little-Parks (LP) experiment [2] and theory [3] the persistent current $I_p \neq 0$ is observed not only in superconducting state, i.e. at $R_l = 0$, but also at $R_l > 0$. It is also known that a potential difference $V = (\langle \rho/s \rangle_{l_s} - \langle \rho/s \rangle_l) l_s I$ should be observed on a segment l_s of an conventional loop with inhomogeneous resistivity ρ or section s if a current $I = \oint_l Edl/R_l$ is induced by the Faraday's voltage $\oint_l Edl = -(1/c)d\Phi/dt$ and the average resistance along the segment $R_{l_s}/l_s = \langle \rho/s \rangle_{l_s} = \int_{l_s} dl \rho / sl_s$ differs from the one along the loop $R_l/l = \langle \rho/s \rangle_l = \oint_l dl \rho / sl$.

Therefore voltage oscillations $V(\Phi/\Phi_0) = (R_{l_s}/l_s - R_l/l) l_s I_p (\Phi/\Phi_0) \propto (\bar{n} - \Phi/\Phi_0)$ can be assumed at a segment of an inhomogeneous loop. Here \bar{n} is close, at $\Phi/\Phi_0 \neq n + 1/2$, to an integer number n corresponding to minimum $(n - \Phi/\Phi_0)^2$ and $(\bar{n} - \Phi/\Phi_0) = 0$ at $\Phi/\Phi_0 = n + 1/2$. The persistent current $I_p = 0$ at

$\Phi/\Phi_0 = n$ and $\Phi/\Phi_0 = n + 1/2$ [1], has maximum values between $\Phi/\Phi_0 = n$ and $\Phi/\Phi_0 = n + 1/2$ and has minimum values between $\Phi/\Phi_0 = n + 1/2$ and $\Phi/\Phi_0 = n + 1$ since the energy difference between adjacent permitted states is much higher than $k_B T$ in any real superconducting loop [4] when the Φ/Φ_0 value is not close to $n + 1/2$. At $\Phi/\Phi_0 = n + 1/2$ two permitted states ($n - \Phi/\Phi_0 = 1/2$ and $n - \Phi/\Phi_0 = -1/2$) with opposite velocity direction have the same minimum energy.

The $V(\Phi/\Phi_0)$ oscillations, like the persistent current oscillations $I_p(\Phi/\Phi_0)$, were observed in our previous work [5] on asymmetric Al loop. We can observe these oscillations in a narrow temperature region $0.988 - 0.994 T_c$, where T_c corresponds with the midpoint of the superconducting resistive transition. Its amplitude increases in this region with temperature lowering. Such temperature dependence is evidence of influence of an external electric noise. In the present work the influence of an external ac current $I_{ac} = \Delta I \sin(2\pi ft)$ (with different frequency f and amplitude ΔI) on the $V(\Phi/\Phi_0)$ oscillations is investigated at lower temperatures $0.95 - 0.98 T_c$ in order to clear up a question what noise can induce the dc voltage $V(\Phi/\Phi_0)$ in [5].

Systems of 3 and 20 (see Fig.1) asymmetric Al loops with the critical temperature $T_c \approx 1.3 K$, the sheet resistance $R_\square \approx 0.5 \Omega/\square$ at 4.2 K and the resistance ratio $R(300 K)/R(4.2 K) \approx 2$ were used for investigations. We used system instead of single loop used in [5] in order to verify a possibility of summation of the dc voltage in the system of identical asymmetric loops connected in series. All loops have the same diameter $2r = l/\pi = 4 \mu m$, Fig.1 and thickness 40 nm. One half of each loop l_n is narrow with the linewidth $w_n = 0.2 \mu m$ (the section $s_n = 0.008 \mu m^2$) and the other half l_w is wide $w_w = 0.4 \mu m$ ($s_w = 0.016 \mu m^2$). These Al microstructures are prepared using an electron lithograph developed on the basis of a JEOL-840A electron scanning microscope. An electron beam of the lithograph was controlled by a PC, equipped with a software package for prox-

imity effect correction "PROXY". The exposition was made at 25 kV and 30 pA. The resist was developed in MIBK: IPA = 1: 5, followed by the thermal deposition of a high-purity Al film 60 nm and lift-off in acetone. The substrates are Si wafers.

The measurements are performed in a standard helium-4 cryostat allowing us to vary the temperature down to 1.2 K. The applied perpendicular magnetic field B was produced by a superconducting coil. The external ac current I_{ac} with the frequency from $f = 100$ Hz to $f = 1$ MHz and the amplitude up to $\Delta I = 50$ μA flows between current contacts I - I, Fig.1. The voltage was measured between different potential contacts V1-V8, Fig.1. The dc voltage variations down to 0.05 μV could be detected.

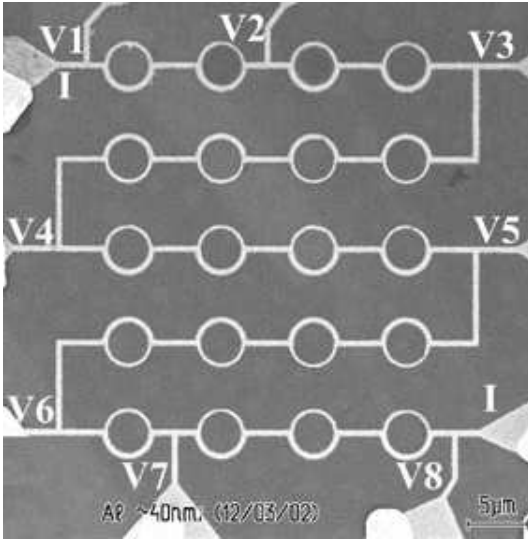


FIG. 1. Electron micrograph of the system of 20 asymmetric aluminum loops. I are the current contacts and V1, V2, V3, V4, V5, V6, V7, V8, are potential contacts.

Our measurements showed that the external ac current I_{ac} with any frequency from $f = 100$ Hz to $f = 1$ MHz induces the dc voltage oscillations $V(\Phi/\Phi_0)$ Fig.2 when its amplitude ΔI exceeds a critical value ΔI_{cr} which decreases, like the superconducting critical current I_c , with temperature and magnetic field increase. Because of the latter the oscillations are observed only at high Φ/Φ_0 values when the I_{ac} amplitude is relatively low, for example at $\Delta I = 3$ μA on Fig.2. The oscillations $V(\Phi/\Phi_0)$ fade at higher Φ/Φ_0 (like the LP oscillations, see for example [6]) because of the suppression of the superconductivity, i.e. I_p , in the wire defining the loops by the magnetic field.

The amplitude of the oscillations $V(\Phi/\Phi_0)$ does not depend on the frequency of the external ac current (in the investigated region 100 Hz - 1 MHz) and depends on its amplitude ΔI . The latter dependence is not monotonous Fig.2. The amplitude $|V|_{max}$ observed at $\Phi/\Phi_0 \approx \pm 0.25$

mounts a maximum value at ΔI slightly higher ΔI_{cr} and decreases further with the ΔI increase, Fig.2. The dependence $|V|_{max}(\Delta I)$ is close to $|V|_{max} \propto 1/\Delta I$ at high ΔI values. The ΔI value corresponded to the maximum of $|V|_{max}(\Delta I)$ and ΔI_{cr} decreases with drawing T near T_c like the superconducting critical current.

Our investigation has shown that the dc voltage can be easily summed up in the system of identical asymmetric loops connected in series. The $V(\Phi/\Phi_0)$ oscillations with amplitude up to ≈ 10 μV were observed on single loop, up to ≈ 40 μV on system of 3 loops and up to ≈ 300 μV on system of 20 loops, Fig.3.

The effect observed in our work may be interpreted as a consequence of a transference of the loop with $I_p \neq 0$ to the resistive state by the external current I_{ac} or as a rectification of the ac current I_{ac} because of an asymmetry of the current-voltage curves, Fig.4. This asymmetry takes place and its value and sign are periodical functions of the magnetic flux Φ because of superposition of the external I_{ac} current and the intrinsic persistent I_p current.

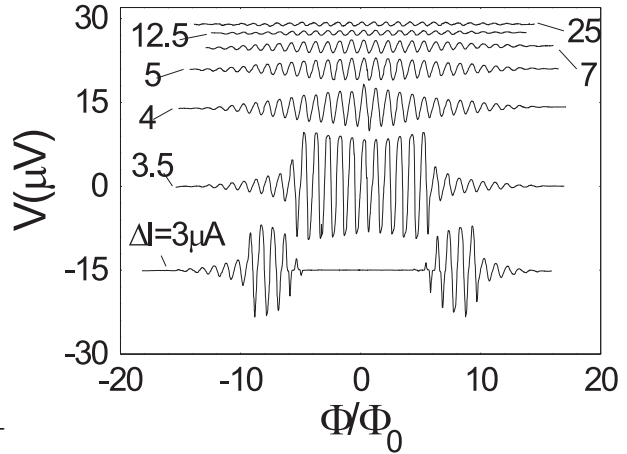


FIG. 2. Oscillations of the dc voltage induced on single loop by the ac current with the frequency $f = 2.03$ kHz and amplitudes $\Delta I = 3; 3.5; 4; 5; 7; 12.5; 25$ μA . $T = 1.280$ K is corresponding to $0.97T_c$. Except $\Delta I = 3.5$ μA , all other dependencies are displaced in the vertical direction.

The distribution of the external current $I_{ac} = I_w + I_n$ between loop halves l_w and l_n is determined in the closed superconducting state by the quantization of the velocity circulation (2): $l_n \bar{v}_n - l_w \bar{v}_w = l_n j_n / 2en_{sn} - l_w j_w / 2en_{sw} = l_n I_n / s_n 2en_{sn} - l_w I_w / s_w 2en_{sw} = (2\pi\hbar/m)(\bar{n} - \Phi/\Phi_0)$. The current density $j_n = j_w = j_{ac} = I_{ac}/(s_n + s_w)$ and the critical value j_c is achieved simultaneously (at $I_{ac} = (s_n + s_w)j_c$) in the both halves at $\bar{n} - \Phi/\Phi_0 = 0$, i.e. $I_p = 0$, since the length l_n equals l_w and the densities of superconducting pairs n_{sn} and n_{sw} are the same in the both halves.

At $\bar{n} - \Phi/\Phi_0 \neq 0$ the densities j_n and j_w are different (for example $j_n = I_{ac}/(s_n + s_w) + I_p/s_n$ and

$j_w = I_{ac}/(s_n + s_w) - I_p/s_w$, Fig.4, when the I_{ac} direction coincides with the I_p one on the narrow half l_n) and the persistent current decreases the critical I_{ac} value. These critical values in opposite directions $|I_{ac}|_{c+} = (s_n + s_w)(j_c - I_p/s_n)$ and $|I_{ac}|_{c-} = (s_n + s_w)(j_c - I_p/s_w)$ are different at $I_p \neq 0$ since $s_w > s_n$.

Since $|I_{ac}|_{c-} - |I_{ac}|_{c+} = (s_n + s_w)(j_c - I_p/s_n) - (s_n + s_w)(j_c - I_p/s_w) = (s_w/s_n - s_n/s_w)I_p \approx 1.5I_p$ the I_p and $(s_n + s_w)j_c$ values can be evaluated from measured $|I_{ac}|_{c-}$ and $|I_{ac}|_{c+}$ values. For example it is followed from the values $|I_{ac}|_{c+} \approx 0.45 \mu A$ and $|I_{ac}|_{c-} \approx 1.0 \mu A$ (see the current-voltage curve on Fig.4) measured at $\bar{n} - \Phi/\Phi_0 \neq 0$ and $T \approx 0.99T_c$ that $I_p \approx (|I_{ac}|_{c-} - |I_{ac}|_{c+}) \approx 0.37 \mu A$ and $(s_n + s_w)j_c \approx 1.6 \mu A$. Note should be taken that the current-voltage curve Fig.4 at $|I_{ac}| > (s_n + s_w)j_c$ coincides with the one in the normal state and a peculiarity is observed at $|I_{ac}| \approx (s_n + s_w)j_c$.

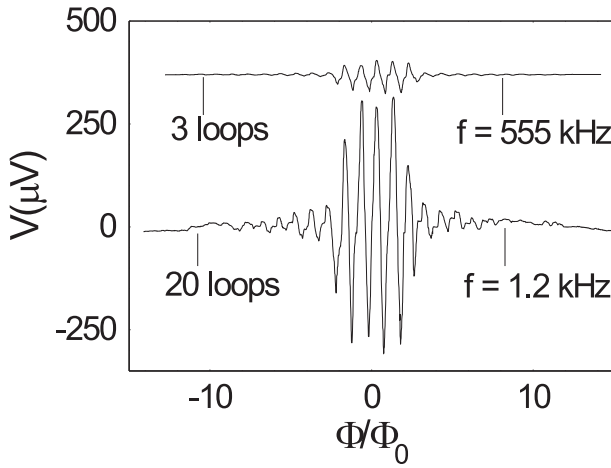


FIG. 3. Oscillations of dc voltage induced on the system of 20 loops by ac current with $f = 1.2 kHz$ and $\Delta I = 3.2 \mu A$ at $T = 1.245 K = 0.97T_c$ and on the system of 3 loops by I_{ac} with $f = 555 kHz$ and $\Delta I = 4.5 \mu A$ at $T = 1.264 K = 0.96T_c$. Second dependence is displaced on $370 \mu m$ in the vertical direction.

Since $(s_n + s_w)j_c > |I_{ac}|_{c-} > |I_{ac}|_{c+}$ the voltage (the resistive state) appears first at $\bar{n} - \Phi/\Phi_0 \neq 0$ and $|I_{ac}|_{c-} > \Delta I > |I_{ac}|_{c+}$ in only direction of the external ac current $I_{ac} = \Delta I \sin(2\pi ft)$, see Fig.5. The absence of the voltage at $\Delta I = 9 \mu A$ (corresponded to the maximum of the $|V|_{max}(\Delta I)$ dependence) and $\Phi = 0$ (see the upper oscillograph curve on Fig.5) means that $j_c > 9 \mu A/s_w \approx 9 \mu A/0.016 \mu m^2 \approx 5.6 \cdot 10^8 A/m^2$ at $T \approx 0.96T_c$ since the width of the wire between the loops and contacts equals $s_w < s_w + s_n$, see Fig.1 and Fig.4. At the same temperature and ΔI value but $\Phi = 0.75\Phi_0$ the voltage is observed in only direction of $I_{ac} = \Delta I \sin(2\pi ft)$, (see the second oscillograph curve on Fig.5). This means that $|I_{ac}|_{c-} > \Delta I = 9 \mu A > |I_{ac}|_{c+}$ at $T \approx 0.96T_c$ and $\Phi = 0.75\Phi_0$ and consequently $I_p = s_n(j_c - |I_{ac}|_{c+}/(s_n + s_w)) > s_n(j_c - 9 \mu A/(s_n + s_w)) >$

$9 \mu A s_n^2/s_w(s_n + s_w) \approx 1.5 \mu A$. At $\Phi = 4.25\Phi_0$ (see the third oscillograph curve on Fig.5) the steady voltage is observed in the opposite (relatively the $\Phi = 0.75\Phi_0$ case) I_{ac} direction and the unsteady voltage is observed in the other direction. The latter takes place because of the j_c decrease down to $|I_{ac}|_{c-} = (s_n + s_w)(j_c - I_p/s_w) \approx 9 \mu A$ in a high magnetic field. At $\Delta I > |I_{ac}|_{c-}$ the steady voltage is observed in the both I_{ac} directions (see the lower oscillograph curve on Fig.5).

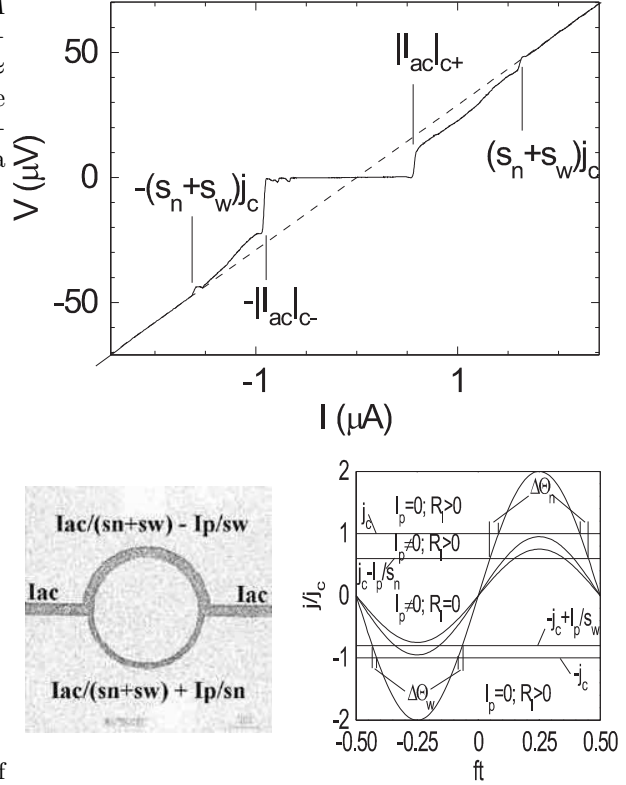


FIG. 4. The current-voltage curve measured on a system of 2 loops at $T \approx 0.99T_c$, $\Phi \neq n\Phi_0$ and $\Phi \neq (n+0.5)\Phi_0$ is shown in the above part. The change of the current distribution between loop halves l_w and l_n because of the persistent current $I_p \neq 0$ is indicated in the lower left side. The drawing in the lower right side elucidates why the $|V|_{max}(\Delta I)$ dependence (see Fig.2 and 6) is not monotonous.

The external current $|I_{ac}| < (s_n + s_w)j_c$ can not destroy superconductivity in the both (l_w and l_n) halves of the loop. Therefore the resistive state observed at $|I_{ac}|_{c+} < |I_{ac}| < (s_n + s_w)j_c$ (and at $|I_{ac}|_{c-} < |I_{ac}| < (s_n + s_w)j_c$, see Fig.4) can not be static. When the l_n (for example) half transfers in the resistive state with $R_n > 0$ and $V(t) = R_n I_n \neq 0$ at $I_n = I_{ac}s_n/(s_n + s_w) + I_p > s_n j_c$ the I_n value decreases (because of the I_p reduction and the I_w increase according to the law $L_w dI_w/dt = V(t)$) and the l_n half should return at $I_n < s_n j_c$ to the superconducting state with $I_n = I_{ac}s_n/(s_n + s_w) + I_p > s_n j_c$. Thus, the superconducting state with both connectiv-

ity (i.e. with $R_n > 0$ and $R_n = 0$) can not be stable and the loop should switch between them with an intrinsic frequency ω at $|I_{ac}|_{c+} < |I_{ac}| < (s_n + s_w)j_c$ (or at $|I_{ac}|_{c-} < |I_{ac}| < (s_n + s_w)j_c$).

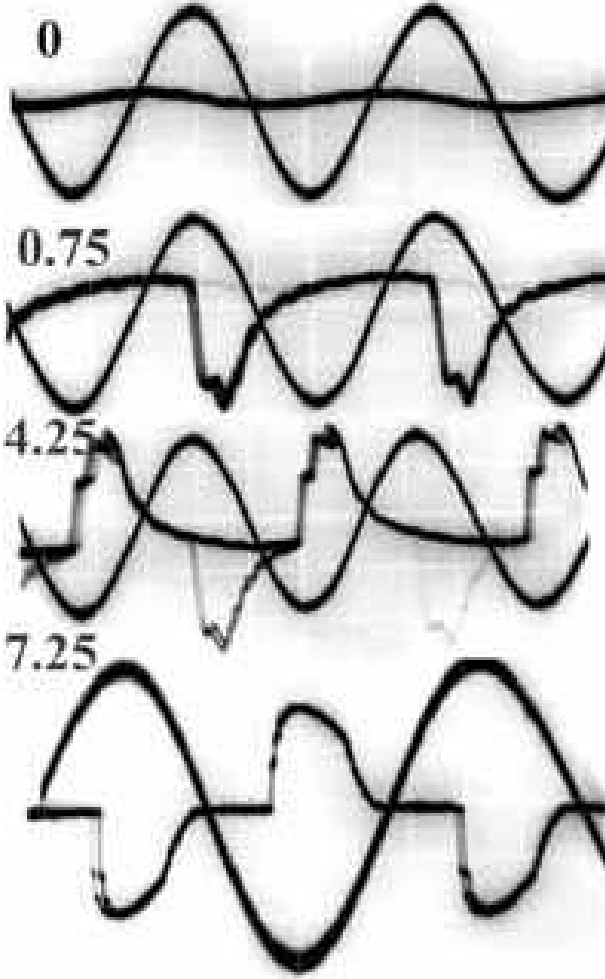


FIG. 5. The oscillograph curves of the voltage measured on a system of 3 loops and of the ac current inducing it at: $\Phi = 0$, $\Phi = 0.75\Phi_0$, $\Phi = 4.25\Phi_0$ ($f = 11.53$ kHz, $\Delta I = 9$ μ A, $T \approx 0.96T_c$) and $\Phi = 7.25\Phi_0$ ($f = 1.53$ kHz, $\Delta I = 5.8$ μ A, $T \approx 0.97T_c$).

It should be noted that the half in which I_{ac} and I_p have opposite directions remains all time in superconducting state in this dynamic resistive state although the average in time voltage $V_{dc} = \overline{V(t)}$ (measured, for example, on the current-voltage curve Fig.4) is not equal zero. It is possible because of the switching between superconducting state with different connectivity. The voltage would not be observed at $|I_{ac}|_{c+} < |I_{ac}| < s_w j_c$ (for example on the second oscillograph curve of Fig.5) if the l_n half could remain constantly in the normal state with $R_n > 0$ when superconducting state in the loop is un-

closed and $I_p = 0$.

The dc voltage $V_{dc} \neq 0$ can be observed on the superconducting half (l_w for example) since the velocity v_s and the momentum $p = mv_s + 2eA$ of superconducting pairs should revert to the initial quantum values, after the acceleration $dp/dt = 2eE(t) = 2eV(t)/l_w = 2eR_n I_n$ at $R_n > 0$, when the loop reverts to the closed superconducting state. The same reason explains the observation of the persistent current at $R > 0$ in the LP experiment [4]. Since the p change because of $V(t)$ equals the average change Δp because of the quantization

$$V_{dc} = \overline{V(t)}^t = \overline{R_n I_n}^t = \Delta p \omega l_w / 2e \quad (3)$$

The Δp value is connected with the deviation of I_w (and consequently $I_n = I_{ac} - I_w$) from the quantum value $I_w = I_{ac} s_w / (s_n + s_w) - I_p$ during a time $t_{R>0}$ when the superconducting state is unclosed, i.e. $R_n > 0$. This change of the current distribution $\Delta I_w < I_{ac}/3 + I_p$ and $\Delta I_w < 3I_p$ since $I_n > 0$ and $I_w < s_w j_c$ in the dynamic resistive state. The momentum circulation of superconducting pair changes from the quantum value $2\pi\hbar n$ to $2e\Phi$ when the persistent current changes from the quantum value I_p to zero [4]. Therefore $\Delta p = \oint l d\Delta p / l < 3(2\pi\hbar/l)(\bar{n} - \Phi/\Phi_0)$ since $\Delta I_w < 3I_p$ and $2\pi\hbar\bar{n} - 2e\Phi = 2\pi\hbar(\bar{n} - \Phi/\Phi_0)$. According to this inequality and (3) the switching frequency $\omega = 2eV_{dc}/\Delta p l_w > 1/3(e\pi\hbar/l/l_w)V_{dc}/(\bar{n} - \Phi/\Phi_0) \approx 1/3(0.4836 \text{ GHz}/\mu\text{V})V_{dc}/(\bar{n} - \Phi/\Phi_0)$ should exceed 90 GHz at $V_{dc} \approx 70$ μ V observed on single loop at $|n - \Phi/\Phi_0| \approx 1/4$ (see Fig.5 for example).

The change of the current distribution ΔI_w determined by the relaxation law $L_w dI_w/dt = -L_w dI_n/dt = V(t) = R_n I_n$ (and consequently Δp) is smaller than its maximum possible value if the time of the relaxation to the equilibrium superconducting state $t_{R>0}$ during which $R_n > 0$ is shorter than the time L_w/R_n of current relaxation. The kinetic inductance L_w exceeds the geometric one L_g , $L_w/L_g \approx \lambda_L^2/s_w \gg 1$, in the case of weak screening, $s_w \ll \lambda_L^2$. The section of the loop $s_w \approx 0.016$ μm^2 is smaller than the square of the London penetration depth $\lambda_L^2(T)$ of Al at $T = 0.95 - 0.98T_c$, $\lambda_L^2(T) = \lambda_L^2(0)/(1 - T/T_c) \approx (0.05 \text{ } \mu\text{m})^2/(1 - T/T_c) \approx 0.1 \text{ } \mu\text{m}^2$ at $1 - T/T_c = 0.025$. Therefore the inductance of l_w , $L_w = L_{kin} + L_g \approx L_{kin} \approx \mu_0 l_w \lambda_L^2(T)/s_w \approx 4 \cdot 10^{-11}$ G at $T = 0.975T_c$ and $L_w/R_n > L_w/R_{n,n} \approx 3 \cdot 10^{-12}$ s since the resistance of l_n in the normal state $R_{n,n} \approx 15$ Ω .

The observed value of the dc voltage $V_{dc} = \overline{V(t)}^t = \overline{R_n I_n}^t < R_{n,n} \overline{I_n}^t$ is evidence of weak variation of the current distribution since the value the average current $\overline{I_n}^t > V_{dc}/R_{n,n}$ is close to the value $I_n = I_{ac} s_n / (s_n + s_w) + I_p$ in the closed superconducting state. For example, the value $V_{dc} \approx 7.4$ μ V measured at $I_{ac} \approx 0.7$ μ A on single loop, see the current-voltage curve on Fig.4, gives $\overline{I_n}^t > V_{dc}/R_{n,n} \approx 0.49$ μ A whereas $I_{ac} s_n / (s_n + s_w) \approx 0.23$ μ A and $I_{ac} s_n / (s_n + s_w) + I_p \approx 0.6$ μ A. The weak variation of the current distribution means that $t_{R>0} < L_w/R_n \geq 3 \cdot 10^{-12}$ s.

Thus, the dc voltage oscillations $V(\Phi/\Phi_0)$ like the persistent current oscillations $I_p(\Phi/\Phi_0)$ are observed since both $\overline{I_p^t} \neq 0$ and $\overline{R_l^t} > 0$ in the dynamic resistive state because of switching between superconducting states with different connectivity. Only this state makes a contribution to $V(\Phi/\Phi_0)$ since $R_l = 0$ at $|I_{as}| < j_c(s_n + s_w) - I_p(s_n + s_w)/s_n$ and at $|I_{as}| > j_c(s_n + s_w)$, $I_p = 0$ and the current-voltage curve does not differ from the one in the normal state, see Fig.4.

Therefore the $V(\Phi/\Phi_0)$ value can be evaluated by the relation $V \approx (V_{dc,n}\Delta\Theta_n - V_{dc,w}\Delta\Theta_w)/\Theta$, where $\Delta\Theta_n$ and $\Delta\Theta_w$ are parts of the time period $\Theta = 1/f$ during which $j_c(s_n + s_w) - I_p(s_n + s_w)/s_n < \Delta I |\sin(2\pi ft)| < j_c(s_n + s_w)$ and $j_c(s_n + s_w) - I_p(s_n + s_w)/s_w < \Delta I |\sin(2\pi ft)| < j_c(s_n + s_w)$ (see Fig.4). $V_{dc,n}$ and $V_{dc,w}$ are average voltage during $\Delta\Theta_n$ and $\Delta\Theta_w$.

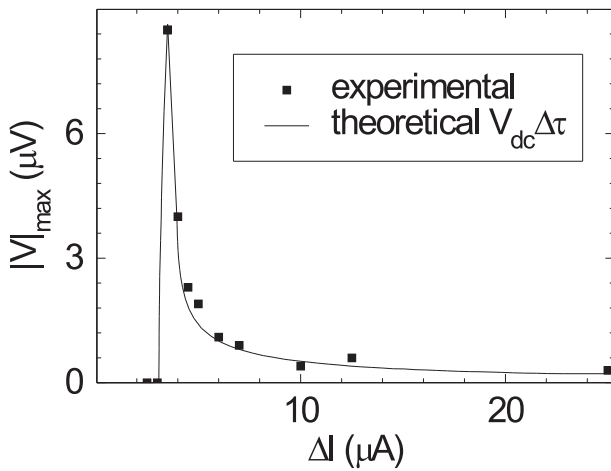


FIG. 6. The dependence of the amplitude of the dc voltage oscillations $V(\Phi/\Phi_0)$ on the amplitude ΔI of the external ac current with the frequency $f = 2.03$ kHz measured on single loop at $T = 1.280$ K $\approx 0.97T_c$ and $\Phi/\Phi_0 \approx \pm 0.25$. The line is the theoretical dependence $V_{dc}(\Delta\Theta_n - \Delta\Theta_w)/\Theta = V_{dc}\Delta\tau(\Delta I)$ calculated at $V_{dc} \approx 25$ μV , $I_c \approx 4.5$ μA and $I_p \approx 0.5$ μA

The dependence of $(\Delta\Theta_n - \Delta\Theta_w)/\Theta = \Delta\tau$ on the amplitude ΔI of the ac current, $\tau(\Delta I)$, is not monotonous like the observed $|V|_{max}(\Delta I)$ dependence, Fig.6. The $\tau(\Delta I)$ and $|V|_{max}(\Delta I)$ have maximum values at $j_c - I_p/s_n < \Delta I/(s_n + s_w) < j_c - I_p/s_w$ when $\Delta\Theta_w = 0$, see Fig.4, and the voltage is observed in only direction of I_{ac} , see Fig.5. When $\Delta I/(s_n + s_w)$ exceeds $j_c - I_p/s_w$ the τ and $|V|_{max}$ values decrease sharply but remain non-zero since $\Delta\Theta_n > \Delta\Theta_w$, Fig.4, because of the loop asymmetry. The following diminution of $|V|_{max}$ with the ΔI increase, Fig.6, may be explained by the $\Delta\Theta_n$ and $\Delta\Theta_w$ diminution, Fig.4. The approximation $|V|_{max}(\Delta I) = V_{dc}\tau(\Delta I)$, where $V_{dc} \approx V_{dc,n} \approx V_{dc,w} \approx 25$ μV and the $\tau(\Delta I)$ dependence is calculated at $I_c \approx 4.5$ μA and $I_p \approx 0.5$ μA , describes enough

well the experimental $|V|_{max}(\Delta I)$ dependence observed at $T = 1.280$ K $\approx 0.97T_c$, Fig.6.

In conclusion, we have shown that the dc voltage oscillations observed in [5] are connected with a rectification of the ac current because of an asymmetry of the current-voltage curves of asymmetric superconducting loop at non-zero persistent current. Since the critical amplitude of the ac current inducing the dc voltage oscillations decreases down to zero with drawing T near T_c , like the superconducting critical current, any how weak electric noise, right down to intrinsic noise, can induce these oscillations when the temperature is enough close to T_c . Therefore the system of asymmetric superconducting loops can be used as noise detector with maximum sensitivity. This system can be used also as a source of high-frequency radiation if the switching of loops between superconducting states with different connectivity are synchronous in it.

We acknowledge useful discussions with V.A.Tulin. This work was financially supported by the Presidium of Russian Academy of Sciences in the Program "Low-Dimensional Quantum Structures".

-
- [1] M.Tinkham, *Introduction to Superconductivity*. McGraw-Hill Book Company (1975).
 - [2] W.A.Little and R.D.Parks, *Phys. Rev. Lett.* **9**, 9 (1962).
 - [3] I.O.Kulik, *Zh.Eksp.Teor.Fiz.* **58**, 2171 (1970).
 - [4] A.V. Nikulov, *Phys.Rev. B* **64**, 012505 (2001).
 - [5] S.V.Dubonos, V.I.Kuznetsov and A.V.Nikulov, in *Proceedings of 10th International Symposium "NANOSTRUCTURES: Physics and Technology"* St Petersburg: Ioffe Institute, 2002, p. 350; physics/0105059.
 - [6] H.Vloeberghs et al., *Phys. Rev.Lett.* **69**,1268 (1992).