

Inductive measurements of third-harmonic voltage and critical current density in bulk superconductors

Yasunori Mawatari, Hirofumi Yamasaki, and Yoshihiko Nakagawa
Energy Electronics Institute,
National Institute of Advanced Industrial Science and Technology,
Tsukuba, Ibaraki 305-8568, Japan
(dated: April 14, 2024)

We propose an inductive method to measure critical current density J_c in bulk superconductors. In this method, an electromagnetic field is generated by a drive current I_0 flowing in a small coil mounted just above the flat surface of superconductors, and the third-harmonic voltage V_3 induced in the coil is detected. We present theoretical calculation based on the critical state model for the ac response of bulk superconductors, and we show that the third-harmonic voltage detected in the inductive measurements is expressed as $V_3 = G_3 I_0^2 = J_c$, where $\omega = 2\pi f$ is the frequency of the drive current, and G_3 is a factor determined by the configuration of the coil. We measured the I_0 - V_3 curves of a melt-textured $\text{YBa}_2\text{Cu}_3\text{O}_{7-x}$ bulk sample, and evaluated the J_c by using the theoretical results.

PACS numbers: 74.25.Sv, 74.25.Qt, 74.25.Nf

Large melt-textured RE-Ba-Cu-O (where RE represents rare-earth elements) superconductors can trap strong magnetic fields, and have been developed for high-field engineering applications.¹ The trapped field is proportional to the critical current density J_c , and a nondestructive and contactless method is desirable to measure J_c distribution in large-sized superconductors.

Classen et al.² proposed a nondestructive and contactless method to measure J_c in superconducting films, and the scientific basis of this inductive technique was theoretically justified.^{3,4} In that method an electromagnetic field is generated by a sinusoidal drive current $I_0 \cos \omega t$ flowing in a coil close to the upper surface of a superconducting film, and the amplitude V_3 of the third-harmonic voltage $V_3 \cos(3\omega t + \phi_3)$ induced in the coil is simultaneously measured. For superconducting films of thickness d_f , V_3 is detected when $I_0 > I_{c0}$, where I_{c0} / J_{cd_f} is the threshold current at which the sheet current of the film reaches its critical value J_{cd_f} and the electromagnetic field penetrates below the film.⁴ The J_c is determined from I_{c0} ,² and the current-voltage characteristics can be determined by measuring the frequency $\omega = 2\pi f$ dependence of J_c .⁵

In this letter, we theoretically calculate the ac response of bulk superconductors based on the critical state model,^{6,7} and derive the relationship between I_0 and V_3 that are measured in the inductive method. Experimental setups and measured quantities in the inductive method for bulk superconductors proposed in this letter are basically the same as those in the previously developed inductive method for films.² Because the thickness of bulk superconductors is much larger than that for superconducting films, an electromagnetic field generated by a small coil placed above the bulk superconductors cannot penetrate below the lower surface of the superconductors. The harmonic voltages of bulk superconductors, however, arise from irreversible vortex motion,⁷ even when the electromagnetic field is shielded below the lower surface of the bulk superconductor. Our theoretical calculations described in this letter show that the I_0 - V_3 curves for bulk superconductors significantly differ from those for films,^{2,3,4,5} but are similar to those for superconducting rods.^{7,8}

First, we theoretically calculate the ac response of a

bulk superconductor of thickness d situated at $-d < z < 0$, where the upper surface is at $z = 0$ and the lower surface at $z = -d$. A single coil mounted just above the superconductor is used to generate an electromagnetic field and to detect the induced voltage.² The bulk superconductor is considered to extend infinitely in the xy plane, and thus the electromagnetic fields are not affected by the edges of the bulk superconductor sample. The edge effects are negligible if the distance between the sample edge and the coil edge is larger than the radius of the coil.^{2,9} We consider a coil of circular shape that produces axially symmetric fields independent of azimuth in cylindrical coordinates $(r; z) = (r; z)$. Current density $\mathbf{J} = J(r; z; t)\hat{z}$, sheet current $\mathbf{K} = K(r; t)\hat{z}$, and vector potential $\mathbf{A} = A(r; z; t)\hat{\phi}$ have only azimuthal components. Although the magnetic field \mathbf{H} has both a radial component H_r parallel to the superconductor surface and a z component H_z normal to the surface, we assume that H_r plays a crucial role in determining the ac response of the bulk superconductors. The shielding current J_s flowing near the surface prevents penetration of magnetic flux into the bulk superconductors, and J_s mostly cancels out H_z near the surface of the bulk superconductors, $H_r \approx H_z$ for $z \approx 0$.

A drive current $I_0 \cos \omega t$ flowing in the coil produces an electromagnetic field, and its radial component at $z = 0$ is given by

$$H_r(r; t) = \frac{I_0}{2} F_1(r) \cos \omega t, \quad (1)$$

The coil-factor function $F_1(r)$ is determined by the configuration of the coil,

$$F_1(r) = \frac{N}{4 S_c} \int_{R_1}^{R_2} \int_{Z_1}^{Z_2} \frac{dz}{d^2 + r^2 + z^2} dz \cos \omega t, \quad (2)$$

where N is the number of windings, $S_c = (R_2 - R_1)(Z_2 - Z_1)$ is the cross-sectional area of the coil in the rz plane at $R_1 < r < R_2$ and $Z_1 < z < Z_2$ where $Z_1 > 0$.

Responding to the electromagnetic field H_r , shielding current density J_s is induced near the surface of the bulk superconductor, $0 < z < \lambda$, where λ is the penetration depth that is smaller than the thickness d

of the bulk superconductor. The vector potential arising from J_s is given by

$$A_s(\mathbf{r}; t) = \frac{1}{4} \int_{S_{sc}} d^2 \mathbf{r}'_0 \int_0^{Z_0} dz'_0 \frac{J_s(\mathbf{r}'_0; z'_0; t)}{(j^2 + \mathbf{r}^2 + z'^2)^{1/2}} \quad (3)$$

where the integral region S_{sc} corresponds to the surface of the bulk superconductor in the xy plane, i.e., $0 < z < 1$ and $0 < r < 2$. The A_s is expressed as the multipole expansion, $A_s = A_{s1} + A_{s2} + \dots$ for $r \ll R_2$, where

$$A_{s1}(\mathbf{r}; t) = \frac{1}{4} \int_{S_{sc}} d^2 \mathbf{r}'_0 \frac{K_s(\mathbf{r}'_0; t)}{(j^2 + \mathbf{r}^2 + z^2)^{1/2}}; \quad (4)$$

$$A_{s2}(\mathbf{r}; t) = \frac{1}{4} \int_{S_{sc}} d^2 \mathbf{r}'_0 \frac{M_s(\mathbf{r}'_0; t) (z\hat{z})}{(j^2 + \mathbf{r}^2 + z^2)^{3/2}}; \quad (5)$$

The $K_s(\mathbf{r}; t) = \int_0^{R_0} dz J_s(\mathbf{r}; z; t)$ is the sheet current, and $M_s(\mathbf{r}; t) = \int_0^{R_0} dz (z\hat{z}) J_s(\mathbf{r}; z; t)$ is the sheet magnetic moment.

The magnetic flux linked in the coil of N turns wound by a thin wire is calculated as

$$\begin{aligned} \Phi(t) &= \frac{2N}{S_c} \int_{R_1}^{R_2} dR \int_{Z_1}^{Z_2} dz A(\mathbf{r}; t) \\ &= L_c I_0 \cos \omega t + \Phi_{s1}(t) + \Phi_{s2}(t) + \dots; \quad (6) \end{aligned}$$

where the first term in the right-hand side of Eq. (6) arises from the drive current, and L_c is the self-inductance of the coil. The remaining terms in Eq. (6), $\Phi_{s1} + \Phi_{s2} + \dots$, arise from the shielding current in the superconductor; Φ_{s1} is due to K_s and Φ_{s2} is due to M_s . The ratio of j_{s2}/j_{s1} is on the order of R_2 for $Z_2 < R_2$, whereas j_{s1}/j_{s1} is on the order of $L_c I_0$. Because the ratio R_2/L_c is typically on the order of 0.01 or less, we can neglect Φ_{s2} to obtain the linear response to I_0 . The non-linear response of bulk superconductors, however, arises from Φ_{s2} , as we show below.¹⁰

When the ac field does not reach the lower surface of a bulk superconductor (i.e., $2H_0 j < J_c d$ and $0 < d$), the sheet current is given by $K_s = 2H_0$ (where $K_s j < J_c d$), the ac magnetic field at the surface of the superconductor ($z = 0$) is also given by $2H_0$,⁴ and the magnetic flux due to the sheet current is simply expressed as $\Phi_{s1} = L_{ci} I_0 \cos \omega t$, where L_{ci} is the mutual inductance between the coil and its image.² The Φ_{s2} is calculated as the line integral of Eq. (5) along the wire of the coil, and is given by $\Phi_{s2}(t) = \frac{2}{\pi} \int_0^{R_1} dR \int_0^{Z_1} dz F_1(r) M_s(\mathbf{r}; t)$, where $F_1(r)$ is given by Eq. (2). Induced voltage in the coil is given by $V(t) = R_c I_0 \cos \omega t + d\Phi/dt$, which can be rewritten as

$$\begin{aligned} V(t) &= R_c I_0 \cos \omega t + (L_c - L_{ci}) I_0 \sin \omega t \\ &\quad + \frac{2}{\pi} \int_0^{R_1} dR \int_0^{Z_1} dz F_1(r) \frac{\partial M_s(\mathbf{r}; t)}{\partial t}; \quad (7) \end{aligned}$$

where R_c is the resistance of the coil. The amplitude of the last term of the right-hand side of Eq. (7) is much smaller than the other terms, but the first and second terms do not contribute to the harmonic response.

The shielding current $J_s = J_s(\mathbf{r}; t)$ induced by the ac magnetic field of Eq. (1) in the critical state model^{6,7} is

given as follows: $J_s(\mathbf{r}; t) = J_c$ for $(\mathbf{r}; t) < z < 0$, and $J_s(\mathbf{r}; t) = J_c$ for $0 < z < (\mathbf{r}; t)$, where J_c is the critical current density. The signs '+' ('') represents '+' ('') for $0 < t < 2$ and '-' ('') for $2 < t < 4$.¹¹ The ux-penetration depths are given by $z_0(t) = 2I_0 F_1(r) = J_c$ and $(\mathbf{r}; t) = z_0(t) (1 - \cos \omega t) = 2$. Then, the sheet magnetic moment $M_s(\mathbf{r}; t) = \int_0^{R_0} dz (\mathbf{r}) J_s(\mathbf{r}; z; t)$ is calculated as

$$\begin{aligned} M_s(\mathbf{r}; t) &= \frac{1}{2} J_c \int_0^2 dz \cos \omega t = \frac{1}{2} \sin^2 \omega t; \\ &= 2I_0^2 F_1(r)^2 = J_c \cos \omega t - \frac{4}{\pi} \sum_{k=1}^{\infty} \frac{\sin(2k-1)\omega t}{(2k-3)(4k^2-1)}; \quad (8) \end{aligned}$$

Substitution of Eq. (8) into Eq. (7) yields

$$V(t) = V_1 \cos(\omega t + \phi_1) + \sum_{n=2}^{\infty} V_n \cos n\omega t; \quad (9)$$

The harmonic voltages are given by $V_n = 0$ for even $n = 2; 4; 6; \dots$ ¹¹ and $V_n = 5V_3/(n^2 - 4)$ for odd $n = 3; 5; 7; \dots$. The third-harmonic voltage is

$$V_3 = G_3 I_0^2 = J_c; \quad (10)$$

$$G_3 = \frac{16}{5} \int_0^{R_1} dR \int_0^{Z_1} dz F_1^3(r); \quad (11)$$

where G_3 is the coil factor determined by the configuration of the coil. The fundamental voltage $V_1 \cos(\omega t + \phi_1)$ in Eq. (9) is affected by the impedance of the coil, R_c and $(L_c - L_{ci})$. Equation (10) is similar to V_3 derived by Bean⁷ to determine averaged J_c over the surface of cylindrical superconductors exposed to a uniform ac magnetic field. Note that Eq. (10) is applicable to evaluate local J_c distribution at the flat surface of large bulk superconductors responding to a nonuniform ac magnetic field.

Next, we demonstrate evaluation of J_c by using the theoretical result of Eq. (10) from our experimental data for a melt-textured $\text{YBa}_2\text{Cu}_3\text{O}_{7-x}$ (YBCO) bulk superconductor sample. The YBCO sample was 12:1 12.7 mm² and 0.9 mm thick. The third-harmonic voltage induced by the YBCO sample was measured by using the experimental setup described in Ref. 5. Although our experimental setup was similar to that in Refs. 2 and 3, an additional cancel coil was needed to compensate for harmonic noise voltages.⁵ The coil used to generate the ac magnetic field and to detect the induced voltage had $N = 400$ turns and dimensions of inner diameter of $2R_1 = 1.0$ mm, outer diameter of $2R_2 = 3.5$ mm, and height of $Z_2 - Z_1 = 1.0$ mm. The distance between the coil and the surface of the sample was $Z_1 = 0.25$ mm. A dc magnetic field B_{dc} was applied perpendicular to the flat surface of the sample (parallel to the c axis of YBCO).

Figure 1 shows the square root of the measured third-harmonic voltage $V_3^{1/2}$ as a function of the drive current I_0 for the YBCO bulk superconductor sample. The dotted lines for the data of $B_{dc} = 1$ and 3 T intersect the origin, and are consistent with Eq. (10). We can evaluate J_c from the slope of the lines in Fig. 1 by using Eq. (10), where the coil factor calculated by using Eqs. (2) and

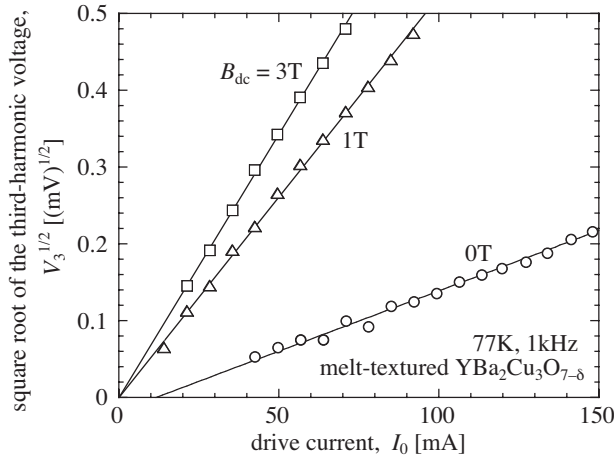


FIG. 1: Drive current I_0 dependence of the square root of the third-harmonic voltage $V_3^{1/2}$ for a melt-textured $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ sample at 77 K and $\omega = 1 \text{ kHz}$. A dc magnetic field B_{dc} was applied perpendicular to the wide surface of the sample.

(11) is $G_3 = 735 \text{ sec/m}^2$ for the coil used in our measurements. The resulting J_c values are $1.7 \cdot 10^6$ and $1.0 \cdot 10^6 \text{ A/m}^2$ for $B_{dc} = 1$ and 3 T, respectively.

The fitted line for the data of $B_{dc} = 0 \text{ T}$ in Fig. 1 does not intersect the origin, suggesting the following empirical equation for I_0 - V_3 :

$$V_3 = G_3 (I_0 - I_{c1})^2 = J_c \text{ for } I_0 > I_{c1}; \quad (12)$$

where $J_c = 1.9 \cdot 10^6 \text{ A/m}^2$. The threshold current is $I_{c1} = 11 \text{ mA}$, which corresponds to the ac magnetic field $2 \cdot 10^{-2} \text{ T}$ at the surface of the bulk superconductor sample. The threshold current I_{c1} might be affected by the lower critical field or surface barrier field. The importance of such barrier fields has been realized in harmonic-voltage measurements.⁸

A rough estimate of the electric field E_s induced at

the surface of the bulk superconductor is given as the product of angular frequency ω , ac magnetic induction $2 \cdot 10^{-2} \text{ T}$, and the field penetration depth $\lambda_0 \approx 2 \cdot 10^{-2} \text{ m}$:

$$E_s \approx 2 \cdot 10^{-2} \cdot \omega \cdot \lambda_0 \approx 4 \cdot 10^{-2} \text{ V/m} = J_c; \quad (13)$$

Both the E_s induced in the bulk superconductors and V_3 induced in the coil are proportional to $\omega^2 = J_c$, and thus, the ratio $V_3 = E_s$ ($\approx 5 \text{ cm}$ for the coil used in our measurements) is governed only by the configuration of the coil. The third-harmonic voltage of $V_3 \approx 0.05 \text{ mV}$, which is the typical order of V_3 shown in Fig. 1, implies that the electric field induced at the surface of the bulk superconductor is on the order of $E_s \approx 1 \text{ mV/m}$, which is much larger than that in the magnetization measurements.¹² Because $E_s \propto \omega$, we can measure J_c - E_s curves (i.e., current-voltage characteristics) by measuring ω dependence of J_c , as demonstrated for InS .⁵

In summary, we theoretically and experimentally investigated the third-harmonic voltage V_3 in response to an ac magnetic field generated by a sinusoidal drive current I_0 in a small coil placed just above bulk superconductors. The theoretical third-harmonic voltage induced in the coil is given by Eq. (10). The experimental data of melt-textured YBCO bulk samples for $B_{dc} = 1 \text{ T}$ are consistent with Eq. (10), and the J_c values can thus be evaluated from the experimental data. These results show that the distribution of J_c in large-sized bulk superconductors can be determined by measuring I_0 - V_3 curves with a scanning coil (or fixed multiple coils) and using Eq. (10). We can measure J_c only near the surface (i.e., J_c for $0 < z < \lambda_0$) of bulk superconductors, whereas information on J_c deep inside bulk superconductors can not be obtained by this method.

This work was done as part of the Super-ACE project (a project for the R & D of fundamental technologies for superconducting ac power equipment) of the Ministry of Economy, Trade, and Industry of Japan.

¹ M. Tomita and M. Murakami, Nature 421, 517 (2003), and references therein.

² J. H. Claassen, M. E. Reeves, and R. J. Soulen, Jr., Rev. Sci. Instrum. 62, 996 (1991).

³ G. D. Poulin, J. S. Preston, and T. Strach, Phys. Rev. B 48, 1077 (1993).

⁴ Y. Mawatari, H. Yamasaki, and Y. Nakagawa, Appl. Phys. Lett. 81, 2424 (2002).

⁵ H. Yamasaki, Y. Mawatari, and Y. Nakagawa, Appl. Phys. Lett. 82, 3275 (2003).

⁶ C. P. Bean, Phys. Rev. Lett. 8, 250 (1962).

⁷ C. P. Bean, Rev. Mod. Phys. 36, 31 (1964).

⁸ G. R. Love, J. Appl. Phys. 37, 3361 (1966); H. A. Ullmaier, Phys. Stat. Sol. 17, 631 (1966); S. T. Sekula and J. H. Barrett, Appl. Phys. Lett. 17, 204 (1970); D. M. K. Roeger, C. C. Koch, and W. A. Coghlan, J. Appl. Phys. 44, 2391 (1973); D. M. K. Roeger, C. C. Koch, and J. P. Charlesworth, J. Low Temp. Phys. 19, 493 (1975).

⁹ H. Hochmuth and M. Lorenz, Physica (Amsterdam) 220C, 209 (1994); *ibid.* 265C, 335 (1996).

¹⁰ For superconducting InS , nonlinear response arises from s_1 when $I_0 > I_{c0}$, and thus the small contribution from

s_2 can be neglected to obtain the behavior of harmonic voltages for InS , as done in the calculation in Ref. 4. When $I_0 < I_{c0}$, on the other hand, linear response of s_1 does not affect the harmonic voltage, and thus s_2 plays a crucial role in harmonic voltages. The contribution to harmonic voltages from $s_2 / 1 = J_c$ is, however, too small to detect in experiments for InS , because J_c of InS is typically 100 times larger than J_c of bulk materials. Therefore, $V_3 = 0$ for $I_0 < I_{c0}$ in InS .^{2,3,4,5}

¹¹ We assume the periodicity of $J_s(\omega) = J_s(\omega + \pi)$, which leads to the disappearance of the even harmonics, $V_n = 0$ for n even. Such behavior of J_s and V_n is not accurate because J_c for $0 < \omega < \pi$ is not identical to J_c for $\pi < \omega < 2\pi$ when $B_{dc} \neq 0$. This assumption of the periodicity of J_s , however, is a good approximation and the even harmonics are generally much smaller than the odd harmonics.

¹² Y. Mawatari, A. Sawa, H. Obara, M. Umeda, and H. Yamasaki, Appl. Phys. Lett. 70, 2300 (1997); H. Yamasaki and Y. Mawatari, Supercond. Sci. Technol. 13, 202 (2000).