

Electric instability in superconductor-normal conductor ring

A. K. Adigrobov¹

Theoretische Physik III, Ruhr-Universität Bochum, D-44780 Bochum, Germany
()

Non-linear electrodynamics of a ring-shaped Andreev interferometer (superconductor-normal conductor-superconductor hybrid structure) inductively coupled to a circuit of the dissipative current is investigated. The current-voltage characteristics (CVC) is demonstrated to be a series of loops with several branches intersecting in the CVC origin. The sensitivity of the transport current to a change of the applied external magnetic flux can be comparable to the one of the conventional SQUID's. Spontaneous arising of coupled non-linear oscillations of the transport current, the Josephson current and the magnetic flux in Andreev interferometers are also predicted and investigated. The frequency of these oscillations can be varied in a wide range, while the maximal frequency can reach $\omega_{\max} \sim 10^{12} \text{ sec}^{-1}$.

Recent years much attention has been paid to the charge transport in mesoscopic systems which combine normal conductor (N) and superconductor (S) elements (for review papers see, e.g., [2,3] and references there). In such a hybrid structure superconducting correlations penetrate into the normal conductor within mesoscopic distances changing its transport properties there. This quantum effect is most pronounced in S-N-S structures ("Andreev interferometers") in which the quantum interference gives rise to a high sensitivity of these superconducting correlations to the phase difference between the superconductors'. It results, in particular, in oscillations of the Josephson current $J_s = J_s(\phi)$ with a change of ϕ , the amplitude of the oscillations [3] being $J_c = N_F v_F L_N$ ($N_F = S_N = \frac{2}{F}$, $F = \hbar p_F$ - the Fermi wave length, p_F - the electron Fermi momentum, e - the electron charge, v_F - the Fermi velocity, S_N and L_N are the cross-section area and the length of the normal conductor, respectively).

If the Andreev interferometer is coupled to reservoirs of normal electrons, the conductance $G(\phi)$ and hence the dissipative current, $J_d = G(\phi)V$, between the reservoirs (V is the bias voltage) are also phase-dependent, the amplitude of the conductance oscillations being proportional to $N_F e^2 \hbar$ (in many experiments $N_F \sim 10^8 - 10^9$).

In a ring-shaped geometry of the S-N-S structure, the phase difference between the superconductors is controlled by the magnetic flux $\Phi = H S_r$ (H is the magnetic field threading the ring, S_r is the area of the ring): $\phi = 2\pi \frac{\Phi}{\Phi_0}$ where the flux quantum $\Phi_0 = \hbar c / e$, c - the light velocity. This allows to control the Josephson and the dissipative currents with a change of the external magnetic field H_{ext} that is favorable for various applications. On the other hand, the Josephson current

(which depends on the magnetic flux in the ring) creates its proper magnetic field which modifies this flux. As a result, for a ring of a large enough self-inductance, the relation between the magnetic flux and the external magnetic field H_{ext} turned out to be highly non-linear with hysteresis loops in the dependence of Φ on H_{ext} as shown in Fig.2 (see, e.g., [4]). This self-inductive property of the Josephson current has been used for creation of Superconducting Quantum Interference Devices (SQUID) which have found extensive applications for extremely precise measurements [4].

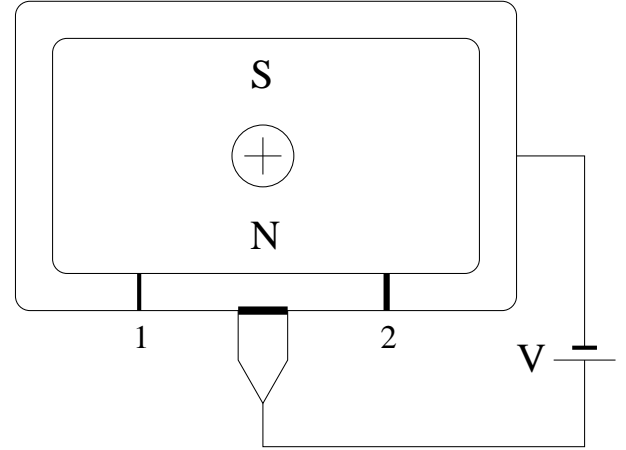


FIG. 1. Superconductor-normal conductor-superconductor structure of the Andreev interferometer type to which a voltage drop V is applied. Thick lines indicate potential barriers at normal conductor - superconductor interfaces 1 and 2, and between the lead and the normal section of the interferometer.

A dissipative current flow through the S-N-S ring creates a new situation in which the Josephson and dissipative currents are coupled together through their joint influence on the magnetic flux inside the S-N-S ring that, in its turn, affects the both currents themselves.

The aim of this paper is to show that the inductive interaction between the dissipative and Josephson currents results in a complicated loop-shaped form of the current-voltage characteristics (CVC) of S-N-S structures schematically presented in Fig.1. In the general case several branches of the CVC (which correspond to different values of the magnetic flux inside the ring) intersect in the origin of CVC ($J_d = 0, V = 0$) as is shown in the insertion of Fig.(4). Stable non-linear periodic in time oscillations of the dissipative current J_d , the Josephson current J_s and the magnetic flux inside the ring (and hence the phase difference ϕ) are predicted and investi-

gated. The form of the loop-shaped CVC and the frequency of these oscillations are shown to be extremely sensitive to the applied external magnetic field H_{ext} and the bias voltage V .

The system under consideration is a ring-shaped superconductor which has a section of a normal conductor (see Fig.1). A steady bias voltage V is applied between the normal and the superconducting sections of the ring that provides a dissipative current J_d in this circuit. There is a potential barrier of a low transparency t_r between the normal conductor and the lead. The electron transport may be in the ballistic or in the diffusive regimes.

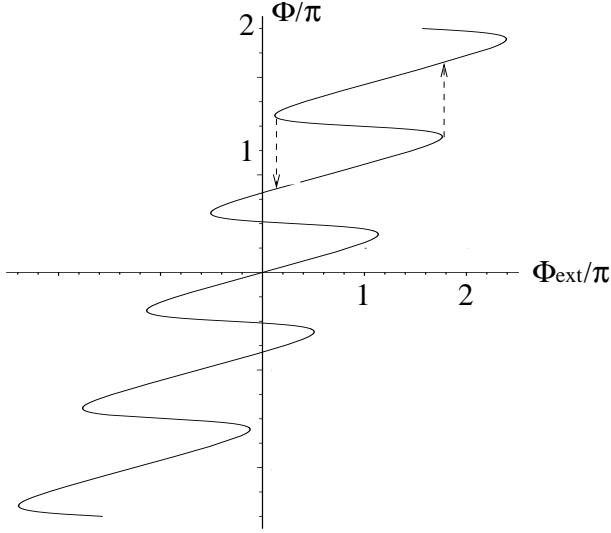


FIG. 2. Dependence of the magnetic flux threading the ring, Φ , on the applied flux $\Phi_{\text{ext}} = H_{\text{ext}} S_r$:

1. Loop-shaped current-voltage characteristics. The total flux of the magnetic field threading the ring, Φ , is created by the external magnetic field H_{ext} , the proper magnetic fields of the Josephson current J_s and the dissipative current J_d , and hence can be written as

$$\Phi = \Phi_{\text{ext}} + \frac{L_r}{c} J_s + \frac{L_{12}}{c} J_d \quad (1)$$

where $\Phi_{\text{ext}} = H_{\text{ext}} S_r$ is the magnetic flux of the external magnetic field H_{ext} , L_r is the self-inductance of the ring, L_{12} is the mutual inductance of the ring and the dissipative current circuit.

Eq.(1) together with the conventional relation $J_d = G(\Phi) V$ define a parametric form of the CVC:

$$J_d = J_d(\Phi) = \frac{1}{L_{12}} \frac{c}{2} (\Phi_{\text{ext}} - \Phi) I_s J_s(\Phi) \quad (2)$$

$$V = \frac{J_d(\Phi)}{G(\Phi)}; \quad \Phi_{\text{ext}} = 2 \Phi_{\text{ext}} = 0$$

One of the distinguishing features of the CVC of the system under consideration is its "many-fold degeneracy", that is several branches of the CVC (which correspond to different values of the magnetic flux threading

the ring) can intersect in its origin ($V = 0, J_d = 0$). As is seen from Eq.(2) at $J_d = 0$ and Fig 2, the "degeneracy factor" is equal to the number of intersections of the vertical line $\Phi_{\text{ext}} = \text{const}$ and the curve $\Phi = \Phi(\Phi_{\text{ext}})$.

Other key features of the CVC can be found if one considers the differential resistance $dV = dJ_d$ which is readily obtained from Eq.(2):

$$\frac{dV}{dJ_d} = \frac{1}{G(\Phi)} \left(1 + \frac{2}{c} \frac{L_{12} J_d}{G(\Phi)} \frac{G'(\Phi)}{A(\Phi)} \right), \quad \Phi = \Phi(J_d) \quad (3)$$

Here and below the sign "prime" means the derivative with respect to Φ ; the function $A(\Phi)$ [5] is

$$A(\Phi) = 1 + \frac{2}{c} \frac{L_r}{c_0} J_s^0(\Phi) \quad (4)$$

All quantities in Eq.(3) are taken at $\Phi = \Phi(J_d)$ which is a solution of the first equation in Eq.(2). Using Eq.(2) one finds

$$d\Phi = dJ_d = \frac{2}{c} \frac{L_{12}}{c_0} \frac{1}{A(\Phi)} \quad (5)$$

If $L_r > L_{\text{cr}}^{(1)}$ ($c_0 = (2 \pi \Phi_0 / \Phi_0)$) there are values of Φ at which $A(\Phi) = 0$. Therefore, in this case, as follows from Eq.(3) the CVC $J_d(V)$ inevitably has points at which the differential resistance $dV = dJ_d$ goes to infinity changing its sign there. On the other hand, the derivative G' also changes its sign with a change of Φ that can provide points at which $dV = dJ_d$ goes to zero changing its sign at them. The consecutive order of this peculiarities with an increase of J_d (that is the form of the CVC) depends on the relative positions of the maxima and minima of $G(\Phi)$ and $J_s(\Phi)$.

For the case of a low transparency of the potential barrier $t_r \ll 1$ the conductance $G(\Phi)$ has maxima at odd numbers of Φ_0 [2] while the Josephson current $J_s = 0$ at them and has a maximum and a minimum in their vicinities [3] as schematically shown in Fig.3. This general information together with Eq.(3-5) would suffice to

find the CVC to be loop-shaped if $L_r > L_{\text{cr}}^{(1)}$. In order to see it let us start from the external magnetic field which corresponds to $\Phi = 0$ and hence $G^0 = 0, J_s^0 > 0$ and therefore $dV = dJ_d > 0$ according to Eq.(3). As at this point $d\Phi = dJ_d < 0$ the phase difference Φ decreases with an increase of current J_d (see Eq.(5)). Therefore, with an increase of the current G^0 becomes negative and after passing the minimum of $J_s(\Phi)$, $A(\Phi)$ starts to decrease because $J_s^0 < 0$ now (see Fig.3), and when A is small enough (but positive yet), the differential resistance becomes $dV = dJ_d = 0$. With a further increase of the current $A(\Phi) \rightarrow +0$ while G^0 is yet negative, and hence $dV = dJ_d \rightarrow -\infty$. When $A(\Phi) = 0$ the differential resistance $dV = dJ_d = +\infty$. In order to follow this second branch of CVC one should decrease the current because $d\Phi = dJ_d > 0$ (see Eq.(5)). Pursuing such a reasoning

one easily finds the current-voltage characteristic to be a series of loops which touch the lines $J_d = G_{min} V$ and $J_d = G_{max} V$ (in our case $G_{min} = G(0)$, $G_{max} = G(\pi)$); the number of loops intersecting in the origin of the CVC increases with an increase of the ring inductance. Such a loop-shaped CVC takes place for the both cases of a diffusive or a ballistic normal conductor of the S-N-S ring-shaped interferometer.

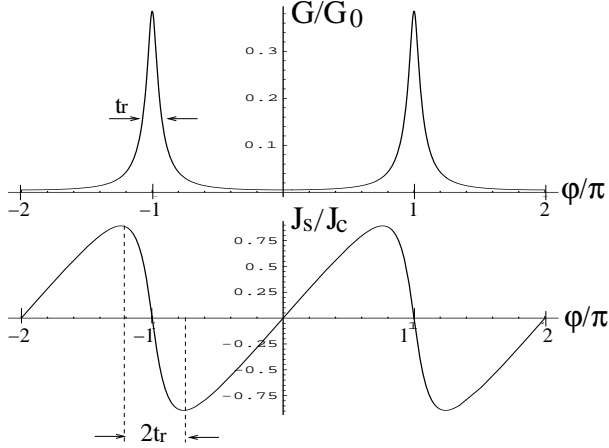


FIG. 3. Typical dependences of the Josephson current and the conductance on the superconductor phase difference ϕ for the case of a low transparency ($t_r \ll 1$) of the potential barrier between the normal section of the sample and the lead ($J_c = N_F e v_F L_N$ and $G_0 = N_F e^2 / (h)$).

An example of such a current-voltage characteristics is presented in Fig.4 for the case of a ballistic normal section of the Andreev interferometer in the presence of potential barriers at the N/S interfaces. In this case the dependences of the conductance $G(\phi)$ [7] and the Josephson current $J_s(\phi)$ can be written as follows:

$$G(\phi) = \frac{t_r^2 G_0}{1 + j_A^{(1)} r_A^{(2)} j \cos \phi + t_r^2 = 2 \frac{j_A^{(1)} r_N^{(2)} j}{j_N^{(1)} r_N^{(2)} j}} \quad (6)$$

$$J_s(\phi) = N_F \frac{2ev_F^k}{L_N} j_A^{(1)} r_A^{(2)} j \sin \phi - \frac{d}{2 \sin \phi} \arctan \frac{e^{2t_r} \sin \phi}{1 - e^{2t_r} \cos \phi} \quad (7)$$

Here $G_0 = N_F e^2 / (h)$, $v_F^k = N_F^{-1} \sum_n v_n$ and v_n is the electron velocity in the n -th transverse mode; $r_N^{(1;2)}$ are the normal reflection amplitudes at N/S interfaces 1 and 2 while $r_A^2 + r_N^2 = 1$, (see [8]); $\cos \phi = \frac{j_N^{(1)} r_N^{(2)} j \cos \phi + j_A^{(1)} r_A^{(2)} j \cos \phi}{1 - \cos \phi}$. Expanding Eq.(7) in $\exp \phi$ and taking the limit $t_r \rightarrow 0$, $t_N \rightarrow 0$ one reduces it to the well-known expression for the Josephson current in a 3D SNS junction [9].

Inserting Eq.(6,7) in Eq.(2) and performing numerical

calculations one obtains the current-voltage characteristics shown in Fig.4.

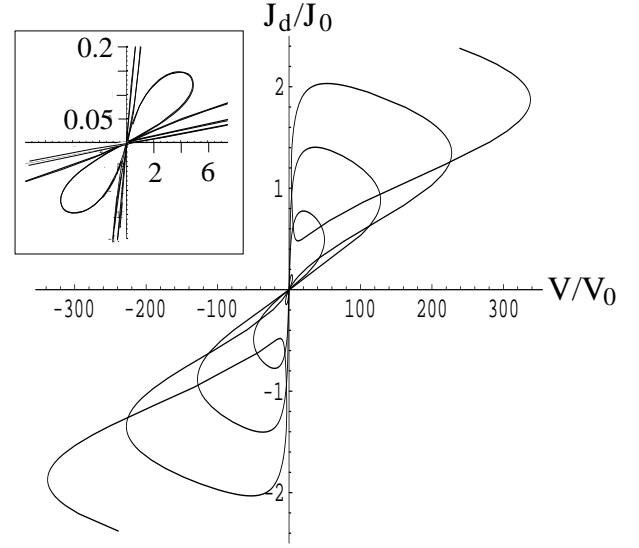


FIG. 4. Current-voltage characteristics of an SNS ring for the external flux $\phi_{ext} = 0 = (2l+1)\pi$, $l = 0; 1; 2; \dots$; $t_r = 0.1$, $t_N^{(1)} = 0.2$, $t_N^{(2)} = 0.25$, and $L_r = 2.5 c_0 = J_c$; $J_0 = (L_r = L_{12}) J_c$, $V_0 = 2\hbar v_F = (e L_N)$. The insertion shows a zoomed vicinity of the CVC origin.

2. Electromagnetic self-oscillations. A change of the magnetic flux threading a superconductor-normal conductor ring results in the following current in the ring:

$$J_r = J_s(\phi) - \frac{1}{cR} \frac{d\phi}{dt} \quad (8)$$

where R is the resistance of the normal section of the S-N-S ring [10]. Using $\phi = 2\pi \phi_{ext}$ one sees Eq.(8) to be the equation of the ac Josephson effect.

Taking into account the self-inductances of the ring L_r and the transport current circuit L_{11} together with their mutual inductances L_{12} , after using Eq.(1) (in which J_s should be changed to J_r) and Eq.(8) one gets a set of equations that describes the time evolution of the transport current and the superconductor phase difference as follows:

$$\frac{L_{11}}{c^2} \frac{dJ_d}{dt} + \frac{L_{12}}{2c^3 R} \frac{d^2 \phi}{dt^2} + \frac{L_{12} J_s^0(\phi)}{c^2} \frac{d\phi}{dt} + \frac{J_d}{G(\phi)} = V; \quad \frac{0 L_r}{2cR} \frac{d\phi}{dt} + \frac{C_0}{2} \phi' + L_r J_s(\phi) + L_{12} J_d = C_{ext} \quad (9)$$

The static solutions of Eq.(9) give the CVC (Eq.(2)).

In order to investigate time-evolution of the system it is convenient to eliminate J_d from the set of equations Eq.(9) and get the following closed equation for $\phi(t)$:

$$\frac{L_{eff}}{R c^2} \frac{d^2 \phi}{dt^2} + \phi' \frac{d\phi}{dt} + F(\phi) = 0 \quad (10)$$

where $L_{eff} = (L_r L_{11} - L_{12}^2) = L_{11}$. Eq.(10) is the equation for a non-linear oscillator under a "friction"

$$(\prime) = 1 + \frac{2 L_{eff}}{C_0} J_s^0(\prime) + \frac{L_r}{L_{11}} \frac{1}{R G(\prime)} \quad (11)$$

and a "force"

$$F(\prime) = \frac{c^2}{L_{11} G(\prime)} \quad (12)$$

$$\prime_{ext} + \frac{2 L_r}{C_0} J_s(\prime) + \frac{2 L_{12}}{C_0} G(\prime) V$$

For low values of L_{11} the "friction" > 0 at any value of \prime and hence, starting from any initial state, the system approaches one of its static states determined by Eq.(1) (in which $J_d = G(\prime) V$). With an increase of L_{11} , the "friction" (\prime) becomes negative in a certain range of \prime and the static state can become unstable. Investigations of the stability of the static solutions of Eq.(10) $\prime = \prime_{st}$ show that the critical value of L_{11} is determined by the condition $(\prime_{st}) = 0$, that is

$$L_{cr} = \frac{L_r}{B R G(\prime_{st})};$$

$$B = 1 + \frac{2 L_{eff}}{C_0} J_s^0(\prime_{st}) > 0 \quad (13)$$

The Poincare method [1] shows that in the plane $(\prime; \prime_{\dot{}})$ a stable limit cycle arises if

$$L_{11} > L_{cr}; \quad b = 1 + \frac{2 L_r}{C_0} J_s^0(\prime_{st}) + \frac{2 L_{12}}{C_0} G^0(\prime_{st}) > 0$$

These inequalities (together with the one in Eq.(13)) can be satisfied if only $J_s^0(\prime_{st}) < 0$ and $G^0(\prime_{st}) > 0$. From here and Eq.(3,4) it follows that the stable limit cycle (that is non-linear periodic time-oscillations of $\prime(t)$ and $\prime_{\dot{}}(t)$) can only be on those branches of the CVC with the negative differential resistance $dV = D J_d < 0$ that are close to the J_d -axis in Fig.2 (and on the loop shown in the insertion of the figure). If $0 < L_{11} - L_{cr} - L_{cr}$ the frequency of these oscillations is

$$\omega_0 = \frac{S}{(L_{11} L_r - L_{12}^2) G(\prime_{st})}$$

This frequency can be varied in a wide range, and estimations show the maximal frequency $\omega_{max} \approx 10^{12} \text{ sec}^{-1}$.

In conclusion, for both the diffusive and ballistic cases I have shown that the current-voltage characteristics of the Andreev ring-shaped interferometer $J_d(V)$ is a series of loops with several branches intersecting in its origin, and hence it has sections with a negative differential resistance $dV = dJ_d$ if the ring inductance is large enough. These properties of the CVC are robust as the negative differential resistance and the intersection of the several branches in the CVC origin appear at any value of the mutual inductance, L_{12} , between the ring and the dissipative transport circuit (which can be as small as is

wished) as soon as the self-inductance of the ring L_r is large enough to provide $A < 0$ (see Eq.(3,4)); of course, such a CVC can not be observed experimentally if the mutual inductance L_{12} is unreasonably small. This inequality ($A < 0$) is the same as the one needed for the conventional SQUID functioning. What's is more, manipulations with the ring self-inductance L_r and the external magnetic flux ϕ_{ext} allow to get CVC loops (and therefore the hysteresis loops of the CVC) as small as wanted, especially it concerns the smallest loop around the CVC origin (see Insertion in Fig.4), and one can obtain the sensitivity of the transport current J_d (or the applied voltage V) to a change of the external magnetic flux comparable to the conventional SQUID sensitivity.

Spontaneous arising of coupled non-linear oscillations of the transport current $J_d(t)$, the Josephson current $J_s(t)$ and the $\phi_{ext}(t)$ in Andreev interferometers have been also predicted and investigated. The frequency of the oscillations ω can be varied in a wide range, and the maximal frequency can reach $\omega_{max} \approx 10^{12} \text{ sec}^{-1}$.

-
- [1] e-mail: kadig@tp3.ruhr-unibochum.de
[2] C.J. Lambert and R. Raimondi, J. Phys.: Condens. Matter 10, 901 (1998).
[3] C. Bruder, Supercond. Rev. 1, 261 (1996).
[4] M. Cyrot and D. Pavuna, "Introduction to Superconductivity and High- T_c Materials", Scientific World 1992.
[5] In general, L_{12} depends on the distribution of J_d inside the SNS ring which, as shown in paper [6], depends on \prime . However, we neglect this dependence of L_{12} on \prime as it can only renormalize $L_{cr}^{(1)}$ (see the text under Eq.(5)), to say nothing of the event that the transport current circuit is a solenoid with the S-N-S ring inside (or around) it. In this case the influence of the current distribution inside the ring on L_{12} is completely negligible.
[6] P. Samuelsson, V.S. Shumeiko, and G.W. Endin, Phys. Rev. B 56, R5763 (1997); P. Samuelsson, J. Lantz, V.S. Shumeiko, and G.W. Endin, Phys. Rev. B 62, 1319 (2000).
[7] H.A. Blom, A. Kadigrobov, A.M. Zagoskin, R.I. Shekhter, and M. Jonson, Phys. Rev. B 57, 9995 (1998).
[8] A.L. Shelankov, JETP Lett. 32, 111 (1980); G.E. Blonder, M. Tinkham, and T.M. Klapwijk, Phys. Rev. B 25, 4515 (1982).
[9] C. Ishii, Prog. Theor. Phys. 44, 1525 (1970); J. Bardar and J.L. Johnson, Phys. Rev. B 5, 72 (1972); A.V. Svidzinski, T.N. Anzygina, and E.N. Bratus, Sov. Phys. JETP 34, 860 (1972).
[10] This equation is readily obtained if one uses the equation $J_r = J_s(\prime) + (L_N = R) \int (1 - c) d\mathbf{r} \nabla \mathbf{A}$ for the normal section and the London equation for the supercurrent density in the superconducting section. (\mathbf{A} is the vector potential, v is the voltage in the ring).
[11] A.A. Andronov, A.A. Witt, S.E. Khaikin, "Theory of Oscillators", Oxford: Pergamon 1966.