

Electromagnetic analog of Rashba spin-orbit interaction in wave guides filled with ferrite

Evgeny N. Bulgakov^{1,2} and Almas F. Sadreev^{1,2,3}

1) Kirensky Institute of Physics,
660036, Krasnoyarsk, Russia

2) Krasnoyarsk Pedagogical University,

3) Department of Physics and Measurement Technology,
Linköping University, S-581 83 Linköping, Sweden
(Dated: December 23, 2021)

We consider infinitely long electromagnetic wave guide filled with a ferrite. The wave guide has arbitrary but constant cross-section D . We show that Maxwell equations are equivalent to the Schrödinger equation for single electron in the two-dimensional quantum dot of the form D with account of the Rashba spin-orbit interaction. The spin-orbit constant is determined by components of magnetic permeability of the ferrite. The upper component of electron spinor function corresponds to the z -th component electric field, while the down component related to the z -th component of magnetic field by relation (30).

PACS numbers:

I. INTRODUCTION

There is a complete equivalence of the two-dimensional Schrödinger equation for a particle in a hard wall box to microwave billiards [1]. A wave function exactly corresponds to the electric field component of the TM mode of electromagnetic field: $(x; y) \rightarrow E_z(x; y)$ with the same Dirichlet boundary conditions. This equivalence is turned out very fruitful and test a mass of predictions found in the quantum mechanics of billiards [1]. In open systems the probability current density corresponds to the Poynting vector. The last equivalence allowed to test in particular universal current statistics in chaotic billiards [2, 3]. Moreover if the resonator is non homogeneously filled with ferrite, a similarity to quantum billiards with broken time-reversal symmetry appears [1].

In present work we develop this idea of resonators filled with ferrite to show an equivalence of the Maxwell equations to electron in quantum dot (QD) with the Rashba spin-orbit interaction (SOI) [4]. This interaction is relevant in a two-dimensional electron gas, such as is formed in GaAs heterostructures. While spin-orbit scattering in metals is largely due to scattering from the metal ions or from impurities, in a GaAs heterostructure, spin-orbit effects mainly arise from the asymmetry of the potential creating the quantum well. The hamiltonian of single electron in the quantum dot with account of the Rashba SOI has the following form [5, 6]

$$H = \frac{1}{2m} \left(p - \frac{e}{c} A \right)^2 + \alpha K \left[\left(p - \frac{e}{c} A \right) \right]_z \quad (1)$$

where $m = 0.023m$ is the effective mass, $\alpha^2 K = 6 \cdot 10^{10} \text{ eV cm}$ is the SOI coefficient in a InAs structures [5]. The dominant mechanism for the SOI in two-dimensional electron gas (2DEG) is attributed by the Rashba term [4, 7]. Using the characteristic scale of QD R we rewrite (1) in dimensionless form for $B = 0$

$$\mathcal{H} = \frac{r^2}{\left(\frac{\partial}{\partial x} + i \frac{\partial}{\partial y} \right)} \frac{\left(\frac{\partial}{\partial x} + i \frac{\partial}{\partial y} \right)}{r^2} ; \quad (2)$$

where $\alpha = 2m \cdot K \cdot R$. We consider that the electric field is directed normal to the plane of QD. If to introduce complex variables $z = x + iy$ and the Cauchy derivative $\frac{\partial}{\partial z} = \frac{1}{2} \left(\frac{\partial}{\partial x} - i \frac{\partial}{\partial y} \right)$ the Schrödinger equation with the Hamiltonian (2) takes the following form

$$\begin{aligned} \frac{\partial^2}{\partial z \partial \bar{z}} + \frac{1}{4} + \frac{\partial}{2 \partial \bar{z}} &= 0; \\ \frac{\partial^2}{\partial z \partial \bar{z}} + \frac{1}{4} - \frac{\partial}{2 \partial \bar{z}} &= 0; \end{aligned} \quad (3)$$

where ψ and $\bar{\psi}$ are the components of the spin state and E is the eigen energy.

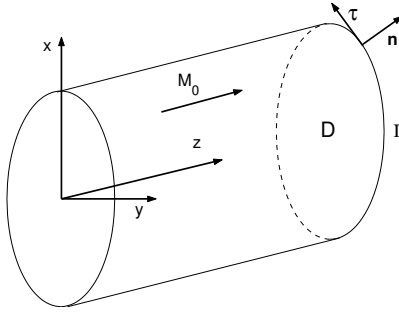


FIG .1: Schematic view of electromagnetic wave guide with constant cross-section

II. BASIC ELECTROMAGNETIC EQUATIONS

Let us consider electromagnetic waves in a wave guide filled with a ferrite with a magnetization M_0 directed along the z axis and with the following magnetic permeability

$$\hat{\epsilon} = \begin{pmatrix} \epsilon_{xx} & \epsilon_{xy} & 0 \\ \epsilon_{yx} & \epsilon_{xx} & 0 \\ 0 & 0 & \epsilon_{zz} \end{pmatrix}; \quad \hat{\epsilon} = 1 + 4\pi \hat{\chi}; \quad (4)$$

By relation $B = \hat{\epsilon}H$ the Maxwell equations take the following form

$$\begin{aligned} \frac{\partial E_z}{\partial y} - \frac{\partial E_y}{\partial z} &= ik(\epsilon_{xx}H_x + \epsilon_{xy}H_y); \\ \frac{\partial E_x}{\partial z} - \frac{\partial E_z}{\partial x} &= ik(\epsilon_{yx}H_x + \epsilon_{yy}H_y); \\ \frac{\partial E_y}{\partial x} - \frac{\partial E_x}{\partial y} &= ik\epsilon_{zz}H_z; \end{aligned} \quad (5)$$

$$\begin{aligned} \frac{\partial H_z}{\partial y} - \frac{\partial H_y}{\partial z} &= ikE_x; \\ \frac{\partial H_x}{\partial z} - \frac{\partial H_z}{\partial x} &= ikE_y; \\ \frac{\partial H_y}{\partial x} - \frac{\partial H_x}{\partial y} &= ikE_z; \end{aligned} \quad (6)$$

where frequency of electromagnetic waves $\omega = ck$. The first couple of the Maxwell equations $\nabla \cdot E = 0; \nabla \cdot B = 0$ follows from the second couple of equations (5) and (6).

Let us consider the wave guide infinitely long in z direction. We take that a cross-section of the wave guide is constant in x, y plane as shown in Fig. 1. Such a geometry of the waveguide allows to separate variables z and x, y and write

$$E(x, y, z) = e^{ik_z z} E(x, y); \quad H(x, y, z) = e^{ik_z z} H(x, y); \quad (7)$$

Then Eqs 6 reduce to

$$\frac{\partial}{\partial y} \left(\frac{\partial H_z}{\partial y} - \frac{\partial H_y}{\partial z} \right) - \frac{\partial}{\partial z} \left(\frac{\partial H_x}{\partial z} - \frac{\partial H_z}{\partial x} \right) = ik \left(\frac{\partial E_x}{\partial y} - \frac{\partial E_y}{\partial x} \right); \quad (8)$$

Combining this equation with the third equation of (5) we obtain from (8)

$$\nabla_{xy}^2 H_z - \frac{\partial}{\partial z} \left(\frac{\partial H_x}{\partial x} + \frac{\partial H_y}{\partial y} \right) + k^2 \epsilon_{zz} H_z = 0; \quad (9)$$

where $\nabla^2 = \frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2}$ is the two-dimensional Laplace operator.

The next task is to exclude H_y and H_x from (9). Eq. $\nabla \cdot \mathbf{B} = 0$ gives

$$\frac{\partial H_x}{\partial x} + \frac{\partial H_y}{\partial y} + \frac{\partial H_z}{\partial z} = 0: \quad (10)$$

Substituting the third equation (6) into (10) we obtain

$$\frac{\partial H_x}{\partial x} + \frac{\partial H_y}{\partial y} = -\frac{\partial H_z}{\partial z} + ik \frac{xy}{xx} E_z:$$

Substituting this equation into (9) we obtain finally the first equation for E_z and H_z :

$$\nabla^2 H_z(x; y) + k_z^2 \frac{zz}{xx} + k^2 \frac{zz}{zz} H_z(x; y) - kk_z \frac{xy}{xx} E_z(x; y) = 0: \quad (11)$$

Let us derive the next equation for E_z and H_z . The first couple of equations (5) gives us:

$$\frac{\partial}{\partial y} \frac{\partial E_z}{\partial y} - \frac{\partial E_y}{\partial z} = \frac{\partial}{\partial x} \frac{\partial E_x}{\partial z} - \frac{\partial E_z}{\partial x} = ik \frac{\partial}{\partial y} (H_x + H_y) + ik \frac{\partial}{\partial x} (H_x + H_y): \quad (12)$$

Because of Eqs (4), (6) and (7) this equation can be written as follows

$$(\nabla^2 + k^2 - k_z^2) E_z = ik \frac{\partial H_y}{\partial x} + \frac{\partial H_y}{\partial y}: \quad (13)$$

On the other hand, Eq. $\nabla \cdot \mathbf{B} = 0$ gives

$$\frac{\partial H_x}{\partial x} + \frac{\partial H_y}{\partial y} + ik H_z + \frac{\partial H_z}{\partial z} = 0:$$

As a result we obtain finally from (6) and (13) the second equation for E_z and H_z :

$$\nabla^2 + (k^2 - k_z^2) + k^2 \frac{xy}{xx} E_z + kk_z \frac{xy}{xx} H_z = 0: \quad (14)$$

III. BOUNDARY CONDITIONS

Let us consider the boundary conditions for these relevant electromagnetic fields E_z and H_z . Assume that surface of the wave guide shown in Fig. 1 is perfect metal. The boundary conditions are the following

$$E_z(x; y)j = 0; \quad E(x; y)j = 0 \quad (15)$$

where j is the unit vector directed along the boundary in the wave guide cross-section. Our task is to express E through the relevant fields E_z and H_z . Write the Maxwell equations (5), (6) and (7) as follows

$$\begin{aligned} \frac{\partial E_z}{\partial y} - ik_z E_y &= ik (H_x + H_y); \\ ik_z E_x - \frac{\partial E_z}{\partial x} &= ik (H_x + H_y) \end{aligned} \quad (16)$$

and

$$\begin{aligned} ik_z H_y &= \frac{\partial H_z}{\partial y} - ik E_x; \\ ik_z H_x &= \frac{\partial H_z}{\partial x} + ik E_y; \end{aligned} \quad (17)$$

From these equations we can express elds E_x and E_y via the elds E_z and H_z . A tedious but straightforward algebra gives the following equations:

$$\begin{aligned}
 E_x &= \frac{1}{D} \left(\frac{\partial H_z}{\partial x} [ik^3_{xy} - k^2_{xx}] - ik_{xy} (k_z^2 - k^2_{xx}) \right) \\
 &+ \frac{\partial H_z}{\partial y} [ik^3_{xy} + ik_{xx} (k_z^2 - k^2_{xx})] - ik_z k^2_{xy} \frac{\partial E_z}{\partial y} - ik_z (k_z^2 - k^2_{xx}) \frac{\partial E_z}{\partial x}; \\
 E_y &= \frac{1}{D} \left(\frac{\partial H_z}{\partial x} [ik^3_{xy} - ik_{xx} (k_z^2 - k^2_{xx})] \right. \\
 &\left. + \frac{\partial H_z}{\partial y} [ik^3_{xx} - ik_{xy} (k_z^2 - k^2_{xx})] + ik_z k^2_{xy} \frac{\partial E_z}{\partial x} - ik_z (k_z^2 - k^2_{xx}) \frac{\partial E_z}{\partial y} \right); \quad (18)
 \end{aligned}$$

where $D = k^4_{xy} + (k_z^2 - k^2_{xx})^2$.

Since $\mathbf{l} = (n_y n_x)$, the second boundary condition (15) takes the following form $n_y E_x + n_x E_y = 0$. Taking into account the first boundary condition (15) we obtain finally from (18)

$$\begin{aligned}
 k_{xy} k_z \frac{\partial E_z}{\partial n} - k_z^2 (\mathbf{l} \cdot \mathbf{r} \cdot \mathbf{H}_z) + \frac{\partial H_z}{\partial n} [k^2_{xy} + k^2_{xx} - k_z^2] = 0 \\
 E_z = 0; \quad (19)
 \end{aligned}$$

IV. SOI EQUIVALENT MICROWAVE EQUATIONS

In order to write Eqs (11) and (14) in form equivalent to the Schrodinger equation (3) with the Rashba SOI let us introduce the following notations

$$\begin{aligned}
 h_z &= iH_z; \\
 \epsilon_1 &= k^2_{xx} - \frac{k_z^2}{\epsilon_1}; \\
 \epsilon_2 &= k^2_{xx} - k_z^2 + \frac{k^2_{xy}}{\epsilon_2}; \\
 \epsilon_3 &= k k_z; \quad i = \frac{xy}{xx}; \quad (20)
 \end{aligned}$$

where [9]

$$\begin{aligned}
 \epsilon_{xx}(\mathbf{l}) &= 1 + \frac{4 M_0 l_0}{2 l^2}; \quad \epsilon_{xy}(\mathbf{l}) = i \frac{4 M_0 l_0 l}{2 l^2}; \\
 l_0 &= (H_0 - 4 M_0); \\
 l^2 &= l_0 (l_0 + H_a); \\
 H_a &= 8 K_a M : \quad (21)
 \end{aligned}$$

Here H_0 is external constant magnetic field applied along the z-axis, i.e. along the direction of magnetization M_0 and H_a is effective anisotropy field directed along the x-axis.

Let us introduce an auxiliary function $u_2(x; y)$:

$$h_z = \frac{\partial u_2}{\partial x}; \quad (22)$$

where $\psi = x + iy$, and α is some coefficient which will be determined below. Then Eqs (11) and (14) take the following form

$$\begin{aligned} 4\frac{\partial^2}{\partial \psi \partial \bar{\psi}} + \alpha^2 E_z + \frac{\partial u_2}{\partial \psi} &= 0; \\ 4\frac{\partial^2}{\partial \bar{\psi} \partial \psi} + \alpha^2 \frac{\partial u_2}{\partial \bar{\psi}} + E_z &= 0: \end{aligned} \quad (23)$$

The first equation (23) can be written as

$$E_z = -\frac{1}{\alpha^2} \left(4\frac{\partial^2}{\partial \psi \partial \bar{\psi}} + \frac{\partial u_2}{\partial \psi} \right) : \quad (24)$$

Let us choose $\alpha^2 = 4\alpha_2$. Then the second equation (23) takes the following form

$$\frac{\partial}{\partial \bar{\psi}} \left(4\frac{\partial^2}{\partial \psi \partial \bar{\psi}} + \alpha_2 \frac{\partial^2}{\partial \bar{\psi} \partial \psi} u_2 - \frac{2}{\alpha_2} \frac{\partial E_z}{\partial \bar{\psi}} \right) = 0: \quad (25)$$

The solution of equation $\frac{\partial g}{\partial \bar{\psi}} = 0$ is any function $g = g(\psi)$ to give us the following equation:

$$4\frac{\partial^2}{\partial \psi \partial \bar{\psi}} + \alpha_2 \frac{\partial^2}{\partial \bar{\psi} \partial \psi} u_2 - \frac{2}{\alpha_2} \frac{\partial E_z}{\partial \bar{\psi}} = g(\psi): \quad (26)$$

One can see that the magnetic field (22) is invariant under gauge transformations $u_2 \rightarrow u_2 + f(\psi)$. Let us make this gauge transformation and substitute into Eq. (26). Then we obtain the following equation for transformed ψ :

$$4\frac{\partial^2}{\partial \psi \partial \bar{\psi}} + \alpha_2 \frac{\partial^2}{\partial \bar{\psi} \partial \psi} u_2 - \frac{2}{\alpha_2} \frac{\partial E_z}{\partial \bar{\psi}} = 0; \quad (27)$$

provided that we have chosen the gauge as follows:

$$\alpha_2 \frac{\partial^2}{\partial \bar{\psi} \partial \psi} f(\psi) = g(\psi): \quad (28)$$

Finally combining this equation with the first equation (23) we obtain the following system of equations

$$\begin{aligned} \frac{\partial^2}{\partial \psi \partial \bar{\psi}} + \frac{1}{4} \alpha_2^2 E_z + \frac{\alpha}{2} \frac{\partial}{\partial \bar{\psi}} &= 0; \\ \frac{\partial^2}{\partial \bar{\psi} \partial \psi} + \frac{1}{4} \alpha_2^2 \frac{\partial^2}{\partial \bar{\psi} \partial \psi} u_2 - \frac{\alpha}{2} \frac{\partial E_z}{\partial \bar{\psi}} &= 0: \end{aligned} \quad (29)$$

If to compare these equations with the Schrodinger equation for electron in quantum dot with SOI (3) one can see that the electric field E_z is equivalent to the upper spinor component while u_2 is down component which related to magnetic field by relation

$$H_z = \frac{2i}{\alpha} \frac{\partial}{\partial \bar{\psi}}: \quad (30)$$

The parameter $\frac{\alpha}{2}$ is completely equivalent to the SOI constant. If to substitute relations (20) one can see that Eq. (29) is the equation for eigen functions E_z and u_2 and eigenvalues k^2 . The eigenvalues of Eq. (29) will coincide with the eigenenergies of Eq. (3) if to choose by variation of magnetic permeability μ_{xx} ; μ_{xy} and k_z

$$\alpha_2 = \alpha_1 \frac{\mu_{xx}}{2}; \quad (31)$$

we can obtain exact correspondence between Eq. (3) and (29). Only difference in boundary conditions is remaining.

This work has been partially supported by Russian Foundation for Basic research Grant 03-02-17039.

- [2] M .Barth and H .J. Stokmann, Phys. Rev. E 65, 066208 (2002).
- [3] A .I.Saichev, H .Ishio, A .F.Sadreev, and K .F.Berggren, J. Phys. A :Math. and General, 35, L87 (2002).
- [4] Yu. A .Bychkov and E .I. Rashba, JETP Lett. 39, 78 (1984). [5] A .
- [5] G .Aronov and Y .B .Lyanda-Geller, Phys. Rev. Lett. 70, 343 (1993).
- [6] A .F.Morpurgo, J. P. Heida, T .M .Kwapwijk, B .J. van Wees, and G .Borghs, Phys. Rev. Lett. 80, 1050 (1998).
- [7] J.Nitta, T .Akazaki, and H .Takayanagi, Phys. Rev. Lett., 78, 1335 (1997).
- [8] C .Kittel, Phys. Rev. 73, 155 (1948).
- [9] B .Lax, K .J. Button, Microwave Ferrites and Ferrimagnetics, N .Y ., 1962.
- [10] B .Eckhard, J. Ford, and F .Vivaldi, Physica 13D , 339 (1984).