

# The Optimal Pessimistic Transactional Memory Algorithm

Paweł T. Wojciechowski, Konrad Siek  
{pawel.t.wojciechowski,konrad.siek}@cs.put.edu.pl  
Institute of Computing Science, Poznań University of Technology

October 21, 2021

## Abstract

Transactional Memory (TM) is an approach aiming to simplify concurrent programming by automating synchronization while maintaining efficiency. TM usually employs the optimistic concurrency control approach, which relies on transactions aborting and restarting if conflicts occur. However, an aborted transaction can still leave some effects in the system that cannot be cleaned up, if irrevocable operations are present within its code. The pessimistic approach eliminates that problem, since it relies on deferring operations in case of conflict rather than aborting, but hitherto pessimistic TMs suffered from low parallelism due to the need of serializing transactions. In this paper, we aim to introduce OptSVA, a pessimistic TM concurrency control algorithm that ensures a high level of parallelism through a battery of far-reaching optimizations including early release, asynchronous execution, and the extensive use of buffering.

**Index terms**—Transactional memory, concurrency control, pessimistic TM, irrevocable transactions, early release

## 1 Introduction

In a world dominated by multicore processors and distributed applications even the rank-and-file programmer is increasingly likely to have to turn to parallel programming to take full advantage of various multiprocessor architectures. However, concurrent execution can cause operations on separate processors to interleave in ways that produce anomalous results, forcing the programmer to predict and eliminate them through synchronization.

Yet implementing synchronization correctly is notoriously difficult, since the programmer must reason about interactions among seemingly unrelated parts of the system code. Furthermore, low-level mechanisms like barriers, monitors, and locks are easily misused and performance, consistency, or progress fall prey to faulty design or simple bugs. Worse still, the resulting errors like deadlocks or livelocks are far reaching, difficult to track down, and often non-deterministic.

Consequently, researchers seek ways to automate synchronization while retaining a decent level of efficiency. *Transactional memory (TM)* [12, 20] is one such approach, introduced for multiprocessor architectures, and then extended

to distributed systems as *distributed TM* (see [14, 27], among others). The TM approach requires that the programmer annotates blocks of code as *transactions* that must be executed with specific correctness guarantees (e.g., *serializability* [17], *opacity* [9], and TMS1 [7]). The TM system then ensures these guarantees using an underlying concurrency control algorithm, which provides synchronization as needed to give the illusion of transaction atomicity and isolation, but whose details remain hidden from the programmer. In effect, TM reduces the effort required to implement correct and efficient programs.

Most TM research emphasizes optimistic concurrency control. There are variations to this approach, but, generally, a transaction executes regardless of other transactions using buffers, and only updates the state of the system as it finishes executing (i.e. on *commit*). If two transactions try to access the same object, and one of them writes to it, they *conflict* and one of them *aborts* by discarding its buffers and *restarts* to execute all of its operations anew. Such an approach allows parallelism on multicores, as transactions do not block one another during execution. However, this requires an assumption that an aborted transaction does not have any visible effect on the system.

Hence, the optimistic approach comes with its own set of problems. Most notably, TM transactions can contain any code, including code with side effects, such as: system calls, I/O operations, locking, or network communication. These are referred to collectively as *irrevocable operations*, since it is practically impossible to revoke their effects. However, the *modus operandi* of optimistic transactions depends on aborted transactions cleaning up after themselves. The problem can be mitigated by using irrevocable transactions that run sequentially, and so cannot abort [29], or providing multiple versions of objects on which transactions execute reads [2, 18]. In other cases, irrevocable operations are simply forbidden in transactions (e.g., in Haskell [10]) or moved to commit. Other research suggests that a form of compensation can be used to fix the computations, so that conflicting transactions do not abort [5]. These solutions, however, introduce complexity and overhead, relax the consistency guarantees of TM, or limit the applicability of TM.

A different approach, as suggested in [16, 1, 3] and our earlier work [30, 31], is to use fully-pessimistic concurrency control [4, 28]. This involves transactions waiting until they have permission to access shared objects. In effect, potentially conflicting operations are postponed until they no longer conflict. Thus transactions, for the most part, avoid forced aborts, and therefore, they also naturally avoid the problems stemming from irrevocable operations. However, the authors of [16] show that the fully-pessimistic approach can have negative impact on performance in high contention, since it depends on serializing write transactions to prevent aborts, which inherently limits parallelism. The goal of this paper is to show that this penalty on parallelism is not inherent in the pessimistic approach and can be overcome.

In our previous work [30, 31, 22], we attempted to mitigate the performance issue by introducing a pessimistic TM algorithm using *early release*—a technique that allows conflicting transactions to execute in parallel and still commit. Specifically, the *Supremum Versioning Algorithm (SVA)* uses *a priori* knowledge to allow transactions to safely release a variable it will no longer access, which, in turn, allows other transactions to read or update it without waiting for the first transaction to finish completely. This increases the number of allowed interleavings between transactions, which then translates into

promising performance results.

In this paper we present OptSVA, a TM concurrency control algorithm that builds on the early release mechanism introduced in SVA, but introduces a number of deep modifications that eliminate its predecessors limitations, which effectively make OptSVA a novel and unique algorithm. Most notably, OptSVA parallelizes reads where possible, and relies on buffering to institute automatic *privatization* of variables, where SVA is operation-type-agnostic and writes to variables in-place. This allows to both expedite early release and defer the moment of synchronization, resulting in greater parallelism. Furthermore, to the best of the authors' knowledge, OptSVA is the first TM concurrency control algorithm to delegate specific concurrency-control-related tasks to separate threads to achieve local asynchrony, allowing a transaction to perform local computations and non-conflicting operations while waiting to serialize conflicting operations with other transactions. This feature is especially valuable in distributed systems, where network communication introduces delays.

Furthermore, we show through formal analysis that OptSVA can produce tighter interleavings than SVA due to the increased level of parallelism. This is also born out by experimental evaluation, which verifies that the higher level of complexity of the algorithm does not incur significant enough penalties to nullify the advantage of better interleavings.

In addition, we demonstrate that OptSVA meets the same correctness guarantees as SVA, by presenting a proof for last-use opacity. Last-use opacity [23, 25] is a strong safety property for TM systems, that relaxes opacity to allow early release after the last use of a variable in a transaction.

Given that opacity is defined as a property that must be demonstrated for all prefixes of a given transactional schedule, proving it for a complex system is typically troublesome, as demonstrated by research on markability [15] and graph representation of opacity [9], both techniques trying to work around the basic definition of opacity. By extension, the same is true of last-use opacity. Furthermore, since last-use opacity is defined using histories, but buffering algorithms like OptSVA divorce transactional operations from the actual operations on memory, and perform synchronization based on the latter, demonstrating last-use opacity is even more complex. Hence, apart from the proof itself, we contribute a *trace harmony*, a proof technique that shows last-use opacity based on interrelationships among memory accesses (and can be easily extended to show related properties like opacity).

The paper is structured as follows: Following the introduction, Section 2 shows other research relating to OptSVA. Then, in Section 3 we present the OptSVA algorithm in full. In Section 4 we compare the parallelism of OptSVA histories to those admitted by SVA. In Section ??, we introduce trace harmony, a proof technique that allows us to demonstrate last-use opacity based on memory accesses. Then, in Section 5 we employ that proof technique to show that despite allowing greater parallelism OptSVA satisfies last-use opacity, i.e. the same safety property as SVA. Finally, we conclude in Section 7.

## 2 Related Work

A large number of TM systems were proposed to date. Here, we concentrate only on those that use some of the same techniques as the one OptSVA is based

on: pessimistic concurrency control and early release.

## 2.1 Pessimistic TM systems

Seeing as TM systems tend heavily towards optimistic concurrency control, pessimistic systems are relatively rare. Examples of these include our previous work on the Basic Versioning Algorithm and the Supremum Versioning Algorithm [30, 31]. The former is an opaque in-place TM that never aborts transactions and uses *a priori* knowledge on access sets to enforce disjoint-access parallelism. The latter adds an early release mechanism in an effort to allow conflicting transactions to execute partially in parallel. SVA was later extended to also allow optional aborts in [22]. All of these algorithms were proposed for a system model using complex objects defining custom methods rather than variables, so none of them distinguish between reads and writes as in the traditional TM model. The algorithm proposed here builds on both of these and introduces the distinction between operation types, as well as other modifications, all aiming to increase the degree of parallelism the of which TM system is capable.

Another example is the system proposed in [16], where read-only transactions execute in parallel, but transactions that update are synchronized using a global lock to execute one-at-a-time. This idea was improved upon in Pessimistic Lock Elision (PLE) [1], where a number of optimizations were introduced, including encounter-time synchronization, rather than commit-time. However, the authors show that sequential execution of update transactions yields a performance penalty. In contrast, the algorithm proposed in this paper maintains a high level of parallelism regardless of updates. In particular, the entire transaction need not be read-only for a variable that is read-only to be read-optimized.

SemanticTM is another pessimistic TM system [8]. Rather than using versioning or blocking, transactions are scheduled and place their operations in bulk into a producer-consumer queues attached to variables. The instructions are then executed by a pool of non-blocking executor threads that use statically derived access sets and dependencies between operations to ensure the right order of execution. The scheduler ensures that all operations of one transaction are executed before another's. In addition, statically derived access sets and dependencies between operations are used to ensure that operations are executed in the right order. Contrary to SVA and OptSVA, the transactions cannot abort, forcibly, but also do not allow for manual aborts. SemanticTM and versioning algorithms produce similar histories, but while the latter are deadlock-free, SemanticTM is wait-free. However, even without aborts, in contrast to SVA and OptSVA, SemanticTM does not guarantee that a given operation is executed (at most) once.

While not exactly a pessimistic system *per se*, Twilight STM [5] relaxes isolation to allow conflicting transactions to reconcile using so-called twilight code at the end of the transaction and commit nevertheless. If a transaction reads a value that was modified by another transaction since its start, twilight code can re-read the changed variables and re-write the variables the transaction modified to reflect the new state, allowing the transaction to commit anyway. Even though the operations are re-executed, as per optimistic concurrency control, it means that transactions that execute twilight code always finish successfully nevertheless. This means, however, that regardless of transactions aborting or committing, the code within them is prone to re-execution, which introduces

problems with irrevocable operations that SVA and OptSVA try to avoid.

## 2.2 Early release TM systems

A number of TM systems employ early release to improve parallelism. One example is SVA, which we elaborate on earlier.

Another example is Dynamic STM [11], the system that can be credited with introducing the concept of early release in the TM context. Dynamic STM allows transactions that only perform read operations on particular variables to (manually) release them for use by other transactions. However, it left the assurance of safety to the programmer, and, as the authors state, even linearizability cannot be guaranteed by the system. In contrast, versioning algorithms guarantee, at minimum, last-use opacity.

The authors of [26] expanded on the work above and evaluated the concept of early release with respect to read-only variables on several concurrent data structures. The results showed that this form of early release does not provide a significant advantage in most cases, although there are scenarios where it would be advantageous if it were automated. We use a different approach in SVA and OptSVA, where early release is not limited to read-only variables.

DATM [19] is another noteworthy system with an early release mechanism. DATM is an optimistic multicore-oriented TM based on TL2 [6], augmented with early-release support. It allows a transaction  $T_i$  to write to a variable that was accessed by some uncommitted transaction  $T_j$ , as long as  $T_j$  commits before  $T_i$ . DATM also allows transaction  $T_i$  to read a speculative value, one written by  $T_j$  and accessed by  $T_i$  before  $T_j$  commits. DATM detects if  $T_j$  overwrites the data or aborts, in which case  $T_i$  is forced to restart. DATM allows all schedules allowed by conflict-serializability. This means that DATM allows overwriting, as well as cascading aborts. It also means that it does not satisfy last-use opacity. Hence, DATM is weaker than OptSVA (as well as most TM systems). DATM can also incur very high transaction abort rates, in comparison to OptSVA, whose abort rate will tend towards zero (depending on the use of programmatic aborts).

## 3 OptSVA

This section describes the *Optimized Supremum Versioning Algorithm (OptSVA)*. OptSVA is specified in full in Fig. 1. Given the complexity of the algorithm we split the presentation into four parts. In the first, we explain the rudiments of the use of versioning for concurrency control, as well as the early release mechanism. These are the foundations of the algorithm and the elements which reflect the basic design of SVA. Then, in the other three parts we discuss how the combination of explicit read/write distinction, buffering, and asynchronous execution of specific synchronization-related tasks is used to optimize accesses to read-only variables, to delay synchronization of the initial operation upon an initial write, and expedite early release to the last (closing) write. First, though, we present the system model.

### 3.1 Transactional Memory System Model

OptSVA operates in a system composed of a set of processes  $\Pi = \{p_1, p_2, \dots, p_n\}$  concurrently executing a set of finite sequential programs  $\mathbb{P} = \{\mathcal{P}_1, \mathcal{P}_2, \dots, \mathcal{P}_n\}$ , where process  $p_i$  executes  $\mathcal{P}_i$ . Within these programs there is code that defines transactions. A *transaction*  $T_i \in \mathbb{T}$  is some piece of code executed by process  $p_k$ , as part of subprogram  $\mathcal{P}_k$ . Each process executes transactions sequentially, one at a time. Transactions contain local computations (that can be whatever) and invoke operations on shared variables, or *variables*, for short. Each variable, denoted  $x, y, z$  etc. supports the following *operations*, that allow to retrieve or modify its state:

- a) *write* operation (denoted  $w_i(x)v$ ) that sets the state of  $x$  to value  $v$ ; the operation's *return value* is the constant  $ok_i$ , indicating correct execution, or the constant  $A_i$  which indicates that transaction  $T_i$  has been forcibly aborted due to some inconsistency,
- b) *read* operation  $r_i(x)$  whose *return value* is the current state of  $x$ , or  $A_i$  in case of a forced abort,

In addition, transactions can execute the following operations related to themselves:

- c) *start* (denoted  $start_i$ ) which initializes transaction  $T_i$ , and whose return value is the constant  $ok_i$ ,
- d) *commit* (denoted  $tryC_i$ ) which attempts to commit  $T_i$  and returns either the constant  $C_i$ , which signifies a successful commitment of the transaction or the constant  $A_i$  in case of a forced abort,
- e) *abort* (denoted  $tryA_i$ ) which aborts  $T_i$  and returns  $A_i$ .

The operations a–e defined above are part of the so-called transactional API. They can only be invoked within a transaction.

Even though transactions are parts of subprograms evaluated by processes, it is convenient to talk about them as separate and independent entities. Thus, rather than saying  $p_k$  executes some operation as part of transaction  $T_i$ , we will simply say that  $T_i$  executes (or performs) some operation.

Transactions follow a particular life-cycle. At the outset each transaction  $T_i$  executes  $start_i$ , following which it can execute local computations and operations on variables. Eventually,  $T_i$  executes either commit or abort, which complete the execution of the transaction, following which the transaction runs no further code. Furthermore, any operation other than start can return  $A_i$ , which also means that the transaction was forced to execute abort during that operation. In addition, a transaction can execute abort arbitrarily. In any case, the transaction can perform no other computations following an execution of an abort. If the transaction was forcibly aborted, though, it will be restarted by the system, but it is easier to think of that as a separate consecutive transaction (i.e.  $T_j, i \neq j$ ) executed by the same process.

If transaction  $T_i$  executed a read operation on variable  $x$ , we say  $x$  is in  $T_i$ 's *read set*. write operation on  $x$ , we say  $x$  is in  $T_i$ 's *write set*. If  $T_i$  executed either a read or a write operation on  $x$ ,  $x$  is in  $T_i$ 's *access set*, which we denote  $x \in \text{ASet}_i$

```

1 proc start(Transaction  $T_i$ ) {
2   for( $x \in \text{ASet}_i$  sorted by  $\langle_{lk}$ )
3     lock lk( $x$ )
4   for( $x \in \text{ASet}_i$ ) {
5      $gv(x) \leftarrow gv(x) + 1$ 
6      $pv_i(x) \leftarrow gv(x)$ 
7   }
8   for( $x \in \text{ASet}_i$  sorted by  $\langle_{lk}$ )
9     unlock lk( $x$ )
10  for( $x \in \text{ASet}_i$ :  $x$  is read-only)
11    async run read_buffer( $T_i, x$ )
12      when  $pv_i(x) - 1 = lv(x)$ 
13 }

14 proc read(Transaction  $T_i$ , Var  $x$ ) {
15   if ( $x$  is read-only) {
16     join with read_buffer( $T_i, x$ )
17   } else if ( $wc_i(x) = 0$  and  $rc_i(x) = 0$ ) {
18     wait until  $pv_i(x) - 1 = lv(x)$ 
19     checkpoint( $T_i, x$ )
20      $buf_i(x) \leftarrow st_i(x)$ 
21   }
22   if ( $\exists y: rv_i(y) \neq cv(y)$ )
23     abort( $T_i, x$ ) and exit
24    $rc_i(x) \leftarrow rc_i(x) + 1$ 
25   return  $buf_i(x)$ 
26 }

27 proc read_buffer(Transaction  $T_i$ , Var  $x$ ) {
28    $rv_i(x) \leftarrow cv(x)$ 
29    $buf_i(x) \leftarrow x$ 
30   release( $T_i, x$ )
31   async run read_commit( $T_i, x$ )
32     when  $pv_i(x) - 1 = ltv(x)$ 
33 }

34 proc read_commit(Transaction  $T_i$ , Var  $x$ ) {
35    $cv(x) \leftarrow pv_i(x)$ 
36   if ( $\exists y: rv_i(y) > cv(y)$ )
37     abort( $T_i$ ) and exit
38    $ltv(x) \leftarrow pv_i(x)$ 
39 }

40 proc write(Transaction  $T_i$ , Var  $x$ , Value  $v$ ) {
41   if (not  $v$  in domain of  $x$ )
42     abort( $T_i$ ) and exit
43   if ( $\exists y: rv_i(y) \neq cv(y)$ )
44     abort( $T_i$ ) and exit
45    $buf_i(x) \leftarrow v$ 
46    $wc_i(x) \leftarrow wc_i(x) + 1$ 
47   if ( $wc_i(x) = wub_i(x)$ )
48     async run write_buffer( $T_i, x$ )
49       when  $pv_i(x) - 1 = lv(x)$ 
50 }

51 proc write_buffer(Transaction  $T_i$ , Var  $x$ ) {
52   if (not checkpoint made)
53     checkpoint( $T_i, x$ )
54   if ( $\exists y: rv_i(y) \neq cv(y)$ )
55     abort( $T_i$ ) and exit
56    $x \leftarrow buf_i(x)$ 
57   release( $T_i, x$ )
58 }

59 proc commit(Transaction  $T_i$ ) {
60   for( $x \in \text{ASet}_i$ ) {
61     if ( $x$  is read-only)
62       join with read_comit( $T_i, x$ )
63     else {
64       if ( $wc_i(x) = wub_i(x)$ )
65         join with write_buffer( $T_i, x$ )
66       else
67         catch_up( $T_i, x$ )
68         wait until  $pv_i(x) - 1 = ltv(x)$ 
69         if ( $pv_i(x) - 1 = lv(x)$ )
70            $lv(x) \leftarrow pv_i(x)$ 
71         if ( $wc_i(x) + rc_i(x) > 0$ 
72             and  $rv_i(x) = cv(x)$ 
73             and  $pv_i(x) - 1 > lv(x)$ )
74            $cv(x) \leftarrow pv_i(x)$ 
75         }
76     }
77   if ( $\exists y: rv_i(y) > cv(y)$ )
78     abort( $T_i$ ) and exit
79   for( $x \in \text{ASet}_i$ )
80      $ltv(x) \leftarrow pv_i(x)$ 
81 }

82 proc abort(Transaction  $T_i$ ) {
83   for( $x \in \text{ASet}_i$ ) {
84     wait until  $pv_i(x) - 1 = ltv(x)$ 
85     if ( $wc_i(x) > 0$ 
86         and  $pv_i(x) - 1 > lv(x)$ 
87         and  $rv_i(x) = cv(x)$ ) {
88       if ( $wc_i(x) = wub_i(x)$ )
89         join with write_buffer( $T_i, x$ )
90        $x \leftarrow st_i(x)$ 
91        $cv(x) \leftarrow rv_i(x)$ 
92     }
93     if ( $pv_i(x) - 1 = lv(x)$ )
94        $lv(x) \leftarrow pv_i(x)$ 
95      $ltv(x) \leftarrow pv_i(x)$ 
96   }
97 }

98 proc checkpoint(Transaction  $T_i$ , Var  $x$ ) {
99    $st_i(x) \leftarrow x$ 
100   $rv_i(x) \leftarrow cv(x)$ 
101 }

102 proc release(Transaction  $T_i$ , Var  $x$ ) {
103   $cv(x) \leftarrow pv_i(x)$ 
104   $lv(x) \leftarrow pv_i(x)$ 
105 }

106 proc catch_up(Transaction  $T_i$ , Var  $x$ ) {
107  wait until  $pv_i(x) - 1 = lv(x)$ 
108  if (not checkpoint made)
109    checkpoint( $T_i, x$ )
110  if ( $\exists y: rv_i(y) \neq cv(y)$ )
111    abort( $T_i$ ) and exit
112  if ( $wc_i(x) > 0$ )
113     $x \leftarrow buf_i(x)$ 
114 }

```

Figure 1: Full listing of OptSVA.

In OptSVA specifically, executing  $start_i$  translates to executing procedure **start**,  $tryC_i$  to executing **commit**,  $tryA_i$  to **abort**,  $w_i(x)v$  to **write**, and  $r_i(x)$  to **read**. If a transaction aborts as a result of some operation (returning  $A_i$ ), **abort** will also have been executed before the operation returns.

### 3.2 Versioning Concurrency Control

OptSVA uses four version counters to determine whether a given transaction can be allowed to access a particular shared variable, or whether the access should be deferred to avoid conflicts. The intuition behind how these counters work is by analogy to how the teller may manage a queue in a bank: customers who come into the bank retrieve a ticket with a number from a dispenser and wait before approaching the teller until their number is called. Meanwhile the teller increments the number as she finishes serving each consecutive customer. In the analogy, each customer is a transaction, and the teller is some resource, like a shared variable. The number in the customer’s hand is his version for that variable, and it is being compared against the number that is currently being served by the teller—the variable’s version. The design gets more involved as more variables and more counters are introduced, and we explain it in detail below.

Whenever a transaction  $T_i$  starts, it retrieves a *private version*  $pv_i(x)$  for every variable  $x$  in its access set (lines 2–9). The access set is assumed to be known *a priori*. The values of private versions received by consecutive transactions are generated from a *global version*  $gv(x)$ , which is initially 0 and is incremented with each starting transaction that has  $x$  in its access set. Hence private versions are unique for a given variable and successive for consecutive transactions. The assignment is also guarded by locks so that it is done atomically. In effect, if one transaction  $T_i$  has a greater private version for  $x$  (or just *version* for  $x$ , for short) than another transaction  $T_j$ , then all of its private versions are greater than  $T_j$ ’s.

Given that private versions ascribe a link between transactions and variables, OptSVA then uses them to permit or deny access to variables. Which transaction can access variable  $x$  is defined by its *local version*  $lv(x)$ . Specifically, the local version of a variable  $x$  is always equal to the private version of the transaction  $T_i$  that most recently finished working on  $x$ , i.e. when  $T_i$  commits or aborts it sets  $lv(x)$  to  $pv_i(x)$  (lines 70 and 94, respectively). The transaction that can access  $x$  is the next transaction after the one that stopped using  $x$  last. That is, the one whose private version for  $x$  is one greater than the local version of  $x$ . Hence, in order to access  $x$ ,  $T_i$  must wait until the condition  $pv_i(x) - 1 = lv(x)$  is met (see, e.g., line 18). We will refer to this condition as the *access condition*.

An example of how this mechanism works is shown in Fig. 2. The diagram depicts a history consisting of operations executed by transactions on a time axis. Every line depicts the operations executed by a particular transaction. The symbol  $\circ$  denotes a complete operation execution. The inscriptions above operation executions denote operations executed by the transactions, e.g.  $r_i(x) \rightarrow 1$  denotes that a read operation on variable  $x$  is executed by transaction  $T_i$  and returns 1, and  $w_i(x)1$  denotes that a write operation writing 1 to  $x$  is executed by  $T_i$ , and  $tryC_i \rightarrow C_i$  indicates that  $T_i$  attempts to commit and succeeds because it returns  $C_i$ . On the other hand, the symbol  $\circ$ - $\circ$  denotes an operation

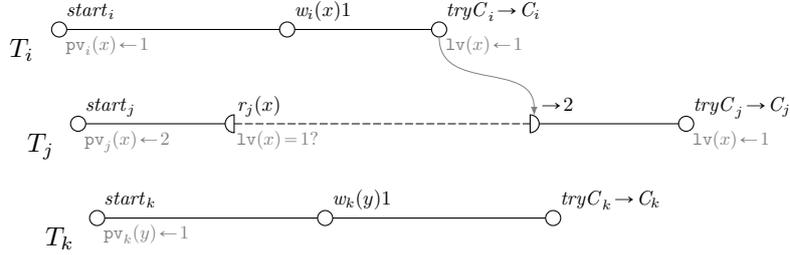


Figure 2: Concurrency control *via* versioning.

execution split into the invocation and the response event to indicate waiting, or that the execution takes a long time. In that case the inscription above is split between the events, e.g., a read operation execution would show  $r_i(x)$  above the invocation, and  $\rightarrow 1$  over the response. If waiting is involved, the arrow  $\curvearrowright$  is used to emphasize a happens before relation between two events. Annotations below events emphasize the state of counters or performed operations within the concurrency control algorithm (used as necessary).

In Fig. 2,  $T_i$  and  $T_j$  attempt to access shared variable  $x$  at the same time. Transaction  $T_i$  executes start first, so  $pv_i(x) = 1$ , and  $T_j$  executes second, so  $pv_j(x) = 2$ . This then determines in which order the transactions access  $x$ : initially  $lv(x) = 0$ , so  $T_j$  is not able to pass the access condition and execute its read operation. However,  $T_i$  can pass the access condition and it executes its operation without delay. Once  $T_i$  commits, it sets  $lv(x)$  to 1, so  $T_j$  then becomes capable of passing the access condition and finishing executing its read operation. In the mean time, transaction  $T_k$  can proceed to access  $y$  completely in parallel.

Below we describe the early release mechanism with means to ensure commit order and forced aborts that we use to improve the effectiveness of the version control mechanism.

### 3.2.1 Early release

The second basic feature of OptSVA is early release based on *a priori* knowledge. Each transaction knows the maximum number of times it will read and write each individual variable at the start of execution. (This information can be provided by the programmer, supplemented by a type checker [30], or generated by static analysis [21].) These *upper bounds* for reads and writes are denoted for transaction  $T_i$  and  $x$  as, respectively,  $rub_i(x)$  and  $wub_i(x)$ . Then, each transaction can count accesses to each variable as they occur using *read* and *write counters*:  $rc_i(x)$  and  $wc_i(x)$  (lines 24 and 46). When the read or write counter for  $x$  reaches the upper bound for  $x$ , the transaction knows that no further accesses of a particular type will occur afterward. When it is apparent that transaction  $T_i$  will perform no further modifications on  $x$ , another transaction can start accessing  $x$  right away, without waiting for  $T_i$  to commit. Hence, if after a write it is true that  $wc_i(x) = wub_i(x)$  (line 47), then procedure **release** is (eventually) executed and  $T_i$  sets  $lv(x)$  to  $pv_i(x)$ .

This is illustrated further in Fig. 3. Here, transaction  $T_i$  and transaction  $T_j$  both try to access  $x$ . Like in Fig. 2, since  $T_i$ 's private version for  $x$  is lower

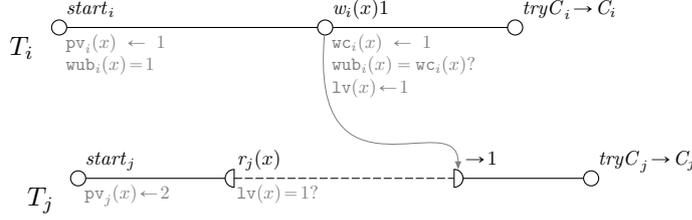


Figure 3: Early release *via* upper bounds.

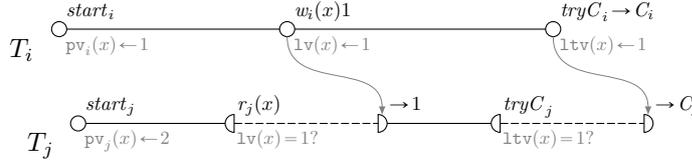


Figure 4: Commit ordering preservation.

than  $T_j$ 's, the former manages to access  $x$  first, and  $T_j$  waits until  $T_i$  is released. Unlike in Fig. 2,  $T_i$  has upper bound information on writes on  $x$  via  $wub_i(x)$ : it knows that it will not read from  $x$  and will write to  $x$  at most once. So,  $T_i$  releases  $x$  immediately after its write to  $x$ , rather than waiting to do so until commit. In effect,  $T_j$  can access  $x$  earlier.

### 3.2.2 Commit Order

Although OptSVA is pessimistic and prevents transactions from aborting on conflict, for expressiveness, it allows the programmer to manually invoke the abort operation. Therefore, it is possible for any transaction spontaneously to abort in effect. Such manual aborts can be useful to the programmer to implement conditional rollbacks, and to the system to recover from failures (e.g., in distributed TM). However, this design decision also makes it necessary to enforce the order in which transactions commit to prevent a situation where transaction  $T_i$  releases  $x$  early and subsequently aborts, but before  $T_i$  does abort,  $T_j$  reads  $x$  and commits. That would mean that  $T_j$  committed having acted on an invalid, inconsistent value of  $x$ , which is incorrect behavior (e.g., according to serializability [17]).

OptSVA prevents that sort of erroneous situation by ordering commits in the same order as accesses to variables and forcing an abort if the previous transaction also aborted. This is instituted through *local terminal versions*, denoted  $ltv(x)$ , that specify which transaction that used  $x$  last completed by either committing or aborting. I.e., each transaction writes its private version to  $ltv(x)$ , if it only used  $x$ , just before finishing the `commit` or `abort` procedure (lines 80 and 95). Then, the local terminal version is used to enforce commit order, as every committing or aborting transaction must wait at *termination condition*  $pv_i(x) - 1 = ltv(x)$  (lines 68 and 84) before it can commit or abort. Thus, a transaction that accesses  $x$  does not complete until the last transaction that previously accessed  $x$  commits or aborts.

An example of how this mechanism affects execution is shown in Fig. 4.

Here,  $T_i$ ,  $T_j$  both access  $x$  and they respectively get the values of 1 and 2 of  $\text{pv}$  for  $x$ . Transaction  $T_i$  accesses  $x$  first and releases it early, setting  $\text{lv}(x)$  to 1. This allows  $T_j$  to pass the access condition and read  $x$ . Transaction  $T_j$  subsequently attempts to commit. However, in order to commit  $T_j$  must pass the termination condition  $\text{pv}_j(x) - 1 = \text{ltv}(x)$ , which will not be satisfied until  $T_i$  sets  $\text{ltv}(x)$  to its own  $\text{pv}_i(x)$ . Hence  $T_j$  can only complete to commit after  $T_i$  commits. In general, this condition is checked for every variables in the access set  $\text{ASet}_j$  of transaction  $T_j$ . In effect the commit order preserves the private version order of transactions for every variable.

### 3.2.3 Forced Aborts

Furthermore, if some transaction reads a value written by another, and the latter aborts, then the former cannot be allowed to commit having possibly acted upon inconsistent state. Hence, the transaction must be forced to abort.

To enforce aborts, OptSVA marks which version of a variable is the last consistent version via its *current version*  $\text{cv}(x)$ —a counter shared by all transactions. This is used in conjunction with its *recovery version*  $\text{rv}_i(x)$ —the last consistent version seen by  $T_i$ —to check whether transaction  $T_i$  is using a consistent (current) version or not. Whenever transaction  $T_i$  gains access to shared variable  $x$  for the first time, it runs procedure `checkpoint` where it reads the state of  $x$  and stores it in its buffer  $\text{st}_i(x)$  (line 99). It then sets its recovery version for  $x$   $\text{rv}_i(x)$  to  $x$ 's current version (line 100). Since  $\text{cv}(x)$  is set to some transaction  $T_j$ 's private version for  $x$  (line 103) whenever  $T_j$  releases  $x$  or commits (lines 103 and 74), then  $\text{rv}_i(x)$  is equal to the private version of a transaction that most recently finished operating on  $x$ . Then, whenever some transaction  $T_j$  aborts and restores shared variable  $x$  from the backup copy (line 90) it also sets  $\text{cv}(x)$  back to  $\text{rv}_j(x)$  (line 91).

In addition, whenever a transaction tries to commit or access a shared variable, it must test the consistency of all the variables it operates on. Thus, e.g.,  $T_i$  cannot proceed to access  $x$  unless  $\text{rv}_i(y) = \text{cv}(y)$  for each variable  $y$  in its access set, and must abort otherwise (e.g. lines 22–23). Similarly, if  $T_i$  attempts to commit, there must be no variable  $y$  in its access set for which  $\text{rv}_i(y) > \text{cv}(y)$ , or  $T_i$  must be forced to abort (line 77–78). Hence, if  $T_i$  gains access to  $x$  after the previous  $T_j$  releases it, and  $T_j$  subsequently aborts and sets  $\text{cv}(x)$  to a new (lesser) value  $\text{rv}_j(x)$ , then  $T_i$  will be forced to abort either when accessing  $x$  later, or when attempting to commit. The condition for aborting is always checked for all variables rather than just the one being accessed, in order to abort as quickly as possible, and to prevent the transaction from operating on both consistent and invalidated variables simultaneously.

We show an example of this in Fig. 5. Here,  $T_i$  and  $T_j$  access  $x$  and have private values for  $x$  equal to 1 and 2, respectively. Hence  $T_i$  accesses  $x$  first. As this is executed  $T_i$  sets its recovery version to 0, the value of the current version for  $x$ . Then, after the write operation finishes executing, the transaction releases  $x$  by setting the local version to 1 and sets the current version to its own private version, i.e. 1. Subsequently  $T_j$  meets the access condition and accesses  $x$  for the first time, setting its own recovery version to 1 (as  $\text{cv}(x) = 1$ ). Since  $\text{rv}_i(x) = \text{cv}(x)$ , the access is successful. However, as  $T_j$  tries to commit, it is delayed because it cannot satisfy the commit condition. Meanwhile transaction  $T_i$  aborts. As it does so, it sets the current version to its recovery version

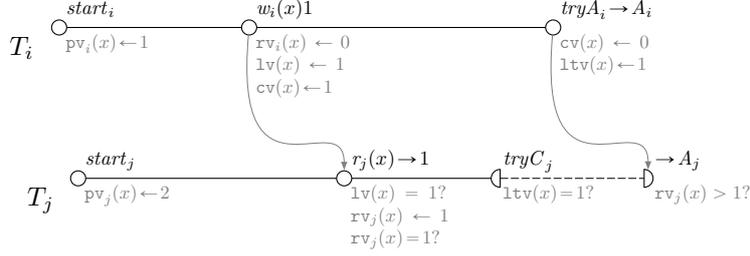


Figure 5: Forced abort.

equal to 0. Then,  $T_i$  sets the local terminal version to its own private version, allowing  $T_j$  to resume committing. However,  $T_j$  cannot satisfy the condition  $rv_j(x) > cv(x)$  during commit, since  $rv_i(x) = 1$  and  $cv(x) = 0$ . Hence,  $T_j$  is forced to abort.

Note that if no programmatic aborts occur in the system, the system does not experience any forced aborts whatsoever. If the programmer does issue manual aborts, however, cascading aborts can occur.

Below we proceed to describe the three optimizations with respect to the version control mechanism that are employed by OptSVA.

### 3.3 Read-only Variables

Since originally versioning algorithms did not distinguish between reads and writes, they did not allow read-only transactions to be executed in parallel to other read-only transactions. This is a run-of-the-mill optimization found in all but a small number of TMs, so it is also introduced in OptSVA. However, OptSVA goes a step further, and allows partial parallelization of transactions whenever a variable in a transaction is only read from and not written to, without requiring that all the variables in a transaction are not written to.

Whenever transaction  $T_i$  accesses  $x$  in such a way that it reads from  $x$  but does not write to  $x$  (and this is known *a priori*—i.e.,  $rub_i(x) > 0$  and  $wub_i(x) = 0$ ), we will refer to  $x$  as being a *read-only variable* in  $T_i$ . In the case of such variables, OptSVA can optimize the accesses by buffering the variable and reading the buffer instead of the actual variable. In addition, since all the reads will be done using the buffer, and the upper bounds indicate that no writes will follow, the variable can be released after it is buffered, irrespective of what operations the transaction will execute later.

Obviously, it is best for parallelism to release any variable as soon as it is no longer needed by a transaction, because it allows other transactions to start acting sooner. Since read-only variables are not needed after they are buffered, they can be released immediately after this happens. The variable must be buffered before or during the first read operation on it is executed, but it could be buffered before that point, even during transaction start. However, in order to buffer a variable, its state must be viewed, so, for the sake of consistency, buffering within versioning concurrency control must be done only after the transaction passes the access condition. Since waiting at the access condition would prevent the transaction from executing operations on other variables or performing local computations, it is best for parallelism for the transaction not

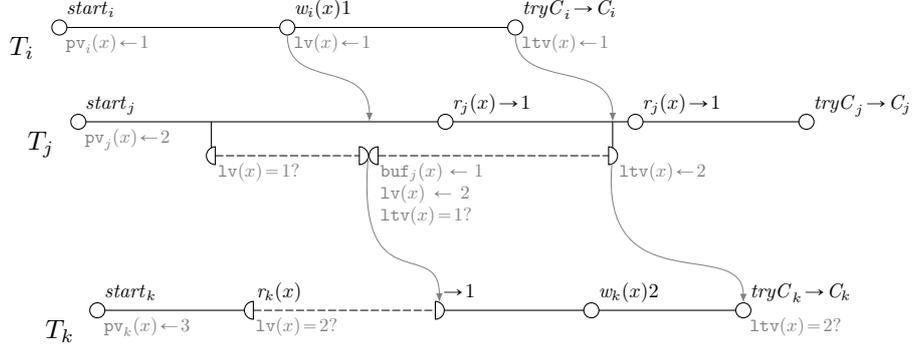


Figure 6: Read-only variable.

to start waiting until it is absolutely necessary.

The algorithm finds balance between buffering as soon as possible and delaying synchronization much as necessary by executing it asynchronously. This is achieved by using the `async run P when C` construct which relegates the execution of procedure `P` to some separate thread. However, before the thread starts executing `P` it waits until condition `C` is satisfied. This allows the transaction to wait at condition `C` without preventing the procedure from delaying other operations that could be executing in the mean time. On the other hand, `P` will be executed as soon as `C` is satisfied, so as soon as it is safe.

OptSVA executes buffering via procedure `read_buffer`. This procedure is relegated to asynchronous execution at lines 11–12, and will execute once the access condition is satisfied. Within `read_buffer`, the transaction  $T_i$  saves the value of some variable  $x$  to its buffer `bufi(x)` (line 29), and releases it immediately afterward by executing `release` (line 30). Since it is possible that the transaction that wrote the value of  $x$  that is being buffered will subsequently abort,  $T_i$  also updates its recovery value (line 28), but it does not need to make a checkpoint for  $x$ , since the transaction will not modify  $x$ . Once read-only variable  $x$  is buffered, read operations can use the buffer to retrieve that value, without accessing the variable (line 25), so without waiting. However, a read on a read-only variable cannot be executed until buffering is finished (line 16), which we indicate using the `join with P` construct.

Since a transaction does not modify a read-only variable, if it aborts, it does not need to force other transactions to abort to maintain consistency. Hence, the transaction tries to immediately perform all commit-related operations for a read-only variable immediately after buffering it. This involves waiting for the local terminal version of the object, so by analogy to buffering, the procedure is executed asynchronously, so as not to block other operations. The procedure that executes the commit for variable  $x$  is `read_commit` and it is started asynchronously at line 32. The procedure executes a simplified version of `commit` for just  $x$ . Hence, once `commit` is executed by the transaction for other variables, it can be skipped for  $x$ , and the transaction simply waits for `read_commit` to finish executing.

We show an example of an execution of a transaction  $T_j$  with a read-only variable  $x$  in Fig. 6. Transaction  $T_j$  asynchronously waits for the access condition

on  $x$  to be met right after  $T_j$  starts, but before any reads actually occur. A parallel line below transaction (such as the one below  $T_j$ ) indicates procedures executed asynchronously with respect to the thread executing the transaction. Meanwhile  $T_j$  can perform local operations or operations on other variables without obstacle. Once  $T_i$  releases  $x$ ,  $T_j$  immediately buffers  $x$ , and releases it. Then  $T_j$  asynchronously tries to commit  $x$ , which requires that it waits for the appropriate local terminal version of  $x$ . Meanwhile  $T_k$  can now access  $x$  in parallel to  $T_j$  and even write to it, without interfering with  $T_j$ 's consistency. Once  $T_i$  commits,  $T_j$  can then asynchronously commit  $x$ , which then allows  $T_k$  to commit earlier than it would have otherwise. Since  $T_j$  treats  $x$  as read-only and hence releases it earlier, transaction  $T_k$  is able to execute its operations much sooner, and thus shorten the total execution time of the three transactions.

From the example it is apparent, that the read-only variable optimization moves the point at which such a variable is acquired, released, and committed forward in time. The earlier a shared variable is released by a transaction, the earlier another transaction can start using it, increasing the possibility of acting in parallel, and, therefore, shortening the schedule of execution.

### 3.4 Delayed Synchronization on First Write

If the first operation that a transaction executes on a particular shared variable is a write operation, then all read operations on that variable are *local*, i.e., they only need to view what the current transaction wrote, and can ignore writes by other transactions. Hence, there is no need for the transaction to synchronize on this variable with other transactions for the sake of those operations. The synchronization is only needed to prevent the current transaction from writing a value to the variable in the middle of another transaction's operations on it. But if the write is saved to a buffer, rather than immediately updating the state of the variable, the synchronization can be delayed until after the write itself, or even after any of the successive read operations.

Since it is beneficial to synchronize as late as possible while performing other tasks beforehand, OptSVA then never checks access conditions on writes (see procedure `write`): either the transaction started with a write, and no synchronization is necessary, or there was a preceding read that already did all the necessary synchronization. Instead, the operation is performed on a buffer (line 45). Then, since all the written values are only visible to the current transaction, the transaction must at some point update the state of the actual variable. This is done either upon executing the last write or during commit. In the former case, when the upper bound on writes is reached (line 47), the transaction asynchronously starts procedure `write_buffer` (line 49), which executes when the access condition is met, and updates the state of the variable (line 56). If the upper bound is not reached during execution, the transaction will instead execute procedure `catch_up` during commit, and update the variable there (line 113), also after waiting at the access condition (line 107).

We illustrate this optimization further in Fig. 7. Here transaction  $T_i$  can pass access condition for  $x$  first, but nevertheless  $T_j$  performs a write simultaneously, since it writes to the buffer rather than wait at the access condition. Transaction  $T_j$  only waits at the access condition when it had performed all of its write operations (of which there is one) and starts a separate thread (indicated by the line below) to write the changes to the variable once the access condition

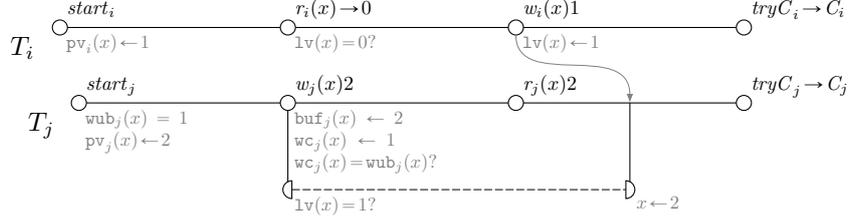


Figure 7: Delayed synchronization on first write.

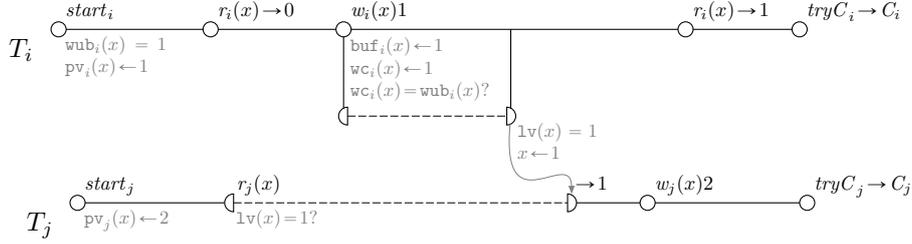


Figure 8: Early release on last write.

is passed. The thread passes the access condition once  $T_i$  releases  $x$ . Then,  $T_j$  applies the value from the buffer to  $x$ .

### 3.5 Early Release on Last Write

Various TMs with early release determine the point at which variables are released variously. For instance, DATM [19] releases variables after each operation, erring on the side of efficiency and guaranteeing only conflict-serializability. SVA, on the other hand, errs on the side of caution and only allows early release after last access to some variable, which it must do because it treats read and write operations uniformly. OptSVA improves on this, since it distinguishes between reads and writes, so early release is done after last write not last access. In effect all reads following last write are executed as if privatized. We argue in [25] that this approach is a solid compromise for TMs with early release.

The early release happens if at some point in the execution of transaction  $T_i$ , the upper bound on the number of writes for some variable  $x$  is reached when performing a write (line 47). The transaction asynchronously executes `write_buffer` in that instance for the purpose of applying the changes from the buffer to the actual shared variable. After this is done,  $x$  will no longer be accessed directly by the transaction, so  $T_i$  also executes `release` (at line 57), which sets  $lv(x)$  to  $pv_i(x)$ , which allows other transactions to pass the access condition. Nevertheless, since  $x$  was buffered during writes, subsequent reads still have access to a local, consistent value of  $x$  (retrieved from the buffer at line 25).

This is illustrated in Fig. 8. Here,  $T_i$  knows *a priori* that it will write to  $x$  at most once, since  $wub_i(x) = 1$ . Hence, after the one write to  $x$ , a separate thread is started which releases  $x$  by setting  $lv(x)$  to 1. Since  $T_i$  passes the

access condition, this happens almost instantaneously (the figure shows a wait time merely for the reason of aesthetics). Once  $x$  is released in this fashion,  $T_j$ , whose private version for  $x$  is 2, can execute its own read and write operations on  $x$  freely. Nevertheless,  $T_i$  can continue to execute reads on  $x$  after releasing  $x$ , and since the value of  $x$  is read from  $T_i$ 's buffer,  $T_j$ 's operations do not interfere.

## 4 Interleaving Comparison

In this section we compare the interleavings, or *histories*, admitted by OptSVA to those admitted by its predecessor, the Supremum Versioning Algorithm (SVA). SVA (with rollback support) is described in detail in [22, 24]. In short, it amounts to the mechanisms described in Section 3.2, without the optimizations described in Sections 3.3–3.5.

### 4.1 Preliminaries

In order to compare the interleavings of the two algorithms, let us first provide definitions of transactional histories and relevant ancillary concepts that extend the transactional system model defined in the previous section.

#### 4.1.1 Traces and Operation Executions

Given program  $\mathbb{P}$  and a set of processes  $\Pi$ , we denote an execution of  $\mathbb{P}$  by  $\Pi$  as  $\mathcal{E}(\mathbb{P}, \Pi)$ . An execution entails each process  $p_k \in \Pi$  evaluating some prefix of subprogram  $\mathcal{P}_k \in \mathbb{P}$ . The evaluation of each statement  $s \in \mathcal{P}_k$  by any process is deterministic. This evaluation produces a (possibly empty) sequence of events (steps) which we denote  $\mathbb{L}(s)$ .

Furthermore by  $\mathbb{L}(\mathcal{P}_k)$  we denote a sequence s.t. given  $s_1, s_2, \dots, s_m = \mathcal{P}_k$ ,  $\mathbb{L}(\mathcal{P}_k) = \mathbb{L}(s_1) \cdot \mathbb{L}(s_2) \cdot \dots \cdot \mathbb{L}(s_m)$ . By extension,  $\mathcal{E}(\mathbb{P}, \Pi)$  produces a sequence of events, which we call a trace  $\mathbb{T}$ :  $\mathbb{T} \vdash \mathcal{E}(\mathbb{P}, \Pi)$  iff  $\forall p_k \in \Pi, \mathcal{P}_k \in \mathbb{P}, \mathbb{L}(\mathcal{P}_k) \subseteq \mathbb{T}$ .  $\mathcal{E}(\mathbb{P}, \Pi)$  is concurrent, i.e. while the statements in subprogram  $\mathcal{P}_k$  are evaluated sequentially by a single process, the evaluation of statements by different processes can be arbitrarily interleaved. Hence, given  $\mathbb{T} \vdash \mathcal{E}(\mathbb{P}, \Pi)$  and  $\mathbb{T}' \vdash \mathcal{E}(\mathbb{P}, \Pi)$ , it is possible that  $\mathbb{T} \neq \mathbb{T}'$ . We call  $\mathcal{E}(\mathbb{P}, \Pi)$  a *complete* execution if each process  $p_k$  in  $\Pi$  evaluates all of the statements in  $\mathcal{P}_k$ . Otherwise, we call  $\mathcal{E}(\mathbb{P}, \Pi)$  a *partial* execution. By extension, if  $\mathcal{E}(\mathbb{P}, \Pi)$  is a complete execution, then  $\mathbb{T} \vdash \mathcal{E}(\mathbb{P}, \Pi)$  is a *complete* trace.

In order to execute some transactional operation  $o$  on variable  $x$  within transaction  $T_i$ , process  $p_k$  issues an *invocation event* denoted  $inv_i^k(o)$ , and receives a *response event* denoted  $res_i^k(u)$ , where  $u$  is the return value of  $o$ . More specifically, given the operations introduced as part of the transactional model, if process  $p_k$  executes some operation as part of transaction  $T_i$  it issues an invocation event of the form  $inv_i^k(start_i)$ ,  $inv_i^k(o)$  for some  $x$ , or  $inv_i^k(tryC_i)$ , (or possibly  $inv_i^k(tryA_i)$ ) and receives a response of the form  $res_i^k(u_i)$ , where  $u_i$  is a value, or the constant  $ok_i$ ,  $C_i$ , or  $A_i$ . The superscript always denotes which process executes the operation, and the subscript denotes of which transaction the operation is a part. Each event is atomic and instantaneous, but the execution of the entire operation composed of two events is not.

A pair of these events composed of an invocation of operation  $o$  and a response event to  $o$  is called a *complete operation execution* and it is denoted

$o_i^k \rightarrow u$ , whereas an invocation event  $inv_i^k(o)$  without the corresponding response event is called a *pending operation execution*. We refer to complete and pending operation executions as *operation executions*, denoted by *op*. The transactional model allows the following transactional operation executions (executed by process  $p_k$  within transaction  $T_i$  as):

- a)  $start_i^k \rightarrow ok_i$ ,
- b)  $r_i^k(x) \rightarrow v$  or  $r_i^k(x) \rightarrow A_i$ ,
- c)  $w_i^k(x)v \rightarrow ok_i$  or  $w_i^k(x)v \rightarrow A_i$ ,
- d)  $tryC_i^k \rightarrow C_i$  or  $tryC_i^k \rightarrow A_i$ .
- e)  $tryA_i^k \rightarrow A_i$ .

Since it is convenient to talk about transactions as independent entities, and their relations to specific processes is irrelevant, we will henceforth simplify the notation of invocation and response events to  $inv_i(o)$ ,  $res_i(o)$ , and of complete executions to  $o_i \rightarrow u$ . Then, the notation of operation executions becomes  $start_i \rightarrow ok_i$ ,  $r_i(x) \rightarrow v$ ,  $w_i(x)v \rightarrow ok_i$ ,  $tryC_i \rightarrow C_i$ , etc.

Whenever an operation execution refers to a value, but it is irrelevant to the discussion and inconvenient to specify it, we use a placeholder value  $\square$  in its place, writing e.g.  $r_i(x) \rightarrow \square$  or  $w_i(x)\square \rightarrow ok_i$ .

#### 4.1.2 Histories

Given a trace  $\mathbb{T} \vdash \mathcal{E}(\mathbb{P}, \Pi)$ , a TM *history*  $H$  is a subsequence of trace  $\mathbb{T}$  consisting only of executions of transactional operations s.t. for every event  $e$ ,  $e \in H$  iff  $e \in \mathbb{T}$  and  $e$  is either an invocation or a response event specified by the transactional model. If  $H \subset \mathbb{T}$  we say  $\mathbb{T}$  produces  $H$ . A *subhistory* of a history  $H$  is a subsequence of  $H$ .

The sequence of events in a history  $H_j$  can be denoted as  $H_j = [e_1, e_2, \dots, e_m]$ . For instance, some history  $H_1$  below is a history of a run of some program that executes transactions  $T_1$  and  $T_2$ :

$$H_1 = [ inv_1(start_1), res_1(ok_1), inv_2(start_2), res_2(ok_2), \\ inv_1(w_1(x)v), inv_2(r_2(x)), res_1(ok_1), res_2(v), \\ inv_1(tryC_1), res_1(C_1), inv_2(tryC_2), res_2(C_2) ].$$

Given any history  $H$ , let  $H|T_i$  be the longest subhistory of  $H$  consisting only of invocations and responses executed by transaction  $T_i$ . For example,  $H_1|T_2$  is defined as:

$$H_1|T_2 = [ inv_2(start_2), res_2(ok_2), inv_2(r_2(x)), res_2(v), \\ inv_2(tryC_2), res_2(C_2) ].$$

We say transaction  $T_i$  is in  $H$ , which we denote  $T_i \in H$ , if  $H|T_i \neq \emptyset$ .

Let  $H|x$  be the longest subhistory of  $H$  consisting only of invocations and responses executed on variable  $x$ , but only those that form complete operation executions.

Given complete operation execution *op* that consists of an invocation event  $e'$  and a response event  $e''$ , we say *op* is in  $H$  ( $op \in H$ ) if  $e' \in H$  and  $e'' \in H$ .

Given a pending operation execution  $op$  consisting of an invocation  $e'$ , we say  $op$  is in  $H$  ( $op \in H$ ) if  $e' \in H$  and there is no other operation execution  $op'$  consisting of an invocation event  $e'$  and a response event  $e''$  s.t.  $op' \in H$ .

Given two complete operation executions  $op'$  and  $op''$  in some history  $H$ , where  $op'$  contains the response event  $res'$  and  $op''$  contains the invocation event  $inv''$ , we say  $op'$  precedes  $op''$  in  $H$  if  $res'$  precedes  $inv''$  in  $H$ .

A history whose all operation executions are complete is a *complete* history.

Most of the time it will be convenient to denote any two adjoining events in a history that represent the invocation and response of a complete execution of an operation as that operation execution, using the syntax  $e \rightarrow e'$ . Then, an alternative representation of  $H_1|T_2$  is denoted as follows:

$$H_1|T_2 = [ start_2 \rightarrow ok_2, r_2(x) \rightarrow v, tryC_2 \rightarrow C_2 ].$$

History  $H$  is *well-formed* if, for every transaction  $T_i$  in  $H$ ,  $H|T_i$  is an alternating sequence of invocations and responses s.t.,

- a)  $H|T_i$  starts with an invocation  $inv_i(start_i)$ ,
- b) no events in  $H|T_i$  follow  $res_i(C_i)$  or  $res_i(A_i)$ ,
- c) no invocation event in  $H|T_i$  follows  $inv_i(tryC_i)$  or  $inv_i(tryA_i)$ ,
- d) for any two transactions  $T_i$  and  $T_j$  s.t.,  $T_i$  and  $T_j$  are executed by the same process  $p_k$ , the last event of  $H|T_i$  precedes the first event of  $H|T_j$  in  $H$  or *vice versa*.

In the remainder of the paper we assume that all histories are well-formed.

History  $H$  has *unique writes* if, given transactions  $T_i$  and  $T_j$  (where  $i \neq j$  or  $i = j$ ), for any two write operation executions  $w_i(x)v' \rightarrow ok_i$  and  $w_j(x)v'' \rightarrow ok_j$  it is true that  $v' \neq v''$  and neither  $v' = v_0$  nor  $v'' = v_0$ .

### 4.1.3 Accesses

Given a history  $H$  and a transaction  $T_i$  in  $H$ , we say that  $T_i$  reads variable  $x$  in  $H$  if there exists an invocation  $inv_i(r_i(x))$  in  $H|T_i$ . By analogy, we say that  $T_i$  writes to  $x$  in  $H$  if there exists an invocation  $inv_i(w_i(x)v)$  in  $H|T_i$ . If  $T_i$  reads  $x$  or writes to  $x$  in  $H$ , we say  $T_i$  accesses  $x$  in  $H$ . In addition, let  $T_i$ 's *read set* be a set that contains every variable  $x$ , s.t.  $T_i$  reads  $x$ . By analogy,  $T_i$ 's *write set* contains every  $x$ , s.t.  $T_i$  writes to  $x$ . A transaction's *access set*, denoted  $\mathbf{ASet}_i$ , is the union of its read set and its write set.

Given a history  $H$  and a pair of transactions  $T_i, T_j \in H$ , we say  $T_i$  and  $T_j$  *conflict* on variable  $x$  in  $H$  if  $T_i$  and  $T_j$  are concurrent, both  $T_i$  and  $T_j$  access  $x$ , and one or both of  $T_i$  and  $T_j$  write to  $x$ .

Given a history  $H$  and a pair of transactions  $T_i, T_j \in H$ , we say  $T_i$  reads from  $T_j$  if there is some variable  $x$ , for which there is a complete operation execution  $w_j(x)v \rightarrow ok_j$  in  $H|T_j$  and another complete operation execution  $r_i(x) \rightarrow u$  in  $H|T_i$ , s.t.  $v = u$ .

Given any transaction  $T_i$  in some history  $H$ , any operation execution on a variable  $x$  within  $H|T_i$  is either *local* or *non-local*. Read operation execution  $r_i(x) \rightarrow v$  in  $H|T_i$  is local if it is preceded in  $H|T_i$  by a write operation execution on  $x$ , and it is non-local otherwise. Write operation execution  $w_i(x)v \rightarrow ok_i$  in  $H|T_i$  is local if it is followed in  $H|T_i$  by a write operation execution on  $x$ , and non-local otherwise.

#### 4.1.4 Execution Time

As program  $\mathbb{P}$  is being evaluated by some TM implementation, by a set of processes  $\Pi$ , it takes time to evaluate each statement. Hence, each event  $e$  in a trace  $\mathbb{T} \vdash \mathcal{E}(\mathbb{P}, \Pi)$  appears at a specific point in time, which we denote  $\tau_{\mathbb{T}}(e)$ . Since each process  $p_k$  executes statements in  $\mathcal{P}_k$  in sequence, then, given two events  $e_1, e_2$  s.t.  $e_1 <_{\mathbb{T}} e_2$ ,  $\tau_{\mathbb{T}}(e_1) < \tau_{\mathbb{T}}(e_2)$ . Given a complete operation execution  $op$  consisting of an invocation event  $e_1$  and a response event  $e_2$ , the time at which  $op$  finishes executing is  $\tau_{\mathbb{T}}^{\rightarrow}(op) = \tau_{\mathbb{T}}(e_2)$ . The *execution time* of trace  $\mathbb{T} \vdash \mathcal{E}(\mathbb{P}, \Pi)$ , denoted  $\tau_{\mathbb{T}}$ , is equal to the largest execution time for any event in  $\mathbb{T}$ . The *release time* of variable  $x$  in transaction  $T_i$  in  $\mathbb{T}$ , denoted  $\tau_{\mathbb{T}}^r(T_i)$ , is the point in time at which  $T_i$  updates  $\text{lv}(x)$ . The *completion time* of variable  $x$  in transaction  $T_i$  in  $\mathbb{T}$ ,  $\tau_{\mathbb{T}}^c(T_i)$ , is the point in time at which  $T_i$  updates  $\text{ltv}(x)$ .

## 4.2 Execution Time Comparison

In this section, we show that the execution time of OptSVA histories is lower than than of SVA histories resulting from the execution of the same program by the same processes.

Let  $\mathcal{E}_{\text{S}}(\mathbb{P}, \Pi)$  denote a complete execution of program  $\mathbb{P}$  by processes  $\Pi$  according to the SVA concurrency control algorithm, and  $\mathcal{E}_{\text{O}}(\mathbb{P}, \Pi)$ , an otherwise identical execution, but according to OptSVA. Then, there are traces  $\mathbb{T}_{\text{S}} \vdash \mathcal{E}_{\text{S}}(\mathbb{P}, \Pi)$  and  $\mathbb{T}_{\text{O}} \vdash \mathcal{E}_{\text{O}}(\mathbb{P}, \Pi)$ , and histories  $H_{\text{S}} = \text{hist}(\mathbb{T}_{\text{S}})$  and  $H_{\text{O}} = \text{hist}(\mathbb{T}_{\text{O}})$ . The histories contain corresponding transactions: if  $T_i \in H_{\text{S}}$  then  $T_i \in H_{\text{O}}$  and *vice versa*. Let  $\mathbb{T}$  be the set of all transactions in  $H_{\text{O}}$  and  $H_{\text{S}}$ .

For the purpose of the comparison we assume that the events in histories are instantaneous. We also do not account for the time it takes to execute concurrency control code. Finally, we assume that apart from the details of the concurrency control, the execution proceeds the same, regardless of whether it is SVA or OptSVA.

**Lemma 1** (Early Release). *For any  $T_i \in \mathbb{T}$  and  $x \in \text{ASet}_i$ ,  $\tau_{H_{\text{O}}}^c(T_i) \leq \tau_{H_{\text{S}}}^c(T_i)$ .*

*Proof.* An SVA transaction releases  $x$  by updating  $\text{lv}(x)$  on commit, on abort, and during the last operation execution on  $x$ . An OptSVA transactions does so on commit, on abort, during the last write operation execution on  $x$ , and after buffering a read-only variable.

- a) If  $x$  is a read-only variable an SVA transaction releases  $x$  no sooner than the last operation execution on  $x$ , so given any read operation execution  $r_i(x) \rightarrow \square \in H_{\text{S}}|T_i$ :

$$\tau_{H_{\text{S}}}^r(T_i) \geq \tau_{H_{\text{S}}}^{\rightarrow}(r_i(x) \rightarrow \square).$$

On the other hand, OptSVA releases  $x$  as soon as possible. That is during  $\text{start}_i \rightarrow \text{ok}_i$  at the earliest, and no later than any  $r_i(x) \rightarrow v \in H_{\text{O}}|T_i$  at the latest. Thus:

$$\tau_{H_{\text{O}}}^r(T_i) \leq \tau_{H_{\text{O}}}^{\rightarrow}(r_i(x) \rightarrow \square).$$

In that case, all things being equal:

$$\tau_{H_{\text{O}}}^r(T_i) \leq \tau_{H_{\text{S}}}^r(T_i).$$

- b) Alternatively, if the last operation execution in  $H_S|T_i|x$  is  $r_i(x) \rightarrow \square$ , then an SVA transaction releases  $x$  no sooner than  $r_i(x) \rightarrow \square$ , so:

$$\tau_{H_S}^r(T_i) \geq \tau_{H_S}^{\rightarrow}(r_i(x) \rightarrow \square).$$

On the other hand, if last operation execution in  $H_O|T_i|x$  is  $r_i(x) \rightarrow \square$ , then an OptSVA transaction releases  $x$  no sooner than any  $w_i(x)_{\square} \rightarrow ok_i$  in  $H_O|T_i$ .

$$\tau_{H_O}^r(T_i) \geq \tau_{H_O}^{\rightarrow}(w_i(x)_{\square} \rightarrow ok_i).$$

Since  $\tau_{H_O}^{\rightarrow}(w_i(x)_{\square} \rightarrow ok_i) < \tau_{H_O}^{\rightarrow}(r_i(x) \rightarrow \square)$ , then, all things being equal:

$$\tau_{H_O}^r(T_i) \leq \tau_{H_S}^r(T_i).$$

- c) Otherwise, the last operation execution in  $T_i$  is  $w_i(x)_{\square} \rightarrow ok_i$ , so both SVA and OptSVA transactions will release  $x$  no sooner than  $w_i(x)_{\square} \rightarrow ok_i$ , so, all things being equal:

$$\tau_{H_O}^r(T_i) = \tau_{H_S}^r(T_i).$$

□

**Lemma 2** (Early Completion). *For any  $T_i \in \mathbb{T}$  and  $x \in \text{ASet}_i$ ,  $\tau_{H_O}^r(T_i) \leq \tau_{H_S}^r(T_i)$ .*

*Proof.* An SVA transaction updates  $\text{ltv}(x)$  on commit, or on abort, so:

$$\tau_{H_S}^c(T_i) = \tau_{H_S}(res_i(C_i)) \text{ or } \tau_{H_S}^c(T_i) = \tau_{H_S}(res_i(A_i)).$$

An OptSVA transactions updates  $\text{ltv}(x)$  on commit, on abort, or after releasing a read-only variable. The latter-most potentially precedes a commit, so:

$$\tau_{H_O}^c(T_i) \leq \tau_{H_S}(res_i(C_i)) \text{ or } \tau_{H_O}^c(T_i) \leq \tau_{H_S}(res_i(A_i)).$$

Thus, all things being equal:

$$\tau_{H_O}^c(T_i) \leq \tau_{H_S}^c(T_i).$$

□

**Lemma 3** (Early Operation Execution). *For any  $T_i \in \mathbb{T}$ , and any operation execution  $op$  in  $H_O|T_i$  and  $H_S|T_i$ ,  $\tau_{H_O}^{\rightarrow}(op) \leq \tau_{H_S}^{\rightarrow}(op)$ .*

*Proof.* The case for  $\text{pv}_i(x) = 1$  is trivial. If  $\text{pv}_i(x) > 1$  then there exists  $T_j \in \mathbb{T}$  s.t.  $\text{pv}_j(x) + 1 = \text{pv}_i(x)$ .

- i) If  $op$  is a read operation execution,  $op$  can return a value and be a non-local read operation execution, or a local one, or an the operation can return  $A_i$ .
  - a) If  $op = r_i(x) \rightarrow v$  is a non-local read operation execution in both SVA and OptSVA the operation execution will not finish before the access condition is satisfied, so:

$$\tau_{H_S}^{\rightarrow}(op) \geq \tau_{H_S}^r(T_j),$$

$$\tau_{H_O}^{\vec{}}(op) \geq \tau_{H_O}^r(T_j).$$

Then, from Lemma 1:

$$\tau_{H_O}^r(T_j) \leq \tau_{H_S}^r(T_j),$$

So, all things being equal:

$$\tau_{H_O}^{\vec{}}(op) \leq \tau_{H_S}^{\vec{}}(op).$$

- b) If  $op = r_i(x) \rightarrow v$  is a local read operation execution, then, by definition, local reads follow a write operation execution, so  $\exists op_w = w_i(x) \rightarrow \in H_S | T_i$  s.t.  $op_w <_{H_S} op$  and  $op_w = w_x(v) \in \rightarrow H_S | T_i$  s.t.  $op_w <_{H_S} op$ . In that case:

$$\tau_{H_S}^{\vec{}}(op) \geq \tau_{H_S}^{\vec{}}(op_w),$$

$$\tau_{H_O}^{\vec{}}(op) \geq \tau_{H_O}^{\vec{}}(op_w).$$

Then, from ii):

$$\tau_{H_O}^{\vec{}}(op_w) \leq \tau_{H_S}^{\vec{}}(op_w).$$

Hence, all other things being equal:

$$\tau_{H_O}^{\vec{}}(op) \leq \tau_{H_S}^{\vec{}}(op).$$

- c) If  $op = r_i(x) \rightarrow A_i$ , then operation execution in both SVA and OptSVA the operation execution waits until  $1\mathbf{tv}(y) = \mathbf{pv}_i(y) - 1$  is true for all  $y \in \mathbf{ASet}_i$ . This means that each transaction  $T_k$  s.t.  $\mathbf{pv}_k(y) + 1 = \mathbf{pv}_i(y)$  must update  $\mathbf{pv}_i(y)$  to its private version. Hence:

$$\tau_{H_S}^{\vec{}}(op) \geq \max_{\substack{\forall T_k \in \mathbb{T}, \forall y \in \mathbf{ASet}_k, \\ \text{s.t. } \mathbf{pv}_k(y) + 1 = \mathbf{pv}_i(y)}} \tau_{H_S}^c(T_k),$$

$$\tau_{H_O}^{\vec{}}(op) \geq \max_{\substack{\forall T_k \in \mathbb{T}, \forall y \in \mathbf{ASet}_k, \\ \text{s.t. } \mathbf{pv}_k(y) + 1 = \mathbf{pv}_i(y)}} \tau_{H_O}^c(T_k).$$

From Lemma 2:

$$\tau_{H_O}^c(T_j) \leq \tau_{H_S}^c(T_j),$$

So, all things being equal:

$$\tau_{H_O}^{\vec{}}(op) \leq \tau_{H_S}^{\vec{}}(op).$$

- ii) If  $op$  is a write operation execution,  $op$  can return  $ok_i$  and either be a preceded by a non-local read operation execution, or only by write and non-local read operation executions. Otherwise the write operation execution can return  $A_i$ .

- a) If  $op = w_i(x) \rightarrow ok_i$  is preceded by some non-local  $op_r = r_i(x) \rightarrow \square$ , then in both SVA and OptSVA:

$$\tau_{H_S}^{\vec{}}(op) \geq \tau_{H_S}^{\vec{}}(op_r),$$

$$\tau_{H_O}^{\vec{}}(op) \geq \tau_{H_O}^{\vec{}}(op_r).$$

From i) point a):

$$\tau_{H_O}^{\vec{}}(op_r) \leq \tau_{H_S}^{\vec{}}(op_r).$$

Thus, all things being equal:

$$\tau_{H_O}^{\vec{}}(op) \leq \tau_{H_S}^{\vec{}}(op).$$

- b) If  $op = w_i(x)^\square \rightarrow ok_i$  is not preceded by non-local read operation executions, then there is such  $op_w = w_i(x)^\square \rightarrow ok_i$  (possibly  $op_w = op$ ) such that  $op_w$  is the initial operation in  $H_S|T_i|x$  and  $H_O|T_i|x$ . In addition,  $op_w$  is necessarily preceded by  $op_s = start_i \rightarrow ok_i$ , so:

$$\begin{aligned}\tau_{H_S}^{\vec{}}(op_w) &\geq \tau_{H_S}^{\vec{}}(op_s), \\ \tau_{H_O}^{\vec{}}(op_w) &\geq \tau_{H_O}^{\vec{}}(op_s).\end{aligned}$$

In SVA an initial write waits for the access condition, so:

$$\tau_{H_S}^{\vec{}}(op) \geq \max(\tau_{H_S}^r(T_j), \tau_{H_S}^{\vec{}}(op_s)).$$

In OptSVA writes do not wait for the access condition at all, so:

$$\tau_{H_O}^{\vec{}}(op) \geq \tau_{H_O}^{\vec{}}(op_s), \text{ regardless of } \tau_{H_S}^r(T_j).$$

From v):

$$\tau_{H_O}^{\vec{}}(op_s) \leq \tau_{H_S}^{\vec{}}(op_s).$$

Hence, all other things being equal:

$$\tau_{H_O}^{\vec{}}(op_s) = \tau_{H_S}^{\vec{}}(op_s).$$

Then, since either  $op_w = op$  or  $op_w$  precedes  $op$ :

$$\tau_{H_O}^{\vec{}}(op) \leq \tau_{H_S}^{\vec{}}(op).$$

- c) If  $op = w_i(x)^\square \rightarrow A_i$ , then, by analogy to ii point c):

$$\tau_{H_O}^{\vec{}}(op) \leq \tau_{H_S}^{\vec{}}(op).$$

- iii) If  $op = tryC_i \rightarrow \square$ , then in both SVA and OptSVA transactions wait until  $ltv(y) = pv_i(y) - 1$  is true for all  $y \in ASet_i$  before returning from  $op$ . This means that each transaction  $T_k$  s.t.  $pv_k(y) + 1 = pv_i(y)$  must update  $pv_i(y)$  to its private version. Hence:

$$\begin{aligned}\tau_{H_S}^{\vec{}}(op) &\geq \max_{\substack{\forall T_k \in \mathbb{T}, \forall y \in ASet_k, \\ \text{s.t. } pv_k(y) + 1 = pv_i(y)}} \tau_{H_S}^c(T_k), \\ \tau_{H_O}^{\vec{}}(op) &\geq \max_{\substack{\forall T_k \in \mathbb{T}, \forall y \in ASet_k, \\ \text{s.t. } pv_k(y) + 1 = pv_i(y)}} \tau_{H_O}^c(T_k).\end{aligned}$$

From Lemma 2:

$$\tau_{H_O}^c(T_j) \leq \tau_{H_S}^c(T_j),$$

So, all things being equal:

$$\tau_{H_O}^{\vec{}}(op) \leq \tau_{H_S}^{\vec{}}(op).$$

- iv) If  $op = tryA_i \rightarrow A_i$ , then, by analogy to iv):

$$\tau_{H_O}^{\vec{}}(op) \leq \tau_{H_S}^{\vec{}}(op).$$

- v) If  $op = start_i \rightarrow ok_i$ , then trivially,

$$\tau_{H_O}^{\vec{}}(op) = \tau_{H_S}^{\vec{}}(op).$$

□

**Corollary 1** (Lower Execution Time).  $\tau_{H_O} \leq \tau_{H_S}$ .

Thus, the execution time of OptSVA is no worse than SVA. Intuitively, OptSVA is likely perform better in almost all cases though, and especially, if high contention causes many transactions to wait to access the same object—then, the expedited release times and delayed synchronization come into play.

### 4.3 Practical Comparison [Proposition for Consideration]

Given that the theoretical considerations above ignore the complexity of the concurrency control algorithm itself, it could be argued that the cost of executing individual operations and delegating execution to separate threads are heavy enough to wipe out any theoretical scheduling advantage in practice. Thus, in this section, we perform a practical comparison of the two algorithms, that bears out the conclusions from the previous section, by showing comparing the performance of SVA to OptSVA given a variety of workloads.

For evaluation we used EigenBench [13], a flexible, powerful, and lightweight benchmark that can be used for comprehensive evaluation of mutlicore TM systems by simulating a variety of transactional application characteristics. It generates a traffic of client transactions, which access objects at random (with a specified degree of locality) according to a predefined ratio of reads to writes from three different array types: the hot array contains variables where transactions can conflict, the mild array contains variables accessed transactionally but without the possibility of conflict, and the cold array contains non-transactional variables.

The experiment was run The benchmark was executed on a 10-node cluster with two quad-core Intel Xeon L3260 processors at 2.67 GHz and 4 GB of RAM per node, running OpenSUSE 13.1 (kernel 3.11.10, x86\_64 architecture), and connected with a 1Gb network. The implementations of SVA and OptSVA run on the 64-bit Java HotSpot(TM) Java Virtual Machine version 1.8 (build 1.8.0\_25-b17), as does the benchmark.

The benchmark executes 80 concurrent threads (one per processor core), each of which executes 10 consecutive transactions. The transactions have three parameters: length, read-to-write ratio, and contention. Long transactions execute 10 operations on shared variables each, while short ones execute 5 each. These operations either have an  $5 \div 1$  or  $1 \div 5$  read-to-write ratio. The high contention scenarios provide a total of 20 shared variables to the transaction, while the low contention ones provide 80. We only use hot arrays for the purpose of this presentation, since only they impact contention. Locality of operations is at 50% and is based on a 5-variable-long history. We measure total execution time of the entire workload, and throughput—operations executed per second.

The results shown in Fig. 9 confirm the theoretical comparison, showing that the execution time of OptSVA is lower than that of SVA, and that, in practice this is the typical result. The advantage of OptSVA over SVA is affected by contention, since OptSVA optimizations have more impact when the rate of potential conflicts is higher. Thus, in high contention the execution time of OptSVA is 34.7–40.7% lower than that of SVA, whereas in low contention the difference drops to only between 17.7 and 32.9%. Note that the advantage occurs regardless of the fact that the threads executing asynchronous computations for

Parameters	Execution Time [s]		Throughput [ops/s]		Gain [%]
	SVA	OptSVA	SVA	OptSVA	
Short, RW 5 ÷ 1, high cont.	492.2	257.2	8.1	15.5	47.7
Short, RW 1 ÷ 5, high cont.	486.1	266.3	8.2	15.0	45.2
Long, RW 5 ÷ 1, high cont.	994.9	576.0	8.0	13.9	42.1
Long, RW 1 ÷ 5, high cont.	979.7	640.1	8.2	12.5	34.7
Short, RW 5 ÷ 1, low cont.	206.5	169.9	19.3	23.5	17.7
Short, RW 1 ÷ 5, low cont.	210.5	168.8	19.0	23.6	19.8
Long, RW 5 ÷ 1, low cont.	439.9	308.5	18.2	25.9	29.9
Long, RW 1 ÷ 5, low cont.	442.7	297.1	18.1	26.9	32.9

Figure 9: Experimental comparison between SVA and OptSVA.

OptSVA transactions have to share processors with transaction threads. This does not have a large impact, since those threads are mostly waiting at access conditions. In addition, a higher incidence of reads is also better optimized by OptSVA (due to read-only variables), but the difference is not very pronounced (no more than 10%), since the optimization has more impact in long transactions, but read-only variables are increasingly less likely to occur in EigenBench as transactions get longer. On the other hand SVA treats reads and writes the same, so it performs consistently regardless of the read-to-write ratio. The abort rate is 0 in all cases.

## 5 Correctness

In this section we show that OptSVA satisfies last-use opacity—the same safety property as SVA, meaning that the parallelism optimization does not sacrifice or otherwise relax correctness.

Last-use opacity [23, 25] is a TM correctness property that provides the same guarantees as opacity, with the exception that it allows reading from live transactions after they performed their *closing write*—the last write in that transaction in any possible execution of that program. (For convenience we repeat the definition of the property after the original paper in the appendix.)

Given that OptSVA divorces the operations performed on shared variables within the code of the transaction from the actual accesses to memory that are executed, and since last-use opacity is defined on operations on shared variables, showing correctness is not straightforward. Instead, we use a different method, where we show that the behavior of view and update events in traces generated by OptSVA satisfy a set of specific event-related properties, which we refer to in aggregate as *trace harmony*.

First, we present the preliminary material that defines how operations on memory are represented within traces. Then, we give the definitions making up trace harmony are presented below in this section. We show in Appendix A that any harmonious trace implies a last-use opaque history in general. Finally, we demonstrate that OptSVA traces are harmonious in Section 6, and so, that OptSVA is last-use opaque.

## 5.1 Events

Events are the results of transactions directly interacting with the memory representing shared variables. When during the execution of some program, some transaction accesses a variable's state (either viewing it or updating it), it issues an update event that is logged in the trace resulting from the execution.

A *view event*  $g_i(x)v$  is any event that represents some transaction  $T_i$  accessing the state of variable  $x$  (i.e. reading the memory location where the value of  $x$  is stored) and retrieving the value of  $v$ . An *update event*  $s_i(x)v$  is any event that represents a modification of the state of variable  $x$  by transaction  $T_i$ , setting it to the value of  $v$ .

Some operations can abort the transaction, rather than doing what they are intended to do. For instance a write operation may fail with an abort rather than setting a new value of some variable. In such cases the transaction will execute specific code that is meant to clean up after the transaction and revert any variables the transaction modified to a previous (consistent) state. We will refer to this code as the recovery procedure. Any update events executed as part of a recovery procedure are called *recovery* (update) events. In contrast, all update events that are not recovery events are called *routine* (update) events. For distinction, we denote a routine update  $\circ s_i(x)v$  and a recovery update  $\blacklozenge s_i(x)v$ .

Given a view event  $g_i(x)v$  (for some  $T_i$ ),  $v$  is specified by the most recent preceding update event on  $x$  in a given trace. I.e., if the most recent preceding update event on  $x$  is some  $s_j(x)v'$  (for some  $T_j$ ), then  $v = v'$ . Note, that this distinction does not depend on how the events appear in the trace, but is intrinsic to the code that executes them.

Event  $e = s_i(x)v$  is the *ultimate update* event on  $x$  in  $\mathbb{T}$  iff there is no  $e' = s_j(x)v'$  s.t.  $e <_{\mathbb{T}} e'$ . Event  $e = s_i(x)v$  is the *ultimate routine update* event on  $x$  in  $\mathbb{T}$  iff  $e$  is routine and there is no  $e' = s_j(x)v'$  s.t.  $e <_{\mathbb{T}} e'$  and  $e'$  is routine.

Given a view event  $e_v = g_i(x)\square$  in some  $T_i$  and an update event  $e = s_j(x)\square$  in some  $T_j$ ,  $e$  prefaces  $e_v$  in trace  $\mathbb{T}$ , denoted  $e \prec_{\mathbb{T}} e_v$  iff  $e <_{\mathbb{T}} e_v$  and there is no update event  $e' = s_k(x)\square$  in any  $T_k$  s.t.  $e <_{\mathbb{T}} e' <_{\mathbb{T}} e_v$ . Given a read operation execution  $op_r \in \mathbb{T}$  s.t.,  $op_r = r_i(x) \rightarrow v$  and  $op_r$  that consists of an invocation event  $e_i$  and a response event  $e_r$ , and a view event  $e_v = g_i(x)v'$ ,  $op_r$  depends on  $e_v$  (denoted  $op_r \leftarrow e_v$ ) iff  $v' = v$  and  $e_v \prec_{\mathbb{T}} e_r$ . Given a write operation execution  $op_w \in \mathbb{T}$  s.t.,  $op_w = w_i(x)v \rightarrow ok_i$  and  $op_w$  consists of an invocation event  $e_i$  and a response event  $e_r$ , and an update event  $e_u = g_i(x)v'$ ,  $op_w$  instigates  $e_u$  (denoted  $op_w \rightsquigarrow e_u$ ) iff  $v' = v$  and  $e_i \prec_{\mathbb{T}} e_u$ .

Transaction  $T_i$  views transaction  $T_j$  ( $T_i \rightsquigarrow T_j$ ) if  $\exists e_u, e_v \in \mathbb{T}$  s.t.  $e_v = g_i(x)v$  and  $e_u = \circ s_j(x)v$  and  $e_u \prec_{\mathbb{T}} e_v$ . Transaction  $T_i$  virtually views transaction  $T_j$  ( $T_i \rightsquigarrow^v T_j$ ) if  $\exists e_u, e_v \in \mathbb{T}$  s.t.  $e_v = g_i(x)v$  and  $e_u = \circ s_j(x)v$  and  $e_u \prec_{\mathbb{T}} e_v$ .

Event access set  $ESet_i$  for some transaction  $T_i \in \mathbb{T}$  is such a set of variables such that  $x \in ESet_i \iff \exists e \in \mathbb{T}|T_i$  s.t.  $e = \circ s_i(x)v$  or  $e = g_i(x)v$ .

Given  $T_i \in \mathbb{T}$ , s.t.  $e_v = g_i(x)v \in \mathbb{T}|T_i$  and  $e_v$  is initial in  $\mathbb{T}|T_i$ , let  $\psi_{\mathbb{T}}(T_i, x)$  be such longest sequence of transactions that: a) if  $\exists T_j \in \mathbb{T}$  s.t.  $e_a = \blacklozenge s_j(x)v \mathbb{T}|T_j$  and  $e_a \prec_{\mathbb{T}} e_v$  then  $\psi_{\mathbb{T}}(T_i, x) = \psi_{\mathbb{T}}(T_i, x) \cdot T_j$ , otherwise b)  $\psi_{\mathbb{T}}(T_i, x) = \emptyset \cdot T_i$ .

Let a view chain  $\xi(\mathbb{T}, T_i, T_j)$  be a sequence of transactions s.t.  $T_i$  is the first element, and  $T_j$  is the last element, and for each pair of consecutive transactions  $T_k, T_l$ , it is true that  $T_k \rightsquigarrow T_l$ . Let  $H|\xi(\mathbb{T}, T_i, T_j)$  be the longest subsequence of  $\mathbb{T}$  s.t.  $e \in H|\xi(\mathbb{T}, T_i, T_j)$  iff  $e \in \mathbb{T}|T_i$  and  $T_i \in \xi(\mathbb{T}, T_i, T_j)$ .

## 5.2 Definitions

Since OptSVA limits events within a transaction to at most a single routine update event, at most a single single recovery update event, and at most a single view event per variable, we limit the method presented below to such a case. This is represented by the definition of *minimalism* below. (However, the method can be extended to allow multiple routine update events and multiple view events per transaction.)

**Definition 1** (Minimalism). *Given transaction  $T_i \in \mathbb{T}$ , for each  $x$ ,  $\mathbb{T}|T_i$  contains:*

- a) *either none or one view event  $g_i(x) \square$ ,*
- b) *either none or one routine update event  $\circ s_i(x) \square$ ,*
- c) *either none or one recovery update event  $\blacklozenge s_i(x) \square$ .*

*Trace isolation* stipulates, that once a transaction starts accessing the memory of some variable, it has exclusive access to it until it is done performing routine updates and view events on it. Hence a transaction is not interfered with by other transaction when it is performing memory accesses, unless an abort is required. Furthermore, if one transaction accesses the memory of one variable before another transaction, then that other transaction cannot access any other variable before the first transaction does.

**Definition 2** (Trace Isolation). *Trace  $\mathbb{T}$  is isolated, iff given any two transactions  $T_i$  and  $T_j$  in  $\mathbb{T}$  for every  $x \in ESet_i \cap ESet_j$ , it is true that given any event  $e_i$  s.t.  $e_i = g_i(x)v \in \mathbb{T}|T_i$  or  $e_i = \circ s_i(x)v' \in \mathbb{T}|T_j$ , and any event  $e_j$  s.t.  $e_j = g_j(x)v' \in \mathbb{T}|T_j$  or a routine update event  $e_j = \circ s_j(x)v' \in \mathbb{T}|T_j$ ,  $e_i <_{\mathbb{T}} e_j$ .*

*Isolation order* imposes an order on transactions in a trace that respects the order of executing update and view events on variables. Given an isolated trace, there exist the following orders:

**Definition 3** (Variable Isolation Order). *Two transactions  $T_i$  and  $T_j$  are isolation-ordered in trace  $\mathbb{T}$  with respect to  $x$ , which we denote  $T_i \dot{<}_{\mathbb{T}}^x T_j$ , if given any event  $e_i$  s.t.  $e_i = g_i(x)v \in \mathbb{T}|T_i$  or  $e_i = \circ s_i(x)v' \in \mathbb{T}|T_j$ , and any event  $e_j$  s.t.  $e_j = g_j(x)v' \in \mathbb{T}|T_j$  or a routine update event  $e_j = \circ s_j(x)v' \in \mathbb{T}|T_j$ , and  $e_i <_{\mathbb{T}} e_j$ .*

**Definition 4** (Direct Isolation Order). *Two transactions  $T_i$  and  $T_j$  are directly isolation-ordered  $T_i \ddot{<}_{\mathbb{T}} T_j$  if for every  $x \in ESet_i \cap ESet_j$ ,  $T_i \dot{<}_{\mathbb{T}}^x T_j$ .*

**Definition 5** (Isolation Order). *Two transactions  $T_i$  and  $T_j$  are isolation-ordered  $T_i \dot{<}_{\mathbb{T}} T_j$  there exists a sequence of transactions  $\epsilon = T_i \cdot \dots \cdot T_j$ , where for every pair of consecutive transactions  $T_n, T_m \in \epsilon$ ,  $T_n \ddot{<}_{\mathbb{T}} T_m$ .*

Note that if  $T_i <_{\mathbb{T}} T_j$  and  $x \in ESet_i \cap ESet_j$ , then  $T_i \dot{<}_{\mathbb{T}} T_j$ , so the isolation order preserves real-time order.

*Consonance* describes when a particular event or operation involve a value that can be considered correct, which is determined by other events or operations that either precede or follow the one in question.

Specifically, a view event is consonant if it retrieves the value that was written there by a preceding event, or the initial value, if no events preceded. A

consonant read operation must then return a value that was retrieved by a view event beforehand. On the other hand, a routine update event must be caused by some write operation. Whereas a consonant recovery update event is one that cleans up after a routine update and returns the state of a variable to a value that was retrieved by a view event that view the unmodified state of the variable in question.

**Definition 6** (View Consonance). *Given some  $T_i \in \mathbb{T}$ , a view event  $e_v = g_i(x)v$  is consonant in  $\mathbb{T}$  iff either:*

- a)  $v = 0$  and  $\nexists e_u \in \mathbb{T}$  s.t.  $e_u = s_j(x)v'$  for any  $T_j$ , and  $e_u <_{\mathbb{T}} e_r$ ,
- b)  $v \neq 0$  and  $\exists e_u \in \mathbb{T}$  s.t.  $e_u = \circ s_j(x)v$  for some  $T_j$ ,  $i \neq j$ ,  $e_u <_{\mathbb{T}} e_r$ , and  $e_u$  is the ultimate routine update on  $x$  in  $\mathbb{T}|T_j$ , or
- c)  $\exists e_u \in \mathbb{T}$  s.t.  $e_u = \blacklozenge s_j(x)v$  for some  $tr_j$ ,  $i \neq j$ ,  $e_u <_{\mathbb{T}} e_r$ .

**Definition 7** (Routine Update Consonance). *Given some  $T_i \in \mathbb{T}$ , a routine update event  $e_u = \circ s_i(x)v$  is consonant in  $\mathbb{T}$  iff  $e_u$  is instigated in  $\mathbb{T}$  by a consonant write operation execution.*

**Definition 8** (Recovery Update Consonance). *Given some  $T_i \in \mathbb{T}$ , event  $e_s = \blacklozenge s_i(x)v$  is consonant in  $\mathbb{T}$  iff:*

- a)  $e_a$  is conservative in  $\mathbb{T}$ , i.e. there exists a consonant non-local view event  $e_v$  in  $\mathbb{T}|T_i$  that is initial in  $\mathbb{T}|T_i$ ,
- b)  $e_a$  is needed in  $\mathbb{T}$ , i.e.  $\exists e_u = \circ s_i(x)v' \in \mathbb{T}|T_i$  s.t.  $e_u <_{\mathbb{T}|T_i} e_a$ ,
- c)  $e_a$  is dooming in  $\mathbb{T}$ , i.e.  $\nexists r \in \mathbb{T}$  s.t.  $r = res_i(C_i)$ ,  $e_a <_{\mathbb{T}|T_i} r$ ,
- d)  $e_a$  is ending in  $\mathbb{T}$ , i.e.  $\nexists e \in \mathbb{T}$  s.t.  $e = g_i(x)v'$  or  $e = s_i(x)v'$ ,  $e_a <_{\mathbb{T}|T_i} e$ ,
- e)  $e_a$  is clean in  $\mathbb{T}$ , i.e. given view  $e_v$  that justifies that  $e_s$  is conservative, there is no event  $e'_a = \blacklozenge s_j(x)v'$  in any  $T_j$  s.t.  $T_j <_{\mathbb{T}}^x T_i$  and  $e_v <_{\mathbb{T}} e'_a <_{\mathbb{T}} e_a$ .

**Definition 9** (Non-local Read Consonance). *A non-local read operation execution is consonant in trace  $\mathbb{T}$  iff it depends in  $\mathbb{T}$  on a consonant non-local view event.*

**Definition 10** (Local Read Consonance). *Given some  $T_i \in \mathbb{T}$ , a local read operation execution  $op_r = r_i(x) \rightarrow v$  is consonant in trace  $\mathbb{T}$  iff there exists  $op_w = w_i(x)v \rightarrow ok_i \in \mathbb{T}|T_i$  s.t.  $op_w <_{\mathbb{T}|T_i} op_r$ , and  $op_w$  is consonant.*

**Definition 11** (Write Consonance). *A write operation execution  $w_i(x)v \rightarrow ok_i$  in some  $T_i$  is consonant in trace  $\mathbb{T}$  iff  $v \neq 0$  and  $v$  is within the domain of  $x$ .*

**Definition 12** (Trace Consonance). *Trace  $\mathbb{T}$  is consonant iff all operation executions, update events, and view events in trace  $\mathbb{T}$  are consonant.*

*Obbligato* ensures that update events required by write operations happen on time, so that the values written to variables by operation executions are actually set in memory by the time the transaction relinquishes control of each variable. This means that a routine update event is required after a write operation by the time a transaction commits (*committed write obbligato*), one is required after a closing write operation, before any other transaction attempts

to access that variable (*closing write obligato*), and one is required if a non-aborted transaction executed write operations and another transaction accesses the variables in question (*view write obligato*).

**Definition 13** (Committed Write Obligato). *Given  $T_i \in \mathbb{T}$ , if  $\exists op_w \in \mathbb{T}|T_i$  s.t.  $op_w = w_i(x)v \rightarrow ok_i$ ,  $op_w$  is non-local, and  $\exists r \in \mathbb{T}|T_i$  s.t.  $r = res_i(C_i) \in \mathbb{T}|T_i$ , then  $op_w$  is in obligato iff  $\exists e_s \in \mathbb{T}|T_i$  s.t.  $e_s = \circ s_i(x)v$  and  $op_w \rightsquigarrow e_s$  and  $e_s <_{\mathbb{T}|T_i} r$ .*

**Definition 14** (Closing Write Obligato). *Given  $T_i \in \mathbb{T}$ , if  $\exists op_w \in \mathbb{T}|T_i$  if  $\exists T_j \in \mathbb{T}$  s.t.  $T_i <_{\mathbb{T}} T_j$  if there is  $op_i = w_i(x)\square \rightarrow ok_i \in \mathbb{T}|T_i$ ,  $op_i$  is a closing write, and there is  $e_v = g_j(x)\square \in \mathbb{T}|T_j$ , then  $op_i$  is in closing obligato iff  $\exists e_u \in \mathbb{T}|T_i$  s.t.  $e_u = \circ s_i(x)v$  and  $op_i \rightsquigarrow e_u$ , and  $e_u <_{\mathbb{T}} e$ .*

**Definition 15** (View Write Obligato). *Given  $T_i \in \mathbb{T}$ , if  $\exists T_j \in \mathbb{T}$ , s.t.  $T_i <_{\mathbb{T}} T_j$ , if there is  $op_i = w_i(x)\square \rightarrow ok_i \in \mathbb{T}|T_i$ , and  $e_v = g_j(x)\square \in \mathbb{T}|T_j$ , then  $op_i$  is in view write obligato iff there is  $e_u = s_i(x)\square \in \mathbb{T}|T_i$  s.t.  $e_u <_{\mathbb{T}} e_v$  or  $\exists r = res_i(A_i) \in \mathbb{T}|T_i$  s.t.  $r <_{\mathbb{T}} e_v$ .*

**Definition 16** (Obligato). *Trace  $\mathbb{T}$  is obligato iff*

- a) *all non-local writes in all transactions committed in  $\mathbb{T}$  are in committed obligato,*
- b) *all closing writes whose effects are potentially viewed are in closing write obligato,*
- c) *all writes whose effects are potentially viewed are in view write obligato.*

*Decisiveness* is achieved, when transactions do not let other transactions to view the values they set to the variables they modify until they commit or perform their closing writes.

**Definition 17** (Decisiveness). *Trace  $\mathbb{T}$  is decisive iff given any pair of transactions  $T_i, T_j \in \mathbb{T}$ , s.t.  $T_i \rightsquigarrow T_j$  for any  $e_u = \circ s_j(x)v \in \mathbb{T}|T_j$  and  $e_v = g_i(x)v \in \mathbb{T}|T_i$ , then either  $T_j$  is decided on  $x$ ,  $\exists r = res_j(C_j) \in \mathbb{T}|T_j$  s.t.  $e_u <_{\mathbb{T}} r <_{\mathbb{T}} e_v$ .*

*Abort accord* is a relation between two transactions, where if one of them views the update events performed by the other, and the other transaction aborts, then the first transaction is not permitted to abort.

**Definition 18** (Abort Accord). *Trace  $\mathbb{T}$  is in abort accord iff for any two transactions  $T_i$  and  $T_j$  in  $\mathbb{T}$  s.t. a)  $T_j \rightsquigarrow T_i$ , if  $T_i$  is aborted in  $\mathbb{T}$ , then  $T_j$  is either live or aborted in  $\mathbb{T}$ , b)  $\exists e_u = \circ s_i(x)\square \in \mathbb{T}|T_i$  and  $e = \circ s_j(x)\square \in \mathbb{T}|T_j$  or  $e = g_j(x)\square \in \mathbb{T}|T_j$  and  $e_a = \blacklozenge s_i(x)\square \in \mathbb{T}|T_i$ , and  $e_u <_{\mathbb{T}} e <_{\mathbb{T}} e_a$ , then  $T_j$  is either live or aborted in  $\mathbb{T}$ .*

*Commit accord* is a similar relation, where given two transactions such that one of them views the update events performed by the other, and the first transaction commits, then the first transaction must have also committed.

**Definition 19** (Commit Accord). *trace  $\mathbb{T}$  is in commit accord iff for any two transactions  $T_i$  and  $T_j$  in  $\mathbb{T}$  s.t.  $T_j \rightsquigarrow T_i$ , if  $T_j$  is committed in  $\mathbb{T}$ , then  $T_i$  is committed in  $\mathbb{T}$ .*

*Coherence* specifies, that if a transaction commits, all preceding transactions according to the isolation order either committed or aborted beforehand.

**Definition 20** (Coherence). *Trace  $\mathbb{T}$  is coherent iff for any two transactions  $T_i$  and  $T_j$  in  $\mathbb{T}$  s.t.  $T_i \prec_{\mathbb{T}}^x T_j$ , if  $\exists r_j = \text{res}_j(C_j) \in \mathbb{T}|T_j$ , then  $\exists r_i = \text{res}_i(C_i)$  or  $r_i = \text{res}_i(A_i)$  and  $r_i \prec_{\mathbb{T}} r_j$ .*

*Abort Coda* specifies when a recovery event can be expected to be issued. If a transaction updates the state of some variable and eventually aborts, either it or another transaction will issue a recovery event to clean up that update before the transaction in question completes aborting. On the other hand, if the transaction commits, neither it or any other transaction will issue a recovery event to revert the state of that variable to another value.

**Definition 21** (Abort Coda). *Trace  $\mathbb{T}$  has coda iff for any transaction  $T_i$*

- a) *if  $T_i$  aborts in  $\mathbb{T}$  (so  $r = \text{res}_i(A_i) \in \mathbb{T}|T_i$ ), then if  $\exists e_u = \circ s_i(x)v \in \mathbb{T}|T_i$ , then for some  $T_j$  s.t.  $i = j$  or  $T_i \prec_{\mathbb{T}}^x T_j$   $\exists e_a = \blacklozenge s_i(x)v' \in \mathbb{T}$  s.t.  $e_u \prec_{\mathbb{T}} e_a \prec_{\mathbb{T}}$ ,*
- b) *if  $T_i$  commits in  $\mathbb{T}$  (so  $\exists r = \text{res}_i(C_i) \in \mathbb{T}|T_i$ ), then if  $\exists e = \circ s_i(x)v \in \mathbb{T}|T_i$  or  $e = g_i(x)v \in \mathbb{T}|T_i$ , then for any  $T_j$  s.t.  $i = j$  or  $T_i \prec_{\mathbb{T}}^x T_j$   $\nexists e_a = \blacklozenge s_i(x)v' \in \mathbb{T}$  s.t.  $e \prec_{\mathbb{T}} e_a \prec_{\mathbb{T}}$ .*

*Chain consistency* describes what events are allowed and barred from a chain of transactions. Specifically, *chain isolation* stipulates that, a chain of transactions executing view and update events is not broken by a revert event, so a transaction cannot view an inconsistent state where the value of one variable is retrieved before an abort was performed, and another one after. *Chain self-containment* if the values viewed by a transaction in some chain always come from that chain.

**Definition 22** (Chain Isolation). *Given trace  $\mathbb{T}$ , transactions  $T_i, T_j \in \mathbb{T}$ ,  $\xi(\mathbb{T}, T_i, T_j)$  is isolated if for  $\forall T_k \in \xi(\mathbb{T}, T_i, T_j)$  s.t.  $e^k = \circ s_k(x)v$ , there is no  $T_l$  (possibly  $T_l \notin \xi(\mathbb{T}, T_i, T_j)$ ) s.t.  $\exists e^l = \blacklozenge s_l(x)v'$  where  $v = v'$  and  $e^l$  is between  $e^k$  and any other event in any transaction in  $\xi(\mathbb{T}, T_i, T_j)$ .*

**Definition 23** (Chain Self-containment). *Given trace  $\mathbb{T}$ , transactions  $T_i, T_j \in \mathbb{T}$ ,  $\xi(\mathbb{T}, T_i, T_j)$  is self-contained iff given any transactions  $T_k, T_l \in \xi(\mathbb{T}, T_i, T_j)$ , s.t.  $k \neq l$  and  $\exists e_u^k = \circ s_k(x)v \in \mathbb{T}|T$   $\exists e_v^l = g_l(x)v' \in \mathbb{T}|T$  and  $e_u^k \prec_{\mathbb{T}} e_v^l$ , then either  $v = v'$  or  $\exists e_u^m = \circ s_m(x)v' \in \mathbb{T}|T_m$  for some  $T_m \in \xi(\mathbb{T}, T_i, T_j)$  s.t.  $T_m$  precedes  $T_l$  and follows  $T_k$  in  $\xi(\mathbb{T}, T_i, T_j)$  and  $e_u^k \prec_{\mathbb{T}} e_u^m \prec_{\mathbb{T}} e_v^l$ .*

**Definition 24** (Chain Consistency). *An isolated trace  $\mathbb{T}$  is chain-consistent if given any  $\xi(\mathbb{T}, T_i, T_j)$  is chain-isolated and self-contained (for some  $T_i, T_j \in \mathbb{T}$ ).*

Finally, *harmony* is satisfied if the preceding properties are satisfied within the entire trace.

**Definition 25** (Harmony). *Trace  $\mathbb{T}$  is harmonious iff it satisfies all of the following: a) minimalism, b) consonance, c) obbligato, d) coherence, commit accord, abort accord, and abort coda, e) isolation, f) decisiveness, g) chain consistency, h) unique writes.*

### 5.3 Last-use Opacity from Harmony

**Theorem 1** (Harmonious Trace Last-use Opacity). *Given harmonious  $H$ , s.t.  $H = \text{hist}(\mathbb{T})$ , if  $\mathbb{T}$  is harmonious,  $H$  is last-use opaque.*

## 6 OptSVA Harmony

Let  $\bar{\mathbb{T}}$  be any trace produced by OptSVA.

**Observation 1** (Memory Access Pattern). *OptSVA generates view and update events for variable  $x$  precisely as a result of executing the following lines:*

- in procedure `checkpoint` at line 99—view event,
- in procedure `read_buffer` at line 29—view event,
- in procedure `write_buffer` at line 56—routine update event,
- in procedure `commit` at line 113—routine update event,
- in procedure `abort` at line 90—recovery update event.

**Observation 2** (Closing Write Identification). *If after executing a write operation on  $x$  by  $T_i$  it is true that  $\text{wub}_i(x) = \text{wc}_i(x)$ , then that is the closing write operation execution on  $x$  in  $T_i$ .*

**Lemma 4** (Version Order). *Any two transactions  $T_i, T_j \in \bar{\mathbb{T}}$  s.t.  $\text{ASet}_i \cap \text{ASet}_j \neq \emptyset$  are isolation ordered: if  $\exists x \in \text{ASet}_i \cap \text{ASet}_j$   $\text{pv}_i(x) < \text{pv}_j(x)$ , then  $\forall x, y \in \text{ASet}_i \cap \text{ASet}_j$ ,  $\text{pv}_i(x) < \text{pv}_j(x)$ .*

*Proof.* During `start` every transaction acquires a value of  $\text{pv}_i(x)$ . Since the acquisition is guarded by locks, it is performed atomically, so that if transaction  $T_i$ , starts acquiring  $\forall x \in \text{ASet}_i$ ,  $\text{pv}_i(x)$ , then no other  $T_j$  acquires  $\forall x \in \text{ASet}_j \cap \text{ASet}_i$ ,  $\text{pv}_i(x)$  until transaction  $T_i$  completes acquiring and releases the locks. Hence, if for any two  $T_i, T_j$ , if  $\exists x \in \text{ASet}_i \cap \text{ASet}_j$   $\text{pv}_i(x) < \text{pv}_j(x)$ , then  $\forall x, y \in \text{ASet}_i \cap \text{ASet}_j$ ,  $\text{pv}_i(x) < \text{pv}_j(x)$ .  $\square$

**Corollary 2** (Version Order from Isolation Order). *Given transactions  $T_i, T_j$  s.t.  $T_i \prec_{\bar{\mathbb{T}}} T_j$ , then  $\forall x \in \text{ASet}_i \cap \text{ASet}_j$ ,  $\text{pv}_j(x) < \text{pv}_i(x)$ .*

**Lemma 5** (Minimalism).  *$\bar{\mathbb{T}}$  is minimalistic.*

*Proof.* If  $x$  is read-only in  $T_i$ , then there is exactly one view event on  $x$  in  $T_i$  (line 29). If  $x$  is not read-only, then there is exactly one view event on  $x$  in  $T_i$  executed as part of procedure `checkpoint` (line 99), either during the first read, the closing write (in `write_buffer`), or, if not previously invoked, during `commit`.

Routine update events are executed only after the closing write (in `write_buffer`—line 56), so at most once, or during `commit` (line 113), if there were writes, but the upper bound on writes was not reached. Hence, routine update events occur at most once per variable.

A recovery update event can occur only during `abort` line 90, at most once per variable.  $\square$

**Lemma 6** (Obligatory Checkpoints). *If  $T_i$  issues an update event or a view update event,  $T_i$  invoked `checkpoint`.*

*Proof.* View events are only executed as part of `checkpoint`.

A routine update event is only executed as part of `write_buffer` at line 56, which is dominated by lines 52–53, which executes `checkpoint` if it was not previously executed.

A recovery update event occurs as a result of executing line 90, which is guarded by a condition that  $wc_i(x) > 0$ , so a write must have been executed. Furthermore,  $pv_i(x) - 1 > lv(x)$  must be true, which implies that  $T_i$  released  $x$ , which means the closing write executed, so `write_buffer` was started asynchronously. That procedure executes a `checkpoint` if it was not executed beforehand at lines 52–53.  $\square$

**Lemma 7** (Always View Before Update). *If transaction  $T_i$  issues an update event  $e_u = s_i(x)$  in trace  $\bar{T}$ , then there is  $e_v = g_i(x) \in \bar{T}|T_i$  s.t.  $e_v <_{\bar{T}} e_u$ .*

*Proof.* From Lemma 6, if  $T_i$  executes an update event, then it executes `checkpoint` before the event is issued. Since `checkpoint` issues a view event, then a view event is issued before an update event.  $\square$

**Lemma 8** (Wait at Access). *Given transactions  $T_i, T_j$  s.t.  $pv_j(x) < pv_i(x)$ ,  $T_i$  does not issue a view or update event on  $x$  until  $T_j$  executes `release` on  $x$ , `abort`, or `commit`.*

*Proof.* Let  $T_k$  be such that  $pv_k(x) = pv_i(x) - 1$ . Every invocation of `checkpoint` is dominated by an instruction that waits until the condition  $pv_i(x) - 1 = lv(x)$ : line 19 by line 18, line 109 by line 107, and line 53 by line 49. Since, from Lemma 6, every view or update event is preceded by the invocation of `checkpoint`, then each view or update event is dominated by an instruction that waits until  $pv_i(x) - 1 = lv(x)$ . Hence in order for  $T_i$  to issue a event it must be true that  $pv_i(x) - 1 = lv(x)$ .

In order for that condition to be met, some transaction must set  $lv(x)$  to  $pv_i(x) - 1$  (or  $pv_i(x) = 1$ , but then there could not be such  $T_j$  as assumed). Some transaction  $T_k$  modifies a new value of  $lv(x)$  during `release`, `abort`, or `commit` and the value is there set to  $pv_k(x)$ . Hence  $T_i$  cannot issue any view or update event until some  $T_k$  such that  $pv_k(x) = pv_i(x) - 1$  executes `release`, `abort`, or `commit`.

Every invocation of `release` (by  $T_k$ ) is dominated by an instruction that waits until the condition  $pv_k(x) - 1 = lv(x)$  is met: the invocation at line 30 by line 12, and the one at line 57 by line 49. Furthermore, modifying  $lv(x)$  within `commit` (line 70) or `abort` (line 94) also requires that  $pv_k(x) - 1 = lv(x)$  be first satisfied (at line 93 and line 93, respectively). Hence  $T_k$  cannot set  $lv(x)$  to  $pv_k(x)$  view or update event unless  $pv_k(x) = 1$  or until some  $T_l$  such that  $pv_l(x) = pv_k(x) - 1$  executes `release`, `abort`, or `commit`.

Assuming that  $pv_k(x) > 1$ , and that some  $T_l$  s.t.  $pv_l(x) = pv_k(x) - 1$  exists, then, since  $T_i$  cannot issue any view or update event until  $T_k$  sets  $lv(x)$  in `release`, `abort`, or `commit` and since  $T_k$  cannot set  $lv(x)$  until  $T_l$  executes `release`, `abort`, or `commit`, then  $T_i$  cannot issue any view or update events until  $T_l$  executes `release`, `abort`, or `commit`. Since  $pv_i(x) - 1 = pv_k(x)$  and  $pv_k(x) - 1 = pv_l(x)$  then  $pv_l(x) < pv_i(x)$ .

It follows by induction then that given any  $T_j$  s.t.  $\text{pv}_j(x) < \text{pv}_i(x)$ ,  $T_i$  does not issue a view or update event on  $x$  until  $T_j$  executes **release**, **abort**, or **commit**.  $\square$

**Lemma 9** (Recovery Versions from Version Order). *Given transactions  $T_i, T_j$  s.t.  $\text{pv}_j(x) < \text{pv}_i(x)$ , if  $T_j$  executes **abort** before  $T_i$  executes **checkpoint**,  $\text{rv}_j(x) \leq \text{rv}_i(x)$ . otherwise  $\text{rv}_j(x) < \text{rv}_i(x)$ .*

*Proof.* Transaction  $T_i$  sets  $\text{rv}_i(x)$  to  $\text{cv}(x)$  only during **checkpoint** (line 100). Every invocation of **checkpoint** is dominated by an instruction that waits until the condition  $\text{pv}_i(x) - 1 = \text{lv}(x)$ : line 19 by line 18, line 109 by line 107, and line 53 by line 49.

In order for that condition to be met, some transaction must set  $\text{lv}(x)$  to  $\text{pv}_i(x) - 1$  (or  $\text{pv}_i(x) = 1$ , but then there could not be such  $T_j$  as assumed, so necessarily  $\text{pv}_i(x) > 1$ ). Some transaction  $T_k$  can set a new value of  $\text{lv}(x)$  during **release**, **abort**, or **commit**. Hence  $T_i$  sets the value of  $\text{rv}_i(x)$  only after  $T_k$  such that  $\text{pv}_k(x) = \text{pv}_i(x) - 1$  executes **release**, **abort**, or **commit**. Thus, since value of  $\text{cv}(x)$  is there set by  $T_k$  to  $\text{pv}_k(x)$  in case of **release** (line 103) and **commit** (line 74), or  $\text{rv}_k(x)$  in case of **abort** (line 91),  $\text{rv}_i(x) = \text{rv}_k(x)$  if  $T_k$  aborts before  $T_i$  executes **checkpoint** and  $\text{rv}_i(x) = \text{pv}_k(x)$  otherwise.

Since  $\text{rv}_k(x)$  either trivially equals 0 if  $\text{pv}_k(x) = 1$ , or is acquired by analogy from some  $T_l$  s.t.  $\text{pv}_l(x) = \text{pv}_k(x) - 1$ , then  $\text{rv}_k(x) \leq \text{rv}_i(x)$ .

Furthermore, under the assumption that  $T_k$  does not execute **abort** prior to  $T_i$  executing **checkpoint**, then value of  $\text{cv}(x)$  is there set by  $T_k$  only either within **release** or **commit**, and thus  $\text{cv}(x) = \text{pv}_k(x)$  during  $T_i$ 's **checkpoint**, so  $\text{rv}_i(x) = \text{pv}_k(x)$ . Since  $\text{pv}_k(x) < \text{pv}_i(x)$ , then  $\text{rv}_k(x) < \text{rv}_i(x)$ .

By extension, given  $T_j$  s.t.  $\text{pv}_j(x) < \text{pv}_i(x)$ , either  $k = j$ , or  $\text{pv}_j(x) < \text{pv}_k(x)$ .

In the former case, necessarily  $\text{rv}_k(x) \leq \text{rv}_i(x)$  if  $T_j$  executes **abort** before  $T_i$  executes **checkpoint**, or  $\text{rv}_k(x) < \text{rv}_i(x)$ .

In the latter case, there must be some  $T_l$  s.t.  $\text{pv}_l(x) = \text{pv}_k(x)$ . Then, if  $T_l$  executes **abort** before  $T_k$  executes **checkpoint**,  $\text{rv}_l(x) \leq \text{rv}_k(x)$ , otherwise  $\text{rv}_l(x) < \text{rv}_k(x)$ . Furthermore, either  $l = j$ , or  $\text{pv}_j(x) < \text{pv}_l(x)$ .

It then follows by induction that given any  $T_j$  s.t.  $\text{pv}_j(x) < \text{pv}_i(x)$ , if  $T_j$  executes **abort** before  $T_i$  executes **checkpoint**,  $\text{rv}_l(x) \leq \text{rv}_k(x)$ , otherwise  $\text{rv}_l(x) < \text{rv}_k(x)$ .  $\square$

**Lemma 10** (Isolation). *Trace  $\bar{\mathbb{T}}$  is isolated.*

*Proof.* Every routine update event, view event, and recovery event is dominated by an access conditions ( $\text{pv}_i(x) - 1 = \text{lv}(x)$ ). This condition is satisfied for  $T_i$  if  $\text{lv}(x) = 0$  and  $\text{pv}_i(x) = 0$ , or if some transaction  $T_j$  s.t.  $\text{pv}_j(x) = \text{pv}_i(x) - 1$  releases  $x$  by setting  $\text{lv}(x)$  to  $\text{pv}_j(x)$  during **commit** or after closing write or after the first non-local read (and thus after any  $\circ s_j(x) \square$  or  $g_j(x) \square$ ).

Since events are guarded by access conditions, since variables are released after all view or routine update events are issued by a transaction, and since each transactions are version-ordered, then for any  $T_i, T_j$ ,  $\exists x \in \text{ASet}_i \cap \text{ASet}_j$  if  $\exists e_i = \circ s_i(x) \square \in \bar{\mathbb{T}}|T_i$  or  $e_i = g_i(x) \square \in \bar{\mathbb{T}}|T_i$  and  $\exists e_j = \circ s_j(x) \square \in \bar{\mathbb{T}}|T_j$  or  $e_j = g_j(x) \square \in \bar{\mathbb{T}}|T_j$ , and  $e_i <_{\mathbb{T}} e_j$  then  $\forall y \in \text{ASet}_i \cap \text{ASet}_j$ , if  $\exists e'_i = \circ s_i(y) \square \in \bar{\mathbb{T}}|T_i$  or  $e'_i = g_i(y) \square \in \bar{\mathbb{T}}|T_i$  and  $\exists e'_j = \circ s_j(y) \square \in \bar{\mathbb{T}}|T_j$  or  $e'_j = g_j(y) \square \in \bar{\mathbb{T}}|T_j$ , and  $e'_i <_{\mathbb{T}} e'_j$ .  $\square$

**Corollary 3** (Isolation Order). *Trace  $\bar{\mathbb{T}}$  is isolation-ordered.*

**Lemma 11** (Write Consonance). *Any (complete) write operation in  $\bar{\mathbb{T}}$  is consonant.*

*Proof.* Each write is guarded by the condition at line 41, which aborts the transaction if the value that is supposed to be written is not within the domain of the variable. Thus, each write is consonant.  $\square$

**Lemma 12** (Routine Update Consonance). *Any routine update event in  $\bar{\mathbb{T}}$  is consonant.*

*Proof.* A routine update event  $\circ s_i(x)v$  occurs either as a result of executing a closing write operation on  $x$  (line 56) or  $T_i$  committing (line 113), if the transaction executed writes, but the upper bound for writes was not reached for  $x$ . Clearly, then, if there was a routine update event, then  $T_i$  executed a write operation on  $x$ . In both cases above  $v = \text{buf}_i(x)$  and  $\text{buf}_i(x)$  can be set by any write operation, the first non-local read operation, or during start for read-only variables. If there was a write, then  $x$  is not read-only, and the first non-local read cannot follow a write, so  $\text{buf}_i(x)$  is set within (the most recent) write operation executed by  $T_i$  and corresponds to the value written by that operation. Thus,  $\forall T_i, \forall e_u^i = \circ s_i(x)v \in \bar{\mathbb{T}}|T_i, \exists op_i = w_i(x)v \rightarrow ok_i \in \bar{\mathbb{T}}|T_i$  s.t.  $op_i \rightsquigarrow e_u^i$ . Therefore,  $e_u^i$  is consonant.  $\square$

**Lemma 13** (View Consonance). *Any view event in  $\bar{\mathbb{T}}$  is consonant.*

*Proof.* If a view event occurs, it views the current state of a variable. So given transaction  $T_i$ , if there is a view event  $e_v = g_i(x)v \in \bar{\mathbb{T}}|T_i$ ,  $v$  corresponds to the current state of  $x$ . The only way to change the state of  $x$  is via an update event on  $x$ . Thus, trivially, for some  $T_j$ , if there is  $e_u = \circ s_j(x)v' \in \bar{\mathbb{T}}|T_j$  or  $e_a = \blacklozenge s_j(x)v' \in \bar{\mathbb{T}}|T_j$ , if either  $e_u$  or  $e_a$  precede  $e_v$  so that no other update event on  $x$  occurs between either  $e_u$  or  $e_a$  and  $e_v$ , then  $v = v'$ . Furthermore, from unique routine updates, there cannot there is no  $e_u$  s.t.  $v' = 0$ , and since  $x$  is initially 0, then  $\nexists e_u$  s.t.  $v' = 0$  and  $e_u < e_v$ .  $\square$

**Lemma 14** (Local Read Consonance). *Any local read operation execution in  $\bar{\mathbb{T}}$  is consonant.*

*Proof.* If transaction executes a local read on  $x$ , then it previously executed a write operation on  $x$ , so  $\text{wc}_i(x) > 0$ . Thus, the read procedure returns at line 25, returning  $\text{buf}_i(x)$ . The value of  $\text{buf}_i(x)$  can be set by any write operation, the first non-local read operation, or during start for read-only variables. If there was a write, then  $x$  is not read-only, and the first non-local read cannot follow a write, so  $\text{buf}_i(x)$  is set within (the most recent) write operation executed by  $T_i$  and corresponds to the value written by that operation. Thus,  $\forall T_i, \forall op^i = r_i(x) \rightarrow v \in \bar{\mathbb{T}}|T_i$  if  $op_i$  is local,  $\exists op'_i = w_i(x)v' \rightarrow ok_i \in \bar{\mathbb{T}}|T_i$  s.t.  $v' = v$ . Therefore,  $op_i$  is consonant.  $\square$

**Lemma 15** (Non-local Read Consonance). *Any non-local read operation execution in  $\bar{\mathbb{T}}$  is consonant.*

*Proof.* If  $x$  is read-only in  $T_i$ , then during **start**, a view event occurs within **read\_buffer** (line 29), and the state of  $x$  is saved in  $\text{buf}_i(x)$ . Then, subsequent writes return the value of  $\text{buf}_i(x)$  (line 25) (waiting if necessary). Thus, they depend on that view event.

Otherwise, a non-local read operation on  $x$  is one that is not preceded by a write on  $x$ , so  $wc_i(x) = 0$ . The first such read executes **checkpoint** which initiates a view event (line 99). The value obtained by that event is saved in  $st_i(x)$  and later  $buf_i(x)$  is set to the same value. Finally, that value is returned at line 25. Subsequent non-local reads use the same value stored in  $buf_i(x)$ . The value remains unchanged, since it only be overwritten by a write, but the occurrence of a preceding write would mean the read is local (and since  $x$  is not read-only, and there was a preceding non-local read). Thus, all non-local reads depend on the view event issued during **checkpoint**.

Thus,  $\forall T_i, \forall op^i = r_i(x) \rightarrow v \in \bar{\mathbb{T}}|T_i$  if  $op_i$  is non-local,  $\exists e_v^i = g_i(x)v' \in \bar{\mathbb{T}}|T_i$  s.t.  $v' = v$ .  $\square$

**Lemma 16** (Conservative Recovery Update Events). *Any recovery update event in  $\bar{\mathbb{T}}$  is conservative.*

*Proof.* The recovery update event in  $T_i$  occurs as a result of executing line 90, which updates the state of  $x$  to  $st_i(x)$ . This is done only if  $rv_i(x) \neq cv(x)$  and  $wc_i(x) > 0$ . If is to be true, Since  $rv_i(x)$  is set to the value of  $cv(x)$  only during **checkpoint** and **read\_buffer**, and since the requirement that  $wc_i(x) > 0$  excludes the latter, this condition checks whether the current transaction previously made a checkpoint. Executing **checkpoint** entails a view event that sets  $st_i(x)$  to the current value of  $x$ . Hence, if  $e_a = \blacklozenge s_i(x)v \in \mathbb{T}|T_i$  then there exists  $e_v = g_i(x)v \in \mathbb{T}|T_i$  s.t.  $e_a < e_v$ .  $\square$

**Lemma 17** (Clean Recovery Update Events). *Any recovery update event in  $\bar{\mathbb{T}}$  is clean.*

*Proof.* Assume by contradiction that there exists  $e_a = \blacklozenge s_i(x)v$  in  $\bar{\mathbb{T}}|T_i$  and  $e_v = getixv$  that justifies that  $e_s$  is conservative, and  $e'_a = \blacklozenge s_j(x)v'$  in  $\bar{\mathbb{T}}|T_j$  s.t.  $T_j \prec_{\bar{\mathbb{T}}}^x T_i$  and  $e_v <_{\mathbb{T}} e'_a <_{\bar{\mathbb{T}}} e_a$ . This implies that  $T_j$  executes **abort** (and satisfies the condition  $rv_j(x) = cv(x)$ ) between the point at which  $T_i$  executes **checkpoint** and **abort**. If that is the case, as a result of executing **abort**,  $T_j$  sets  $cv(x)$  to  $rv_j(x)$ , and the.

Given that  $T_j \prec_{\bar{\mathbb{T}}}^x T_i$ , then  $pv_j(x) < pv_i(x)$ . Since any execution of **checkpoint** for some  $T_k$  is guarded by the condition  $pv_k(x) - 1 = lv(x)$ , then  $T_j$  executes **checkpoint** before  $T_i$ . Hence,  $T_j$  acquires  $rv_j(x)$  from  $cv(x)$  before  $T_i$  acquires  $rv_i(x)$  from  $cv(x)$ .

The value of  $rv_j(x)$  is equal to the value of  $cv(x)$  at the point when  $T_j$  executed **checkpoint** (i.e. when  $pv_i(x) - 1 = lv(x)$ ). The value of  $cv(x)$  is set to  $pv_k(x)$  when  $T_k$  executes **release** or **commit** or to  $rv_k(x)$  when  $T_k$  aborts. Thus, when  $T_j$  executes **checkpoint**, since  $pv_i(x) - 1 = lv(x)$ , then either:

- a)  $cv(x) = pv_k(x) = pv_j(x) - 1$  (if  $T_k$  released  $x$  or committed),
- b)  $cv(x) = rv_k(x)$  and  $rv_k(x) < pv_j(x)$  (if  $T_k$  aborted), or
- c)  $cv(x) = 0$  (if there is no such  $T_k$ ).

In any case,  $rv_j(x) < pv_i(x)$ .

$T_i$  is capable of executing **checkpoint** after  $T_j$  commits, aborts, or releases  $x$ . Since  $T_j$  executes **abort** between  $T_i$ 's **checkpoint** and **abort**, then only the third option remains. If  $T_j$  executes **release** for  $x$ , then it sets  $cv(x)$  to  $pv_j(x)$ .

Following the logic from the previous paragraph, this means that when  $T_i$  assigns  $\text{cv}(x)$  to  $\text{rc}_i(x)$ ,  $\text{pv}_j(x) \leq \text{cv}(x)$ , so  $\text{pv}_j(x) \leq \text{rv}_i(x)$ , so  $\text{rv}_j(x) < \text{rv}_i(x)$ .

Hence, after  $\text{cv}(x)$  to  $\text{rv}_j(x)$  during abort, it is not true that  $\text{cv}(x) = \text{rv}_j(x)$ . Thus,  $e_a$  cannot occur once  $e'_a$  occurs, which is a contradiction.  $\square$

**Lemma 18** (Needed Recovery Update Events). *Any recovery update event in  $\bar{\mathbb{T}}$  is needed.*

*Proof.* The recovery update event occurs as a result of executing line 90, which is guarded by a condition that  $\text{wc}_i(x) > 0$ , so a write must have been executed. Furthermore,  $\text{pv}_i(x) - 1 > \text{lv}(x)$  must be true, which implies that  $T_i$  released  $x$ , which means the closing write executed, so `write_buffer` was started asynchronously. If that is the case, the recovery update event cannot execute until `write_buffer`, which means a routine update event on  $x$  will have executed before the recovery update event on  $x$ .  $\square$

**Lemma 19** (Dooming Recovery Update Events). *Any recovery update event in  $\bar{\mathbb{T}}$  is dooming.*

*Proof.* Trivially, since any recovery update event occurs only within `abort`.  $\square$

**Lemma 20** (Ending Recovery Update Events). *Any recovery update event in  $\bar{\mathbb{T}}$  is ending.*

*Proof.* Trivially, since any recovery update event occurs only within `abort`, and there are no other update or view events on the same variable in `abort`.  $\square$

**Lemma 21** (Recovery Update Consonance). *Any recovery update event in  $\bar{\mathbb{T}}$  is consonant.*

*Proof.* Since each recovery update is conservative (from Lemma 16), needed (from Lemma 18), dooming (from Lemma 19), ending (from Lemma 20), and clean (from Lemma 17), then each recovery update is consonant.  $\square$

**Lemma 22** (Trace Consonance). *Trace  $\bar{\mathbb{T}}$  is consonant.*

*Proof.* From Lemmata 11–15 and 21.  $\square$

**Lemma 23** (Comitted Write Obligato). *Given  $T_i$  that is committed in  $\bar{\mathbb{T}}$ , every non-local write operation execution  $op_i = w_i(x)v \rightarrow ok_i \in \bar{\mathbb{T}}|T_i$  is in committed obligato.*

*Proof.* If  $T_i$  executes a write corresponding to  $op_i$ , then, if at the end of the execution it is true that  $\text{wc}_i(x) = \text{wub}_i(x)$ , `write_buffer` is executed, which causes a routine update event to execute, writing the value of  $\text{buf}_i(x)$  to  $x$ .

Since  $\text{wc}_i(x) = \text{wub}_i(x)$  no other writes follow, and since  $x$  is not read-only in  $T_i$ , then the value written to  $x$  in `write_buffer` is the value passed to the write operation. In that case there is  $e_u = \circ s_i(x)v \in \bar{\mathbb{T}}|T_i$ . Since commit will not return until `write_buffer` finishes executing, then trivially  $\text{inv}_i(w_i(x)v) <_{\bar{\mathbb{T}}|T_i} e_u <_{\bar{\mathbb{T}}|T_i} \text{res}_i(C_i)$ .

If it is true that  $\text{wc}_i(x) = \text{wub}_i(x)$ , then `write_buffer` is not executed, but during `commit`, the same condition is checked again, and if it is not satisfied,  $T_i$  writes the value from  $\text{buf}_i(x)$  to  $x$ . Thus, by analogy to the paragraph above, there is  $e_u = \circ s_i(x)v \in \bar{\mathbb{T}}|T_i$ . Since this is executed within `commit`, then  $\text{inv}_i(w_i(x)v) <_{\bar{\mathbb{T}}|T_i} e_u <_{\bar{\mathbb{T}}|T_i} \text{res}_i(C_i)$ .  $\square$

**Lemma 24** (Closing Write Obbligato). *Given  $T_i$  that is decided on  $x$  in  $\bar{\mathbb{T}}$ , every non-local write operation execution  $op_i = w_i(x)v \rightarrow ok_i \in \bar{\mathbb{T}}|T_i$  is in closing write obbligato.*

*Proof.* If  $T_i$  executes a write corresponding to  $op_i$ , then, at the end of the execution, if  $op_i$  is a closing write it is necessarily true that  $wc_i(x) = wub_i(x)$ . This causes `write_buffer` to be executed, line 49 which causes a routine update event to execute, writing the value of `bufi(x)` to  $x$ .

Since  $wc_i(x) = wub_i(x)$  no other writes follow, and since  $x$  is not read-only in  $T_i$ , then the value written to  $x$  in `write_buffer` is the value passed to the write operation. In that case there is  $e_u = \circ s_i(x)v \in \bar{\mathbb{T}}|T_i$ . Since commit will not return until `write_buffer` finishes executing, then trivially  $inv_i(w_i(x)v) <_{\bar{\mathbb{T}}|T_i} e_u <_{\bar{\mathbb{T}}|T_i} res_i(C_i)$ . Hence  $op_i \rightsquigarrow e_u$ .  $T_i$  executes `release` only following issuing  $e_u$  `wb:release`.

If  $T_i \dot{<}_{\bar{\mathbb{T}}} T_j$ , then  $pv_i(x) < pv_j(x)$  (Corollary 2). From Lemma 8, to issue any  $e_v = g_j(x)v$ , since  $pv_i(x) < pv_j(x)$ ,  $T_i$  must executed `abort`, `commit`, or `release`. Hence  $T_j$  does not issue  $e_v$  before  $T_i$  executes `release`, which requires that  $T_i$  issues  $e_u$  so that  $e_u <_{\bar{\mathbb{T}}} e_v$ .  $\square$

**Lemma 25** (View Write Obbligato). *Given  $T_i \in \bar{\mathbb{T}}$ , if  $\exists T_j \in \mathbb{T}$ , s.t.  $T_i \dot{<}_{\bar{\mathbb{T}}} T_j$ , if there is  $op_i = w(i)x \square ok_i \in \bar{\mathbb{T}}|T_i$ , and  $e_v = g_j(x)v \square \in \bar{\mathbb{T}}|T_j$ , then  $op_i$  is in in view write obbligato.*

*Proof.* If  $T_i \dot{<}_{\bar{\mathbb{T}}} T_j$ , then  $pv_i(x) < pv_j(x)$  Corollary 2. From Lemma 8  $e_v$  occurs only after  $T_i$  releases  $x$ , commits, or aborts. Since according to the assumption,  $T_i$  cannot abort prior to  $T_j$  issuing  $e_v$ ,  $T_i$  either releases  $x$  or commits prior to  $T_j$  issuing  $e_v$ .

If  $T_i$  releases  $x$  it executes `release`. This can occur as a result of executing line 30 or line 57. Since  $T_i$  executes  $op_i$ , then line 30 cannot be executed, since it can only be reached if  $T_i$  only ever reads  $x$  (condition at line 10). Hence  $T_i$  must execute line 57, which is dominated by line 56, which issues a write event  $e_u = s_i(x)v$ , where  $v$  is the value of `bufi(x)`.

Since `release` was executed at line 57, `write_buffer` must have been executed at line 49. Then the value written to  $x$  in `write_buffer` is the value passed to the write operation. In that case there is  $e_u = \circ s_i(x)v \in \bar{\mathbb{T}}|T_i$ . Since commit will not return until `write_buffer` finishes executing, then trivially  $inv_i(w_i(x)v) <_{\bar{\mathbb{T}}|T_i} e_u <_{\bar{\mathbb{T}}|T_i} res_i(C_i)$ . Hence  $op_i \rightsquigarrow e_u$ .  $T_i$  executes `release` only following issuing  $e_u$  `wb:release`.  $\square$

**Lemma 26** (Obbligato). *Trace  $\bar{\mathbb{T}}$  is obbligato.*

*Proof.* From Lemmas 23, 24, and 25.  $\square$

**Lemma 27** (Decisiveness). *Trace  $\bar{\mathbb{T}}$  is decisive.*

*Proof.* If  $T_j \dot{\rightsquigarrow} T_i$ , then for any  $x \in \text{ASet}_i \cap \text{ASet}_j$ ,  $pv_i(x) < pv_j(x)$  (Lemma 10). Before any view event occurs,  $T_j$  must pass the condition  $pv_k(x) - 1 = 1v(x)$  in `read_buffer` or `checkpoint`. Hence, before any  $e_v = g_j(x)v$  can occur, some  $T_k$  s.t.  $pv_i(x) - 1 = pv_k(x)$  must set  $pv_k(x)$  to  $1v(x)$ . Transaction  $T_j$  issues a routine update event  $e_u = \circ s_j(x)v'$ , whenever it commits or releases  $x$ . If it releases, it means that  $wc_j(x) = wub_j(x)$ , which implies that  $op_i$  is closing. Otherwise,  $T_j$  will update on commit, meaning that it will issue  $res_j(C_j)$  once

it returns from the `commit` procedure. Before returning from the closing write or commit,  $T_j$  sets  $\text{lv}(x)$  to  $\text{pv}_j(x)$ . In either case, this happens only afterward  $e_u$  is issued. Since there is no waiting between  $e_u$  and either a commit or a last write returning, no other transaction may execute anything on  $x$  in the meantime. Thus, any transaction  $T_k$  s.t.  $\text{pv}_k(x)$  that waits until  $\text{pv}_k(x) - 1 = \text{lv}(x)$  and  $\text{pv}_k(x) - 1 = \text{pv}_j(x)$  will wait until  $T_j$  returns from the closing write or commit procedure, and so will any subsequent transactions according to version order. Thus, if  $\text{pv}_i(x) < \text{pv}_j(x)$  and  $T_j$  commits, then either  $op_j$  is closing or  $e_u <_{\bar{\mathbb{T}}} \text{res}_j(C_j) < e_v$ .  $\square$

**Lemma 28** (Abort Accord). *Trace  $\bar{\mathbb{T}}$  is in abort accord.*

*Proof.* Let  $T_i, T_j$  be two transactions in  $\bar{\mathbb{T}}$  s.t.

a)  $T_j \overset{\leftrightarrow}{\sim} T_i$ ,  $T_i$  is aborted in  $\bar{\mathbb{T}}$ .

Assume by contradiction that  $T_j$  commits in  $\bar{\mathbb{T}}$ , meaning it executes `commit` successfully. Thus it passes  $\forall x, \text{cv}(x) \geq \text{rv}_j(x)$ .

Since  $T_j \overset{\leftrightarrow}{\sim} T_i$ ,  $\exists e_v = g_j(x)v \in \bar{\mathbb{T}}|T_j$  and  $\exists e_u = \circ s_i(x)v \in \bar{\mathbb{T}}|T_i$ .

If  $T_i$  aborted before  $e_v$  was issued, then from abort coda,  $\exists e_a = \blacklozenge s_k(x)\square$  in some  $T_k$  that precedes the abort, which contradicts that  $T_j \overset{\leftrightarrow}{\sim} T_i$ . Hence  $T_i$  aborts only after  $e_v$  is issued.

Since  $T_j \overset{\leftrightarrow}{\sim} T_i$ , then  $T_i \overset{\prec}{\sim} T_j$ , so from Corollary 2,  $\text{pv}_i(x) < \text{pv}_j(x)$ . From Lemma 8,  $e_v$  cannot occur until  $T_i$  aborts, commits, or releases  $x$ . Since  $T_i$  aborts after  $e_v$ , then it must therefore release  $x$  prior to  $e_v$ .

Since  $\text{pv}_i(x) < \text{pv}_j(x)$ , then from Lemma 9,  $\text{rv}_i(x) < \text{rv}_j(x)$ . When  $T_i$  aborts, it sets  $\text{cv}(x)$  to  $\text{rv}_i(x)$ . From coherence,  $T_j$  commits after  $T_i$  aborts. Thus, when  $T_j$  commits,  $\text{cv}(x) = \text{rv}_i(x)$ , so since  $\text{rv}_i(x) < \text{rv}_j(x)$ , then  $\text{cv}(x) < \text{rv}_j(x)$ , which contradicts the condition that  $\text{cv}(x) > \text{rv}_j(x)$ .

Thus  $T_j$  cannot commit.

b)  $\exists e_u = \circ s_i(x)\square \in \bar{\mathbb{T}}|T_i$  and  $e = \circ s_j(x)\square \in \bar{\mathbb{T}}|T_j$  or  $e = g_j(x)\square \in \bar{\mathbb{T}}|T_j$  and  $e_a = \blacklozenge s_i(x)\square \in \bar{\mathbb{T}}|T_i$ , and  $e_u <_{\bar{\mathbb{T}}} e <_{\bar{\mathbb{T}}} e_a$ .

Assume by contradiction that  $T_j$  commits in  $\bar{\mathbb{T}}$ , meaning it executes `commit` successfully. Thus it passes  $\forall x, \text{cv}(x) \geq \text{rv}_j(x)$ .

Since  $e_u <_{\bar{\mathbb{T}}} e$ , then from isolation it follows that  $T_i \overset{\prec}{\sim} T_j$ . Hence, from Corollary 2,  $\text{pv}_i(x) < \text{pv}_j(x)$ . Since  $e_a$  must be issued during `abort`, then from coherence,  $T_j$  cannot commit prior to  $e_a$  occurring. Furthermore,  $T_j$  cannot commit until  $T_i$  returns from `abort`.

If  $T_i$  returned from `abort`, then it executed line 91, so  $\text{cv}(x) = \text{rv}_i(x)$  prior to  $T_j$  committing.

From Lemma 9, since  $\text{pv}_i(x) < \text{pv}_j(x)$ , then  $\text{rv}_i(x) < \text{rv}_j(x)$ . When  $T_i$  aborts, it sets  $\text{cv}(x)$  to  $\text{rv}_i(x)$ . From coherence,  $T_j$  commits after  $T_i$  aborts. Thus, when  $T_j$  commits,  $\text{cv}(x) = \text{rv}_i(x)$ , so since  $\text{rv}_i(x) < \text{rv}_j(x)$ , then  $\text{cv}(x) < \text{rv}_j(x)$ , which contradicts the condition that  $\text{cv}(x) > \text{rv}_j(x)$ .

Thus  $T_j$  cannot commit.  $\square$

**Lemma 29** (Commit Accord). *Trace  $\bar{\mathbb{T}}$  is in commit accord.*

*Proof.* Let  $T_i, T_j$  be transaction in  $\mathbb{T}$  s.t.  $T_j \overset{x}{\rightsquigarrow} T_i$  and  $T_j$  is committed in  $\bar{\mathbb{T}}$ .

Let us assume by contradiction that  $T_i$  is not committed in  $\bar{\mathbb{T}}$ . So  $T_i$  is either aborted or live in  $\bar{\mathbb{T}}$ . From coherence, if  $T_j$  cannot commit until  $T_i$  commits or aborts. Thus  $T_i$  is not live in  $\bar{\mathbb{T}}$ , so it is aborted in  $\bar{\mathbb{T}}$ .

Since  $T_j \overset{x}{\rightsquigarrow} T_i$ ,  $\exists e_v = g_j(x)v \in \bar{\mathbb{T}}|T_j$  and  $\exists e_u = \circ s_i(x)v \in \bar{\mathbb{T}}|T_i$ .

If  $T_i$  aborted before  $e_v$  was issued, then from abort coda,  $\exists e_a = \blacklozenge s_k(x)\square$  in some  $T_k$  that precedes the abort, which contradicts that  $T_j \overset{x}{\rightsquigarrow} T_i$ . Hence  $T_i$  aborts only after  $e_v$  is issued.

Since  $T_j \overset{x}{\rightsquigarrow} T_i$ , then  $T_i \overset{x}{\prec}_{\mathbb{T}} T_j$ , so from Corollary 2,  $\text{pv}_i(x) < \text{pv}_j(x)$ . From Lemma 8,  $e_v$  cannot occur until  $T_i$  aborts, commits, or releases  $x$ . Since  $T_i$  aborts after  $e_v$ , then it must therefore release  $x$  prior to  $e_v$ .

Since  $\text{pv}_i(x) < \text{pv}_j(x)$ , then from Lemma 9,  $\text{rv}_i(x) < \text{rv}_j(x)$ . When  $T_i$  aborts, it sets  $\text{cv}(x)$  to  $\text{rv}_i(x)$ . From coherence,  $T_j$  commits after  $T_i$  aborts. Thus, when  $T_j$  commits,  $\text{cv}(x) = \text{rv}_i(x)$ , so since  $\text{rv}_i(x) < \text{rv}_j(x)$ , then  $\text{cv}(x) < \text{rv}_j(x)$ , which contradicts the condition that  $\text{cv}(x) > \text{rv}_j(x)$ .

Thus  $T_i$  cannot abort. □

**Lemma 30** (Abort Coda). *Trace  $\bar{\mathbb{T}}$  has coda.*

*Proof.* a) If  $T_i$  aborts in  $\bar{\mathbb{T}}$  (so  $r = \text{res}_i(A_i) \in \bar{\mathbb{T}}|T_i$ ) then if  $\exists e_u = \circ s_x(v) \in \bar{\mathbb{T}}|T_i$  then for some  $T_j$  (possibly  $i = j$ ) s.t.  $j = i$  or  $T_j \overset{x}{\prec}_{\mathbb{T}} T_i$ ,  $\exists e_a = \blacklozenge s_j(x)\square \in \bar{\mathbb{T}}|T_j$  s.t.  $e_u <_{\bar{\mathbb{T}}} e_a <_{\bar{\mathbb{T}}} r$ .

If there is such  $e_u$ , then  $T_i$  executes **checkpoint** (Lemma 6). Since there is such  $e_u$  there is also a write operation execution on  $x$  in  $\bar{\mathbb{T}}|T_i$  (Lemma 12), so  $\text{wc}_i(x) > 0$  (line 46).

If there is such  $e_u$ , then  $T_i$  executes **release** for  $x$  or **commit**. Since  $T_i$  aborts, then **commit** is not possible, so  $T_i$  executes **release** for  $x$ . Therefore  $T_i$  sets  $\text{lv}(x)$  to  $\text{pv}_x(i) - 1$ .

- i) If no other transaction modified  $\text{cv}(x)$  between the point at which  $T_i$  executed **checkpoint** and **abort**, then  $\text{cv}(x) = \text{rv}_i(x)$ , thus during abort  $T_i$  satisfies the condition on line 87 and executes line 90, issuing the recovery event  $e_a$ . Since  $e_a$  is issued during **abort**, then  $e_u <_{\bar{\mathbb{T}}} e_a <_{\bar{\mathbb{T}}} r$ .
- ii) If there is  $T_j$  s.t.  $T_j$  modifies  $\text{cv}(x)$  between the points at which  $T_i$  executed **checkpoint** and **abort**, s.t.  $T_j \overset{x}{\prec}_{\mathbb{T}} T_i$ , then  $T_j$  executes **release**, **commit**, or **abort** between the points at which  $T_i$  executed **checkpoint** and **abort**. For the sake of simplicity we assume that there is no other  $T_k$  that modifies  $\text{cv}(x)$  between those two points s.t.  $T_k \overset{x}{\prec}_{\mathbb{T}} T_i$ .

Since  $T_i$  executes **checkpoint**, it issues a view event  $e_v = g_i(x)\square$ . In addition, since  $T_j \overset{x}{\prec}_{\mathbb{T}} T_i$ , then from Corollary 2,  $\text{pv}_j(x) < \text{pv}_i(x)$ . From Lemma 8,  $e_v$  cannot occur until  $T_j$  aborts, commits, or releases  $x$ . Since  $T_j$  is supposed to execute **release**, **abort**, or **commit** after  $T_i$  executes **checkpoint**, hence after  $e_v$ , then  $T_j$  must therefore release  $x$  prior to  $e_v$ . Hence  $T_j$  executes **commit**, or **abort** between the points at which  $T_i$  executed **checkpoint** and **abort**.

If  $T_i$  executes **commit**, then in order to set  $\text{cv}(x)$  to  $\text{pv}_j(x)$ , it must be true that  $\text{rv}_i(x) = \text{cv}(x)$ . But if  $T_j$  executed **release**, then  $\text{cv}(x)$  is set

to  $\text{pv}_j(x)$ . Since  $\text{rv}_x(j) \neq \text{pv}_j(x)$ , then  $\text{rv}_i(x) \neq \text{cv}(x)$ , so  $T_j$  cannot set  $\text{cv}(x)$  as a result of a commit. Hence,  $T_j$  executes **abort** between the points at which  $T_i$  executed **checkpoint** and **abort**.

If  $T_j$  executes **abort**, then this implies that  $T_j$  executes line 91, and therefore also line 90, thus  $tr_j$  issues recovery event  $e_a$  during **abort**. Thus,  $e_u <_{\bar{\mathbb{T}}} e_a <_{\bar{\mathbb{T}}} r$ .

- b) If  $T_i$  commits in  $\bar{\mathbb{T}}$  (so  $r = \text{res}_i(C_i) \in \bar{\mathbb{T}}|T_i$ ) then if  $\exists e = \circ_{s_x}(v) \in \bar{\mathbb{T}}|T_i$  or  $e = g_x(v) \in \bar{\mathbb{T}}|T_i$  then for no  $T_j$  s.t.  $j = i$  or  $T_j \dot{<}_{\bar{\mathbb{T}}}^x T_i$ ,  $\exists e_a = \blacklozenge_{s_j}(x) \square \in \bar{\mathbb{T}}|T_j$  s.t.  $e_u <_{\bar{\mathbb{T}}} e_a <_{\bar{\mathbb{T}}} r$ .

If there is such  $e$ , then  $T_i$  executes **checkpoint** (Lemma 6). If  $T_i$  successfully commits, then means that  $T_i$  passes the condition for  $x$  that  $\text{cv}(x) \geq \text{rv}_i(x)$ .

Assume by contradiction that there is such  $e_a$  in some  $T_j$ . Since  $e_a \in \bar{\mathbb{T}}|T_j$ , then  $T_j$  must execute line 90, which also means that it executes line 91 and therefore sets  $\text{cv}(x)$  to  $\text{rv}_j(x)$ .

Since  $T_j \dot{<}_{\bar{\mathbb{T}}}^x T_i$ , then from Corollary 2  $\text{pv}_j(x) < \text{pv}_i(x)$  and from Lemma 9,  $\text{rv}_j(x) < \text{rv}_i(x)$ . Thus,  $\text{cv}(x) < \text{rv}_i(x)$  which contradicts that  $\text{cv}(x) \geq \text{rc}_i(x)$ . Thus there is no such  $T_j$ . □

**Lemma 31** (Coherence). *Trace  $\bar{\mathbb{T}}$  is coherent.*

*Proof.* If  $T_i \dot{<}_{\bar{\mathbb{T}}}^x T_j$ , then  $\text{pv}_i(x) < \text{pv}_j(x)$ . In order to commit or abort, any  $T_k$  must pass the condition  $\text{pv}_k(x) - 1 = \text{ltv}(x)$ . In addition, each  $T_k$  sets  $\text{ltv}(x)$  to  $\text{pv}_k(x)$  only at the end of either committing or aborting. Hence, if  $T_k$  cannot commit or abort until some  $T_l$  s.t.  $\text{pv}_k(x) - 1 = \text{pv}_l(x)$  finishes committing or aborting. Hence if  $T_j$  committed, it must have passed the condition  $\text{pv}_k(x) - 1 = \text{ltv}(x)$ , and since  $\text{pv}_i(x) < \text{pv}_j(x)$ ,  $T_i$  must have committed or aborted before  $T_j$  committed. Thus, given  $r_j = \text{res}_j(C_j) \in \bar{\mathbb{T}}|T_j$ , then there is  $r_i = \text{res}_i(C_i) \in \bar{\mathbb{T}}|T_i$  or  $r_i = \text{res}_i(A_i) \in \bar{\mathbb{T}}|T_i$  and  $r_i <_{\bar{\mathbb{T}}} r_j$ . □

**Lemma 32** (Chain Isolation). *Given trace  $\bar{\mathbb{T}}$  and transactions  $T_i, T_j \in \bar{\mathbb{T}}$  s.t. there is  $\xi(\bar{\mathbb{T}}, T_i, T_j)$ ,  $\forall T_k \in \xi(\bar{\mathbb{T}}, T_i, T_j)$  s.t.  $e_u^k = \circ_{s_k}(x)v$ , there is no  $T_l$  s.t.  $\exists e_a^l = \blacklozenge_{s_l}(x)v'$  where  $v = v'$  and  $e^l$  is between  $e^k$  and any other event in any transaction in  $\xi(\bar{\mathbb{T}}, T_i, T_j)$ .*

*Proof.* Assume by contradiction that there exists  $T_l$  such that  $\exists e^l = \blacklozenge_{s_l}(x)v'$  and  $e^l$  is between  $e_u^k$  and any other event  $e \in \bar{\mathbb{T}}|\xi(\bar{\mathbb{T}}, T_i, T_j)$ . This means that either  $e \in \bar{\mathbb{T}}|T_l$  and  $e_u^k <_{\bar{\mathbb{T}}} e_a^l <_{\bar{\mathbb{T}}} e$ , or  $\exists T_n$  s.t.  $e \in \bar{\mathbb{T}}|T_n$ .

- a) Assume  $e \in \bar{\mathbb{T}}|T_l$  and  $e_u^k <_{\bar{\mathbb{T}}} e_a^l <_{\bar{\mathbb{T}}} e$ .

From Lemma 7 there is a view event  $e_u^k = g_k(x) \square \in \bar{\mathbb{T}}|T_k$ , and from minimalism there is only one such event in  $\bar{\mathbb{T}}|T_k$ , so  $e$  must be a recovery event  $e = \blacklozenge_{s_k}(x)v$ . If  $T_l$  executes  $e_a^l$ , then from Lemma 18,  $\exists e_u^l = \circ_{s_l}(x)v$  in  $\bar{\mathbb{T}}|T_l$  s.t.  $e_u^k <_{\bar{\mathbb{T}}} e_u^l$ . Hence either  $e_u^l <_{\bar{\mathbb{T}}} e_u^k$  or  $e_u^k <_{\bar{\mathbb{T}}} e_u^l$ . So either  $T_l \dot{<}_{\bar{\mathbb{T}}}^x T_k$  or  $T_k \dot{<}_{\bar{\mathbb{T}}}^x T_l$ .

If  $T_l \dot{<}_{\bar{\mathbb{T}}}^x T_k$ , then  $e_u^l <_{\bar{\mathbb{T}}} e_u^k$ , so from Lemma 8,  $e_u^k$  cannot occur until  $e_u^l$  executes **release**, **commit**, or **abort**, and since  $e_u^k <_{\bar{\mathbb{T}}} e_a^l$ , then only **release** is viable.

If  $T_l \dot{<}_{\bar{\mathbb{T}}}^x T_k$ , then from version order  $\mathbf{pv}_l(x) < \mathbf{pv}_k(x)$ , so from Lemma 9,  $\mathbf{rv}_l(x) < \mathbf{rv}_k(x)$ . In order for  $T_l$  to issue  $e_a$ , it must execute **abort** and satisfy the condition line 87. This means that line 91 is executed, so  $\mathbf{cv}(x) = \mathbf{rv}_l(x)$ .

If subsequently  $T_k$  issues  $e_a$ , then it must also satisfy the condition at line 87, so  $\mathbf{rv}_k(x) = \mathbf{cv}(x)$ . But since  $\mathbf{rv}_l(x) < \mathbf{rv}_k(x)$ , then  $\mathbf{cv}(x) < \mathbf{rv}_k(x)$ , which contradicts that  $\mathbf{cv}(x) = \mathbf{rv}_l(x)$ .

The execution of a recovery event on  $x$  by  $T_l$  is dominated by line 84, which cannot be passed until  $\mathbf{pv}_l(x) - 1 = \mathbf{ltv}(x)$ . Any transaction  $T_n$  sets  $\mathbf{ltv}(x)$  to  $\mathbf{pv}_n(x)$  as a last action during **commit** (line 80) or **abort** (line 95). Hence  $T_l$  cannot proceed to abort until  $T_n$  finishes committing or aborting. Since  $T_n$  cannot execute line 80 or line 95 if line 68 or line 84 was passed, then  $T_n$  cannot proceed to commit or abort until some other  $T_m$  s.t  $\mathbf{pv}_n(x) - 1 = \mathbf{pv}_m(x)$  committed or aborted. Hence  $T_l$  cannot execute a recovery event until any  $T_m$  s.t.  $\mathbf{pv}_m(x) < \mathbf{pv}_l(x)$  committed or aborted.

If  $T_k \dot{<}_{\bar{\mathbb{T}}}^x T_l$ , then from version order  $\mathbf{pv}_k(x) < \mathbf{pv}_l(x)$ . Hence,  $T_l$  executes any events **abort** only after  $T_k$  returns from **abort** or **commit**. Hence if  $T_k$  executes  $e_a^k$ , then  $e_a^k <_{\bar{\mathbb{T}}} e_a^l$ , which contradicts that  $e_a^l <_{\bar{\mathbb{T}}} e_a^k$ .

Thus, regardless of whether  $T_l \dot{<}_{\bar{\mathbb{T}}}^x T_k$  or  $T_k \dot{<}_{\bar{\mathbb{T}}}^x T_l$  there is a contradiction. Therefore,  $T_l$  cannot issue such  $e_a^l$  between  $e_a^k$  and another event in  $\bar{\mathbb{T}}|T_l$ .

b) Assume  $\exists T_n$  s.t.  $e \in \bar{\mathbb{T}}|T_n$ .

We assume without loss of generality that  $T_n \dot{\rightsquigarrow} T_k$ . Thus, there is a view event  $e_v^n$  and possibly a routine update event  $e_u^n$  in  $\bar{\mathbb{T}}|T_n$ . From minimalism and Lemma 7:  $e_v^n <_{\bar{\mathbb{T}}} e_u^n$ . Also, since  $T_n \dot{\rightsquigarrow} T_k$ , then  $T_k \dot{<}_{\bar{\mathbb{T}}}^x T_n$ , so from Corollary 2,  $\mathbf{pv}_k(x) < \mathbf{pv}_n(x)$ .

If  $T_l$  executes  $e_a^l$ , then from Lemma 18,  $\exists e_u^l = \circ_{s_l}(x) \square$  in  $\bar{\mathbb{T}}|T_l$  s.t.  $e_u^l <_{\bar{\mathbb{T}}} e_a^l$ . Hence either  $e_u^l <_{\bar{\mathbb{T}}} e_u^k$  or  $e_u^k <_{\bar{\mathbb{T}}} e_u^l$ . So either  $T_k \dot{<}_{\bar{\mathbb{T}}}^x T_l \dot{<}_{\bar{\mathbb{T}}}^x T_n$  or  $T_k \dot{<}_{\bar{\mathbb{T}}}^x T_n \dot{<}_{\bar{\mathbb{T}}}^x T_l$ . Thus, from Corollary 2, either  $\mathbf{pv}_k(x) < \mathbf{pv}_l(x) < \mathbf{pv}_n(x)$  or  $\mathbf{pv}_k(x) < \mathbf{pv}_n(x) < \mathbf{pv}_l(x)$ .

If  $\mathbf{pv}_k(x) < \mathbf{pv}_l(x) < \mathbf{pv}_n(x)$ , then either  $e_a^l <_{\bar{\mathbb{T}}} e_v^n$  or  $e_v^n <_{\bar{\mathbb{T}}} e_a^l$ .

If  $e_a^l <_{\bar{\mathbb{T}}} e_v^n$ , then since  $e_a^l$  sets  $x$  to  $v'$  s.t.  $v' \neq v''$  for any  $v''$  s.t.  $\exists \circ_{s_l}(x)v'' \in \bar{\mathbb{T}}|T_l$  prior to the occurrence of  $e_v^n$ . Thus when  $T_n$  subsequently executes **checkpoint** it issues  $e_v^n = g_n(x)v'$ , and since  $v' \neq v''$ , this contradicts that  $T_n \dot{\rightsquigarrow} T_k$ .

If  $e_v^n <_{\bar{\mathbb{T}}} e_a^l$ , then since  $T_l \dot{<}_{\bar{\mathbb{T}}}^x T_n$  then from version order  $\mathbf{pv}_l(x) < \mathbf{pv}_n(x)$ , so from Lemma 9,  $\mathbf{rv}_l(x) < \mathbf{rv}_n(x)$ . In order for  $T_n$  to issue  $e_a$ , it must execute **abort** and satisfy the condition line 87. This means that line 91 is executed, so  $\mathbf{cv}(x) = \mathbf{rv}_l(x)$ .

If subsequently  $T_l$  issues  $e_u^n$  then it either executes **write\_buffer** or **commit**. Issuing an update event at line 56 or line 113 is dominated by checking whether  $\mathbf{cv}(x) = \mathbf{rv}_n(x)$  (for all variables) at line 54 or line 110, respectively. If the condition is failed, the transaction aborts instead. From Lemma 9,  $\mathbf{rv}_l(x) < \mathbf{rv}_n(x)$ , so if  $\mathbf{cv}(x) = \mathbf{rv}_l(x)$ , then  $\mathbf{cv}(x) \neq \mathbf{rv}_n(x)$ . Hence,  $T_l$  will **abort** rather than issue an update event. Since during **abort** only a recovery event may be issued, and only if  $\mathbf{rv}_n(x) = \mathbf{cv}(x)$ , then, similarly, no recovery event is issued. Hence  $T_n$  cannot issue events on  $x$  following  $e_a^l$ .

Since each occurrence of a routine update event or a view event checks  $\forall y, \text{cv}(y) = \text{rv}_n(y)$ , then no other such event in  $T_n$  can follow  $e_a^l$ . This is a contradiction.

The execution of a recovery event on  $x$  by  $T_l$  is dominated by line 84, which cannot be passed until  $\text{pv}_l(x) - 1 = \text{ltv}(x)$ . Any transaction  $T_n$  sets  $\text{ltv}(x)$  to  $\text{pv}_o(x)$  as a last action during **commit** (line 80) or **abort** (line 95). Hence  $T_l$  cannot proceed to abort until  $T_o$  finishes committing or aborting. Since  $T_o$  cannot execute line 80 or line 95 if line 68 or line 84 was passed, then  $T_o$  cannot proceed to commit or abort until some other  $T_m$  s.t  $\text{pv}_o(x) - 1 = \text{pv}_m(x)$  committed or aborted. Hence  $T_l$  cannot execute a recovery event until any  $T_m$  s.t.  $\text{pv}_m(x) < \text{pv}_l(x)$  committed or aborted.

If  $\text{pv}_k(x) < \text{pv}_n(x) < \text{pv}_l(x)$ , from version order  $\text{pv}_n(x) < \text{pv}_l(x)$ , so  $T_l$  executes **abort** only after  $T_k$  returns from **abort** or **commit**. Hence, since  $e_u^n <_{\bar{\mathbb{T}}} \text{res}_n(A_n)$  or  $e_u^n <_{\bar{\mathbb{T}}} \text{res}_n(C_n)$ , either  $\text{res}_n(A_n) \in \bar{\mathbb{T}}|T_n$  or  $\text{res}_n(C_n) \in \bar{\mathbb{T}}|T_n$ , and since  $\text{res}_n(C_n) <_{\bar{\mathbb{T}}} e_a^l$  or  $\text{res}_n(A_n) <_{\bar{\mathbb{T}}} e_a^l$ , then  $e_u^n <_{\bar{\mathbb{T}}} e_a^l$ . This contradicts that  $e_a^l <_{\bar{\mathbb{T}}} e_u^n$ .

Thus, regardless of whether there is a contradiction. Therefore,  $T_l$  cannot issue such  $e_a^l$  between  $e_u^k$  and another event in  $\bar{\mathbb{T}}|T_n$ . By extension, it cannot issue  $e_a^l$  between  $e_u^k$  and another event in  $\bar{\mathbb{T}}|T_m$  for any  $T_m \in \xi(\bar{\mathbb{T}}, T_i, T_j)$ .

□

**Lemma 33** (Chain Self-containment). *Given  $\bar{\mathbb{T}}$ , and any transactions  $T_i, T_j \in \bar{\mathbb{T}}$ , s.t.  $\exists \xi(\bar{\mathbb{T}}, T_i, T_j)$ ,  $\xi(\bar{\mathbb{T}}, T_i, T_j)$  is self-contained.*

*Proof.* Given transaction  $T_q$  s.t.  $\exists e_v^q = g_q(x)v^q \in \bar{\mathbb{T}}|T_q$ , assuming that there are any update events on  $x$  in  $\bar{\mathbb{T}}$  prior to  $e_v^q$ , then  $\exists e_u^r = \circ s_r(x)v^r \in \bar{\mathbb{T}}|T_r$  where  $e_u^r < e_v^q$  or  $\exists e_a^r = \blacklozenge s_r(x)v^r \in \bar{\mathbb{T}}|T_r$  where  $e_a^r < e_v^q$  for some  $T_r$ . In addition, from Lemma 7,  $\exists e_v^r = g_r(x)v^r \in \bar{\mathbb{T}}|T_r$  s.t.  $e_v^r <_{\bar{\mathbb{T}}} e_u^r$  and  $e_v^r <_{\bar{\mathbb{T}}} e_a^r$  (as applicable).

Then, similarly, assuming that there are any update events on  $x$  in  $\bar{\mathbb{T}}$  prior to  $e_v^r$ , then  $\exists e_u^s = \circ s_s(x)v^s \in \bar{\mathbb{T}}|T_s$  where  $e_u^s < e_v^r$  or  $\exists e_a^s = \blacklozenge s_s(x)v^s \in \bar{\mathbb{T}}|T_s$  where  $e_a^s < e_v^r$ . And by analogy to  $T_r$ , from Lemma 7,  $\exists e_v^s = g_s(x)v^s$  s.t.  $e_v^s <_{\bar{\mathbb{T}}} e_u^s$  and  $e_v^s <_{\bar{\mathbb{T}}} e_a^s$  (as applicable).

It is then clear that as long as there are update events on  $x$  preceding a view event in some transaction, another transaction exists that both views and updates  $x$  before that view event.

Thus, given  $T_k$  and  $T_l \in \xi(\bar{\mathbb{T}}, T_i, T_j)$  such that  $k \neq l$  and  $\exists e_u^k = \circ s_k(x)v \in \bar{\mathbb{T}}|T$   $\exists e_v^l = g_l(x)v' \in \bar{\mathbb{T}}|T$  and  $e_u^k <_{\bar{\mathbb{T}}} e_v^l$ , there is a sequence of transactions  $\mathcal{S}$  s.t.:

1. the first transaction is  $T_k$ ,
2. the last transaction is  $T_l$ , and
3. given some transaction  $T_m \in \mathcal{S}$ , where  $m \neq k$ ,  $T_m$  is preceded in  $\mathcal{S}$  by some transaction  $T_n$ , s.t. for  $e_v^m = g_m(x)v^m \in \bar{\mathbb{T}}|T_m$ ,  $\exists e_u^n = \circ s_n(x)v^n \in \bar{\mathbb{T}}|T_n$  where  $e_u^n < e_v^m$  or  $\exists e_a^n = \blacklozenge s_n(x)v^n \in \bar{\mathbb{T}}|T_n$  where  $e_a^n < e_v^m$ .

Given such  $\mathcal{S}$ , given some  $T_m$ ,  $m \neq k$ , there is some  $T_n$  that precedes  $T_m$  in  $\mathcal{S}$ .

If for for  $e_v^m = g_m(x)v^m \in \bar{\mathbb{T}}|T_m$ ,  $\exists e_u^n = \circ s_n(x)v^n \in \bar{\mathbb{T}}|T_n$  where  $e_u^n < e_v^m$ , then  $T_m \overset{\leftarrow}{\rightsquigarrow} T_n$ .

If, on the other hand, for  $e_v^m = g_m(x)v^m \in \bar{\mathbb{T}}|T_m$ , or  $\exists e_a^n = \blacklozenge s_n(x)v^m \in \bar{\mathbb{T}}|T_n$  where  $e_a^n < e_v^m$ , then from chain isolation there cannot be a recovery event  $e_a^k = \blacklozenge s_k(x)v^m$  s.t.  $e_a^k <_{\bar{\mathbb{T}}} e_v^l$ , so it follows that  $k \neq n$ . Since  $e_a^n$  is conservative,  $\exists e_v^n = g_n(x)v^m \in \bar{\mathbb{T}}|T_n$ .

Since  $k \neq n$  and  $T_n \in \mathcal{S}$ , then there is some  $T_o$  preceding  $T_n$  in  $\mathcal{S}$ . Then:

- a) If  $o = k$ , then  $T_m \rightsquigarrow T_k$ .
- b) If  $o \neq k$  and  $\exists e_u^n = \circ s_o(x)v^m \in \bar{\mathbb{T}}|T_o$  where  $e_u^n < e_v^n$  then  $T_m \rightsquigarrow T_o$ .
- c) If  $o \neq k$  and  $\exists e_a^n = \blacklozenge s_o(x)v^m \in \bar{\mathbb{T}}|T_o$  where  $e_a^n < e_v^n$  then by analogy, either case a), b) or c) applies to  $T_o$  as it does to  $T_n$ . So, by analogy, either a)  $T_m \rightsquigarrow T_k$ , b)  $T_m \rightsquigarrow T_o$ , or c) there is another preceding transaction in  $\mathcal{S}$ , etc.

Note, however, that since  $\mathcal{S}$  is finite, and  $e_a^k$  cannot precede  $e_v^l$  in  $\bar{\mathbb{T}}$ , then eventually for some such preceding  $T_q \in \mathcal{S}$  case a) or b) and not c) will apply. Thus, there will be some  $T_q \in \mathcal{S}$  s.t.  $T_m \rightsquigarrow T_q$  (where either  $q = k$  or  $q \neq k$ ).

Therefore,  $\forall T_m \in \mathcal{S}$  s.t.  $m \neq k$ ,  $\exists T_n \in \mathcal{S}$  s.t.  $T_m \rightsquigarrow T_n$ .

In addition, for each such pair  $T_m, T_n$ , there is therefore  $\xi(\bar{\mathbb{T}}, T_n, T_m)$ . Furthermore, if  $T_m \rightsquigarrow T_n$  and for some other  $T_o, T_n \rightsquigarrow T_o$ , then there is  $\xi(\bar{\mathbb{T}}, T_o, T_m)$ . Thus, there is also  $\xi(\bar{\mathbb{T}}, T_k, T_l)$ , such that if  $T_l \rightsquigarrow T_m$  and  $T_m \in \mathcal{S}$ , then  $T_m \in \xi(\bar{\mathbb{T}}, T_k, T_l)$ . Since  $T_k, T_l \in \xi(\bar{\mathbb{T}}, T_i, T_j)$ , then if  $T_m \in \xi(\bar{\mathbb{T}}, T_k, T_l)$ ,  $T_m \in \xi(\bar{\mathbb{T}}, T_i, T_j)$ .

If  $\mathcal{S} = T_k \cdot T_l$  then trivially  $v = v'$ .

Otherwise, since  $T_l \in \mathcal{S}$  and  $l \neq k$ , then  $\exists T_m \in \mathcal{S}$  s.t.  $T_l \rightsquigarrow T_m$ , so  $\exists e_u^m = \circ s_m(x)v' \in \bar{\mathbb{T}}|T_m$  for some  $T_m \in \xi(\bar{\mathbb{T}}, T_i, T_j)$  s.t.  $T_m$  precedes  $T_l$  and follows  $T_k$  in  $\xi(\bar{\mathbb{T}}, T_i, T_j)$  and  $e_u^k <_{\bar{\mathbb{T}}} e_u^m <_{\bar{\mathbb{T}}} e_v^l$ .  $\square$

**Lemma 34** (Tree Chain Consistency). *Trace  $\bar{\mathbb{T}}$  is chain consistent.*

*Proof.* From Lemma 32 and Lemma 33.  $\square$

**Lemma 35** (Trace Harmony). *Trace  $\bar{\mathbb{T}}$  is harmonious.*

*Proof.* Trace  $\bar{\mathbb{T}}$  satisfies all of the following: a) minimalism from Lemma 5 b) consonance from Lemma 22, c) obbligato from Lemma 26, d) coherence, commit accord, abort accord, and abort coda from Lemmas 31, 29, 28, and 30, e) isolation from Lemma 10, f) decisiveness from Lemma 27, g) chain consistency from Lemma 34, h) unique writes (assumed).  $\square$

**Corollary 4.** *History  $H = \text{hist}(\bar{\mathbb{T}})$  is last-use opaque. In consequence OptSVA is last-use opaque.*

## 7 Conclusions

The paper presents OptSVA, a highly optimized pessimistic TM that uses a number of techniques to improve the length of interleavings produced by conflicting transactions without losing the guarantees of the algorithm it was based on. Some of these techniques are straightforward, like the read-write distinction and buffering, but were sorely lacking in versioning algorithms thus far. More importantly, using dedicated executor threads to do transactions' waiting

for them, so they can perform other computations in the mean time, is a novel technique in the context of TM. The agglomeration of these techniques creates a new algorithm that performs well in comparison to other versioning algorithms, both in theory, as well as in practice. On the other hand, OptSVA maintains the advantages of pessimistic TM with regards to irrevocable operations, since it only aborts when an abort is manually invoked.

In addition to the algorithm itself, the paper also presents trace harmony, a proof technique that can be used for OptSVA and other buffered algorithms that concentrate on memory accesses over transactional API operations to demonstrate last-use opacity. Moreover, the proof technique and can be trivially modified to demonstrate opacity (and related properties). This requires applying the tests that we apply to events in committed transactions to all other transactions uniformly.

Future work on OptSVA includes a comprehensive evaluation comparing it against state-of-the-art TM algorithms. However, even though OptSVA can be implemented successfully as a multicore system, we consider its intended application to be in distributed TM, and such an implementation is out of scope of this paper, even though, the results of the evaluation of such a system are promising.

**Acknowledgments** The project was funded from National Science Centre funds granted by decisions No. DEC-2012/06/M/ST6/00463 and DEC-2012/07/B/ST6/01230.

## References

- [1] Y. Afek, A. Matveev, and N. Shavit. Pessimistic Software Lock-Elision. In *Proceedings of DISC'12: the 26th International Symposium on Distributed Computing*, pages 297–311, Oct. 2012.
- [2] H. Attiya and E. Hillel. Single-version STMs Can Be Multi-version Permissive. In *Proceedings of ICDCN'11: the 12th International Conference on Distributed Computing and Networking*, number 6522 in Lecture Notes in Computer Science, pages 83–94, Jan. 2011.
- [3] H. Avni, S. Dolev, P. Fatourou, and E. Kosmas. Abort free semantic tm by dependency aware scheduling of transactional instructions. In *Proceedings of NETYS'14*.
- [4] P. A. Bernstein, V. Hadzilacos, and N. Goodman. *Concurrency control and recovery in database systems*. Addison-Wesley, 1987.
- [5] A. Bieniusa, A. Middelkoop, and P. Thiemann. Brief Announcement: Actions in the Twilight—Concurrent Irrevocable Transactions and Inconsistency Repair. In *Proceedings of PODC'10: the 29th ACM SIGACT-SIGOPS Symposium on Principles of Distributed Computing*, July 2010.
- [6] D. Dice, O. Shalev, and N. Shavit. Transactional Locking II. In *Proceedings of DISC'06: the 20th International Symposium on Distributed Computing*, Sept. 2006.

- [7] S. Doherty, L. Groves, V. Luchangco, and M. Moir. Towards formally specifying and verifying transactional memory. *Formal Aspects of Computing*, 25:769–799, Sept. 2013.
- [8] D. Dziurma, P. Fatourou, and E. Kanellou. Consistency for transactional memory computing. *Bulletin of the EATCS*, 113, 2014.
- [9] R. Guerraoui and M. Kapałka. *Principles of Transactional Memory*. Morgan & Claypool, 2010.
- [10] T. Harris, S. Marlow, S. Peyton Jones, and M. Herlihy. Composable memory transactions. In *Proceedings of PPOPP’05: the ACM SIGPLAN Symposium on Principles and Practice of Parallel Programming*, June 2005.
- [11] M. Herlihy, V. Luchangco, M. Moir, and I. W. N. Scherer. Software Transactional Memory for Dynamic-sized Data Structures. In *Proceedings of PODC’03: the 22nd ACM SIGACT-SIGOPS Symposium on Principles of Distributed Computing*, pages 92–101, July 2003.
- [12] M. Herlihy and J. E. B. Moss. Transactional Memory: Architectural Support for Lock-free Data Structures. In *Proceedings of ISCA’93: the 20th International Symposium on Computer Architecture*, pages 289–300, May 1993.
- [13] S. Hong, T. Oguntebi, J. Casper, N. Bronson, C. Kozyrakis, and K. Olukotun. Eigenbench: A simple exploration tool for orthogonal tm characteristics. In *Proceedings of IISWC’10: the IEEE International Symposium on Workload Characterization*, 2010.
- [14] C. Kotselidis, M. Ansari, K. Jarvis, M. Luján, C. C. Kirkham, and I. Watson. DiSTM: A Software Transactional Memory Framework for Clusters. In *Proceedings of ICPP’08: the 37th IEEE International Conference on Parallel Processing*, Sept. 2008.
- [15] M. Lesani and J. Palsberg. Decomposing opacity. In *Proceedings of DISC’14: the 28th International Symposium on Distributed Computing*, 2014.
- [16] A. Matveev and N. Shavit. Towards a Fully Pessimistic STM Model. In *Proceedings of TRANSACT ’12: the 7th ACM SIGPLAN Workshop on Transactional Computing*, number 7437 in Lecture Notes in Computer Science, pages 192–206, Aug. 2012.
- [17] C. H. Papadimitrou. The Serializability of Concurrent Database Updates. *Journal of the ACM*, 26(4):631–653, 1979.
- [18] D. Perelman, R. Fan, and I. Keidar. On Maintaining Multiple Versions in STM. In *Proceedings of PODC’10: the 29th ACM SIGACT-SIGOPS Symposium on Principles of Distributed Computing*, July 2010.
- [19] H. E. Ramadan, I. Roy, M. Herlihy, and E. Witchel. Committing Conflicting Transactions in an STM. In *Proceedings of PPOPP’09: the 14th ACM SIGPLAN Symposium on Principles and Practice of Parallel Programming*, Feb. 2009.

- [20] N. Shavit and D. Touitou. Software Transactional Memory. In *Proceedings of PODC'95: the 14th ACM SIGACT-SIGOPS Symposium on Principles of Distributed Computing*, pages 204–213, Aug. 1995.
- [21] K. Siek and P. T. Wojciechowski. A Formal Design of a Tool for Static Analysis of Upper Bounds on Object Calls in Java. In *Proceedings of FMICS'12: the 17th International Workshop on Formal Methods for Industrial Critical Systems*, number 7437 in Lecture Notes in Computer Science, pages 192–206, Aug. 2012.
- [22] K. Siek and P. T. Wojciechowski. Brief announcement: Towards a Fully-Articulated Pessimistic Distributed Transactional Memory. In *Proceedings of SPAA'13: the 25th ACM Symposium on Parallelism in Algorithms and Architectures*, pages 111–114, July 2013.
- [23] K. Siek and P. T. Wojciechowski. Brief announcement: Relaxing opacity in pessimistic transactional memory. In *Proceedings of DISC'14: the 28th International Symposium on Distributed Computing*, 2014.
- [24] K. Siek and P. T. Wojciechowski. Atomic RMI: A Distributed Transactional Memory Framework. *International Journal of Parallel Programming*, 2015.
- [25] K. Siek and P. T. Wojciechowski. Last-use opacity: A strong safety property for transactional memory with early release support, June 2015. preprint, <http://arxiv.org/abs/1506.06275>.
- [26] T. Skare and C. Kozyrakis. Early release: Friend or foe? In *Proceedings of WTW'06: the Workshop on Transactional Memory Workloads*, June 2006.
- [27] A. Turcu, B. Ravindran, and R. Palmieri. HyFlow2: A High Performance Distributed Transactional Memory Framework in Scala. In *Proceedings of PPPJ'13: the 10th International Conference on Principles and Practices of Programming on JAVA platform: virtual machines, languages, and tools*, Sept. 2013.
- [28] G. Weikum and G. Vossen. *Transactional Information Systems: Theory, Algorithms, and the PRactice of Concurrency Control and Recovery*. Morgan Kaufmann Publishers, 2002.
- [29] A. Welc, B. Saha, and A.-R. Adl-Tabatabai. Irrevocable Transactions and their Applications. In *Proceedings of SPAA'08: the 20th ACM Symposium on Parallelism in Algorithms and Architectures*, June 2008.
- [30] P. T. Wojciechowski. Isolation-only Transactions by Typing and Versioning. In *Proceedings of PPDP'05: the 7th ACM SIGPLAN International Symposium on Principles and Practice of Declarative Programming*, July 2005.
- [31] P. T. Wojciechowski. *Language Design for Atomicity, Declarative Synchronization, and Dynamic Update in Communicating Systems*. Poznań University of Technology Press, 2007.

## A Last-use Opacity from Harmony

### A.1 Last-use Opacity

Given program  $\mathbb{P}$  and a set of processes  $\Pi$  executing  $\mathbb{P}$ , since different interleavings of  $\Pi$  cause an execution  $\mathcal{E}(\mathbb{P}, \Pi)$  to produce different histories, then let  $\mathbb{H}^{\mathbb{P}, \Pi}$  be the set of all possible histories that can be produced by  $\mathcal{E}(\mathbb{P}, \Pi)$ , i.e.,  $\mathbb{H}^{\mathbb{P}, \Pi}$  is the largest possible set s.t.  $\mathbb{H}^{\mathbb{P}, \Pi} = \{H \mid H \models \mathcal{E}(\mathbb{P}, \Pi)\}$ .

**Definition 26** (Closing Write Invocation [25]). *Given a program  $\mathbb{P}$ , a set of processes  $\Pi$  executing  $\mathbb{P}$  and a history  $H$  s.t.  $H \models \mathcal{E}(\mathbb{P}, \Pi)$ , i.e.  $H \in \mathbb{H}^{\mathbb{P}, \Pi}$ , an invocation  $inv_i(w(x)v)$  is the closing write invocation on some variable  $x$  by transaction  $T_i$  in  $H$ , if for any history  $H' \in \mathbb{H}^{\mathbb{P}, \Pi}$  for which  $H$  is a prefix (i.e.,  $H' = H \cdot R$ ) there is no operation invocation  $inv_i(w(x)u)$  s.t.  $inv_i(w(x)v)$  precedes  $inv_i(w(x)u)$  in  $H'|T_i$ .*

**Definition 27** (Closing Write [25]). *Given a program  $\mathbb{P}$ , a set of processes  $\Pi$  executing  $\mathbb{P}$  and a history  $H$  s.t.  $H \models \mathcal{E}(\mathbb{P}, \Pi)$ , an operation execution is the closing write on some variable  $x$  by transaction  $T_i$  in  $H$  if it comprises of an invocation and a response other than  $A_i$ , and the invocation is the closing write invocation on  $x$  by  $T_i$  in  $H$ .*

**Definition 28** (Transaction Decided on  $x$  [25]). *Given a program  $\mathbb{P}$ , a set of processes  $\Pi$  and a history  $H$  s.t.  $H \models \mathcal{E}(\mathbb{P}, \Pi)$ , we say transaction  $T_i \in H$  decided on variable  $x$  in  $H$  iff  $H|T_i$  contains a complete write operation execution  $w_i(x)v \rightarrow ok_i$  that is the closing write on  $x$ .*

Given some history  $H$ , let  $\hat{\mathbb{T}}^H$  be a set of transactions s.t.  $T_i \in \hat{\mathbb{T}}^H$  iff there is some variable  $x$  s.t.  $T_i$  decided on  $x$  in  $H$ .

Given any  $T_i \in H$ , a *decided transaction subhistory*, denoted  $H\hat{|}T_i$ , is the longest subsequence of  $H|T_i$  s.t.:

- a)  $H\hat{|}T_i$  contains  $start_i \rightarrow u$ , and
- b) for any variable  $x$ , if  $T_i$  decided on  $x$  in  $H$ , then  $H\hat{|}T_i$  contains  $(H|T_i)|x$ .

In addition, a *decided transaction subhistory completion*, denoted  $H\hat{\diamond}T_i$ , is a sequence s.t.  $H\hat{\diamond}T_i = H\hat{|}T_i \cdot [tryC_i \rightarrow C_i]$ .

Given a sequential history  $S$  s.t.  $S \equiv H$ ,  $LVis(S, T_i)$  is the longest subhistory of  $S$ , s.t. for each  $T_j \in S$ :

- a)  $S|T_j \subseteq LVis(S, T_i)$  if  $i = j$  or  $T_j$  is committed in  $S$  and  $T_j <_S T_i$ , or
- b)  $S\hat{\diamond}T_j \subseteq LVis(S, T_i)$  only if  $T_j$  is not committed in  $S$  but  $T_j \in \hat{\mathbb{T}}^H$  and  $T_j <_S T_i$  and not  $T_j <_H T_i$ .

Given a sequential history  $S$  and a transaction  $T_i \in S$ , we then say that transaction  $T_i$  is *last-use legal in  $S$*  if  $LVis(S, T_i)$  is legal.

**Definition 29** (Final-state Last-use Opacity [25]). *A finite history  $H$  is final-state last-use opaque if, and only if, there exists a sequential history  $S$  equivalent to any completion of  $H$  s.t.,*

- a)  $S$  preserves the real-time order of  $H$ ,

- b) every transaction in  $S$  that is committed in  $S$  is legal in  $S$ ,
- c) every transaction in  $S$  that is not committed in  $S$  is last-use legal in  $S$ .

**Definition 30** (Last-use Opacity [25]). *A history  $H$  is last-use opaque if, and only if, every finite prefix of  $H$  is final-state last-use opaque.*

## A.2 Composition Rules

Given trace  $\mathbb{T}$  and a history  $H = \text{hist}(\mathbb{T})$ , let  $\hat{C} = \text{Compl}(H)$  be a completion of  $H$  s.t. for every  $T_i \in H$ , if  $T_i$  is live or commit-pending in  $H$ , then  $T_i$  is aborted in  $H_C$ . Let  $\hat{T}_i$  such a transaction in  $\hat{C}$  that corresponds to a completion of  $T_i$  in  $\hat{C}$ .

**Definition 31** (Equivalent Sequential History Construction). *Let  $\hat{S}_H$  be a sequential history s.t.  $\hat{S}_H \equiv H_C$  and, given two transactions  $T_i, T_j \in \hat{C}$ :*

1. if  $T_i <_{\mathbb{T}} T_j$ , then  $T_i <_{\hat{S}_H} T_j$ ,
2. otherwise, if  $T_i \dot{<}_{\mathbb{T}} T_j$  for any variable  $x$ , then  $T_i <_{\hat{S}_H} T_j$ ,
3. otherwise, if  $\exists \text{op}_j = w_j(x)_{\square} \rightarrow \text{ok}_j \in \mathbb{T}|T_j$  and  $\exists e^i = g_i(x)_{\square} \in \mathbb{T}|T_i$  or  $e^i = \circ s_i(x)_{\square} \in \mathbb{T}|T_i$ , then  $T_i <_{\hat{S}_H} T_j$ .

**Definition 32** (Last-use Visible History Construction). *Given transactions  $T_i$  and  $T_j$  in  $\mathbb{T}$ :*

1. if  $T_j$  is committed in  $\mathbb{T}$ , then  $\hat{T}_j$  is included in  $L\text{Vis}(\hat{S}_H, T_i)$  as a whole, otherwise
2. if  $T_j$  is aborted in  $\mathbb{T}$  and  $T_j <_{\mathbb{T}} T_i$ ,  $\hat{T}_j$  is not included in  $L\text{Vis}(\hat{S}_H, T_i)$  at all, otherwise
3. if there exists  $\xi(\mathbb{T}, T_j, T_i)$ , then  $\hat{S}_H \overset{\circ}{\hat{T}}_j$  is included in  $L\text{Vis}(\hat{S}_H, T_i)$ , otherwise
4.  $T_j$  is not included in  $L\text{Vis}(\hat{S}_H, T_i)$  at all.

## A.3 Auxilia

**Lemma 36.** *Let there be a consonant, isolation-ordered, trace  $\mathbb{T}$  in obligato and  $H = \text{hist}(\mathbb{T})$  from which  $\hat{S}_H$  is generated, and  $T_i, T_j \in \mathbb{T}$ . Given any non-local  $\text{op}_i = r_i(x) \rightarrow v \in \mathbb{T}|T_i$  s.t.  $\exists e_i = g_i(x)v \in \mathbb{T}|T_i$  and  $\text{op}_i \leftarrow e_i$  and given any non-local  $\text{op}_j = w_j(x)v \rightarrow \text{ok}_j \in \mathbb{T}|T_j$  s.t.  $\exists e_j = \circ s_i(x)v \in \mathbb{T}|T_j$  and  $\text{op}_j \rightsquigarrow e_j$ , and  $e_j <_{\mathbb{T}} e_i$ , then  $\nexists T_k \in \mathbb{T}$  s.t.  $T_k \text{op}_k = w_j(x)v' \rightarrow \text{ok}_j$  s.t.  $\text{op}_i <_{\hat{S}_H} \text{op}_k <_{\hat{S}_H} \text{op}_j$  and  $T_k$  is either committed or decided on  $x$  in trace  $\mathbb{T}$ .*

*Proof.* Assume for the sake of contradiction that such  $T_k$  exists in  $\mathbb{T}$ . Since both  $\text{op}_i$  and  $\text{op}_j$  are non-local, then  $i \neq j \neq k$ .

If  $T_k$  is committed, then, from the definition of commit write obligato,  $\exists e_k = \circ s_k(x)v' \in \mathbb{T}|T_k$  if  $\text{inv}_k(w_k(x)v')$  is the invocation event of  $\text{op}_k$  then  $\text{inv}_k(w_k(x)v') <_{\mathbb{T}} e_k <_{\mathbb{T}} \text{res}_k(C_k)$ .

If  $T_k$  is decided on  $x$  in  $\mathbb{T}$ , then, from the definition of closing write obligato,  $\exists e_k = \circ s_k(x)v' \in \mathbb{T}|T_k$  s.t. if  $inv_k(w_k(x)v')$  is the invocation event of  $op_k$  then  $inv_k(w_k(x)v') <_{\mathbb{T}} e_k <_{\mathbb{T}} e_i$ .

Thus, in either of the above cases,  $e_j <_{\mathbb{T}} e_k$  and either  $e_k < e_i$  or  $e_i < e_k$ . If then  $e_k < e_i$ , it is not true that  $e_j <_{\mathbb{T}} e_i$ , which is a contradiction. Alternatively, if  $e_i < e_k$ , then, since  $\mathbb{T}$  is isolation-ordered,  $T_i \dot{<}_{\mathbb{T}}^x T_k$ , which implies that  $T_i <_{\hat{S}_H} T_k$ . In this case,  $op_i <_{\hat{S}_H} op_k$ , which is a contradiction.

Therefore, there can be no such  $T_k$ , which satisfies the lemma.  $\square$

**Lemma 37.** *Given a consonant trace  $\mathbb{T}$ , and  $T_i \in \mathbb{T}$ , if  $T_j$  is the first element of  $\psi_{\mathbb{T}}(T_j, x)$ , then  $\exists e_v = g_j(x)v \in \mathbb{T}|T_j$  that is initial and non-local, and either*

- a)  $v = 0$  and  $\#T_k \in \mathbb{T}$  s.t.  $e_u = s_k(x)v \in \mathbb{T}|T_k$  and  $e_u <_{\mathbb{T}} e_v$ ,
- b)  $v \neq 0$  and  $\exists T_k \in \mathbb{T}$  s.t.  $e_u = s_k(x)v \in \mathbb{T}|T_k$  and  $e_u <_{\mathbb{T}} e_v$ .

*Proof.* Since  $T_j$  is in  $\psi_{\mathbb{T}}(T_i, x)$  then by definition, either  $k = i$  or  $e_a = \diamond s_j(x)v \in \mathbb{T}|T_j$ . In either case  $e_v = g_j(x)v \in \mathbb{T}|T_j$  s.t.  $e_v$  is initial and non-local (in the former case by definition of  $\psi_{\mathbb{T}}(T_i, x)$  and in the latter by definition of recovery update consonance).

Since  $e_v$  is consonant and non-local, then either:

- a)  $v = 0$  and  $\#T_k \in \mathbb{T}$  s.t.  $e_u s_k(x)v' \in \mathbb{T}|T_k$   $e_u <_{\mathbb{T}} e_r$ ,
- b)  $v \neq 0$  and  $\exists T_k \in \mathbb{T}$  s.t.  $e_u = \circ s_j(x)v \in \mathbb{T}|T_k$ ,  $i \neq k$ ,  $e_u <_{\mathbb{T}} e_r$ ,  $e_u$  is consonant, and  $e_u$  is the ultimate routine update on  $x$  in  $\mathbb{T}|T_k$ , or
- c)  $\exists e_u \in \mathbb{T}$  s.t.  $e_u = \diamond s_j(x)v$  for some  $tr_k$ ,  $j \neq k$ ,  $e_u <_{\mathbb{T}} e_r$ ,  $e_u$  is a consonant recovery event, and is the ultimate update on  $x$  in  $\mathbb{T}|T_k$ .

In the latter-most case, if such  $e_u$  exists in  $T_k$  then,  $T_k \in \psi_{\mathbb{T}}(T_j, x)$  so that  $T_k$  preceded  $T_j$  in  $\psi_{\mathbb{T}}(T_j, x)$ . Thus,  $T_k$  would precede  $T_j$  in  $\psi_{\mathbb{T}}(T_i, x)$ , and therefore  $T_j$  is not the first element of  $\psi_{\mathbb{T}}(T_i, x)$ . Thus, the latter-most case is impossible.  $\square$

**Lemma 38.** *Given a consonant trace  $\mathbb{T}$ , and  $T_i \in \mathbb{T}$ ,  $\forall T_j \in \psi_{\mathbb{T}}(T_i, x)$  ( $i \neq j$ ),  $T_j$  is aborted or live in  $\mathbb{T}$ .*

*Proof.* Since  $i \neq j$  then  $\forall T_j \in \mathbb{T}$ ,  $\exists e_a = \diamond s_j(x)v \in \mathbb{T}|T_j$ . Since  $\mathbb{T}$  is consonant, then  $e_a$  is consonant, so  $e_a$  is dooming. Thus  $T_j$  is aborted or live in  $\mathbb{T}$ .  $\square$

**Lemma 39.** *Given a consonant, abort abiding trace  $\mathbb{T}$  in obligato, and a pair of transaction  $T_i, T_j \in \mathbb{T}$ , and  $T_j$  is the first element in  $\psi_{\mathbb{T}}(T_i, x)$ ,  $\forall T_k \in \mathbb{T}$  if  $T_j \dot{<}_{\mathbb{T}}^x T_k \dot{<}_{\mathbb{T}}^x T_i$  and  $op_k w_k(x)v \rightarrow \in \mathbb{T}|T_k$  then  $T_k$  is aborted or live in  $\mathbb{T}$ .*

*Proof.* If  $i = j$ , then the lemma is vacuously true.

Since  $T_j \dot{<}_{\mathbb{T}}^x T_k \dot{<}_{\mathbb{T}}^x T_i$ , then  $\exists e_u = \circ s_k(x)v' \in \mathbb{T}|T_k$  or  $e_v = g_k(x)v' \in \mathbb{T}|T_k$ . Hence, either  $e_u$  exists in  $\mathbb{T}|T_k$  or it does not.

If  $e_u$  does not exist, then, from commit write obligato,  $T_k$  cannot commit in trace, so  $T_k$  is either live or aborted in  $\mathbb{T}$ .

If  $e_u$  exists, then, since  $T_j \dot{<}_{\mathbb{T}}^x T_k \dot{<}_{\mathbb{T}}^x T_i$  and from the definition of  $\psi_{\mathbb{T}}(T_i, x)$ , there is some pair of transactions  $T_\alpha$  and  $T_\beta \in \mathbb{T}$  s.t.  $T_\alpha, T_\beta \in \psi_{\mathbb{T}}(T_i, x)$  and  $T_\alpha$  immediately precedes  $T_\beta$  in  $\psi_{\mathbb{T}}(T_i, x)$  and  $T_\alpha \dot{<}_{\mathbb{T}}^x T_k \dot{<}_{\mathbb{T}}^x T_\beta$ . Therefore  $\exists e_\alpha = \diamond s_\alpha(x)v_\alpha \in \mathbb{T}|T_\alpha$  and  $e_\beta = g_\beta(x)v_\beta \in \mathbb{T}|T_\beta$  s.t.  $e_\alpha <_{\mathbb{T}} e_\beta$ . In addition, since  $e_\alpha$

is consonant, then it is needed, so  $\exists e'_\alpha = \circ s_\alpha(x)v'_\alpha \in \mathbb{T}|T_\alpha$  s.t.  $e'_\alpha <_{\mathbb{T}} e_\alpha$ . Also, from definition of isolation order,  $e'_\alpha <_{\mathbb{T}} e_u <_{\mathbb{T}} e_\beta$ . Then,  $e'_\alpha <_{\mathbb{T}} e_u <_{\alpha} e_\beta$ . Therefore, from the definition of abort accord,  $T_k$  is either live or aborted in  $\mathbb{T}$ .  $\square$

**Lemma 40.** *Given a consonant trace  $\mathbb{T}$ , and  $T_i \in \mathbb{T}$ ,  $\forall T_j, T_k \in \psi_{\mathbb{T}}(T_i, x)$  ( $i \neq j$ ), if  $T_j$  precedes  $T_k$  in  $\psi_{\mathbb{T}}(T_i, x)$  then  $T_j \prec^x_{\mathbb{T}} T_k$ .*

*Proof.* Given  $\psi_{\mathbb{T}}(T_i, x)$ , from Lemma 38,  $\forall T_k \in \psi_{\mathbb{T}}(T_i, x)$ ,  $T_k$  is aborted or live in  $\mathbb{T}$ . In addition, since for all  $T_m \in \psi_{\mathbb{T}}(T_i, x)$  except the first, where  $e_v^m = g_m(x)v \in \mathbb{T}|T_m$  there is some  $T_n$  that directly precedes  $T_m$  in  $\psi_{\mathbb{T}}(T_i, x)$  and contains  $e_a^n = \blacklozenge s_n(x)v$  s.t.  $e_a^n <_{\mathbb{T}} e_v^m$ . Since  $e_a^n$  is conservative, there is a preceding view  $e_v^n = g_n(x)v$  s.t.  $e_v^n <_{\mathbb{T}} e_a^n$ . Thus  $e_v^n <_{\mathbb{T}} e_v^m$ , so  $T_n \prec^x_{\mathbb{T}} T_m$ .  $\square$

**Corollary 5.** *Given a consonant trace  $\mathbb{T}$ , and  $T_i \in \mathbb{T}$ ,  $\forall T_j \in \psi_{\mathbb{T}}(T_i, x)$  ( $i \neq j$ ),  $T_j \prec^x_{\mathbb{T}} T_i$ .*

**Lemma 41.** *Given  $T_i, T_j$  s.t.  $\hat{T}_j \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_i)$ ,  $\forall T_k$  if  $\hat{T}_k \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_j)$ , then  $\hat{T}_k \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_i)$  and  $LVis(\hat{S}_H, T_i)|T_k = LVis(\hat{S}_H, T_j)|T_k$*

*Proof.* If  $T_k$  is committed in  $\mathbb{T}$  and  $\hat{T} \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_j)$  then  $\hat{S}_H|\hat{T}_k \subseteq LVis(\hat{S}_H, T_j)$  and  $\hat{T}_k <_{\hat{S}_H} \hat{T}_j$ . Since  $T_j \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_i)$ , then  $\hat{T}_j <_{\hat{S}_H} \hat{T}_i$ . Since  $T_k$  is committed in  $\mathbb{T}$  and  $\hat{T}_j <_{\hat{S}_H} \hat{T}_i$ , then  $\hat{S}_H|\hat{T}_k \subseteq LVis(\hat{S}_H, T_i)$ .

If  $T_k$  is not committed in  $\mathbb{T}$  and  $\hat{T} \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_j)$  then  $\hat{S}_H|\hat{T}_k = LVis(\hat{S}_H, T_j)|T_k$  and  $\hat{T}_k <_{\hat{S}_H} \hat{T}_j$  and  $T_k \not\prec_{\mathbb{T}} T_j$  and  $\exists \xi(\mathbb{T}, T_k, T_j)$  (from Def. 32).

Since  $T_k$  is not committed in  $\mathbb{T}$ , and since  $\mathbb{T}$  is commit abiding, then from Lemma 43, there cannot be  $\xi(\mathbb{T}, T_k, T_j)$  s.t.  $T_j$  is committed. Thus  $T_j$  is not committed in  $\mathbb{T}$ . Thus, if  $\hat{S}_H|\hat{T}_j$  then  $\hat{T}_j <_{\hat{S}_H} \hat{T}_i$  and  $T_j \not\prec_{\mathbb{T}} T_i$  and  $\exists \xi(\mathbb{T}, T_j, T_i)$ .

If  $\exists \xi(\mathbb{T}, T_k, T_j)$  and  $\exists \xi(\mathbb{T}, T_j, T_i)$  then  $\exists \mathbb{T} T_k T_i$ .

Either  $T_k$  aborts in  $\mathbb{T}$  (i.e.  $res_k(A_k)$ ) or  $T_k$  is live in  $\mathbb{T}$ . In the latter case trivially  $T_k \not\prec_{\mathbb{T}} T_i$ . In the former case, from Lemma 44, also  $T_k \not\prec_{\mathbb{T}} T_i$ .

Since  $\exists \xi(\mathbb{T}, T_k, T_i)$  and  $\hat{T}_k <_{\hat{S}_H} \hat{T}_i$  and  $T_k \not\prec_{\mathbb{T}} T_i$  then  $\hat{S}_H|\hat{T}_k = LVis(\hat{S}_H, T_i)|T_k$  (from Def. 32).  $\square$

**Lemma 42.** *Given  $T_i, T_j$  s.t.  $\hat{T}_j \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_i)$ ,  $\forall T_k$  if  $\hat{T}_k \not\subseteq LVis(\hat{S}_H, T_j)$  and  $\exists \xi(\mathbb{T}, T_k, T_j)$  then  $\hat{T}_k \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_i)$ .*

*Proof.* If  $T_k \not\subseteq LVis(\hat{S}_H, T_j)$  and  $\hat{T}_k <_{\hat{S}_H} \hat{T}_j$  then  $\hat{T}_k$  is not committed in  $\mathbb{T}$ .

If  $\hat{S}_H|\hat{T}_k \not\subseteq LVis(\hat{S}_H, T_j)$  and  $\hat{T}_k <_{\hat{S}_H} \hat{T}_j$  then either  $T_k <_{\mathbb{T}} T_j$  or  $\nexists \xi(\mathbb{T}, T_i, T_j)$ . The latter case contradicts the assumptions of the lemma, hence  $T_k <_{\mathbb{T}} T_j$ .

If  $T_k <_{\mathbb{T}} T_j$ , then  $\exists r = res_k(A_k) \in \mathbb{T}|T_k$  s.t. for every event  $e$  in  $\mathbb{T}|T_j$ ,  $r <_{\mathbb{T}} e$ . Since  $\exists \xi(\mathbb{T}, T_j, T_i)$  then there is some view event  $e_v^i$  in  $\mathbb{T}|T_i$  and some update event  $e_u^j$  in  $\mathbb{T}|T_j$  s.t.  $e_u^j <_{\mathbb{T}} e_v^i$ . Therefore  $r <_{\mathbb{T}} e_u^j <_{\mathbb{T}} e_v^i$ .

Since no events can occur in  $\mathbb{T}|T_k$  after  $v$ , then for all events in  $e$  in  $\mathbb{T}|T_k$  apart from  $r$ ,  $e <_{\mathbb{T}} r$ . So, for any  $\xi(\mathbb{T}, T_k, T_i)$  for any update event  $e_u^k = \circ s_k(x)v \in \mathbb{T}|T_k$ ,  $e_u^k <_{\mathbb{T}} r <_{\mathbb{T}} e_v^i$ .

From abort coda,  $\exists e_a^l = \blacklozenge s_l(x)v'$  s.t.  $e_u^k <_{\mathbb{T}} e_a^l <_{\mathbb{T}} r$ , and, from conservatism and unique routine updates,  $v \neq v'$ . Thus, since  $e_u^k <_{\mathbb{T}} e_a^l <_{\mathbb{T}} e_v^i$  and  $v \neq v'$ ,

there cannot be such  $\xi(\mathbb{T}, T_k, T_i)$  that satisfies chain isolation, and therefore  $\nexists \xi(\mathbb{T}, T_k, T_i)$ .

Therefore, from Lemma 32,  $\hat{S}_H | \hat{T}_k \not\subseteq LVis(\hat{S}_H, T_i)$ .

Thus,  $\hat{S}_H | \hat{T}_i \not\subseteq LVis(\hat{S}_H, T_i)$ .  $\square$

**Lemma 43.** *Given  $\xi(\mathbb{T}, T_i, T_j)$ , if  $T_j$  is committed in  $\mathbb{T}$ , then  $\forall T_k \in \xi(\mathbb{T}, T_i, T_j)$ ,  $T_k$  is committed in  $\mathbb{T}$ .*

*Proof.* Given a pair of transaction  $T_l, T_m \in \mathbb{T}$  s.t.  $T_m \overset{\circ}{\leftarrow} T_l$ , from commit accord, if  $T_m$  is committed in  $\mathbb{T}$ , then  $T_l$  is also committed in  $\mathbb{T}$ .

If  $\xi(\mathbb{T}, T_i, T_j) = T_i \cdot T_j$ , then since  $T_j$  is committed in  $\mathbb{T}$ , then so is  $T_i$ .

Since,  $\xi(\mathbb{T}, T_i, T_j) = T_i \xi(\mathbb{T}, T_i, T_k) \cdot T_j$  and  $T_k$  is such that  $T_j \overset{\circ}{\leftarrow} T_k$ , then since  $T_j$  is committed in  $\mathbb{T}$ , then so is  $T_k$ . This follows recursively for  $\xi(\mathbb{T}, T_i, T_k)$ .

Thus every transaction in  $\xi(\mathbb{T}, T_i, T_j)$  is committed in  $\mathbb{T}$ .  $\square$

**Lemma 44.** *Given  $\xi(\mathbb{T}, T_i, T_j)$ , if  $T_i$  aborts in  $\mathbb{T}$ , then  $T_i \not\prec_{\mathbb{T}} T_j$ .*

*Proof.* Assume for the sake of contradiction that  $T_i \prec_{\mathbb{T}} T_j$ .

Thus, there exists  $T_k \in \xi(\mathbb{T}, T_i, T_j)$  s.t.  $T_k \overset{\circ}{\leftarrow} T_i$ , so  $\exists e_u^i = \circ s_i(x)v \in \mathbb{T} | T_i$  and  $e_v^k = g_k(x)v \in \mathbb{T} | T_k$  and  $e_u^i \prec_{\mathbb{T}} e_v^k$ .

If  $T_i$  is aborted, then, from abort coda,  $\exists e_a^l = \circ s_l(x)v' \in \mathbb{T}$  s.t.  $e_u^i \prec_{\mathbb{T}} e_a^l \prec_{\mathbb{T}} res_i(A_i)$  and from unique routine updates  $v \neq v'$ .

Since  $T_j$  is in  $\xi(\mathbb{T}, T_i, T_j)$ ,  $\exists e_v^j = g_j(y)v''$  and since  $T_i \prec_{\mathbb{T}} T_j$ , then  $res_i(A_i) \prec_{\mathbb{T}} e_v^j$ . Thus,  $e_u^i \prec_{\mathbb{T}} e_a^l \prec_{\mathbb{T}} e_v^j$ .

This contradicts chain isolation, so it is not true that  $T_i \prec_{\mathbb{T}} T_j$ , so  $T_i \not\prec_{\mathbb{T}} T_j$ .  $\square$

## A.4 Main Lemmas

Let there be a harmonious trace  $\mathbb{T}$  and  $H = hist(\mathbb{T})$  from which  $\hat{S}_H$  is generated. Let there be such  $T_i \in \mathbb{T}$  that  $T_i$  is committed in  $\mathbb{T}$ . Then:

**Lemma 45** (Unique Routine Updates). *If  $\mathbb{T}$  is consonant, and  $\mathbb{T}$  has unique writes, then given any  $s_i(x)v$  and  $s_j(x)v'$  s.t.  $v \neq v'$ .*

*Proof.* Since both events are consonant, then for  $s_i(x)v$  there exists  $op_i = w_i(x)v^i \rightarrow ok_i$  s.t.  $v = v^i$ , and for  $s_j(x)v'$  there exists  $op_j = w_j(x)v^j \rightarrow ok_j$  s.t.  $v' = v^j$ . Since  $\mathbb{T}$  has unique writes, then  $v^i \neq v^j$ , so  $v \neq v'$ .  $\square$

**Lemma 46** (Non-local Read Consistency). *For any  $op_i \in \mathbb{T} | T_i$  s.t.  $op_i = r_i(op_i) \rightarrow v$  and  $op_i$  is non-local, then either:*

- 1)  $v \neq 0$  and  $\exists op_j \in Vis(\hat{S}_H, \hat{T}_i)$  for some  $T_j$  s.t.  $op_j = w_j(x)v \rightarrow ok_j$ ,  $op_j \prec_{Vis(\hat{S}_H, \hat{T}_i)} op_i$ , or
- 2)  $v = 0$  and  $\nexists op_j \in Vis(\hat{S}_H, \hat{T}_i)$  s.t.  $op_j = w_j(x)v \rightarrow ok_j$  and  $op_j \prec_{Vis(\hat{S}_H, \hat{T}_i)} op_i$ .

*Proof for Lemma 46.* Since  $op_i$  is consonant and non-local, then  $\exists e_v = g_i(x)v \in \mathbb{T}$ , s.t.  $op_i \leftarrow e_v$  and  $e_v$  is consonant. Then, from  $e_v$ 's consonance, either:

a)  $v = 0$  and  $\#e_u = s_j(x)v' \in \mathbb{T}$  for some  $T_j \in \mathbb{T}$  s.t.  $e_u <_{\mathbb{T}} e_v$ .

In which case, if  $\#op_j w_j(x)v' \rightarrow ok_i \in \mathbb{T}|T_j$  s.t.  $op_j <_{\mathbb{T}} g_i(x)v$ , then,  $\#T_j \in \mathbb{T}$  s.t.  $T_j <_{\mathbb{T}} T_i$  and  $op_j \in \mathbb{T}|T_j$ . Thus, from construction of  $\hat{S}_H$ ,  $\#T_j \in \mathbb{T}$  s.t.  $\hat{T}_j <_{\hat{S}_H} \hat{T}_i$  and  $op_j \in \hat{S}_H|\hat{T}_j$ . Thus, from construction of  $Vis(\hat{S}_H, \hat{T}_i)$ , for any such  $T_j$ ,  $\hat{S}_H|\hat{T}_j \not\subseteq Vis(\hat{S}_H, \hat{T}_i)$ , so for any such  $T_j$ ,  $w_j(x)v \rightarrow ok_j \notin Vis(\hat{S}_H, \hat{T}_i)$  and  $v = 0$ .

On the other hand, if  $\exists op_j w_j(x)v' \rightarrow ok_i \in \mathbb{T}|T_j$  s.t.  $op_j <_{\mathbb{T}} g_i(x)v$ , then if  $T_i$  is committed in  $\mathbb{T}$ , then, from the definition of commit write obligato,  $\circ s_j(x)v' \in \mathbb{T}|T_j$ , which contradicts the assumption of case a). Thus,  $T_i$  is not committed in  $\mathbb{T}$ , so  $\hat{T}_i$  is not committed in  $\hat{S}_H$ , and therefore  $\hat{S}_H|\hat{T}_i \not\subseteq Vis(\hat{S}_H, \hat{T}_i)$ . Thus for any such  $T_j$ ,  $w_j(x)v' \rightarrow ok_j \notin Vis(\hat{S}_H, \hat{T}_i)$  and  $v = 0$ .

b)  $v \neq 0$  and  $\exists e_u = \circ s_j(x)v \in \mathbb{T}$  for some  $T_j \in \mathbb{T}$  s.t.  $e_u <_{\mathbb{T}} e_v$  and  $e_u$  is consonant.

Since  $e_u$  is consonant, then  $\exists op_j = w_j(x)v \rightarrow ok_j \in \mathbb{T}|T_j$  s.t.  $op_j$  is non-local and consonant, and  $op_j < \circ s_j(x)v$ . Thus, since  $e_u <_{\mathbb{T}} e_v$ ,  $T_j <_{\mathbb{T}}^x T_i$ , then, by construction,  $\hat{T}_j < \hat{S}_H \hat{T}_i$ .

Since  $T_i$  is committed in  $\mathbb{T}$  and  $T_i \leftrightarrow T_j$ , and since  $\mathbb{T}$  is commit-abiding, then  $T_j$  must be committed in  $\mathbb{T}$ . Thus  $\hat{T}_j$  is also committed in  $\hat{S}_H$ . Thus,  $\hat{S}_H|\hat{T}_j \subseteq Vis(\hat{S}_H, T_i)$ , and therefore  $op_j <_{Vis(\hat{S}_H, T_i)} op_i$ . Then, from Lemma 36,  $op_j <_{Vis(\hat{S}_H, T_i)} op_i$ . Thus,  $w_j(x)v \rightarrow ok_j <_{Vis(\hat{S}_H, \hat{T}_i)} op_i$  and  $v \neq 0$ .

c)  $\exists e_a = \diamond s_j(x)v \in \mathbb{T}$  for some  $T_j \in \mathbb{T}$  s.t.  $e_a <_{\mathbb{T}} e_v$  and  $e_u$  is consonant.

Given  $\psi_{\mathbb{T}}(T_i, x)$ , from Lemma 38,  $\forall T_k \in \psi_{\mathbb{T}}(T_i, x)$ ,  $T_k$  is aborted or live in  $\mathbb{T}$ . So, by construction,  $\hat{T}_k$  is aborted in  $\hat{S}_H$ , and therefore excluded from  $Vis(\hat{S}_H, T_i)$ . Thus for any  $T_k \in \psi_{\mathbb{T}}(T_i, x)$ ,  $\forall op_k = w_k(x)v \rightarrow \in \mathbb{T}|T_k$ ,  $op_k \notin Vis(\hat{S}_H, T_i)$ .

Given  $\psi_{\mathbb{T}}(T_i, x)$ , from Lemma 37,  $\exists e'_v = g_k(x)v \in \mathbb{T}|T_k$  s.t.  $T_k$  is the first element of  $\psi_{\mathbb{T}}(T_i, x)$  that is initial and non-local, and either of the following is true:

i)  $v = 0$  and  $\#T_l \in \mathbb{T}$  s.t.  $e'_u = s_l(x)v \in \mathbb{T}|T_l$  and  $e'_u <_{\mathbb{T}} e'_v$ .

Then, either  $\exists e'_u \in s_l(x)v \in \mathbb{T}|T_l$  and  $e'_v <_{\mathbb{T}} e'_u$  or  $\#e'_u = s_l(x)v \in \mathbb{T}|T_l$ .

If  $\exists e'_u \in s_l(x)v \in \mathbb{T}|T_l$  and  $e'_v <_{\mathbb{T}} e'_u$ , then from Lemma 37,  $e'_u = \circ s_l(x)v'$ . Thus, by definition of isolation order,  $T_k <_{\mathbb{T}}^x T_l$ . Thus, if  $T_l <_{\mathbb{T}}^x T_j$ , then, from Lemma 39,  $T_l$  is aborted or live in  $\mathbb{T}$ , so, by construction,  $\hat{T}_l$  is aborted in  $\hat{S}_H$ . Therefore  $\hat{T}_l \not\subseteq Vis(\hat{S}_H, T_i)$ , so for any write operation execution  $op_l = w_l(x)v' \rightarrow ok_l$  in any such  $T_l$ ,  $op_l \notin Vis(\hat{S}_H, T_i)$  (and  $v = 0$ ).

Alternatively, if  $T_j <_{\mathbb{T}}^x T_l$ , then since  $e_a <_{\mathbb{T}} e_v$ , then it is not possible that  $e_a <_{\mathbb{T}} e'_u < e_v$ . By corollary, from the definition of isolation order, it is not possible that  $T_j <_{\mathbb{T}}^x T_l <_{\mathbb{T}}^x T_i$ . Then, by construction,  $\hat{T}_i <_{\hat{S}_H} \hat{T}_l$ , so  $\hat{T}_l \not\subseteq Vis(\hat{S}_H, T_i)$ . Therefore, for any write operation execution  $op_l = w_l(x)v' \rightarrow ok_l$  in any such  $T_l$ ,  $op_l \notin Vis(\hat{S}_H, T_i)$  (and  $v = 0$ ).

On the other hand, if  $\#e'_u \in s_l(x)v \in \mathbb{T}|T_l$ , then either  $\mathbb{T}|T_l$  contains some write operation  $op_l = w_l(x)v' \rightarrow ok_l$  or it does not. If it does not, then vacuously, for any write operation execution  $op_l = w_l(x)v' \rightarrow ok_l$  in any

such  $T_l$ ,  $op_l \notin \text{Vis}(\hat{S}_H, T_i)$  (and  $v = 0$ ). On the other hand, if  $op_l \in \mathbb{T}|T_l$ , then from commit write obbligato, since  $\#e'_u = \circ_{s_l}(x)v \in \mathbb{T}|T_l$ , then  $T_l$  is not committed in  $\mathbb{T}$ . Thus,  $\hat{T}_l$  is aborted in  $\hat{S}_H$  and  $\hat{T}_l \notin \text{Vis}(\hat{S}_H, T_i)$ . Thus, for any write operation execution  $op_l = w_l(x)v' \rightarrow ok_l$  in any such  $T_l$ ,  $op_l \notin \text{Vis}(\hat{S}_H, T_i)$  (and  $v = 0$ ).

ii)  $v \neq 0$  and  $\exists T_l \in \mathbb{T}$  s.t.  $e'_u = \circ_{s_l}(x)v \in \mathbb{T}|T_l$  and  $e'_u <_{\mathbb{T}} e'_v$ .

Since  $\mathbb{T}$  is consonant, then  $e'_u$  is consonant, so  $\exists op_l = w_l(x)v \rightarrow ok_l$  s.t.  $op_l \rightsquigarrow e'_u$ .

Since for all  $T_m \in \psi_{\mathbb{T}}(T_i, x)$ ,  $e''_v = g_m(x)v''$  there is some  $T_n$  that directly precedes  $T_m$  in  $\psi_{\mathbb{T}}(T_i, x)$  and contains  $e''_a = \blacklozenge s_n(x)v''$  s.t.  $e''_a <_{\mathbb{T}} e''_v$ . Since  $e''_a$  is conservative, there is a preceding view  $e'''_v = g_n(x)v''$  s.t.  $e'''_v <_{\mathbb{T}} e''_a$ . Thus  $e'''_v <_{\mathbb{T}} e''_v$ , so  $T_n \dot{<}^x_{\mathbb{T}} T_m$ . Therefore,  $T_k \dot{<}^x_{\mathbb{T}} T_i$ , and, by extension, since  $e'_u <_{\mathbb{T}} e'_v$ ,  $T_l \dot{<}^x_{\mathbb{T}} T_k$ , then  $T_l \dot{<}^x_{\mathbb{T}} T_i$ . Since  $T_i$  is committed in  $\mathbb{T}$ , then since  $T_l \dot{<}^x_{\mathbb{T}} T_i$ , then, from commit coherence,  $T_l$  is either committed or aborted in  $T_j$ .

Transaction  $T_l$  cannot be aborted in  $\mathbb{T}$ , as follows. Let us assume by contradiction that  $T_l$  is aborted (i.e.  $\exists r_a = \text{res}_l(A_l) \in \mathbb{T}|T_l$ ). Then, since  $\mathbb{T}$  has coda, then for some  $T_n$ ,  $\exists e'''_a = \blacklozenge s_n(x)v'''$  s.t.  $e'_u <_{\mathbb{T}} e'''_a <_{\mathbb{T}} r$ . Since  $e'_a$  is consonant, then since it is clean and  $T_l \dot{<}^x_{\mathbb{T}} T_k$ , then there is no recovery event following  $e'_v$  and preceding  $e'_a$ . In addition from commit coherence,  $T_l$  must abort before  $T_i$  commits, so, by extension  $e'''_a$  must precede  $\text{res}_i(C_i)$  in  $\mathbb{T}$ . Thus either  $e'''_a <_{\mathbb{T}} e'_v$  or  $e'_a <_{\mathbb{T}} e'''_a <_{\mathbb{T}} r_a$ . In the former case, if  $e'''_a <_{\mathbb{T}} e'_u$ , then this contradicts that  $e'''_a$  is consonant (ending), and if  $e'_u <_{\mathbb{T}} e'''_a <_{\mathbb{T}} e'_v$ , it contradicts that  $e'_u <_{\mathbb{T}} e'_v$ . On the other hand, if  $e'_a <_{\mathbb{T}} e'''_a <_{\mathbb{T}} r_a$ , then one of three scenarios is possible. If for some  $T_m \in \psi_{\mathbb{T}}(T_i, x)$ , s.t.  $i \neq m$  and  $g_m(x) \square <_{\mathbb{T}} e'''_a <_{\mathbb{T}} \blacklozenge s_m(x) \square$ , then this contradicts that  $\blacklozenge s_m(x) \square$  is clean. Alternatively, if for a pair  $T_m, T_n \in \psi_{\mathbb{T}}(T_i, x)$ , s.t.  $T_m$  directly precedes  $T_n$  in  $\psi_{\mathbb{T}}(T_i, x)$ , and  $\blacklozenge s_m(x) \square <_{\mathbb{T}} e'''_a <_{\mathbb{T}} g_n(x) \square$ , then this contradicts that  $\blacklozenge s_m(x) \square <_{\mathbb{T}} g_n(x) \square$ . Finally, if  $e'_v < e'''_a$ , then this violates abort coda of  $\mathbb{T}$  (case b), and is also a contradiction. Thus, there cannot be such  $e'''_a$ , and therefore  $T_l$  cannot be aborted in  $\mathbb{T}$ .

Hence,  $T_l$  must be committed in  $\mathbb{T}$ . Then since  $T_l \dot{<}^x_{\mathbb{T}} T_i$  (so  $\hat{T}_l <_{\hat{S}_H} \hat{T}_i$ ),  $op_l \in \text{Vis}(\hat{S}_H, T_i)$ .

Since  $e'_u$  is non-local, then it is not followed in  $\mathbb{T}|T_l$  by another  $e''_u = \circ_{s_l}(x)v$ . Since  $op_l \rightsquigarrow e'_u$ ,  $\#op'_l = w_l(x)v' \rightarrow ok_l$  s.t.  $op_l <_{\mathbb{T}|T_l} op'_l$ .

Let  $T_m$  be a transaction in  $\mathbb{T}$  s.t.  $T_l \dot{<}^x_{\mathbb{T}} T_m \dot{<}^x_{\mathbb{T}} T_j$ . If  $T_m \in \psi_{\mathbb{T}}(T_i, x)$ , then from Lemma 38,  $T_m$  is not committed in  $\mathbb{T}$ . If  $T_m \notin \psi_{\mathbb{T}}(T_i, x)$ , then from Lemma 39,  $T_m$  is also not committed in  $\mathbb{T}$ . In either case,  $\hat{T}_m$  is aborted in  $\hat{S}_H$ . Thus, for any  $T_m$  s.t.  $T_l \dot{<}^x_{\mathbb{T}} T_m \dot{<}^x_{\mathbb{T}} T_j$ ,  $\hat{S}_H|\hat{T}_m \notin \text{Vis}(\hat{S}_H, i)$ . Therefore, for any write operation execution  $op_m = w_m(x)v'' \rightarrow ok_m \in \mathbb{T}|T_m$ ,  $op_m \notin \text{Vis}(\hat{S}_H, T_i)$ .

Let  $T_m \in \mathbb{T}$  be any transaction s.t.  $T_j \dot{<}^x_{\mathbb{T}} T_m \dot{<}^x_{\mathbb{T}} T_i$ . Since  $e_a$  consonant, it is needed, so  $\exists e''_u = s_j(x)v'' \in \mathbb{T}|T_j$  s.t.  $e''_u <_{\mathbb{T}} e_a$ . In addition, since  $T_j \dot{<}^x_{\mathbb{T}} T_m \dot{<}^x_{\mathbb{T}} T_i$ , then by definition of isolation order,  $\exists e = s_m(x)v''' \in \mathbb{T}|T_m$ , or  $e = g_m(x)v''' \in \mathbb{T}|T_m$ , so  $e''_u <_{\mathbb{T}} e <_{\mathbb{T}} e_v$ . Since  $e_a <_{\mathbb{T}} e_v$ , then  $e''_u <_{\mathbb{T}} e <_{\mathbb{T}} e_u$ . Thus, by definition of abort accord,  $T_m$  is not committed in  $\mathbb{T}$ , so, by construction,  $\hat{T}_m$  is aborted in  $\hat{S}_H$ . Thus, for any  $T_m$  s.t.

$T_j \dot{<}_{\mathbb{T}}^x T_m \dot{<}_{\mathbb{T}}^x T_i$ ,  $\hat{S}_H | \hat{T}_m \not\subseteq \text{Vis}(\hat{S}_H, i)$ . Therefore, for any write operation execution  $op_m = w_m(x)v'' \rightarrow ok_m \in \mathbb{T} | T_m$ ,  $op_m \notin \text{Vis}(\hat{S}_H, T_i)$ .

Since no other write operation execution follows  $op_l$  in  $\mathbb{T} | T_m$ , and since there is no transaction  $T_m \in \mathbb{T}$  s.t.  $\hat{T}_l <_{\hat{S}_H} \hat{T}_m <_{\hat{S}_H} \hat{T}_i$  (and therefore  $\hat{T}_l <_{\text{Vis}(\hat{S}_H, \hat{T}_i)} \hat{T}_m <_{\text{Vis}(\hat{S}_H, \hat{T}_i)} \hat{T}_i$ ) s.t.  $\exists op_m = w_m(x)v'' \rightarrow ok_m \in \mathbb{T} | T_m$  and  $op_m \in \text{Vis}(\hat{S}_H, \hat{T}_i)$ , then  $w_l(x)v \rightarrow ok_l <_{\text{Vis}(\hat{S}_H, \hat{T}_i)} op_i$  and  $v \neq 0$ .

□

**Corollary 6** (Total Non-local Read Consistency). *By extension of the above, since, by definition, if for some sequential history  $S$ ,  $\hat{S}_H | tr_j \in \text{Vis}(S, T_i)$ , then  $\text{Vis}(\hat{S}_H, T_j)$  is a prefix of  $\text{Vis}(S, T_i)$ , then for any  $op_j \in \mathbb{T} | T_j$  s.t.  $op_j = r_i(op_j) \rightarrow v$  either:*

- 1)  $v \neq 0$  and  $\exists op_k \in \text{Vis}(\hat{S}_H, T_k)$  for some  $T_k$  s.t.  $op_k = w_k(x)v \rightarrow ok_k$ ,  $op_k <_{\text{Vis}(\hat{S}_H, \hat{T}_i)} op_j$ , or
- 2)  $v = 0$  and  $\nexists op_k \in \text{Vis}(\hat{S}_H, T_i)$  s.t.  $op_k = w_k(x)v \rightarrow ok_k$  and  $op_k <_{\text{Vis}(\hat{S}_H, T_i)} op_j$ .

**Lemma 47** (Local Read Consistency). *For any  $op_i \in \mathbb{T} | T_i$  s.t.  $op_i = r_i(op_i) \rightarrow v$  and  $op_i$  is local, then  $\exists op'_i \in \text{Vis}(\hat{S}_H, T_i)$  s.t.  $op'_i = w_i(x)v \rightarrow ok_i$ ,  $op'_i <_{\text{Vis}(\hat{S}_H, T_i)} op_i$ .*

*Proof.* From local read consonance it follows that For any  $op_i \in \mathbb{T} | T_i$  s.t.  $op_i$  is local, then  $\exists op'_i \in \mathbb{T} | T_i$  and  $op'_i <_{\mathbb{T} | T_i} op_i$ . Thus,  $op'_i <_{\hat{S}_H | \hat{T}_i} op_i$ . Since  $T_i \subseteq \text{Vis}(\hat{S}_H, T_i)$  then  $op'_i <_{\text{Vis}(\hat{S}_H, T_i)} op_i$ . □

**Corollary 7** (Total Local Read Consistency). *For any  $op_i \in \mathbb{T} | T_i$  s.t.  $op_i = r_i(op_i) \rightarrow v$  and  $op_i$  is local, then for any  $T_j$ ,  $\exists op'_i \in \text{Vis}(\hat{S}_H, T_j)$  s.t.  $op'_i = w_i(x)v \rightarrow ok_i$ ,  $op'_i <_{\text{Vis}(\hat{S}_H, T_j)} op_i$ .*

Let there instead be such  $T_i \in \mathbb{T}$  that  $T_i$  is either committed or not committed  $\mathbb{T}$ . Then:

**Lemma 48** (Non-local Read Last-use Consistency). *For any  $op_i \in \mathbb{T} | T_i$  s.t.  $op_i = r_i(op_i) \rightarrow v$  and  $op_i$  is non-local, then either*

- i)  $v \neq 0$  and  $\exists op_j \in \text{LVis}(\hat{S}_H, \hat{T}_i)$  for some  $T_j$  s.t.  $op_j = w_j(x)v \rightarrow ok_j$ ,  $op_j <_{\text{LVis}(\hat{S}_H, \hat{T}_i)} op_i$ , or
- ii)  $v = 0$  and  $\nexists op_j \in \text{LVis}(\hat{S}_H, \hat{T}_i)$  s.t.  $op_j = w_j(x)v \rightarrow ok_j$  and  $op_j <_{\text{LVis}(\hat{S}_H, \hat{T}_i)} op_i$ .

*Proof.* Since  $op_i$  is consonant and non-local, then  $\exists e_v = g_i(x)v \in \mathbb{T}$ , s.t.  $op_i \leftarrow e_v$ . Then, since  $\mathbb{T}$  is consonant, then  $e_v$  is also consonant, so one of the following is true:

- a)  $v = 0$  and  $\nexists e_u = s_j(x)v \in \mathbb{T}$  for some  $T_j \in \mathbb{T}$  s.t.  $e_u <_{\mathbb{T}} e_v$ .

In which case, if  $\nexists op_j = w_j(x)v \rightarrow ok_j \in \mathbb{T} | T_j$  s.t.  $op_j <_{\mathbb{T}} g_i(x)v$ , then,  $\nexists T_j \in \mathbb{T}$  s.t.  $T_j \dot{<}_{\mathbb{T}} T_i$  and  $op_j \in \mathbb{T} | T_j$ . Thus, from construction of  $\hat{S}_H$ ,

$\# \hat{T}_j \in \mathbb{T}$  s.t.  $\hat{T}_j <_{\hat{S}_H} \hat{T}_i$  and  $op_j \in \hat{S}_H | \hat{T}_j$ . Thus, from construction of  $LVis(\hat{S}_H, \hat{T}_i)$ , for any such  $T_j$ ,  $\hat{S}_H | \hat{T}_j \not\subseteq LVis(\hat{S}_H, \hat{T}_i)$ , so for any such  $T_j$ ,  $w_j(x)v \rightarrow ok_j \notin LVis(\hat{S}_H, \hat{T}_i)$  and  $v = 0$ .

On the other hand, if  $\exists op_j w_j(x)v \rightarrow ok_i \in \mathbb{T} | T_j$  s.t.  $op_j <_{\mathbb{T}} g_i(x)v$ , then if  $T_j$  is committed in  $\mathbb{T}$ , then, from the definition of commit write obligato,  $\exists \circ s_j(x)v \in \mathbb{T} | T_j$ , which contradicts the assumption of case a). If, however,  $T_j$  is not committed in  $\mathbb{T}$ , then either  $T_j$  is decided on  $x$  in  $\mathbb{T}$ , or it is not. In the former of those two cases, from the definition of closing write obligato,  $\exists \circ s_j(x)v \in \mathbb{T} | T_j$ , which also contradicts the assumption of case a). In the latter case, since  $\hat{T}_j$  is neither committed in  $\mathbb{T}$  nor decided on  $x$  in  $\mathbb{T}$ , then neither is it committed in  $\hat{S}_H$  nor decided on  $x$  in  $\hat{S}_H$ . Therefore, by definition of  $LVis(\hat{S}_H, \hat{T}_i)$ ,  $\hat{S}_H | \hat{T}_j | x \not\subseteq LVis(\hat{S}_H, \hat{T}_i)$ . Thus for any such  $T_j$ ,  $w_j(x)v \rightarrow ok_j \notin LVis(\hat{S}_H, \hat{T}_i)$  and  $v = 0$ .

b)  $v \neq 0$  and  $\exists e_u = \circ s_j(x)v \in \mathbb{T}$  for some  $T_j \in \mathbb{T}$  s.t.  $e_u <_{\mathbb{T}} e_v$ .

Since  $e_u$  is consonant, then  $\exists op_j = w_j(x)v \rightarrow ok_j \in \mathbb{T} | T_j$  s.t.  $op_j$  is non-local and consonant, and  $op_j < \circ s_j(x)v$ . Thus, since  $e_u <_{\mathbb{T}} e_v$ ,  $T_j \dot{<}_{\mathbb{T}}^x T_i$ , then, by construction,  $\hat{T}_j <_{\hat{S}_H} \hat{T}_i$ .

If  $T_i$  is not committed in  $\mathbb{T}$ , since  $T_i \dot{\sim} T_j$ , and since  $\mathbb{T}$  is decisive, then  $T_j$  is decided on  $x$  in  $\mathbb{T}$ . Thus, from Def. 32,  $\hat{S}_H | \hat{T}_j | x \subseteq LVis(\hat{S}_H, T_i)$ , and therefore  $op_j <_{LVis(\hat{S}_H, T_i)} op_i$ . Alternatively, if  $T_i$  is committed in  $\mathbb{T}$ , then, from commit accord,  $T_j$  is also committed in  $\mathbb{T}$ . Then, by definition of  $LVis(\hat{S}_H, T_i)$ ,  $\hat{S}_H | \hat{T}_j \subseteq LVis(\hat{S}_H, T_i)$ , and thus  $op_j <_{LVis(\hat{S}_H, T_i)} op_i$ . Then, from Lemma 36,  $op_j <_{LVis(\hat{S}_H, T_i)} op_i$ . Thus,  $w_j(x)v \rightarrow ok_j <_{LVis(\hat{S}_H, \hat{T}_i)} op_i$  and  $v \neq 0$ .

c)  $\exists e_a^j = \diamond s_j(x)v \in \mathbb{T} | T_j$  s.t.  $e_a^j <_{\mathbb{T}} e_v$ .

Since  $\mathbb{T}$  is consonant, then  $e_a^j$  is consonant, so  $e_a^j$  is conservative, and thus  $\exists e_v^j = g_j(x)v \in \mathbb{T} | T_j$ .

From Corollary 5  $\forall T_n \in \psi_{\mathbb{T}}(T_i, x)$  ( $n \neq i$ )  $T_n \dot{<}_{\mathbb{T}}^x T_i$ . So, by construction, for every such  $T_n$ ,  $\hat{T}_n$  is aborted in  $\hat{S}_H$  and therefore not included as a whole in  $LVis(\hat{S}_H, T_i)$ . In addition, since  $e_a^n$  is needed there is a preceding routine update  $e_u^n = \circ s_n(x)v'$ . Because of unique writes,  $v' \neq v$ . Therefore, it is not true that  $T_i \dot{\sim} T_n$ . Furthermore, since  $e_u^n <_{\mathbb{T}} e_a^n$  and  $e_a^n <_{\mathbb{T}} e_a^j$  and  $e_a^j <_{\mathbb{T}} e_v$ , then,  $e_u^n <_{\mathbb{T}} e_a^n <_{\mathbb{T}} e_v$ , so, from chain isolation,  $\# \xi(\mathbb{T}, T_n, T_m)$ . Thus, from Def. 32  $\hat{S}_H | \hat{T}_n$  is not included in  $LVis(\hat{S}_H, T_i)$ . Thus for any  $T_n \in \psi_{\mathbb{T}}(T_i, x)$  ( $n \neq i$ ),  $\forall op_n = w_n(x)v \rightarrow \in \mathbb{T} | T_n$ ,  $op_n \notin LVis(\hat{S}_H, T_i)$ .

Given  $\psi_{\mathbb{T}}(T_i, x)$ , from Lemma 37,  $\exists e_v^k = g_k(x)v \in \mathbb{T} | T_k$  s.t.  $T_k$  is the first element of  $\psi_{\mathbb{T}}(T_i, x)$  that is initial and non-local, and either of the following is true:

i)  $v = 0$  and  $\# T_l \in \mathbb{T}$  s.t.  $e_u^l = s_l(x)v \in \mathbb{T} | T_l$  and  $e_u^l <_{\mathbb{T}} e_v^k$ .

Then, either  $\exists e_u^l = s_l(x)v \in \mathbb{T} | T_l$  and  $e_v^k <_{\mathbb{T}} e_u^l$  or  $\# e_u^l = s_l(x)v \in \mathbb{T} | T_l$ .

If  $\exists e_u^l = s_l(x)v \in \mathbb{T} | T_l$  and  $e_v^k <_{\mathbb{T}} e_u^l$ , then from Lemma 37,  $e_u^l = \circ s_l(x)v \in \mathbb{T} | T_l$ . Thus, by definition of isolation order,  $T_k \dot{<}_{\mathbb{T}}^x T_l$ .

Thus, if  $T_l \dot{<}_{\mathbb{T}}^x T_i$ , then, from Lemma 39,  $T_l$  is aborted or live in  $\mathbb{T}$ , so, by construction,  $\hat{T}_l$  is aborted in  $\hat{S}_H$ . Since  $\hat{T}_l$  is not committed in  $\hat{S}_H$ , then

$\hat{T}_l | \hat{S}_H$  is not included as a whole in  $LVis(\hat{S}_H, T_i)$ . Furthermore,  $\hat{S}_H | \hat{T}_l$  can be omitted from  $LVis(\hat{S}_H, T_i)$ . From unique routine updates, there cannot be  $T_n \in \xi(\mathbb{T}, T_l, T_i)$  s.t.  $\exists \circ s_n(x)0$ , so since  $v = 0$  and from self-containment,  $\nexists \xi(\mathbb{T}, T_l, T_i)$ . Thus, from Def. 32,  $\hat{S}_H | \hat{T}_l \notin LVis(\hat{S}_H, T_i)$ . Then, for any write operation execution  $op_l = w_l(x)v' \rightarrow ok_l$  in any such  $T_l$ ,  $op_l \notin LVis(\hat{S}_H, T_i)$  (and  $v = 0$ ).

Alternatively, if  $T_i \prec_{\mathbb{T}}^x T_l$ , then since  $e_a \prec_{\mathbb{T}} e_v$ , then  $e_v \prec_{\mathbb{T}} e_u^l$ , so  $T_i \prec_{\mathbb{T}}^x T_l$ , and thus  $T_i \prec_{\hat{S}_H} T_l$ , which means that  $\hat{S}_H | \hat{T}_l \notin LVis(\hat{S}_H, T_i)$ . In either case for any write operation execution  $op_l = w_l(x)v' \rightarrow ok_l$  in any such  $T_l$ ,  $op_l \notin Vis(\hat{S}_H, T_i)$  (and  $v = 0$ ).

On the other hand, if  $\nexists e_u^l = s_l(x) \square \in \mathbb{T} | T_l$ , either  $T_l \prec_{\mathbb{T}} T_i$ , or  $T_l \dot{\prec}_{\mathbb{T}} T_i$ . In the latter case, if  $T_i \prec_{\mathbb{T}} T_l$ , then, trivially, no subset of  $\hat{S}_H | \hat{T}_l$  is contained in  $LVis(\hat{S}_H, T_l)$ . If  $T_i \dot{\prec}_{\mathbb{T}} T_l$ , then there does not exist  $\xi(\mathbb{T}, T_l, T_i)$ , so, from Def. 32, no subset of  $\hat{S}_H | \hat{T}_l$  is contained in  $LVis(\hat{S}_H, T_l)$ . If  $T_l \prec_{\mathbb{T}} T_i$ , then either  $\mathbb{T} | T_l$  contains some write operation  $op_l = w_l(x)v' \rightarrow ok_l$  or it does not. However, from view write obligato, since  $T_l \prec_{\mathbb{T}} T_i$ , there must be  $s_l(x) \square \in \mathbb{T} | T_l$ , so, there is no such  $op_l$ . Then vacuously, for any write operation execution  $op_l = w_l(x) \square \rightarrow ok_l$  in any such  $T_l$ ,  $op_l \notin LVis(\hat{S}_H, T_i)$  (and  $v = 0$ ).

- ii)  $v \neq 0$  and  $\exists T_l \in \mathbb{T}$  s.t.  $e_u^l = \circ s_l(x)v \in \mathbb{T} | T_l$  and  $e_u^l \prec_{\mathbb{T}} e_v^l$ .

Since  $\mathbb{T}$  is consonant, then  $e_u^l$  is consonant, so  $\exists op_l = w_l(x)v \rightarrow ok_l$  s.t.  $op_l \rightsquigarrow e_u^l$ .

Let us first assume that  $T_l$  is committed in  $\mathbb{T}$ . Then since  $T_l \prec_{\mathbb{T}}^x T_i$  (so  $\hat{T}_l \prec_{\hat{S}_H} \hat{T}_i$ ),  $op_l \in LVis(\hat{S}_H, T_i)$ .

If, on the other hand,  $T_l$  is not committed in  $\mathbb{T}$ , then, since  $e_v^k$  is consonant, then  $e_u^l$  is the ultimate routine update event in  $\mathbb{T} | T_l$ . Therefore, from decisiveness,  $e_u^l$  is either the closing routine update event on  $x$  in  $\mathbb{T} | T_l$ , or  $e_u^l \prec_{\mathbb{T}} res_l(C_l) \prec_{\mathbb{T}} e_v$ . Since  $T_l$  is not committed in  $\hat{S}_H$ ,  $e_u^l$  is the closing routine update event, so  $op_l$  is the closing write on  $x$  in  $T_l$ . Because of this, and since  $\hat{T}_l \prec_{\hat{S}_H} \hat{T}_i$ ,  $\hat{S}_H | \hat{T}_l$  can be included in  $LVis(\hat{S}_H, T_i)$ . Then, since  $T_i \rightsquigarrow T_l$ , then there exists  $\xi(\mathbb{T}, T_l, T_i)$ , so according to Def. 32,  $\hat{S}_H | \hat{T}_l$  is included in  $LVis(\hat{S}_H, T_i)$ , and therefore  $op_l \in LVis(\hat{S}_H, T_i)$ .

From minimalism,  $e_u^l$  is not followed in  $\mathbb{T} | T_l$  by another  $\circ s_l(x) \square$ . Since  $op_l \rightsquigarrow e_u^l$ ,  $\nexists op'_l = w_l(x) \square \rightarrow ok_l$  s.t.  $op_l \prec_{\mathbb{T} | T_l} op'_l$ .

Let  $T_m$  be any transaction in  $\mathbb{T}$  s.t.  $T_l \prec_{\mathbb{T}} T_m \prec_{\mathbb{T}} T_i$ . If  $\nexists w_m(x) \square \rightarrow ok_m \in \mathbb{T} | T_m$ , then trivially, for any such  $T_m$   $\nexists w_m(x)v \rightarrow ok_m \in LVis(\hat{S}_H, T_i)$ . Thus, let there be  $op_m = w_m(x)v' \rightarrow ok_m \in \mathbb{T} | T_m$ .

If  $T_m \in \psi_{\mathbb{T}}(T_{\mathbb{T}}, x)i$ , then, as shown above,  $\hat{S}_H | \hat{T}_m \notin LVis(\hat{S}_H, T_i)$  and therefore  $op_m \notin LVis(\hat{S}_H, T_i)$ . Hence, let  $T_m \notin \psi_{\mathbb{T}}(T_{\mathbb{T}}, x)i$ .

Either  $tr_m \prec_{\mathbb{T}} T_i$  or  $tr_m \dot{\prec}_{\mathbb{T}} T_i$ . In the latter case, if  $T_m$  is not committed,  $T_m$  can be excluded from  $LVis(\hat{S}_H, T_i)$ . Since in that case there does not exist  $\xi(\mathbb{T}, T_m, T_i)$ , then, by Def. 32,  $\hat{S}_H | \hat{T}_m \notin LVis(\hat{S}_H, T_i)$  and therefore  $op_m \notin LVis(\hat{S}_H, T_i)$ . If  $T_m$  is committed, then if  $w_m(x)v' \rightarrow ok_m \in \mathbb{T} | T_m$ , then by commit write obligato, there would have to exist  $e_u^m = \circ s_m(x)v' \in \mathbb{T} | T_m$ , which would imply that  $T_m \prec_{\mathbb{T}}^x T_i$ , which

contradicts the assumption that  $tr_m \dot{\prec}_{\mathbb{T}} T_i$ . Therefore, there is no such transaction.

If  $T_m \dot{\prec}_{\mathbb{T}} T_i$ , then, if  $T_m \dot{\prec}_{\mathbb{T}} T_l$ , then  $\hat{T}_m \prec_{\hat{S}_H} \hat{T}_l$ , and therefore  $op_m \prec_{LVis(\hat{S}_H, T_i)} op_l$ , which has no bearing on whether  $op_i$  is preceded by a corresponding write operation. Hence, let  $T_l \dot{\prec}_{\mathbb{T}} T_m \dot{\prec}_{\mathbb{T}} T_i$ . Then,  $T_m$  is either committed in  $\mathbb{T}$  or not.

If  $T_m$  is committed, then from commit write obligato  $\exists e_u^m = \circ s_m(x)v' \in \mathbb{T}|T_m$ . From isolation, it is impossible that  $T_i \dot{\prec}_{\mathbb{T}} T_m$  or  $T_m \dot{\prec}_{\mathbb{T}} T_l$ , then  $T_l \dot{\prec}_{\mathbb{T}} T_m \dot{\prec}_{\mathbb{T}} T_i$ .

Then, if  $T_j \dot{\prec}_{\mathbb{T}} T_m \dot{\prec}_{\mathbb{T}} T_i$ , since  $e_a$  is consonant, it is needed, so  $\exists e_u^j = s_j(x)\square \in \mathbb{T}|T_j$  s.t.  $e_u^j \prec_{\mathbb{T}} e_a$ . In addition, since  $T_j \dot{\prec}_{\mathbb{T}} T_m \dot{\prec}_{\mathbb{T}} T_i$ , then by definition of isolation,  $\exists e = s_m(x)\square \in \mathbb{T}|T_m$ , or  $eg_m(x)\square \in \mathbb{T}|T_m$ , so  $e_u^j \prec_{\mathbb{T}} e \prec_{\mathbb{T}} e_v$ . Since  $e_a \prec_{\mathbb{T}} e_v$ , then  $e_u^j \prec_{\mathbb{T}} e \prec_{\mathbb{T}} e_u$ . Thus, by definition of abort accord,  $T_m$  cannot be in  $\mathbb{T}$ , thus there is no such  $T_m$ .

If  $T_l \dot{\prec}_{\mathbb{T}} T_m \dot{\prec}_{\mathbb{T}} T_j$ , then, since  $T_m \notin \psi_{\mathbb{T}}(T_{\mathbb{T}}, x)i$ , then, from Lemma 39,  $T_m$  cannot be committed in  $\mathbb{T}$ , thus, there is also no such  $T_m$ .

Since there is no such  $T_m$  that is both committed and contains an operation execution such as  $op_m$ , then for any such  $T_m$ ,  $\hat{S}_H|\hat{T}_m \not\subseteq LVis(\hat{S}_H, T_i)$  and therefore  $op_m \notin LVis(\hat{S}_H, T_i)$ .

On the other hand, if  $T_m$  is not committed in  $\mathbb{T}$ , then, since  $op_m$  is consonant, either  $op_m \rightsquigarrow e_u^m$  where  $e_u^m = \circ s_m(x)v' \in \mathbb{T}|T_m$ , or  $\# \circ s_m(x)\square \in \mathbb{T}|T_m$ . Since, from view write obligato the latter case is impossible, then  $\exists e_u^m = \circ s_m(x)v' \in \mathbb{T}|T_m$ . Then, from the definition of isolation order,  $T_l \dot{\prec}_{\mathbb{T}} T_m \dot{\prec}_{\mathbb{T}} T_i$ . Since  $T_m$  is not committed, then  $\hat{T}_m$  can be omitted in  $LVis(\hat{S}_H, T_i)$ . Due to unique routine updates, there cannot be any  $T_n \in \mathbb{T}$  s.t.  $\circ s_n(x)v''$  where  $v'' = v$ . Therefore, given any  $\xi(\mathbb{T}, T_m, T_i)$  and there is no transaction to satisfy self-containment. Thus, there is no such  $\xi(\mathbb{T}, T_m, T_i)$ . Thus, by Def. 32,  $\hat{S}_H|\hat{T}_m \not\subseteq LVis(\hat{S}_H, T_i)$  and therefore  $op_m \notin LVis(\hat{S}_H, T_i)$ .

Because there is no  $T_m$  s.t.  $\hat{S}_H|\hat{T}_m \subseteq LVis(\hat{S}_H, T_i)$  and  $op_m \in LVis(\hat{S}_H, T_i)$ , then there is no write operation execution  $op'$  on  $x$  s.t.  $op_l \prec_{LVis(\hat{S}_H, T_i)} op_i$  and  $v \neq 0$ .  
 $op' \prec_{LVis(\hat{S}_H, T_i)} op_i$ . Therefore  $w_l(x)v \rightarrow ok_l \prec_{Vis(\hat{S}_H, \hat{T}_i)} op_i$  and  $v \neq 0$ .

□

**Lemma 49** (All Non-local Read Last-use Consistency). *If for some sequential history  $S$ ,  $\hat{S}_H|tr_j \in Vis(S, T_i)$ , for any  $op_j \in \mathbb{T}|T_j$  s.t.  $op_j = r_i(op_j) \rightarrow v$  either:*

- 1)  $v \neq 0$  and  $\exists op_k \in Vis(\hat{S}_H, \hat{T}_k)$  for some  $T_k$  s.t.  $op_k = w_k(x)v \rightarrow ok_j$ ,  $op_k \prec_{Vis(\hat{S}_H, \hat{T}_i)} op_j$ , or
- 2)  $v = 0$  and  $\# op_k \in Vis(\hat{S}_H, \hat{T}_i)$  s.t.  $op_k = w_k(x)v' \rightarrow ok_k$  and  $op_k \prec_{Vis(\hat{S}_H, \hat{T}_i)} op_j$ .

*Proof.* Either  $v \neq 0$  or  $v = 0$ .

- 1) If  $v \neq 0$ , from Lemma 48, since  $v \neq 0$  then  $\exists op_k = w_k(x)v \rightarrow ok_k \in \mathbb{T}|T_k$  s.t.  $op_k \prec_{LVis(\hat{S}_H, T_j)} op_j$ .

From Lemma 41,  $\forall T_l$  if  $\hat{T}_l \hat{\subseteq} LVis(\hat{S}_H, T_j)$  then  $\hat{T}_l \hat{\subseteq} LVis(\hat{S}_H, T_i)$  and  $LVis(\hat{S}_H, T_i)|T_l = LVis(\hat{S}_H, T_j)|T_l$ . Hence,  $T_k \hat{\subseteq} LVis(\hat{S}_H, T_i)$  and  $op_k \in$

$LVis(\hat{S}_H, T_i)$ . Furthermore, if  $T_k \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_j)$ , then  $T_k <_{\hat{S}_H} T_j$ , so  $op_k <_{LVis(\hat{S}_H, T_i)} op_j$ .

For the sake of contradiction, let us assume there exists  $op_l = w_l(x)v \rightarrow ok_l \in \mathbb{T}|T_l$  s.t.  $op_k <_{LVis(\hat{S}_H, T_i)} op_l <_{LVis(\hat{S}_H, T_i)} op_j$ . Since from Lemma 48, there is no such transaction in  $LVis(\hat{S}_H, T_i)$ , then  $T_l$  is such that  $\hat{T}_l \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_i)$  s.t. and  $\hat{T}_l \not\stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_j)$  (and  $\hat{T}_l <_{\hat{S}_H} \hat{T}_j$ ).

If  $\hat{T}_l \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_i)$ , then, by definition,  $T_l$  is not committed in  $\mathbb{T}$ .

If  $T_l \dot{<} x \mathbb{T} T_j$ , then this is a contradiction by analogy to Lemma 48.

If  $T_j \dot{<} x \mathbb{T} T_l$ , then, from Def. 31,  $\hat{T}_j <_{\hat{S}_H} \hat{T}_l$ , which implies that  $op_j <_{LVis(\hat{S}_H, T_j)} op_l$ , which is a contradiction.

If  $T_l \dot{\not<} x \mathbb{T} T_j$ , then  $\#e_u^k = \circ s_l(x) \square \in \mathbb{T}|T_l$ . Hence, from Def. 31,  $\hat{T}_j <_{\hat{S}_H} \hat{T}_l$ , which implies that  $op_j <_{LVis(\hat{S}_H, T_j)} op_l$ , which, again, is a contradiction.

Thus, there is no such  $T_l$ , and, therefore,  $op_k <_{LVis(\hat{S}_H, T_i)} op_j$  (and  $v \neq 0$ ).

- 2) If  $v = 0$ , let us assume by contradiction, that there exists such  $T_k$  and  $op_k$ . From Lemma 48, since  $v = 0$  then  $\#op_l = w_l(x) \square \rightarrow ok_l \in \mathbb{T}|T_l$  s.t.  $op_l <_{LVis(\hat{S}_H, T_j)} op_j$ . Hence,  $T_k$  must be such that  $\hat{T}_k \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_i)$  s.t. and  $\hat{T}_k \not\stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_j)$  (and  $T_k <_{\hat{S}_H} T_j$ ).

From Lemma 42,  $\forall T_l$  if  $\hat{T}_l \not\stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_j)$  and  $\exists \xi(\mathbb{T}, T_l, T_j)$  then  $\hat{T}_l \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_i)$ . Thus, if  $T_k$  is such that  $\hat{T}_k \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_j)$  and  $\hat{T}_k \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_i)$ , then  $\# \xi(\mathbb{T}, T_k, T_j)$ .

If  $\hat{T}_k \stackrel{\circ}{\subseteq} LVis(\hat{S}_H, T_i)$ , then, by definition,  $T_k$  is not committed in  $\mathbb{T}$ .

If  $T_k \dot{<} x \mathbb{T} T_j$ , then this is a contradiction by analogy to Lemma 48.

If  $T_j \dot{<} x \mathbb{T} T_k$ , then, from Def. 31,  $\hat{T}_j <_{\hat{S}_H} \hat{T}_k$ , which implies that  $op_j <_{LVis(\hat{S}_H, T_j)} op_k$ , which is a contradiction.

If  $T_k \dot{\not<} x \mathbb{T} T_j$ , then  $\#e_u^k = \circ s_k(x) \square \in \mathbb{T}|T_k$ . Hence, from Def. 31,  $\hat{T}_j <_{\hat{S}_H} \hat{T}_k$ , which implies that  $op_j <_{LVis(\hat{S}_H, T_j)} op_k$ , which, again, is a contradiction.

Thus, there is no such  $T_k$ , and, therefore,  $\#op_k \in LVis(\hat{S}_H, \hat{T}_i)$  s.t.  $op_k = w_k(x)v' \rightarrow ok_k$  and  $op_k <_{LVis(\hat{S}_H, \hat{T}_i)} op_j$  (and  $v = 0$ ).

□

**Lemma 50** (Local Read Last-use Consistency). *For any  $op_i \in \mathbb{T}|T_i$  s.t.  $op_i = r_i(op_i) \rightarrow v$  and  $op_i$  is local, then  $\exists op'_i \in LVis(\hat{S}_H, T_i)$  s.t.  $op'_i = w_i(x)v \rightarrow ok_i$ ,  $op'_i <_{LVis(\hat{S}_H, T_i)} op_i$ .*

*Proof.* From local read consonance it follows that for any  $op_i \in \mathbb{T}|T_i$  s.t.  $op_i$  is local, then  $\exists op'_i \in \mathbb{T}|T_i$  and  $op'_i <_{\mathbb{T}|T_i} op_i$ . Thus,  $op'_i <_{\hat{S}_H|\hat{T}_i} op_i$ . Since  $op_i$  and  $op_j$  operate on the same variable, then trivially,  $op_i \in LVis(\hat{S}_H, T_i) \iff op'_i \in LVis(\hat{S}_H, T_i)$ . Hence,  $op'_i <_{LVis(\hat{S}_H, T_i)} op_i$ . □

**Corollary 8** (Total Local Read Last-use Consistency). *For any  $op_i \in \mathbb{T}|T_i$  s.t.  $op_i = r_i(op_i) \rightarrow v$  and  $op_i$  is local, then for any  $T_j$ ,  $\exists op'_i \in LVis(\hat{S}_H, T_j)$  s.t.  $op'_i = w_i(x)v \rightarrow ok_i$ ,  $op'_i \leq_{LVis(\hat{S}_H, T_j)} op_i$ .*

**Lemma 51** (Total Write Consistency). *For any  $T_i, T_j$ ,  $\forall op_i \in LVis(\hat{S}_H, T_j)$  s.t.  $op_i = w_i(op_i)v \rightarrow ok_i \in \mathbb{T}|T_i$ ,  $v$  is in the domain of  $x$ .*

*Proof.* Follows from write consonance.  $\square$

## A.5 Proof for Theorem 1

*Proof for Theorem 1: Trace Last-use Opacity.* For every transaction  $T_i \in \mathbb{T}$ , given  $\hat{S}_H$  constructed by Def. 31,

- i) If  $T_i$  is committed in  $H$ , from Corollary 6,  $\forall op_j \in H|T_j$  s.t.  $op_j = r_i(op_j) \rightarrow v$  and  $op_j$  is non-local, either:
  - a)  $v \neq 0$  and  $\exists op_k \in Vis(\hat{S}_H, \hat{T}_k)$  for some  $T_k$  s.t.  $op_k = w_k(x)v \rightarrow ok_j$ ,  $op_k \leq_{Vis(\hat{S}_H, \hat{T}_i)} op_j$ , or
  - b)  $v = 0$  and  $\nexists op_k \in Vis(\hat{S}_H, \hat{T}_i)$  s.t.  $op_k = w_k(x)v \rightarrow ok_k$  and  $op_k <_{Vis(\hat{S}_H, \hat{T}_i)} op_j$ .

In addition, from Corollary 7,  $\forall op_j \in H|T_j$  s.t.  $op_j = r_i(op_j) \rightarrow v$  and  $op_j$  is local,  $\exists op'_j \in Vis(\hat{S}_H, \hat{T}_j)$  s.t.  $op'_j = w_j(x)v \rightarrow ok_j$ ,  $op'_j \leq_{Vis(\hat{S}_H, \hat{T}_i)} op_j$ .  
Furthermore, from Lemma 51,  $\forall op'_j \in H|T_j$  s.t.  $op_j = w_i(op_j)v \rightarrow ok_j$ ,  $v$  is in the domain of  $x$ .

Thus,  $Vis(\hat{S}_H, T_i)$  is legal, and therefore  $T_i$  is legal.

- ii) If  $T_i$  is not committed in  $H$ , from Lemma 49,  $\forall op_j \in H|T_j$  s.t.  $op_j = r_i(op_j) \rightarrow v$  and  $op_j$  is non-local, either:
  - a)  $v \neq 0$  and  $\exists op_k \in LVis(\hat{S}_H, \hat{T}_k)$  for some  $T_k$  s.t.  $op_k = w_k(x)v \rightarrow ok_j$ ,  $op_k \leq_{LVis(\hat{S}_H, \hat{T}_i)} op_j$ , or
  - b)  $v = 0$  and  $\nexists op_k \in LVis(\hat{S}_H, \hat{T}_i)$  s.t.  $op_k = w_k(x)v \rightarrow ok_k$  and  $op_k <_{LVis(\hat{S}_H, \hat{T}_i)} op_j$ .

In addition, from Corollary 8,  $\forall op_j \in H|T_j$  s.t.  $op_j = r_i(op_j) \rightarrow v$  and  $op_j$  is local,  $\exists op'_j \in LVis(\hat{S}_H, \hat{T}_j)$  s.t.  $op'_j = w_j(x)v \rightarrow ok_j$ ,  $op'_j \leq_{LVis(\hat{S}_H, \hat{T}_i)} op_j$ .  
Furthermore, from Lemma 51,  $\forall op'_j \in H|T_j$  s.t.  $op_j = w_i(op_j)v \rightarrow ok_j$ ,  $v$  is in the domain of  $x$ .

Thus,  $LVis(\hat{S}_H, T_i)$  is legal, and therefore  $T_i$  is last-use legal.

Since every committed transaction  $T_i \in H$  is legal if it is committed and last-use legal if it is not committed, then  $H$  is final-state last-use opaque.

Since a prefix of a harmonious  $\mathbb{T}$  is trivially also harmonious, then for every prefix  $\mathbb{T}'$  of  $\mathbb{T}$ ,  $H' = hist(\mathbb{T}')$  is also final-state last-use opaque. Thus,  $H$  is last-use opaque.  $\square$