

# Properties of 1D two-barrier quantum pump with harmonically oscillating barriers

M. M. Mahmoodian,<sup>1</sup> L. S. Braginskii,<sup>2</sup> and M. V. Entin<sup>2</sup>

Institute of Semiconductor Physics, Siberian Division,  
Russian Academy of Sciences,  
Novosibirsk, 630090 Russia

We study a one-dimensional quantum pump composed of two oscillating delta-functional barriers. The linear and non-linear regimes are considered. The harmonic signal applied to any or both barriers causes the stationary current. The direction and value of the current depend on the frequency, distance between barriers, value of stationary and oscillating parts of barrier potential and the phase shift between alternating voltages.

The quantum pump or a device which generate a stationary current under action of alternating voltage was a subject of numerous recent publications (for example,<sup>1-15</sup>). The quantum pump is essentially analogous to various versions of the photovoltaic effect, studied in detail from the beginning of the 1980s<sup>16-19</sup>. The difference is that the photovoltaic effect is related to the emergence of a direct current in a homogeneous macroscopic medium (the only exception is the mesoscopic photovoltaic effect), while a pump is a microscopic object. From the phenomenological point of view, the emergence of a direct current in the pump is not surprising since any asymmetric microcontact can rectify ac voltage. However, analysis of adiabatic transport in a quantum-mechanical object leads to new phenomena, such as quantization of charge transport<sup>20</sup>. The quantum pump is a sample of phenomena important in living matter such as active ion transport through the cell membrane and bacterial motion (biological motors).

In the recent paper<sup>21</sup> we have studied the one-dimensional quantum pump with two oscillating delta-like potential barriers or wells. We have found a variety of regimes of the pump operation, depending on the system parameters. In this paper we continue this study, concentrating on the non-considered cases, aimed especially at low-frequency and non-linear operation modes of the electronic pump.

## Basic Equations

We study a one-dimensional system with a potential (Fig. 1)

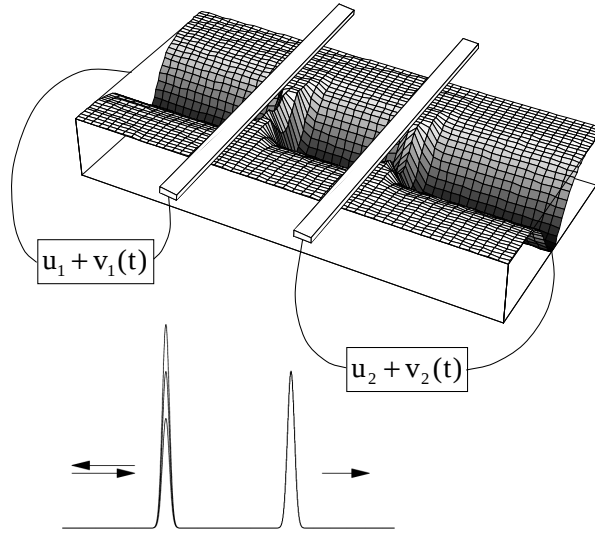


FIG. 1: Up: The draft of potential of the pump. Down: One-dimensional model of the pump.

$$U(x) = (u_1 + v_1(t)) \delta(x + d) + (u_2 + v_2(t)) \delta(x - d); \quad (1)$$

where  $v_1(t) = v_1 \sin(\omega t)$ ;  $v_2(t) = v_2 \sin(\omega t + \phi)$ ,  $2d$  is the distance between  $\delta$ -shaped barriers (wells); quantities  $u$  and  $v$  are measured in units of  $\hbar^2/m d$  ( $m$  is the electron mass); momentum  $p$  is measured in units of  $\hbar/d$ ; energy  $E$  is measured in units of  $\hbar^2/2m d^2$ ; and frequency is measured in units of  $\hbar/2m d^2$ . In the absence of an ac signal, the system has two barriers for positive values of  $u_1$  and  $u_2$  and two wells for negative values of these parameters. This system may be considered as a quantum wire with two narrow gates (see Figure 1) to which alternating voltages are applied. A direct current can be induced only in an asymmetric system. The specific direction in this system is determined by any of factors: the difference of static voltages  $u_1$  and  $u_2$ , alternating voltages  $v_1$  and  $v_2$  or the phase shift between alternating voltages. Unlike diode system, the alternating voltages are applied to the pump by the capacitive method.

We assume that the electron gas is in equilibrium and the distribution functions are identical in the regions  $x < -d$  and  $x > d$ . The problem is to determine the direct current induced by the ac field.

The solution to the Schrodinger equation with the potential (1) is searched in the form

$$\psi = \sum_n e^{i(E + n!)t} \begin{cases} r_n e^{ip_n x} & x < -d; \\ a_n e^{ip_n x} + b_n e^{-ip_n x} & -d < x < d; \\ T_n e^{-i(p + p_n)x} & x > d; \end{cases} \quad (2)$$

Here,  $p_n = \sqrt{p^2 + n!}$  and  $p = \sqrt{2mE}$ . The wavefunction (2) corresponds to the wave incident on the barrier from the left. (In the following formulas, we mark directions of incident waves by indices "+" and "-"). Quantities  $T_n$  and  $r_n$  give the amplitudes of transmission (reflection) with absorption (for  $n > 0$ ) or emission (for  $n < 0$ ) of  $n$  ac field quanta, while quantity  $T_0$  determines the amplitude of the elastic process. If the value of  $p_n$  becomes imaginary, the waves moving away from the barriers should be treated as damped waves, so that  $\text{Im } p_n > 0$ .

The transmission amplitudes  $T_n$  obey the equations

$$\begin{aligned} v_1 v_2 g_{n-1} e^{-i' T_{n-2}} - i v_1 S_{n-1} + v_2 V_n e^{-i' T_{n-1}} - 2W_n + v_1 v_2 g_{n-1} e^{i'} + g_{n+1} e^{-i' T_n} + \\ i v_1 S_{n+1} + v_2 V_n e^{i' T_{n+1}} + v_1 v_2 g_{n+1} e^{i' T_{n+2}} = 2ip_{n+0}; \\ v_1 v_2 g_{n-1} e^{-i' T_{n-2}} - i v_1 S_n + v_2 V_{n-1} e^{-i' T_{n-1}} - 2W_n + v_1 v_2 g_{n-1} e^{i'} + g_{n+1} e^{-i' T_n} + \\ i v_1 S_n + v_2 V_{n+1} e^{i' T_{n+1}} + v_1 v_2 g_{n+1} e^{i' T_{n+2}} = 2ip_{n+0}; \end{aligned} \quad (3)$$

Here,  $g_n = \sin 2p_n = p_n$ ,

$$S_n = 2u_2 g_n + e^{2ip_n}; \quad V_n = 2u_1 g_n + e^{-2ip_n}; \quad (4)$$

$$W_n = 2u_1 u_2 g_n + (u_1 + u_2 - ip_n) e^{2ip_n}; \quad (5)$$

Provided that the electrons from the right and left of the contact are in equilibrium, and they have identical chemical potentials, the stationary current is

$$J = \frac{e}{h} \int_{-\infty}^{\infty} dE \sum_n (\mathcal{T}_n^+ - \mathcal{T}_n^-) f(E) (E + n!); \quad (6)$$

where  $f(E)$  is the Fermi distribution function, and  $\Theta(x)$  is the Heaviside step function. The current is determined by the transmission coefficients with real  $p_n$  only.

At a low temperature, it is convenient to differentiate the current with respect to the chemical potential:

$$G = e \frac{\partial J}{\partial \mu} = G_0 \sum_n (E + n!) (\mathcal{T}_n^+ - \mathcal{T}_n^-)_{p=p_F}; \quad (7)$$

Here,  $G_0 = 2e^2/h$  is the conductance quantum,  $h$  is the Planck constant, and  $p_F$  is the Fermi momentum. The resultant quantity  $G$  can be treated as a two-terminal photoconductance (the conductance for simultaneous change of chemical potentials of source and drain).

#### The asymptotic cases

Let us consider the limit  $v_1; v_2 \rightarrow u_1; u_2$ . The steady-state problem gives the transmission amplitude

$$T_0 = \frac{ip}{W_0} = \frac{ip^2}{2u_1 u_2 \sin 2p + (u_1 + u_2 - ip) p e^{2ip}}; \quad T_n \neq 0 = 0; \quad (8)$$

The scattering amplitude vanishes for  $p \rightarrow 0$  and experiences oscillations with a period  $p = \pi/2$ . For large values of  $u_{1,2}$ , quantity  $T_0$  has poles in the vicinity of points  $p = \pi n/2$ .

In the zeroth order of perturbation theory, the direct and reverse transmission coefficients coincide; consequently, the current vanishes. The current appears only in the second order of perturbation theory. Second-order corrections to the current come only from quantities  $T_0, T_1$ , and  $T_{-1}$ . Expanding in the ac signal, we obtain

$$\begin{aligned} G = G_0 \frac{p^2}{4W_0^2} \left\{ v_1^2 \frac{\mathcal{T}_0^+ \mathcal{T}_1^+}{W_1^2} (\dots) + \frac{\mathcal{T}_0^+ \mathcal{T}_1^-}{W_1^2} + \right. \\ \left. v_2^2 \frac{\mathcal{T}_0^- \mathcal{T}_1^-}{W_1^2} (\dots) + \frac{\mathcal{T}_0^- \mathcal{T}_1^+}{W_1^2} + \right. \\ \left. 2v_1 v_2 \text{Re} \frac{S_0 V_{-1}}{W_1^2} e^{-i'} (\dots) + \frac{S_0 V_1}{W_1^2} \frac{S_1 V_0}{W_1^2} e^{i'} + \right. \\ \left. 4v_1 v_2 \sin' \text{Im} \frac{S_0 V_0}{W_0 W_1} \frac{S_1 V_{-1}}{W_1^2} + 2 \frac{g_{-1}}{W_0} \frac{g_1}{W_0} \right\}; \end{aligned} \quad (9)$$



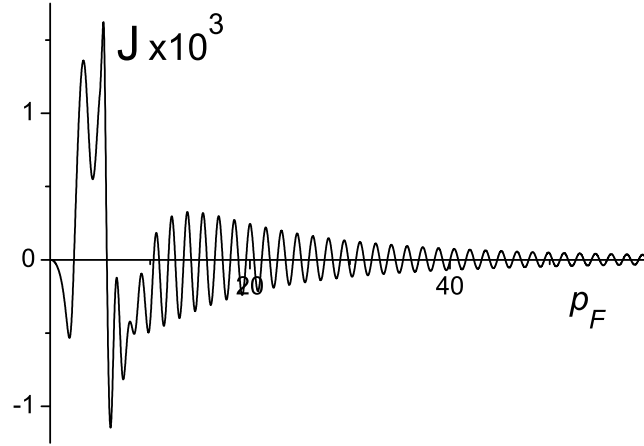


FIG. 2: The dependence of the stationary current  $J$  (in units  $eh/2 \cdot m d^2$ ) on the Fermi momentum in a symmetric structure  $u_1 = u_2 = 1$ ;  $v_1 = v_2 = 0.1$ ;  $\delta = 25$ ;  $\gamma' = 2$ .

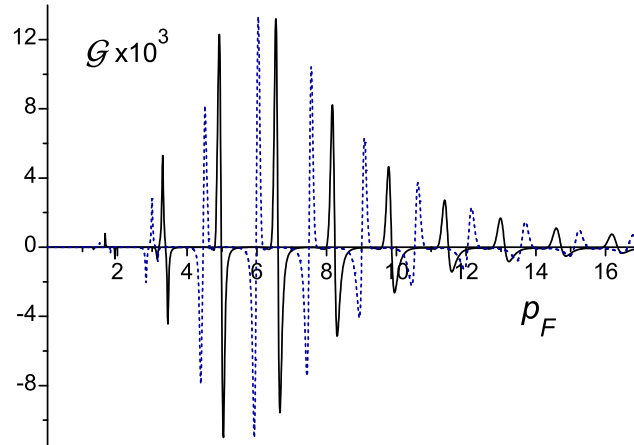


FIG. 3: The dependence of  $G$  on the Fermi momentum in a symmetric structure  $u_1 = u_2 = 1$ ;  $v_1 = v_2 = 0.1$ ;  $\delta = 1$ ;  $\gamma' = 2$ . The solid and dashed curves correspond to  $u_1 = 1$  and  $u_1 = -1$ , accordingly.

The Figure 8 depicts  $G$  for strong low-frequency alternating voltages. The resonance at  $p_F = -2$ , which presents in the low-signal regime (see the curve a) obtains the photon repetitions. They overlap composing damped (with the number of photons) oscillations. The oscillations rarefy with the increase of the frequency.

### Conclusions

The problem of stationary current induced by harmonic signals applied via two gates to one-dimensional system was studied. The considered system is described by the simplified double delta-functional time-dependent barriers. The regimes of weak and strong external voltage were considered. The current experiences oscillations as a function of chemical potential. These oscillations turn into interference resonances if the stationary barriers or the alternating voltages are strong enough. The resonances have many-photon nature. The current depends on the phase shift between gates.

The work was supported by grants of RFBR Nos. 05-02-16939 and 04-02-16398, Program for support of scientific schools of the Russian Federation No. 593.2003.2 and the Dynasty Foundation.

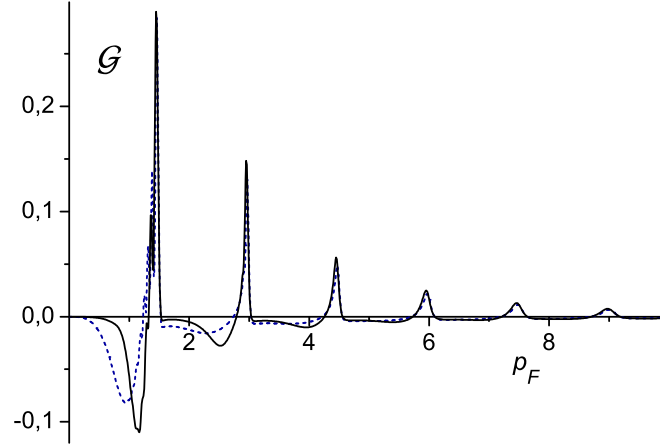


FIG. 4: The dependence of  $G$  on the Fermi momentum  $u_1 = u_2 = v_1 = v_2 = 5$ ;  $\lambda = 0.1$  for  $\phi' = \pi/2$  (solid curve) and  $\phi' = \pi/3$  (dashed curve).

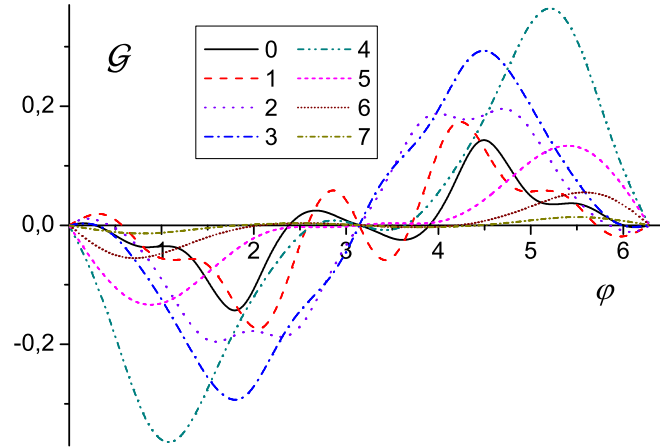


FIG. 5: The dependence of  $G$  on the phase shift  $\phi'$  in a symmetric structure  $\lambda = 1$ ;  $p_F = 2$ ;  $v_1 = v_2 = 5$ ;  $u_1 = u_2 = 0; 1; 2; 3; 4; 5; 6; 7$ .

<sup>2</sup> Electronic address: entin@isp.nsc.ru

<sup>1</sup> M. M. Oskalets and M. Buttiker, Phys. Rev. B 68, 161311(R) (2003).

<sup>2</sup> J. E. Avron, A. Elgart, G. M. Graf, and L. Sadun, Phys. Rev. B 62, R10618 (2000).

<sup>3</sup> J. E. Avron, A. Elgart, G. M. Graf, and L. Sadun, Phys. Rev. Lett. 87, 236601 (2001).

<sup>4</sup> O. Entin-Wohlman and Amnon Aharony, Phys. Rev. B 65, 195411 (2002).

<sup>5</sup> D. Cohen, Phys. Rev. B 68, 155303 (2003).

<sup>6</sup> Huan-Qiang Zhou, Sam Young Cho, and Ross H. McKenzie, Phys. Rev. Lett. 91, 186803 (2003).

<sup>7</sup> M. M. Oskalets and M. Buttiker, Phys. Rev. B 66, 205320 (2002).

<sup>8</sup> F. Renzozi, T. Brandes, Phys. Rev. B 64, 2045301 (2001).

<sup>9</sup> Shi-Liang Zhu and Z. D. Wang, Phys. Rev. B 65, 155313 (2002).

<sup>10</sup> C. S. Tang, C. S. Chu, Solid State Commun., 120, 353 (2001).

<sup>11</sup> Baigeng Wang, Jian Wang, and Hong Guo, Phys. Rev. B 68, 155326 (2003).

<sup>12</sup> M. Switkes, C. M. Marcus, K. Campman, and A. C. Gossard, Science 283, 1905 (1999).

<sup>13</sup> T. A. Itabaeumer, H. Ahmed, Japanese Journal of Applied Physics, part I, 41, Iss 4B, 2694 (2002).

<sup>14</sup> Y. Ono, Y. Takahashi, Applied Physics Lett., 82, 1221 (2003).

<sup>15</sup> S. V. Lotkhov, S. A. Bogoslovsky, A. B. Zorin, J. Niemeyer, Applied Physics Lett., 78, 946 (2001).

<sup>16</sup> V. I. Belinicher and B. I. Sturman, Usp. Fiz. Nauk 130, 415 (1980) [Sov. Phys. Usp. 23, 199 (1980)].

<sup>17</sup> M. D. Blokh, L. I. M. Agarill, and M. V. Entin, Fiz. Tekh. Poluprovodn. (Leningrad) 12, 249 (1978) [Sov. Phys. Semicond. 12, 143 (1978)].

<sup>18</sup> E. M. Baskin, L. I. M. Agarill, and M. V. Entin, Fiz. Tverd. Tela (Leningrad) 20, 2432 (1978) [Sov. Phys. Solid State 20, 1403 (1978)].

<sup>19</sup> E. L. Ivchenko and G. E. Pikus, Pis'ma Zh. Eksp. Teor. Fiz. 27, 640 (1978) [JETP Lett. 27, 604 (1978)].

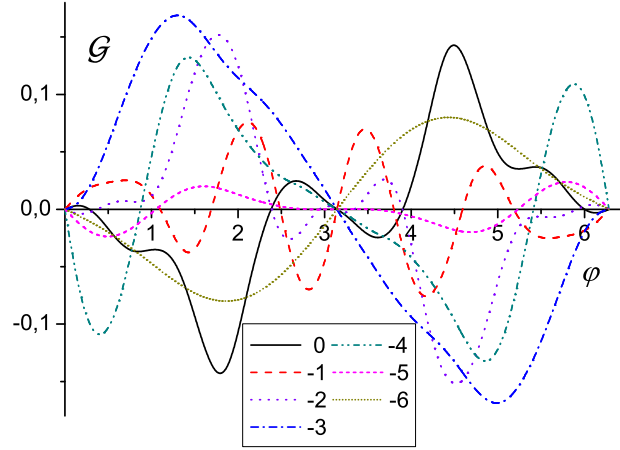


FIG . 6: The dependence of  $G$  on the phase shift  $\varphi$  in a symmetric structure  $l = 1$ ;  $p_F = 2$ ;  $v_1 = v_2 = 5$ ;  $u_1 = u_2 = 0$ ; 1; 2; 3; 4; 5; 6:

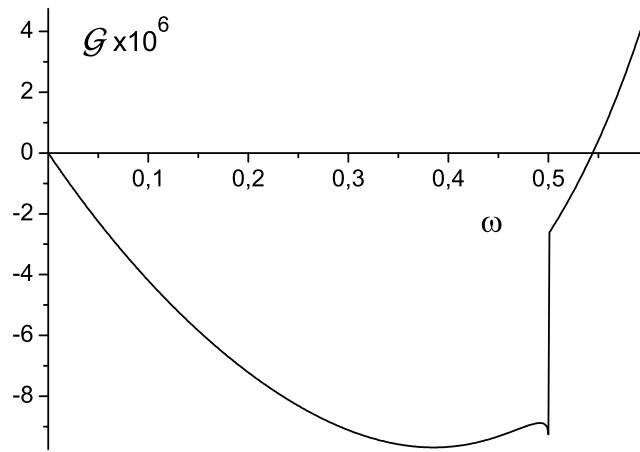


FIG . 7: The dependence of  $G$  on the frequency  $u_1 = 1$ ;  $u_2 = 3$ ;  $v_1 = v_2 = 0.1$ ;  $\varphi = \pi/2$ ;  $p_F = 0.71$ .

<sup>20</sup> D .J. Thouless, Phys. Rev. B 27, 6083 (1983).

<sup>21</sup> L .S. Braginskii, M .M .M akhm udian, and M .V .Entin, Zh. Eksp. Teor. Fiz. 127, 1046 (2005) [JETP 100, 920 (2005)].

<sup>22</sup> R .D .A stum ian, Phys. Rev. Lett. 91, 118102 (2003).

<sup>23</sup> S .W .K im , Phys. Rev. B 66, 235304 (2002).

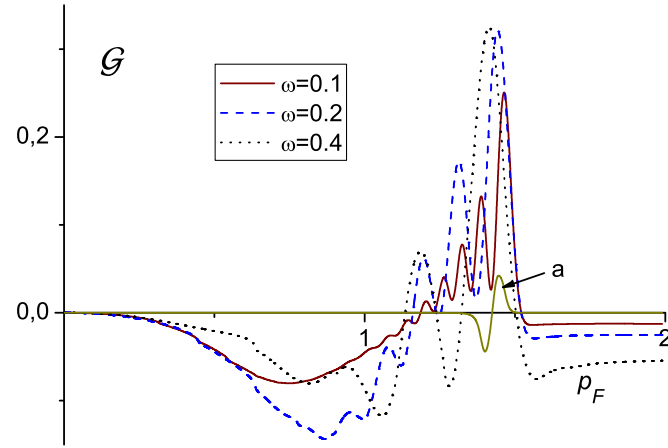


FIG. 8: The dependence of  $G$  on the Fermi momentum for different small frequencies (shown in the figure);  $u_1 = u_2 = v_1 = v_2 = 5$ ;  $\beta = 4$ . The curve a) represents low-signal result for  $u_1 = u_2 = 5$ ;  $v_1 = v_2 = 1$ ;  $\beta = 4$ ;  $\lambda = 0.1$ .