

2. TRANSFER STRATEGIES

Our main objective is to explore the VGG-M deep convolutional model [14], which was originally trained on ImageNet, in a transfer scheme for the classification task of the Pascal VOC 2007 dataset [15]. We perform extensive experiments to study the robustness of this architecture, detailed in Table 1, against different types of stresses.

Let us formalize the pre-trained deep model as a series of functions $\phi_i : \mathbb{R}^{m_i} \rightarrow \mathbb{R}^{n_i}$, where ϕ_i is the i^{th} layer of the network, m_1 is equal to the dimensionality of the input data and $n_i = m_{i+1}$ is the output of such layer.

In our stress tests, we choose a layer i up to which we freeze the network (i.e., we keep layers $\phi_1 \dots \phi_i$ untouched). At first, we use the output of layer ϕ_i to train an SVM. Then, we pick a stressing function T and retrain the model using $T(\phi_i)$ as input. Comparing the two scores, we can infer the network’s resiliency to the chosen stress.

To better highlight inherent properties of deep models, instead of specific characteristics of VGG-M [14], we also evaluate part of our experiments with GoogLeNet [16]. Furthermore, in order to differentiate these deep models from classical approaches, we also report comparative results with the recent Bag-of-Words (BoW) model’s BossaNova [17]. In all cases, we pre-process the images according to each model’s recommended protocol.

We also explore how to extend the results obtained for Pascal VOC 2007 by comparing part of the experiments with two other datasets: MIT-67 – Indoor [18] and UPMC Food-101 [19] (67 and 101 classes, respectively).

2.1. Dimensionality Reduction (DR)

In order to understand how redundant is the deep representation, the first stress tests drop dimensions from the feature vector. The number of dimensions p_i preserved at each step $1 \leq i \leq 20$ is proportional to the initial size n of the feature vector, according to the expression $p_i = \lfloor \frac{n * (21 - i)}{20} \rfloor$.

We contrast two strategies for selecting the $p_{i-1} - p_i$ dimensions dropped at each step i : **T_{DR-1}** drops randomly; and **T_{DR-2}** uses a PCA-based strategy. The latter discards the dimensions encoding less variance. To take in consideration the random choice in DR-1, we repeat the experiment 10 times.

2.2. Quantization (Q)

The other stressor diminishes the numerical precision of the representation, quantizing the feature vectors. Our objective is not to explore advanced quantization strategies here, but to consider 2 fast and simple scalar quantizations and to analyze their effect on a classification task. In our first one, **Q-1**, all dimensions are quantized in the same $h \in [1, 30]$ regular intervals, using the minimum (*min*) and maximum (*max*) scalar values observed in the training set for all dimensions.

	G 1	G 2	G 3	G 4	G 5	G 6	G 7	G 8
Conv.	L 1	L 5	L 9	L 11	L 13	–	–	–
Fully	–	–	–	–	–	L 16	L 18	L 20
ReLU	L 2	L 6	L 10	L 12	L 14	L 17	L 19	–
LRN	L 3	L 7	–	–	–	–	–	–
Pooling	L 4	L 8	–	–	L 15	–	–	–
Softmax	–	–	–	–	–	–	–	L 21

Table 1: VGG-M model. Description of layers (L) and groups (G) of the VGG-M model, from the MatConvNet toolbox [20], proposed by Chatfield et al. [14]. *Conv.* indicates a convolutional layer, *Fully* a fully connected layer, *ReLU* a Rectified Linear Unit layer, *LRN* a Local Response Normalization layer, *Pooling* a Max Pooling layer and *Softmax* the activation of the Softmax function.

In our second one, **Q-2**, we adapt the limits for each dimension individually, according, again, to values observed in the training set.

Formally, Q-1, using the global step $st = \frac{max-min}{h}$, has a single dictionary \mathcal{H} , generated by

$$\mathcal{H} = \{(min + \frac{st}{2}) + st * i \mid 0 \leq i < h\}$$

For Q-2, let \mathbf{x} be the feature matrix of the training feature vectors, and \mathbf{x}_t the t^{th} element from all the vectors. Using one step $st_t = \frac{max(\mathbf{x}_t) - min(\mathbf{x}_t)}{h}$ per dimension, Q-2 has n (number of dimensions) dictionaries, generated by

$$\mathcal{H}_t = \{(min(\mathbf{x}_t) + \frac{st_t}{2}) + st_t * i \mid 0 \leq i < h\}$$

Finally, in the quantization step, we assign to each element the value of the closest point in the dictionary. For Q-1 and Q-2, respectively, this is defined by:

$$T_{Q-1}(\mathbf{x}_{ij}) = \arg \min_y \{abs(\mathbf{x}_{ij} - y) \mid y \in \mathcal{H}\}$$

$$T_{Q-2}(\mathbf{x}_{ij}) = \arg \min_y \{abs(\mathbf{x}_{ij} - y) \mid y \in \mathcal{H}_j\}$$

2.3. Feature Compression (FC)

The final experiment **FC**, applies both stressors DR-2 and Q-2 simultaneously, dropping dimensions of the feature vector and quantizing the values of the remaining elements. Our goal is to measure any cross-effects between DR-2 and Q-2.

3. EXPERIMENTS

As explained, for a given experimental point, we freeze a pre-trained network at layer ϕ_i , discarding all upper layers. We then pick a stressing function T , and use the output of $T(\phi_i)$ as a feature vector in a transfer learning classification task. We ℓ_2 -normalize those feature vectors, and feed them to a linear SVM model¹ [21], measuring the model’s scores for dif-

¹For all setups, we use a regularization parameter $C = 1$; preliminary experiments shown very little variation when the C was cross-validated.

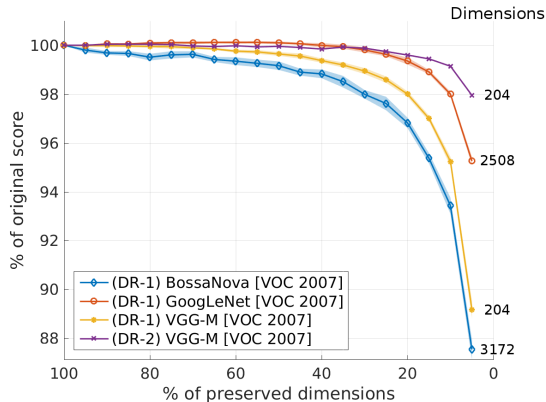


Fig. 2: Results for dimensionality reduction (DR) on VOC 2007 with standard deviation (shaded regions around the lines). In the horizontal axis, each value indicates the percentage of the original dimensions that is kept, while the corresponding score, with the respect to the initial one, is shown vertically. On the right side of the figure, we show the number of dimensions for each model, when only 5% of their initial size is preserved.

ferent choices of T . By picking stressing functions of different kinds and intensities (including the identity $T(x) = x$) we gain insight on the resiliency of deep models to those stresses.

For all our experiments, we report the classification scores in Mean Average Precision (mAP) for Pascal VOC 2007, and Accuracy (Acc) for Food-101 and MIT-67, following literature tradition on those datasets. Although we have tested the deep networks extensively, due to space constraints, we only report the experiments with layer 19 for the VGG-M, and with layer 151 for GoogLeNet. Those results are representative of our observations throughout the networks.

Table 2 shows the scores for our vanilla experiments, using setups without perturbing the feature vectors (i.e., $T(x) = x$). We simplify BossaNova’s pipeline for Pascal VOC 2007, disabling the concatenation with the classic Bag of Visual Words, and using a linear SVM instead of the recommended RBF kernel.

The results for our dimensionality reduction (DR) experiments in the Pascal VOC 2007 dataset are shown in Figure 2. Strong redundancy on the representations is detected, since across runs, small variations in the score were observed. GoogLeNet was the most robust against random dimension-

	VGG-M	GoogLeNet	BossaNova
Pascal VOC 2007 (mAP)	76.95%	80.58%	51.02%
MIT-67 Indoor (Acc)	63.35%	–	–
UPMC Food-101 (Acc)	46.22%	–	–
Feature Dimensionality	$4 * 10^3$	$5 * 10^4$	$6 * 10^4$

Table 2: Classification scores for deep and BoW strategies in a vanilla transfer scheme, with a linear SVM as classifier.

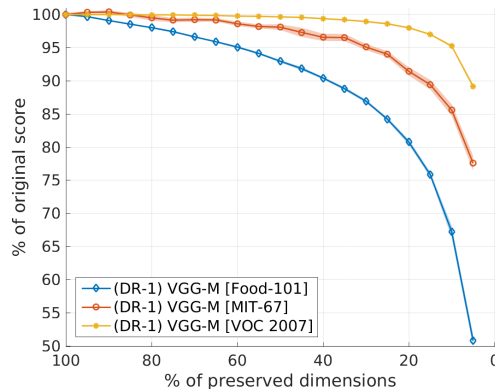


Fig. 3: Results for dimensionality reduction (DR) with VGG-M for Food-101, MIT-67 and VOC 2007. The datasets have 101, 67 and 20 classes, respectively.

ality perturbation DR-1, with an average mAP drop of 4.74% for 95% of the dimensions removed. However, GoogLeNet is, from start, 12-times bigger than CNN-M. Considering a direct comparison of descriptions of approximately the same size, the scores of the two models were equivalent.

Although BossaNova has shown similar resiliency to dimensionality reduction, VGG-M held better scores for every test point, despite having feature vectors 15-times smaller (right side of Figure 2).

The PCA-based strategy was very effective for preserving information while dropping dimensions. DR-2 held 97.95% of the mAP with 95% of dimensions removed, while DR-1 could only keep 89.16% of the mAP. Choosing the right dimensions to drop improves the robustness of the feature vectors to dimensionality perturbations.

The number of classes in the target dataset also seems to play an important role on performance resiliency, as seen in Figure 3. For correctly classifying the data, diverse datasets may need complementary feature points, which can be lost with dimensionality reduction.

Our quantization (Q) experiments, on the other hand, reduce the size of the feature vectors, from initial $32 * m_i$ bits², by aggressively limiting their values. Q-2 performed better than Q-1, indicating that adaptiveness to scale plays an important role (Figure 4).

Furthermore, Q-1 kept vanilla scores with 7 values, while Q-2 only needed 4. That represents a strong compression of the feature vectors, from $32 * m$ to $\lceil \log_2 4 \rceil * m$ bits.

The main results for DR and Q for VOC 2007 are summarized in Table 3, where each column indicates the maximum desired loss with respect to the original score for an experiment, while the cells indicate the minimum value which satisfies such requirement. For example, the second line of the second column reveals that with only 10% of the dimensions preserved, GoogLeNet score drops less than 2%.

²For 32-bit single-precision floating-point numbers.

	Original Score	DR-1 – 2%	DR-1 – 5%	DR-2 – 1%	Q-1 – 1%	Q-1 – 4%	Q-2 – 1%	Q-2 – 3%
VGG-M	76.95%	25%	10%	10%	6 values	4 values	3 values	2 values
GoogLeNet	80.58%	10%	5%	–	–	–	–	–
BossaNova	39.59%	50%	25%	–	–	–	–	–

Table 3: Minimum representation rate for Pascal VOC 2007. Each column indicates a requirement, and each line represents a dataset. The cells reveal the minimum representation needed for losing at most the indicated percentage. For instance, (DR-1 – 2%) + GoogLeNet = 10% means that with only 10% of the dimensions, we lose at most 2% of the initial score.

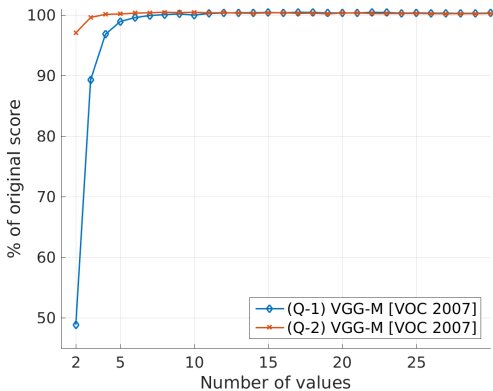


Fig. 4: Results for quantization of features on the base setup (VGG-M and Pascal VOC 2007). We can keep vanilla performance while reducing the feature vectors from $32 * m_i$ to $\lceil \log_2 7 \rceil * m_i$ and $\lceil \log_2 4 \rceil * m_i$ bits, using Q-1 and Q-2, respectively.

Finally, the results for FC with the base setup are shown in Figure 5. The flat region on the top represents combinations of parameters from DR-2 and Q-2 with complementary characteristics, indicating that the features can be compressed in terms of dimension and precision at the same time. We point, with the circle, square and cross markers, specific combinations of DR-2 and Q-2 with compression rates of 99.1%, 98.4% and 96.9%, respectively, while maintaining 97.8%, 99.1% and 99.6% of the original score.

Supplementary results and resources, including the source code for our experiments, are available online³.

4. DISCUSSION

In this paper we evaluated the robustness of deep representations by introducing perturbations to feature vectors extracted from upper layers of deep networks. We explored in depth the resiliency of features transferred from the VGG-M model to the Pascal VOC 2007 dataset. Our findings show that there is a high level of redundancy in deep representations, and thus, they may be heavily compressed. In our experiments, we achieve a compression rate of 98.4%, while losing only

³<https://github.com/MicaelCarvalho/DNNsUnderStress>

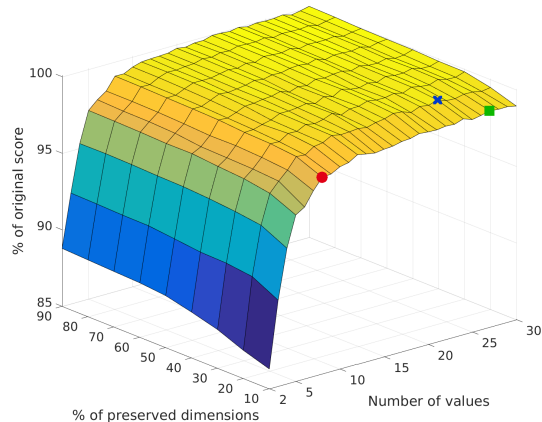


Fig. 5: Results for feature compression (FC). We reduce the number of dimensions and the precision of the feature vectors at the same time. The circle, square and cross, mark configurations with compression rates of 99.1%, 98.4% and 96.9%, respectively, while maintaining 97.8%, 99.1% and 99.6% of the original score.

0.88% of the original score for Pascal VOC 2007. To ensure our conclusions are not dataset- nor model-specific, our two main approaches – Dimensionality Reduction and Quantization – were extensively tested, with supplementary results for MIT-67, Food-101, GoogLeNet and BossaNova. Furthermore, we observed that despite being more compact, deep architectures are also more robust to perturbations, when compared to approaches based on Bags of Visual Words. Those findings are specially useful for image retrieval and metric learning [22], in which the size of the feature vector is crucial to achieve fast response times, and for applications involving portable devices or remote classification, in which data must be efficiently transferred over the network.

ACKNOWLEDGEMENTS

This research was partially supported by CNPq, Santander and Samsung Eletrônica da Amazônia Ltda., in the framework of law No. 8,248/91. We also thank CENAPAD-SP (Project 533), Microsoft Azure and Amazon Web Services for computational resources and Michel Fornaciali for his valuable advices.

5. REFERENCES

- [1] A. Krizhevsky, I. Sutskever, and G. Hinton, “ImageNet classification with deep convolutional neural networks,” *Advances in Neural Information Processing Systems (NIPS)*, pp. 1–9, 2012.
- [2] K. He, X. Zhang, S. Ren, and J. Sun, “Deep residual learning for image recognition,” *CoRR*, vol. abs/1512.03385, 2015.
- [3] Thibaut Durand, Nicolas Thome, and Matthieu Cord, “WELDON: Weakly Supervised Learning of Deep Convolutional Neural Networks,” in *Computer Vision and Pattern Recognition (CVPR)*, 2016.
- [4] J. Bruna and S. Mallat, “Invariant scattering convolution networks,” *IEEE Transactions on Pattern Analysis and Machine Intelligence (PAMI)*, vol. 35, no. 8, pp. 1872–1886, 2013.
- [5] Y. LeCun, Y. Bengio, and G. Hinton, “Deep learning,” *Nature*, vol. 521, no. 7553, pp. 436–444, 2015.
- [6] A. Razavian, H. Azizpour, J. Sullivan, and S. Carlsson, “CNN features off-the-shelf: an astounding baseline for recognition,” in *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2014.
- [7] J. Yosinski, J. Clune, Y. Bengio, and H. Lipson, “How transferable are features in deep neural networks?,” in *Advances in Neural Information Processing Systems (NIPS)*, 2014, pp. 3320–3328.
- [8] M. Chevalier, N. Thome, M. Cord, J. Fournier, G. Henaff, and E. Dusch, “LR-CNN for fine-grained classification with varying resolution,” *2015 IEEE International Conference on Image Processing (ICIP)*, Sep 2015.
- [9] Thibaut Durand, Nicolas Thome, and Matthieu Cord, “MANTRA: Minimum Maximum Latent Structural SVM for Image Classification and Ranking,” in *International Conference on Computer Vision (ICCV)*, 2015.
- [10] V. Vanhoucke, A. Senior, and M. Mao, “Improving the speed of neural networks on CPUs,” in *Advances in Neural Information Processing Systems (NIPS)*, 2011, pp. 1–8.
- [11] M. Courbariaux, Y. Bengio, and J.-P. David, “Training deep neural networks with low precision multiplications,” in *International Conference on Learning Representations (ICLR)*, 2015.
- [12] M. Courbariaux, Y. Bengio, and J.-P. David, “BinaryConnect: Training deep neural networks with binary weights during propagations,” in *Advances in Neural Information Processing Systems (NIPS)*, 2015.
- [13] P. Judd, J. Albericio, T. Hetherington, T. Aamodt, N. Jerger, R. Urtasun, and A. Moshovos, “Reduced-precision strategies for bounded memory in deep neural nets,” *CoRR*, vol. abs/1511.05236, 2015.
- [14] K. Chatfield, K. Simonyan, A. Vedaldi, and A. Zisserman, “Return of the devil in the details: Delving deep into convolutional nets,” in *British Machine Vision Conference (BMVC)*, 2014.
- [15] M. Everingham, L. Van Gool, C. Williams, J. Winn, and A. Zisserman, “The Pascal Visual Object Classes (VOC) Challenge,” *International Journal of Computer Vision (IJCV)*, vol. 88, no. 2, pp. 303–338, 2010.
- [16] C. Szegedy, W. Liu, Y. Jia, P. Sermanet, S. Reed, D. Anguelov, D. Erhan, V. Vanhoucke, and A. Rabinovich, “Going deeper with convolutions,” in *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2015, pp. 1–9.
- [17] S. Avila, N. Thome, M. Cord, E. Valle, and A. De A. Araújo, “Pooling in image representation: The visual codeword point of view,” *Computer Vision and Image Understanding (CVIU)*, vol. 117, no. 5, pp. 453–465, 2013.
- [18] A. Quattoni and A. Torralba, “Recognizing indoor scenes,” in *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2009, pp. 413–420.
- [19] X. Wang, D. Kumar, N. Thome, M. Cord, and F. Precioso, “Recipe recognition with large multimodal food dataset,” in *IEEE International Conference on Multimedia & Expo (ICME)*, 2015, pp. 1–6.
- [20] A. Vedaldi and K. Lenc, “MatConvNet – Convolutional neural networks for MATLAB,” in *ACM International Conference on Multimedia (MM)*, 2015.
- [21] R.-E. Fan, K.-W. Chang, C.-J. Hsieh, X.-R. Wang, and C.-J. Lin, “LIBLINEAR: A library for large linear classification,” *Journal of Machine Learning Research (JMLR)*, vol. 9, pp. 1871–187, 2008.
- [22] C. Le Barz, N. Thome, M. Cord, S. Herbin, and M. Sanfourche, “Exemplar based metric learning for robust visual localization,” *2015 IEEE International Conference on Image Processing (ICIP)*, Sep 2015.