

Local Distributed Verification*

Alkida Balliu^{1,2}, Gianlorenzo D'Angelo², Pierre Fraigniaud^{†1}, and Dennis Olivetti^{1,2}

¹ CNRS and University Paris Diderot, France.

²Gran Sasso Science Institute, L'Aquila, Italy.

Abstract

In the framework of distributed network computing, it is known that, for every network predicate, each network configuration that satisfies this predicate can be proved using distributed certificates which can be verified locally. However, this requires to leak information about the identities of the nodes in the certificates, which might not be applicable in a context in which privacy is desirable. Unfortunately, it is known that if one insists on certificates independent of the node identities, then not all network predicates can be proved using distributed certificates that can be verified locally. In this paper, we prove that, for every network predicate, there is a distributed protocol satisfying the following two properties: (1) for every network configuration that is legal w.r.t. the predicate, and for any attempt by an adversary to prove the illegality of that configuration using distributed certificates, there is a locally verifiable proof that the adversary is wrong, also using distributed certificates; (2) for every network configuration that is illegal w.r.t. the predicate, there is a proof of that illegality, using distributed certificates, such that no matter the way an adversary assigns its own set of distributed certificates in an attempt to prove the legality of the configuration, the actual illegality of the configuration will be locally detected. In both cases, the certificates are independent of the identities of the nodes. These results are achieved by investigating the so-called *local hierarchy* of complexity classes in which the certificates do not exploit the node identities. Indeed, we give a characterization of such a hierarchy, which is of its own interest

*The first, third and fourth authors received additional supports from the ANR project DISPLEXITY.

[†]Additional supports from the INRIA project GANG.

1 Introduction

1.1 Context and objective

In the framework of distributed network computing, local decision is the ability to check the legality of network configurations using a local distributed algorithm. This concern is of the utmost importance in the context of fault-tolerant distributed computing, where it is highly desirable that the nodes are able to collectively check the legality of their current configuration, which could have been altered by the corruption of variables due to failures. In this paper, we insist on locality, as we want the checking protocols to avoid involving long-distance communications across the network, for they are generally costly and potentially unreliable. More specifically, we consider the standard LOCAL model of computation in networks [14]. Nodes are assumed to be given distinct identities, and each node executes the same algorithm, which proceeds in synchronous rounds where all nodes start at the same time. In each round, every node sends messages to its neighbors, receives messages from its neighbors, and performs some individual computation. The model does not limit the amount of data sent in the messages, neither it limits the amount of computation that is performed by a node during a round. Indeed, the model places emphasis on the number of rounds before every node can output, as a measure of locality. (Note however that, up to some exceptions, our positive results involves messages of logarithmic size, and polynomial-time computation). A *local algorithm* is a distributed algorithm \mathcal{A} satisfying that there exists a constant $t \geq 0$ such that \mathcal{A} terminates in at most t rounds in all networks, for all inputs. The parameter t is called the *radius* of \mathcal{A} . In other words, in every network G , and for all inputs to the nodes of G , every node executing \mathcal{A} just needs to collect all information present in its t -ball around it in order to output, where the t -ball of u is the ball $B_G(u, t) = \{v \in V(G) : \text{dist}(u, v) \leq t\}$.

Following the guidelines of [6], we define a *configuration* as a pair (G, x) where $G = (V, E)$ is a connected simple graph, and $x : V(G) \rightarrow \{0, 1\}^*$ is a function assigning an input $x(u)$ to every node $u \in V$. A *distributed language* \mathcal{L} is a Turing-decidable set of configurations. Note that the membership of a configuration to a distributed language is independent of the identity that may be assigned to the nodes in the LOCAL model (as one may want to study the same language under different computational models, including ones that assume anonymous nodes). The class LD is the set of all distributed languages that are locally decidable. That is, LD is the class of all distributed languages \mathcal{L} for which there exists a local algorithm \mathcal{A} satisfying that, for every configuration (G, x) ,

$$(G, x) \in \mathcal{L} \iff \mathcal{A} \text{ accepts } (G, x)$$

where one says that \mathcal{A} accepts if it accepts at *all* nodes. More formally, given a graph G , let $\text{ID}(G)$ denote the set of all possible identity assignments to the nodes of G (with distinct non-negative integers). Then LD is the class of all distributed languages \mathcal{L} for which there exists a local algorithm \mathcal{A} satisfying the following: for every configuration (G, x) ,

$$\begin{aligned} (G, x) \in \mathcal{L} &\Rightarrow \forall \text{id} \in \text{ID}(G), \forall u \in V(G), \mathcal{A}(G, x, \text{id}, u) = \text{accept} \\ (G, x) \notin \mathcal{L} &\Rightarrow \forall \text{id} \in \text{ID}(G), \exists u \in V(G), \mathcal{A}(G, x, \text{id}, u) = \text{reject} \end{aligned}$$

where $\mathcal{A}(G, x, \text{id}, u)$ is the output of Algorithm \mathcal{A} running on the instance (G, x) with identity-assignment id , at node u . For instance, the language PROP-COL, composed of all (connected) properly colored graphs, is in LD. Similarly, the class LCL of “locally checkable labelings”, defined in [13], satisfies $\text{LCL} \subseteq \text{LD}$. In fact, LCL is precisely LD restricted to configurations on graphs with constant maximum degree, and inputs of constant size.

The class NLD is the non-deterministic version of LD, i.e., the class of all distributed languages \mathcal{L} for which there exists a local algorithm \mathcal{A} *verifying* \mathcal{L} , i.e., satisfying that, for every configuration (G, x) ,

$$(G, x) \in \mathcal{L} \iff \exists c, \mathcal{A} \text{ accepts } (G, x) \text{ with certificate } c.$$

More formally, NLD is the class of all distributed languages \mathcal{L} for which there exists a local algorithm \mathcal{A} satisfying the following: for every configuration (G, x) ,

$$\begin{aligned} (G, x) \in \mathcal{L} &\Rightarrow \exists c \in \mathcal{C}(G), \forall \text{id} \in \text{ID}(G), \forall u \in V(G), \mathcal{A}(G, x, c, \text{id}, u) = \text{accepts} \\ (G, x) \notin \mathcal{L} &\Rightarrow \forall c \in \mathcal{C}(G), \forall \text{id} \in \text{ID}(G), \exists u \in V(G), \mathcal{A}(G, x, c, \text{id}, u) = \text{rejects} \end{aligned}$$

where $\mathcal{C}(G)$ is the class of all functions $c : V(G) \rightarrow \{0, 1\}^*$, assigning certificate $c(u)$ to each node u . Note that the certificates c may depend on the network and the input to the nodes, but should be set independently of the actual identity assignment to the nodes of the network. This guarantees that no information is revealed about far away nodes in the network by the certificates, hence preserving some form of privacy. In the following, for the sake of simplifying the notations, we shall omit specifying the domain sets $\mathcal{C}(G)$ and $\text{ID}(G)$ unless they are not clear from the context.

It follows from the above that NLD is a class of distributed languages that can be locally *verified*, in the sense that, on legal instances, certificates can be assigned to nodes by a *prover* so that a *verifier* \mathcal{A} accepts, and, on illegal instances, the verifier \mathcal{A} rejects (i.e., at least one node rejects) systematically, and cannot be fooled by any fake certificate. For instance, the language $\text{TREE} = \{(G, x) : G \text{ is a tree}\}$ is in NLD, by selecting a root r of the given tree, and assigning to each node u a counter $c(u)$ equal to its hop-distance to r . If the given (connected) graph contains a cycle, then no counters could be assigned to fool an algorithm checking that, at each node u with $c(u) \neq 0$, a unique neighbor v satisfies $c(v) < c(u)$. In [5], NLD was proved to be exactly the class of distributed languages that are closed under lift.

Finally, [6] defined the randomized versions $\text{BPLD}_{p,q}$ and $\text{BPNLD}_{p,q}$, of the aforementioned classes LD and NLD, respectively, by replacing the use of a deterministic algorithm with the use of a randomized algorithm characterized by its probability p of acceptance for legal instances, and its probability q of rejection for illegal instances. By defining $\text{BPNLD} = \cup_{p^2+q \geq 1} \text{BPNLD}_{p,q}$, the landscape of local decision was pictured as follows:

$$\text{LD} \subset \text{NLD} \subset \text{BPNLD} = \text{All}$$

where all inclusions are strict, and All is the set of all distributed languages. That is, every distributed language can be locally verified with constant success probabilities p and q , for some p and q satisfying $p^2 + q \geq 1$. In other words, by combining non-determinism with randomization, one can decide any given distributed language. However, this holds only up to a certain guaranty of success, which is only guaranteed to satisfy $p^2 + q \geq 1$.

1.2 Our contributions

Following up the approach recently applied to *distributed graph automata* in [15], we observe that the class LD and NLD are in fact the basic levels of a “local hierarchy” defined as follows. Let $\Sigma_0^{\text{loc}} = \Pi_0^{\text{loc}} = \text{LD}$, and, for $k \geq 1$, let Σ_k^{loc} be the class of all distributed languages \mathcal{L} for which there exists a local algorithm \mathcal{A} satisfying that, for every configuration (G, x) ,

$$(G, x) \in \mathcal{L} \iff \exists c_1, \forall c_2, \dots, Qc_k, \mathcal{A} \text{ accepts } (G, x) \text{ with certificates } c_1, c_2, \dots, c_k$$

where the quantifiers alternate, and Q is the universal quantifier if k is even, and the existential one if k is odd. The class Π_k^{loc} is defined similarly, by starting with a universal quantifier,

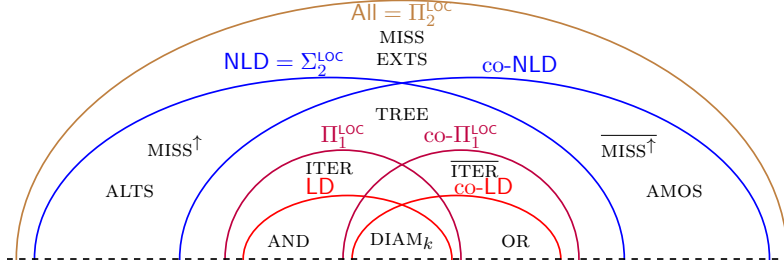


Figure 1: Relations between the different decision classes of the local hierarchy (the definitions of the various languages can be found in the text).

instead of an existential one. A local algorithm \mathcal{A} insuring membership to a class $\mathcal{C} \in \{\Sigma_k^{loc}, k \geq 0\} \cup \{\Pi_k^{loc}, k \geq 0\}$ is called a \mathcal{C} -algorithm. Hence, $\text{NLD} = \Sigma_1^{loc}$, and, for instance, Π_2^{loc} is the class of all distributed languages \mathcal{L} for which there exists a Π_2^{loc} -algorithm, that is, a local algorithm \mathcal{A} satisfying the following: for every configuration (G, x) ,

$$\begin{aligned} (G, x) \in \mathcal{L} &\Rightarrow \forall c_1, \exists c_2, \forall \text{id}, \forall u \in V(G), \mathcal{A}(G, x, c_1, c_2, \text{id}, u) = \text{accept}; \\ (G, x) \notin \mathcal{L} &\Rightarrow \exists c_1, \forall c_2, \forall \text{id}, \exists u \in V(G), \mathcal{A}(G, x, c_1, c_2, \text{id}, u) = \text{reject}. \end{aligned} \quad (1)$$

Our main results are the following.

Theorem 1 $\text{LD} \subset \Pi_1^{loc} \subset \text{NLD} = \Sigma_2^{loc} \subset \Pi_2^{loc} = \text{All}$, where all inclusions are strict.

That is, $\Pi_1^{loc} \supset \Pi_0^{loc}$, while $\Sigma_2^{loc} = \Sigma_1^{loc}$, and the whole local hierarchy collapses to the second level, at Π_2^{loc} . This collapsing has a significant impact on our ability to certify the legality, or correctness of a network configuration w.r.t. any (Turing decidable) boolean predicate on networks. Indeed, $\Pi_2^{loc} = \text{All}$ says that, for every network predicate, there is a distributed protocol satisfying the following two properties:

1. For every network configuration that is legal w.r.t. the predicate, and for any attempt by an adversary to prove the illegality of that configuration using distributed certificates, there is a locally verifiable proof that the adversary is wrong, also using distributed certificates, whose setting is *independent of the node identities*.
2. For every network configuration that is illegal w.r.t. the predicate, there is a proof of that illegality, using distributed certificates whose setting is *independent of the node identities*, such that no matter the way an adversary assigns its own set of distributed certificates in an attempt to prove the legality of the configuration, the actual illegality of the configuration will be locally detected.

We complete our description of the local hierarchy by a collection of separation and completeness results regarding the different classes and co-classes in the hierarchy. In particular, we revisit the completeness results in [6], and show that the notion of reduction introduced in this latter paper is too strong, and may allow a language outside NLD to be reduced to a language in NLD. We introduce a more restricted form of local reduction, called *label-preserving*, which does not have this undesirable property, and we establish the following.

Theorem 2 NLD and Π_2^{loc} have complete distributed languages for local label-preserving reductions.

Finally, Figure 1 summarizes all our separation results.

1.3 Related Work

Several form of “local hierarchies” have been investigated in the literature, with the objective of understanding the power of local computation, and/or for the purpose of designing verification mechanisms for fault-tolerant computing. In particular, [15] has investigated the case of *distributed graph automata*, where the nodes are finite automata, and the network is anonymous (which are weaker assumptions than those in our setting), but also assuming an arbitrary global interpretation of the individual decisions of the nodes (which is a stronger assumption than those in our setting). It is shown that all levels Σ_k^{AUT} , $k \geq 0$, of the resulting hierarchy are separated, and that the whole local hierarchy is exactly composed of the MSO (monadic second order) formulas on graphs.

In the framework of distributed computing, where the computing entities are Turing machines, *proof-labeling schemes* (PLS) [8], extended to *locally checkable proofs* (LCP) [7], give the ability to certify predicates using certificates that can take benefits of the node identities. That is, for the same network predicate, and the same legal network configuration, the distributed proof that this configuration is legal may be different if the node identities are different. In this context, the whole hierarchy collapses at the first level, with $\Sigma_1^{\text{LCP}} = \text{All}$. However, this holds only if the certificates can be as large as $\Omega(n^2)$ bits. In [2], the class LogLCP [7], which bounds the certificate to be of size $O(\log n)$ bits is extended to a hierarchy. In particular, it is shown that MST stands at the second level Π_2^{LogLCP} of that hierarchy, while there are languages outside the hierarchy.

In [6], the authors introduced the model investigated in this paper. In particular, they defined and characterized the class NLD, which is nothing else than Σ_1^{LOC} , that is, the class of languages that have a proof-labeling scheme in which the certificates are *not* depending on the node identities. It is proved that, while $\text{NLD} \neq \text{All}$, randomization helps a lot, as the randomized version BPNLD of NLD satisfies $\text{BPNLD} = \text{All}$. It is also proved that, with the oracle $\#\text{nodes}$ providing each node with the number of nodes in the network, we get $\text{NLD}^{\#\text{nodes}} = \text{All}$. Interestingly, it was proved [5] that restricting the verification algorithms for NLD to be *identity-oblivious*, that is, enforcing that each node decides the same output for every identity-assignment to the nodes in the network, does not reduce the ability to verify languages. This is summarized by the equality $\text{NLDO} = \text{NLD}$ where the “O” in NLDO stands for identity-oblivious. Instead, it was recently proved that restricting the algorithms to be identity-oblivious reduces the ability to decide languages locally, i.e., $\text{LDO} \subsetneq \text{LD}$ (see [4]).

Finally, it is worth mentioning that the ability to decide a distributed language locally has impact on the ability to design *construction* algorithms [12] for that language (i.e., computing outputs x such that the configuration (G, x) is legal w.r.t. the specification of the task). For instance, it is known that if \mathcal{L} is locally decidable, then any randomized local construction algorithm for \mathcal{L} can be derandomized [13]. This result has been recently extended [1] to the case of languages that are locally decidable by a randomized algorithm (i.e., extended from LD to BPLD according to the notations in [6]). More generally, the reader is invited to consult [3, 9, 10, 11, 14, 16] for good introductions to local computing, and/or samples of significant results related to local computing.

2 All languages are Π_2^{LOC} decidable

In this section, we show the last equality of Theorem 1.

Proposition 3 $\Pi_2^{\text{LOC}} = \text{All}$.

Proof. Let \mathcal{L} be a distributed language. We give an explicit Π_2^{loc} -algorithm for \mathcal{L} , i.e., a local algorithm \mathcal{A} such that, for every configuration (G, x) , Eq. (1) is satisfied. For this purpose, we describe the distributed certificates c_1 and c_2 . Intuitively, the certificate c_1 aims at convincing each node that $(G, x) \in \mathcal{L}$, while c_2 aims at demonstrating the opposite. More precisely, at each node u in a configuration (G, x) , the certificate $c_1(u)$ is interpreted as a triple $(M(u), \text{data}(u), \text{index}(u))$ where $M(u)$ is an $m \times m$ boolean matrix, $\text{data}(u)$ is a linear array with m entries, and $\text{index}(u) \in \{1, \dots, m\}$. Informally, $c_1(u)$ aims at proving to node u that it is node labeled $\text{index}(u)$ in the m -node graph with adjacency matrix $M(u)$, and that the whole input data is $\text{data}(u)$. We denote by n the number of nodes of the actual graph G .

For a legal configuration $(G, x) \in \mathcal{L}$, given c_1 , the certificate c_2 is then defined as follows. It is based on the identification of a few specific nodes, that we call *witnesses*. Intuitively, a witness is a node enabling to demonstrate that the structure of the configuration (G, x) does not fit with the given certificate c_1 . Let $\text{dist}(u, v)$ denote the distance between any two nodes u and v in the actual network G , that is, $\text{dist}(u, v)$ equals the number of edges of a shortest path between u and v in G . A certificate $c_2(u)$ is of the form $(f(u), \sigma(u))$ where $f(u) \in \{0, \dots, 4\}$ is a flag, and $\sigma(u) \in \{0, 1\}^*$ depends on the value of the flag.

- Case 0: There are two adjacent nodes $v \neq v'$ such that $(M(v), \text{data}(v)) \neq (M(v'), \text{data}(v'))$, or there are nodes v in which $c_1(v)$ cannot be read as a triple $(M(v), \text{data}(v), \text{index}(v))$. Then we set one of these nodes as witness w , and we set $c_2(u) = (0, \text{dist}(u, w))$ at every node u .

Otherwise, i.e., if the pair $(M(u), \text{data}(u))$ is identical to some pair (M, data) at every node u :

- Case 1: (G, x) is isomorphic to (M, data) , preserving the inputs, denoted by $(G, x) \sim (M, \text{data})$, and $\text{index}()$ is injective. Then we set $c_2(u) = (1)$ at every node u .

- Case 2: $n > m$, i.e., $|V(G)|$ is larger than the dimension m of M , or $\text{index}()$ is not injective. Then we set the certificate $c_2(u) = (2, i, d(u, w), d(u, w'))$ where $i \in \{1, \dots, m\}$, and $w \neq w'$ are two distinct nodes such that $\text{index}(w) = \text{index}(w') = i$. These two nodes w and w' are both witnesses.

- Case 3: $n < m$ and $\text{index}()$ is injective. Then we set $c_2(u) = (3, i)$ where $i \in \{1, \dots, m\}$ is such that $\text{index}(v) \neq i$ for every node v .

- Case 4: $n = m$ and $\text{index}()$ is injective, but (G, x) is not isomorphic to (M, data) . Then we set as witness a node w whose neighborhood in (G, x) does not fit with what it should be according to (M, data) , and we set $c_2(u) = (4, d(u, w))$ for every node u .

The local verification algorithm \mathcal{A} then proceeds as follows. First, every node u checks whether its flag $f(u)$ in $c_2(u)$ is identical to all the ones of its neighbors, and between 0 and 4. If not, then u rejects. Otherwise, u carries on executing the verification procedure. Its behavior depends on the value of its flag.

- If $f(u) = 0$, then u checks that at least one of its neighbors has a distance to the witness that is smaller than its own distance. A node with distance 0 to the witness checks that there is indeed an inconsistency with its c_1 certificate (i.e., its c_1 certificate cannot be read as a pair matrix-data, or its c_1 certificate is distinct from the one of its neighbors). Every node accepts or rejects accordingly.

- If $f(u) = 1$, then u accepts or rejects according to whether $(M(u), \text{data}(u)) \in \mathcal{L}$ (recall that, by definition, we consider only distributed languages \mathcal{L} that are Turing-decidable).

- If $f(u) = 2$, then u checks that it has the same index i in its certificate c_2 as all its neighbors. If that is not the case, then it rejects. Otherwise, it checks each of the two distances in its certificate c_2 separately, each one as in the case where $f(u) = 0$. A node with one of the two distances equal to 0 also checks that its c_1 index is equal to the index i in c_2 . If that is not

the case, or if its two distances are equal to 0, then it rejects. If all the test are passed, then u accepts.

- If $f(u) = 3$, then u accepts if and only if it has the same index i in its c_2 certificate as all its neighbors, and $\text{index}(u) \neq i$.
- If $f(u) = 4$, then u checks the distances as in the case where $f(u) = 0$. A node with distance 0 also checks that its neighborhood in the actual configuration (G, x) is not what it should be according to (M, data) . It accepts or rejects accordingly.

To prove the correctness of this Algorithm \mathcal{A} , let us first consider a legal configuration $(G, x) \in \mathcal{L}$. We show that the way c_2 is defined guarantees that all nodes accept, because c_2 correctly pinpoints inconsistencies in c_1 , witnessing any attempt of c_1 to certify that the actual configuration is illegal. Indeed, in Case 0, by the setting of c_2 , all nodes but the witness accept. Also, the witness itself accepts because it does witness the inconsistency of the c_1 certificate. In Case 1, then all nodes accept because $(G, x) \sim (M, \text{data})$ and $(G, x) \in \mathcal{L}$. In Case 2, by the setting of c_2 , all nodes but the witnesses accept, and the witnesses accept too because each one checks that it is the vertex with index i in M . In Case 3, all nodes accept by construction of the certificate c_2 . Finally, in Case 4, by the setting of c_2 , all nodes but the witness accept. Also, the witness itself accepts because, as in Case 0, it does witness the inconsistency of the c_1 certificate. So, in all cases, all nodes accept, as desired.

We are now left with the case of illegal configurations. Let $(G, x) \notin \mathcal{L}$ be such an illegal configuration. We set $c_1(u) = (M, \text{data}, \text{index}(u))$ where $(M, \text{data}) \sim (G, x)$ and $\text{index}(u)$ is the index of node u in the adjacency matrix M and the array data . We show that, for any certificate c_2 , at least one node rejects. Indeed, for all nodes to accept, they need to have the same flag in c_2 . This flag cannot be 1 because, if $f(u) = 1$ then u checks the legality of (M, data) . In all other cases, the distance checking should be passed at all nodes for them to accept. Thus, the flag is distinct from 0 and 4 because every radius-1 ball in (G, x) fits with its description in (M, data) . Also, the flag is distinct from 2 because there are no two distinct nodes with the same index i in the c_1 certificate. Finally, also the flag is distinct from 3, because, by the setting of c_1 , every index in $\{1, \dots, n\}$ appears at some node, and this node would reject. Hence, all cases lead to contradiction, that is, not all nodes can accept, as desired. \square

To conclude the section, let us define a simple problem in $\Pi_2^{\text{loc}} \setminus \text{NLD}$. Let EXTS , which stands for “exactly two selected” be the following language. We set $(G, x) \in \text{EXTS}$ if $x(u) \in \{\perp, \top\}$ for every $u \in V(G)$, and $|\{u \in V(G) : x(u) = \top\}| = 2$. Proving that $\text{EXTS} \notin \text{NLD}$ is easy using the following characterization of NLD . Let $t \geq 1$. A configuration (G', x') is a t -lift of a configuration (G, x) iff there exists a mapping $\phi : V(G') \rightarrow V(G)$ such that, for every $u \in V(G')$, $B_G(\phi(u), t)$ is isomorphic to $B_{G'}(u, t)$, preserving inputs. A distributed language \mathcal{L} is closed under lift if there exists $t \geq 1$ such that, for every (G, x) , we have $(G, x) \in \mathcal{L}$ implies $(G', x') \in \mathcal{L}$ for every (G', x') that is a t -lift of (G, x) .

Lemma 4 ([5]) *NLD is the class of distributed languages closed under lift.*

Since EXTS is not closed under lift, it results from Lemma 4 that $\text{EXTS} \notin \text{NLD}$.

3 On the impact of the last universal quantifier

In this section, we prove the part of Theorem 1 related to the two classes Π_1^{loc} and Σ_2^{loc} . These two classes have in common that the universal quantifier is positioned last. It results that these two classes seem to be limited, as witnessed by the following two propositions.

Proposition 5 $\Sigma_2^{\text{loc}} = \text{NLD}$.

Proof. By Lemma 4, it is sufficient to prove that, for any $\mathcal{L} \in \Sigma_2^{\text{loc}}$, \mathcal{L} is closed under lift. If $\mathcal{L} \in \Sigma_2^{\text{loc}}$ then let \mathcal{A} be a local algorithm establishing the membership of \mathcal{L} in Σ_2^{loc} . \mathcal{A} is satisfying the following. For every $(G, x) \in \mathcal{L}$,

$$\exists c_1, \forall c_2, \forall \text{id}, \forall u \in V(G), \mathcal{A}(G, x, c_1, c_2, \text{id}, u) = \text{accept}.$$

Let t be the radius of \mathcal{A} , and assume, for the purpose of contradiction, that \mathcal{L} is not closed under lift. There exists $(G, x) \in \mathcal{L}$, and a t -lift (G', x') of (G, x) with $(G', x') \notin \mathcal{L}$. Let $\phi : V(G') \rightarrow V(G)$ be this t -lift. Note that the t -balls in (G, x) are identical to the t -balls in (G', x') by definition of a t -lift. Let c_1 be the distributed certificate that makes \mathcal{A} accept (G, x) at all nodes, for all certificates c_2 . Let c'_1 be the distributed certificate for (G', x') defined by $c'_1(u) = c_1(\phi(u))$. Since, with certificate c_1 , \mathcal{A} accepts at all nodes of G , for every certificate c_2 , and for every identity assignment, it follows that, with certificate c'_1 , \mathcal{A} accepts at all nodes of G' , for every certificate c'_2 , and for every identity assignment, contradicting the correctness of \mathcal{A} . Therefore, \mathcal{L} is closed under lift. Thus, $\Sigma_2^{\text{loc}} \subseteq \text{NLD}$. Since, by definition, $\text{NLD} = \Sigma_1^{\text{loc}} \subseteq \Sigma_2^{\text{loc}}$, the result follows. \square

To show that $\Pi_1^{\text{loc}} \neq \text{NLD}$, we consider the language ALTS, which stands for “at least two selected”. (Note that ALTS is the complement of the language AMOS introduced in [6], where AMOS stands for “at most one selected”). We set $(G, x) \in \text{ALTS}$ if $x(u) \in \{\perp, \top\}$ for every node $u \in V(G)$, and $|\{u \in V(G) : x(u) = \top\}| \geq 2$. Note that $\text{ALTS} \in \text{NLD} \setminus \Pi_1^{\text{loc}}$.

Proposition 6 $\Pi_1^{\text{loc}} \subset \text{NLD}$ (the inclusion is strict).

Proof. By Lemma 4, to establish $\Pi_1^{\text{loc}} \subseteq \text{NLD}$, it is sufficient to prove that, for any $\mathcal{L} \in \Pi_1^{\text{loc}}$, \mathcal{L} is closed under lift. The arguments are exactly similar to the ones used in the proof of Proposition 5 without even the need to lift a first set of certificates. To show that $\Pi_1^{\text{loc}} \neq \text{NLD}$, we consider the language ALTS. We have $\text{ALTS} \in \text{NLD}$ because ALTS is closed under lift. However, $\text{ALTS} \notin \Pi_1^{\text{loc}}$. Indeed, assume that there exists a local algorithm \mathcal{A} for $\text{ALTS} \in \Pi_1^{\text{loc}}$. Then, consider the cycle C_n , and three distinct nodes u, v, w in C_n equally spread at distance $n/3$. Let us fix a set of certificates, say $c(u) = \emptyset$ for every node u . \mathcal{A} cannot be correct for all eight configurations resulting from the two possible input assignments \perp or \top to the three nodes u, v, w . \square

While Π_1^{loc} is in NLD, the universal quantifier does add some power compared to LD. We show that $\text{LD} \neq \Pi_1^{\text{loc}}$ by exhibiting a language in $\Pi_1^{\text{loc}} \setminus \text{LD}$. Note that the existence of this language is not straightforward as it must involve Turing-computability issues. Indeed, if one does not insist on the fact that the local algorithm must be a Turing-computable function, then the two classes LD and Π_1^{loc} would be identical. For instance, given a t -round algorithm \mathcal{A} deciding a language \mathcal{L} in Π_1^{loc} , one could define the following function f for deciding the same language in LD. Given a t -ball B centered at u , node u accepts with f if and only if there are no certificate assignments to the nodes of B that could lead \mathcal{A} to reject at u . The function f is however not an algorithm. We show that, in fact, $\Pi_1^{\text{loc}} \setminus \text{LD} \neq \emptyset$.

Proposition 7 $\text{LD} \subset \Pi_1^{\text{loc}}$ where the inclusion is strict.

Proof. We describe the distributed language ITER, which stands for “iteration”. Let M be a Turing machine, and let us enumerate lexicographically all the states of the system tape-machine where M starts its execution on the blank tape, with the head at the beginning of the tape. We define the function $f_M : \mathbb{N} \rightarrow \mathbb{N}$ by $f_M(0) = 0$, $f_M(1) = 1$, and, for $i > 1$, $f_M(i)$ equal to the index of the system state after one step of M from system state i . We define ITER as the

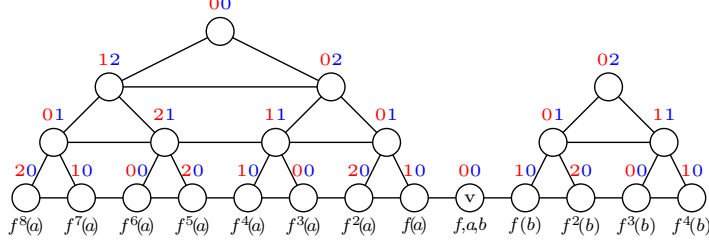


Figure 2: An illustration of the distributed language ITER

collection of configurations (G, x) representing two sequences of iterations of a function f_M on different inputs a and b (see Figure 2).

More precisely, let M be a Turing machine, and let a and b be two non-negative integers. We define the following family of configurations — cf. Figure 2. A configuration in ITER mainly consists in a path P with a special node v , called the *pivot*, identified in this path. So $P = LvR$ where L and R are subpaths, respectively called left path and right path. All nodes of the path are given the machine M as input, and the pivot v is also given a and b as inputs. The node of the left path (resp., right path) at distance i from v is given a value $f_{i,L}$ (resp., $f_{i,R}$) as input. To be in the language, it is required that, for every i , $f_{i,L} = f_M^{(i)}(a)$ and $f_{i,R} = f_M^{(i)}(b)$, where $g^{(i)}$ denotes the i th iterated of a function g . Let u_ℓ and u_r be the two nodes at the extremity of the left path and of the right path, respectively. The configuration is in the language if and only if the f -values at both extremities of the path P are 0 or 1, and at least one of them is equal to 0. That is, the configuration is in the language if and only if:

$$(f_{|L|,L} \in \{0, 1\} \text{ and } f_{|R|,R} \in \{0, 1\}) \text{ and } (f_{|L|,L} = 0 \text{ or } f_{|R|,R} = 0). \quad (2)$$

In fact, for technical reasons, it is also required that both $|L|$ and $|R|$ are powers of 2. Indeed, on top of L and R are two complete binary trees T_L and T_R , respectively, with horizontal paths connecting nodes of the same depth in each tree (see Figure 2). The nodes of L and R are the leaves of these two trees. Finally, every node u of the graph receives as input a pair of labels $(\ell_1, \ell_2) \in \{0, 1, 2\}^2$. The label ℓ_1 is the distance modulo 3 from u to the right-most node (resp., left-most node) of the path if u is an internal node of T_L (resp., T_R), and, for nodes in the path P , ℓ_1 is simply the distance modulo 3 from the pivot v . The label ℓ_2 is the height of the node in its tree modulo 3. (The pivot, which belongs to none of the trees, has height 0).

A configuration $(G, x) \in \text{ITER}$ if and only if (G, x) satisfies all the above conditions with respect to the given machine M . Let us consider a weaker version of ITER, denoted by ITER^- where the condition of Eq. (2) is replaced by just: $f_{|L|,L} \in \{0, 1\}$ and $f_{|R|,R} \in \{0, 1\}$. Thanks to the labeling (ℓ_1, ℓ_2) at each node, which “rigidifies” the structure, we have $\text{ITER}^- \in \text{LD}$ using the same arguments as the ones in [4]. Moreover, $\text{ITER} \in \Pi_1^{\text{loc}}$. To see why, we describe a local algorithm \mathcal{A} using certificates. The algorithm first checks whether $(G, x) \in \text{ITER}^-$. All nodes, but the pivot v , decide according to this checking. If the pivot rejected $(G, x) \in \text{ITER}^-$, then it rejects in \mathcal{A} as well. Otherwise, it carries on its decision process by interpreting its certificate as a non-negative integer k , and accepts in \mathcal{A} unless $f_M^{(k)}(a) = 1$ and $f_M^{(k)}(b) = 1$. To show the correctness of \mathcal{A} , let $(G, x) \in \text{ITER}$. We have $f_{|L|,L} = 0$ or $f_{|R|,R} = 0$, i.e., $f_M^{(|L|)}(a) = 0$ or $f_M^{(|R|)}(b) = 0$. W.l.o.g., assume $f_M^{(|L|)}(a) = 0$. If $k \geq |L|$ then $f_M^{(k)}(a) = 0$ since $f_M(0) = 0$, and thus v accepts. If $k < |L|$ then $f_M^{(k)}(a) \neq 1$ since $f_M(1) = 1$, and thus v accepts. Therefore, all certificates lead to acceptance. Let us now consider $(G, x) \notin \text{ITER}$. If $(G, x) \notin \text{ITER}^-$ then at least one node rejects, independently of the certificate. So, we assume that $(G, x) \in \text{ITER}^- \setminus \text{ITER}$. Thus, $f_M^{(|L|)}(a) = 1$ and $f_M^{(|R|)}(b) = 1$. The certificate is set to $k = \max\{|L|, |R|\}$. Let us assume,

w.l.o.g., that $k = |L| \geq |R|$. By this setting, we have $f_M^{(k)}(a) = 1$. Moreover, since $k \geq |R|$, and since $f_M(1) = 1$, we get that $f_M^{(k)}(b) = 1$. Therefore, \mathcal{A} rejects, as desired. Thus, $\text{ITER} \in \Pi_1^{\text{LOC}}$.

It remains to show that $\text{ITER} \notin \text{LD}$. Let us assume, for the purpose of contradiction, that there exists a t -round algorithm \mathcal{A} deciding ITER . Since $\text{ITER}^- \in \text{LD}$, this algorithm is able to distinguish an instance with $f_M^{(|L|)}(a) = 1$ and $f_M^{(|R|)}(b) = 1$ from instances in which $f_M^{(|L|)}(a) \neq 1$ or $f_M^{(|R|)}(b) \neq 1$. Observe that a node at distance greater than t from the pivot can gather information related to only one of the two inputs a and b . Therefore, the distinction between the case $f_M^{(|L|)}(a) = 1$ and $f_M^{(|R|)}(b) = 1$ and the case $f_M^{(|L|)}(a) \neq 1$ or $f_M^{(|R|)}(b) \neq 1$ can only be made by a node at distance at most t from the pivot. Therefore, by simulating \mathcal{A} at all nodes in the ball of radius t around v , with identities between 1 and the size of the ball of radius $2t$ around the pivot, a sequential algorithm can determine, given a Turing machine M , and given a and b , whether there exist ℓ and r such that $f_M^{(\ell)}(a) = f_M^{(r)}(b) = 1$ or not, which is actually Turing undecidable. This contradiction implies that, indeed, $\text{ITER} \notin \text{LD}$. \square

4 Complement classes

Given a class \mathcal{C} of distributed languages, the class $\text{co-}\mathcal{C}$ is composed of all distributed languages \mathcal{L} such that $\bar{\mathcal{L}} \in \mathcal{C}$, where $\bar{\mathcal{L}} = \{(G, x) \notin \mathcal{L}\}$. For instance, $\text{co-}\Pi_1^{\text{LOC}}$ is the class of languages \mathcal{L} for which there exists a local algorithm \mathcal{A} such that, for every configuration (G, x) ,

$$\begin{aligned} (G, x) \in \mathcal{L} &\Rightarrow \exists c, \forall \text{id}, \exists u \in V(G), \mathcal{A}(G, x, c, \text{id}, u) = \text{accepts}; \\ (G, x) \notin \mathcal{L} &\Rightarrow \forall c, \forall \text{id}, \forall u \in V(G), \mathcal{A}(G, x, c, \text{id}, u) = \text{rejects}. \end{aligned}$$

Note in particular, that the rejection must now be unanimous, while the acceptance requires only one node to accept. Let us define the following two languages: each input to every node belongs to $\{\text{true}, \text{false}\}$, and a configuration is in AND (resp., in OR) if and only if the logical conjunction (resp., disjunction) of the inputs is true. We have $\overline{\text{AND}} = \text{OR}$. These two languages enable to separate LD from its co- class. Indeed, trivially, $\text{OR} \notin \text{LD}$, and $\text{AND} \in \text{LD}$ (without communication). The class $\text{LD} \cap \text{co-LD}$ is almost trivial. It contains simple distributed languages such as DIAM_k , the class of graphs with diameter at most k , for any fixed k . We have the following separation.

Proposition 8 $\text{OR} \in \text{co-LD} \setminus \Pi_1^{\text{LOC}}$, and $\text{AND} \in \text{LD} \setminus \text{co-}\Pi_1^{\text{LOC}}$.

Similarly, the languages ALTS and AMOS introduced in the proof of Proposition 6 enable to separate NLD from its co- class. Indeed, $\text{ALTS} = \overline{\text{AMOS}}$, ALTS is closed under lift, and AMOS is not closed under lift. Moreover, consider the language EXTS defined at the end of Section 2. Both EXTS and $\overline{\text{EXTS}}$ are not closed under lift. So, overall, by Lemma 4, we get:

Proposition 9 $\text{ALTS} \in \text{NLD} \setminus \text{co-NLD}$, $\text{AMOS} \in \text{co-NLD} \setminus \text{NLD}$, and $\text{EXTS} \notin \text{NLD} \cup \text{co-NLD}$.

More interesting is the position of the Π_1^{LOC} w.r.t. NLD and co-NLD :

Proposition 10 $\Pi_1^{\text{LOC}} \cup \text{co-}\Pi_1^{\text{LOC}} \subset \text{NLD} \cap \text{co-NLD}$, where the inclusion is strict.

Proof. From Proposition 6, we know that $\Pi_1^{\text{LOC}} \subset \text{NLD}$. We prove that $\text{co-}\Pi_1^{\text{LOC}} \subset \text{NLD}$. Let $\mathcal{L} \in \text{co-}\Pi_1^{\text{LOC}}$, and let \mathcal{A} be a t -round algorithm deciding \mathcal{L} . Let $(G, x) \in \mathcal{L}$, and let c be a certificate such that \mathcal{A} accepts at all nodes. Let (G', x') be a t -lift of (G, x) , and lift c into c' accordingly. Then \mathcal{A} also accepts (G', x') , which implies that \mathcal{L} is closed under t -lift, and thus,

by Lemma 4, $\mathcal{L} \in \text{NLD}$. Therefore $\Pi_1^{\text{LOC}} \cup \text{co-}\Pi_1^{\text{LOC}} \subseteq \text{NLD} \cap \text{co-NLD}$. To prove that the inclusion is strict, we consider the language $\text{TREE} = \{(G, x) : G \text{ is a tree}\}$. We have $\text{TREE} \in \text{NLD}$ since a tree cannot be lifted. We also have $\text{TREE} \in \text{co-NLD}$ since a tree cannot result from a lift. (By Lemma 4, co-NLD is the class of languages \mathcal{L} closed down under lift, i.e., if $(G, x) \in \mathcal{L}$ is the lift of a configuration (G', x') , then we have $(G', x') \in \mathcal{L}$). To see why $\text{TREE} \notin \Pi_1^{\text{LOC}}$, consider a path and a cycle. If TREE could be decided in Π_1^{LOC} , then the center nodes of the path must accept for all certificates and for any identity-assignment. Hence, all degree-2 nodes that see only degree-2 nodes in their neighborhoods accept, for all certificates. As a consequence, the cycle will be incorrectly accepted for all certificates. Somewhat similarly, if TREE could be decided in $\text{co-}\Pi_1^{\text{LOC}}$, say in t -rounds, then it would mean that, in a path, the node(s) that accept(s) (with the appropriate certificate) can only be at distance at most t from an extremity of the path. Indeed, otherwise, one could close the path and create a cycle that will still be accepted. So, by gluing two paths P and P' of length at least $2t$ to two antipodal nodes of a cycle C , and by giving to the nodes of P and P' the certificates that lead each of them to be accepted, this graph would be incorrectly accepted. \square

5 Complete problems

In this section, we prove Theorem 2. Let G be a connected graph, and U be a set (typically, $U = \{0, 1\}^*$). Let $e : V(G) \rightarrow U$, and let $\mathcal{S} : V(G) \rightarrow 2^{2^U}$. That is, e assigns an element $e(u) \in U$ to every node $u \in V(G)$, and \mathcal{S} assigns a collection of sets $\mathcal{S}(u) = \{S_1(u), \dots, S_{k_u}(u)\}$ to every node $u \in V(G)$, with $k_u \geq 1$ and $S_i : V(G) \rightarrow 2^U$ for every $i \geq 1$. We say that \mathcal{S} covers e if and only if there exists $u \in V(G)$, and there exists $i \in \{1, \dots, k_u\}$, such that $S_i(u) = \{e(u), u \in V(G)\}$. In [6], the authors defined the language

$$\text{COVER} = \{(G, x) : \forall u \in V(G), x(u) = (\mathcal{S}(u), e(u)) \text{ such that } \mathcal{S} \text{ covers } e\}$$

and proved that COVER is the “most difficult problem”, in the sense that every distributed language can be locally reduced to COVER . However COVER is closed under lift as lifting does not create new elements, while lifting preserves the sets. Therefore, by Lemma 4, $\text{COVER} \in \text{NLD}$. In fact, one can show that there exists a local verification algorithm for COVER using certificates of size quasi linear in n whenever the ground set U is of polynomial size.

Proposition 11 Let U be the ground set of COVER . Then COVER has a local decision algorithm for NLD, using certificates of size $O(n(\log n + \log |U|))$ bits.

Proof. Given $(G, x) \in \text{COVER}$, where G is an n -node graph, the prover assigns the following certificates to the nodes. For any $u \in V(G)$, we have $c(u) = (d_0, (d_1, e_1), (d_2, e_2), \dots, (d_n, e_n))$, where, for every $i \in \{0, \dots, n\}$, d_i is a non-negative integer, and, for every $i \in \{1, \dots, n\}$, $e_i \in U$. This certificate is on $O(n(\log n + \log |U|))$ bits. The d_i 's measure distances: d_0 is the distance from u to the node v which has a set $S_i(v)$ covering e , and, for every $i \in \{1, \dots, n\}$, d_i is the distance from u to a node u' with $e(u') = e_i$.

The verifier acts as follows, in just one communication round. Every node u checks that it has the same number of distance entries in its certificate as all its neighbors, and that the i th elements coincide between neighbors, for every $i = 1, \dots, n$. Next, it checks that one and only one of its distances d_i with $i \in \{1, \dots, n\}$ is null, and that $e(u) = e_i$. Next, if $d_0 = 0$, it checks that it has a set $S_j(u) = \{e_i, i = 1, \dots, n\}$. Finally, it checks that the distances are consistent, that is, for every i such that $d_i \neq 0$, it checks that it has at least one neighbor whose i th distance is smaller than d_i . If all tests are passed, then u accepts, otherwise it rejects.

By construction, if $(G, x) \in \text{COVER}$ then all nodes accept. Conversely, let us assume that all nodes accept. Since the distances are decreasing, for each element e_i there must exist at least one node u such that $x(u) = e_i$. Conversely, every node has its element appearing in the certificate (because it must have one distance equal to 0). Finally, since the distance d_0 is decreasing, there must exist at least one node u that has a set $S_j(u) = \{e_i, i = 1, \dots, n\}$. This implies that $(G, x) \in \text{COVER}$. \square

This latter result is in contradiction with the claim in [6] regarding the hardness of COVER. The reason for this contradiction is that the local reduction used in [6] for reducing any language to COVER is too strong. Indeed, it transforms a configuration (G, x) into a configuration (G, x') where the certificates used for proving x' may depend on the identities of the nodes in G . This is in contradiction with the definitions of the classes Σ_k^{loc} and Π_k^{loc} , $k \geq 0$, for which the certificates must be independent of the identity assignment. In this section, we show that completeness results can be obtained using a more constrained notion of reduction which preserves the membership to the classes.

Recall from [6] that a local reduction of \mathcal{L} to \mathcal{L}' is a local algorithm \mathcal{R} which maps any configuration (G, x) to a configuration (G, y) , where $y = R(G, x, \text{id})$ may depend of the identity assignment id , such that: $(G, x) \in \mathcal{L}$ if and only if, for every identity assignment id to the nodes of G , $(G, y) \in \mathcal{L}'$ where $y = \mathcal{R}(G, x, \text{id})$. Ideally, we would like \mathcal{R} to be *identity-oblivious*, that is, such that the output of each node does not depend on the identity assignment. We use a concept somewhat intermediate between identity-oblivious reduction and the unconstrained reduction in [6].

Definition 12 Let \mathcal{C} be a class of distributed languages, and let \mathcal{L} and \mathcal{L}' be two distributed languages. Let \mathcal{A} be a \mathcal{C} -algorithm deciding \mathcal{L}' , and let \mathcal{R} be a local reduction of \mathcal{L} to \mathcal{L}' . We say that $(\mathcal{R}, \mathcal{A})$ is *label-preserving* for $(\mathcal{L}, \mathcal{L}')$ if and only if, for any configuration (G, x) , the certificates used by the prover in \mathcal{A} for (G, y) where $y = \mathcal{R}(G, x, \text{id})$ are the same for all identity assignments id to G .

The following result shows that the notion of reduction in Definition 12 preserves the classes of distributed languages.

Lemma 13 *Let \mathcal{C} be a class of distributed languages. Let \mathcal{L} and \mathcal{L}' be two distributed languages with $\mathcal{L}' \in \mathcal{C}$, and let $(\mathcal{R}, \mathcal{A})$ be a label-preserving local reduction for $(\mathcal{L}, \mathcal{L}')$. Then $\mathcal{L} \in \mathcal{C}$.*

Proof. We describe a local algorithm \mathcal{B} for deciding \mathcal{L} in \mathcal{C} . In essence, $\mathcal{B} = \mathcal{A} \circ R$. More precisely, let (G, x) be a configuration, with an arbitrary identity assignment id , and let $y = R(G, x, \text{id})$. Let c be a certificate assigned by the prover in \mathcal{A} for configuration (G, y) . (Note that this certificate may depend on some previously set certificates, as in, e.g., Π_1^{loc}). The certificate assigned by the prover in \mathcal{B} for configuration (G, x) is c . The algorithm \mathcal{B} then proceeds as follows. Given (G, x) , it computes (G, y) using R , and then applies \mathcal{A} on (G, y) using the certificates constructed by the prover in \mathcal{B} . Algorithm \mathcal{B} then outputs the decision taken by \mathcal{A} . Since R preserves the membership to the languages, and since the certificates assigned by the prover in \mathcal{A} for configurations resulting from the application of R are independent of the identity assignment, the certificates chosen under the identity assignment id are also appropriate for any other identity assignment id' . This guarantees the correctness of \mathcal{B} , and thus $\mathcal{L} \in \mathcal{C}$. \square

In the following problem, every node u of a configuration (G, x) is given a family $\mathcal{F}(u)$ of configurations, each described by an adjacency matrix representing a graph, and a 1-dimensional array representing the inputs to the nodes of that graph. In addition, every node u has an input string $x'(u) \in \{0, 1\}^*$. Hence, (G, x') is also a configuration. The actual configuration (G, x)

is legal if (G, x') is missing in all families $\mathcal{F}(u)$ for every $u \in V(G)$, i.e., $(G, x') \notin \mathcal{F}$ where $\mathcal{F} = \cup_{u \in V(G)} \mathcal{F}(u)$. In short, we consider the language

$$\text{MISS} = \{(G, x) : \forall u \in V(G), x(u) = (\mathcal{F}(u), x'(u)) \text{ and } (G, x') \notin \mathcal{F}\}$$

We show that MISS is among the hardest problems, under local label-preserving reductions. Note that MISS \notin NLD (it is not closed under lift: it may be the case that $(G, x') \notin \mathcal{F}$ but a lift of (G, x') is in \mathcal{F}).

Proposition 14 MISS is Π_2^{loc} -complete for local label-preserving reductions.

Proof. Let \mathcal{L} be a distributed language. We describe a local label-preserving reduction (R, \mathcal{A}) for $(\mathcal{L}, \text{MISS})$ with respect to Π_2^{loc} .

In essence, the local algorithm \mathcal{A} for deciding MISS in Π_2^{loc} is the generic algorithm described in the proof of Proposition 3. Recall that, in this generic algorithm, on a legal configuration (G, x) , the existential c_2 certificate in \mathcal{A} is pointing to an inconsistency in the given c_1 certificate which is supposed to describe the configuration (G, x) . And, on an illegal configuration (G, x) , the existential c_1 certificate in \mathcal{A} does provide an accurate description of the configuration (G, x) . For the purpose of label-preservation, we slightly modify the generic algorithm for MISS. Instead of viewing c_1 as a description of the configuration (G, x) , the algorithm views it as a description of (G, x') where, at each node u , $x'(u)$ is the second item in $x(u)$ (the first item is the family $\mathcal{F}(u)$). The algorithm is then exactly the same as the generic algorithm with the only modification that the test when the flag $f(u) = 1$ is not regarding whether $(G, x') \in \text{MISS}$, but whether $(G, x') \notin \mathcal{F}(u)$. On a legal configuration, all nodes accept. On an illegal instance, a node with $(G, x') \in \mathcal{F}(u)$ rejects.

The reduction R from \mathcal{L} to MISS proceeds as follows, in a way similar to the one in [6]. A node u with identity $\text{id}(u)$ and input $x(u)$ computes its *width* $\omega(u) = 2^{|\text{id}(u)| + |x(u)|}$ where $|s|$ denotes the length of a bit-string s . Then u generates all configurations $(H, y) \notin \mathcal{L}$ such that H has at most $\omega(u)$ nodes and $y(v)$ has value at most $\omega(u)$, for every node v of H . It places all these configurations in $\mathcal{F}(u)$. The input $x'(u)$ is simply $x'(u) = x(u)$. If $(G, x) \in \mathcal{L}$, then $(G, x) \notin \mathcal{F}$ since only illegal instances are in \mathcal{F} , and thus $(G, R(G, x)) \in \text{MISS}$. Conversely, if $(G, x) \notin \mathcal{L}$, then $(G, R(G, x)) \notin \text{MISS}$. Indeed, there exists at least one node u with identity $\text{id}(u) \geq n$, which guarantees that u generates the graph G . If no other node u' has width $\omega(u') > n$ then u generates $(G, x) \in \mathcal{F}(u)$. If there exists a node u' with $\omega(u') > n$ then u' generates $(G, x) \in \mathcal{F}(u')$. In each case, we have $(G, x) \in \mathcal{F}$, and thus $(G, R(G, x)) \notin \text{MISS}$.

It remains to show that the existential certificate used in \mathcal{A} for all configurations $(G, R(G, x))$ are the same for any given (G, x) , independently of the identity assignment to G used to perform the reduction R . This directly follows from the nature of \mathcal{A} since the certificates do not depend on the families $\mathcal{F}(u)$'s but only on the bit strings $x'(u)$'s. \square

The following language is defined as MISS by replacing \mathcal{F} by the closure under lift \mathcal{F}^\uparrow of \mathcal{F} . That is, \mathcal{F}^\uparrow is composed of \mathcal{F} and all the lifts of the configurations in \mathcal{F} .

$$\text{MISS}^\uparrow = \{(G, x) : \forall u \in V(G), x(u) = (\mathcal{F}(u), x'(u)) \text{ and } (G, x') \notin \mathcal{F}^\uparrow\}$$

We show that MISS^\uparrow is the hardest problem in NLD.

Proposition 15 MISS^\uparrow is NLD-complete (and $\overline{\text{MISS}^\uparrow}$ is co-NLD-complete) under label-preserving reduction.

Proof. We do have $\text{MISS}^\uparrow \in \text{NLD}$ because MISS^\uparrow is closed under lift. Let $\mathcal{L} \in \text{NLD}$. The reduction R from \mathcal{L} to MISS^\uparrow is the same as the one in the proof of Proposition 14. We describe a local

algorithm for deciding MISS^\uparrow in NLD which is label-preserving with respect to R . The certificate $c(u)$ is a description of (G, x') of the form $(M(u), \text{data}(u), \text{index}(u))$ as certificate c_1 in the proof of Proposition 3. This guarantees label-preservation with respect to R . For the verification part, each node u checks whether $(M(u), \text{data}(u), \text{index}(u))$ fits with its local neighborhood. If no, it rejects. Otherwise, it checks whether $(M(u), \text{data}(u)) \notin \mathcal{F}(u)^\uparrow$, accepts if yes, and rejects otherwise. On a legal configuration $(G, x) \in \text{MISS}^\uparrow$, with the correct certificate $c = (G, x')$, all nodes accept. On an illegal configuration $(G, x) \notin \text{MISS}^\uparrow$, there are two cases. If $(M(u), \text{data}(u))$ is neither (G, x') nor a lift of (G, x') , then some node will detect an inconsistency, and reject. If $(M(u), \text{data}(u))$ is an accurate description of (G, x') or of a lift of (G, x') , then some node will detect that $(M(u), \text{data}(u)) \in \mathcal{F}^\uparrow(u)$, and therefore will reject. \square

6 Conclusion

Our investigation raises several intriguing questions. In particular, identifying a distributed language in $\Pi_1^{\text{loc}} \setminus \text{LD}$ was an uneasy task. We succeeded to find one such language, but we were unable to identify a Π_1^{loc} -complete problem, if any. In fact, completeness results are very sensitive to the type of local reductions that is used. We have identified label-preserving local reduction as an appropriate notion. It would be interesting to know whether NLD-complete and Π_2^{loc} -complete languages exist for *identity-oblivious* reductions. This latter type of reductions is indeed the most natural one in a context in which nodes may not want to leak information about their identities. It is easy to see that the class co-LD has a complete language for identity-oblivious reductions, namely, OR is co-LD-complete for identity-oblivious reductions. However, we do not know whether this can be achieved for NLD or Π_2^{loc} .

This paper is aiming at providing a proof of concept for the notion of interactive local verification: Π_2^{loc} can be viewed as the interaction between two players, with conflicting objectives, one is aiming at proving the instance, while the other is aiming at disproving it. As a consequence, for this first attempt, we voluntarily ignored important parameters such as the size of the certificates, and the individual computation time, and we focussed only on the locality issue. The impact of limiting the certificate size was recently investigated in [2]. Regarding the individual computation time, our completeness results involve local reductions that are very much time consuming at each node. Insisting on local reductions involving polynomial-time computation at each node is crucial for practical purpose. At this point, we do not know whether non trivial hardness results can be established under polynomial-time local reductions. Proving or disproving the existence of such hardness results is left as an open problem.

Acknowledgement: The authors are thankful to Laurent Feuilloley for fruitful discussions about the topic of the paper.

References

- [1] L. Feuilloley, P. Fraigniaud: Randomized Local Network Computing. In proc. 27th ACM Symp. on Parallelism in Algorithms and Architectures (SPAA), pp340-349, 2015
- [2] L. Feuilloley, P. Fraigniaud, J. Hirvonen: A Hierarchy of Local Decision. In proc. 43rd International Colloquium on Automata, Languages and Programming (ICALP), to appear, July 2016.
- [3] P. Floréen, J. Kaasinen, P. Kaski, J. Suomela: An optimal local approximation algorithm for max-min linear programs. In proc. 21st ACM Symp. on Parallelism in Algorithms and Architectures (SPAA), pp260-269, 2009.
- [4] P. Fraigniaud, M. Göös, A. Korman, J. Suomela: What can be decided locally without identifiers? In proc. 32nd ACM Symp. on Principles of Distributed Computing (PODC), pp157-165, 2013.
- [5] P. Fraigniaud, M. Halldórsson, A. Korman. On the Impact of Identifiers on Local Decision. In proc. 16th Int. Conference on Principles of Distributed Systems (OPODIS). Springer, LNCS 7702, pp224-238, 2012.
- [6] P. Fraigniaud, A. Korman, D. Peleg. Towards a complexity theory for local distributed computing. *J. ACM* 60(5): 35 (2013) (Preliminary version in FOCS 2011).
- [7] M. Göös, J. Suomela: Locally checkable proofs. In proc. 30th ACM Symposium on Principles of Distributed Computing (PODC), pp159-168, 2011.
- [8] A. Korman, S. Kutten, D. Peleg (2010). Proof labeling schemes. *Distributed Computing* 22(4): 215-233.
- [9] F. Kuhn, T. Moscibroda, R. Wattenhofer: What cannot be computed locally! In proc. 23rd ACM Symp. on Principles of Distributed Computing (PODC), pp300-309, 2004.
- [10] C. Lenzen, Y. Anne Oswald, R. Wattenhofer: What can be approximated locally? In proc. 20th ACM Symp. on Parallelism in Algorithms and Architectures (SPAA), pp46-54, 2008.
- [11] C. Lenzen, R. Wattenhofer: Leveraging Linial's Locality Limit. In proc. 22nd Int. Symp. on Distributed Computing (DISC), pp394-407, 2008.
- [12] N. Linial. Locality in Distributed Graph Algorithms. *SIAM J. Comp.* 21(1): 193-201 (1992)
- [13] M. Naor, L. Stockmeyer. What Can be Computed Locally? *SIAM J. Comput.* 24(6): 1259-1277 (1995)
- [14] D. Peleg. *Distributed Computing: A Locality-Sensitive Approach*. SIAM (2000)
- [15] F. Reiter: Distributed Graph Automata. In proc. 30th ACM/IEEE Symposium on Logic in Computer Science (LICS), pp192-201, 2015.
- [16] J. Suomela: Survey of local algorithms. *ACM Comput. Surv.* 45(2): 24 (2013)