

Harmonic analysis of random number generators and multiplicative groups of residue class rings

OLIVER SCHNETZ*

September 26, 1996

Abstract

The spectral test of random number generators (R.R. Coveyou and R.D. McPherson, 1967) is generalized. The sequence of random numbers is analyzed explicitly, not just via their n -tupel distributions. The generalized analysis of many generators becomes possible due to a theorem on the harmonic analysis of multiplicative groups of residue class rings. We find that the mixed multiplicative generator with power of two modulus does not pass the extended test with an ideal result. Best qualities has a new generator with the recursion formula $X_{k+1} = aX_k + c \text{int}(k/2) \bmod 2^d$. We discuss the choice of the parameters a, c for very large moduli 2^d and present an implementation of the suggested generator with $d = 256$, $a = 2^{128} + 2^{64} + 2^{32} + 62181$, $c = (2^{160} + 1) \cdot 11463$.

Contents

1	Introduction	2
2	The generalized spectral test	4
2.1	Review of the spectral test	4
2.2	Generalization of the spectral test	5
2.3	Valuation with the generalized spectral test	6
3	Multiplicative groups of residue class rings	8

*Institut für theoretische Physik III, Staudtstraße 7, 91058 Erlangen, Germany,
 e-mail: schnetz@pest.physik.uni-erlangen.de
 Supported in parts by the DFG Graduiertenkolleg 'Starke Wechselwirkung' and the BMBF.
 FAU-TP3-96/13

4	Generators	14
4.1	$X_0 = c, X_{k+1} = aX_k \bmod M$	14
4.2	$X_0 = 0, X_{k+1} = aX_k + c \bmod M$	17
4.3	$X_0 = 0, X_{k+1} = aX_k + ck \bmod M$	20
4.4	$X_0 = 0, X_{k+1} = aX_k + c \operatorname{int}(k/t) \bmod M$	23
4.5	$X_0 = 1, X_{-1} = \dots = X_{-r+1} = 0, X_{k+1} = a_{r-1}X_k + \dots + a_0X_{k-r+1} \bmod P$	26
5	Choice of parameters	27
6	Results and outlook	34

1 Introduction

The spectral test was proposed by R.R. Coveyou and R.D. McPherson in 1967 [1]. The advantage of this test is to present an algebraic criterion for the quality of the generator. For the mixed multiplicative generator $X_{k+1} = aX_k + c \bmod M$

$$\min \{ |\mathbf{s}| = \sqrt{s_1^2 + \dots + s_n^2} \text{ with } s_a = s_1 + as_2 + \dots + a^{n-1}s_n = 0 \bmod M \} \quad (1)$$

should be as large as possible [1, 2]. The criterion is that simple since the n -tuples of random numbers form an n -dimensional lattice (cf. e.g. Fig. 4). A good generator has uniformly distributed n -tuples which refers to an almost cubic lattice [3, 4, 5].

The lattice is a consequence of the (affine) linear dependence of X_{k+1} on X_k . From the figures on the left (type I) we see that the relation between k and X_k is much more complicated. This is however one of the most fundamental aspects of randomness. In order to judge whether a sequence X_k takes random values one would first plot the sequence itself and then maybe X_{k+1} over X_k .

Of course, the correlation between k and X_k is not independent from the distribution of pairs (X_k, X_{k+1}) . E.g., a poor 'random' sequence $X_k = ak$ lying on a line with gradient a leads to pairs $(X_k, X_{k+1} = X_k + a)$ lying on a line with gradient 1 shifted by a off the origin. This makes it reasonable to judge randomness by only looking at the n -tuple distributions. However, random number generators which have identical valuation by the spectral test may still look quite different. The generators $X_{k+1} = 41X_k + 3 \bmod 1024$ (Fig. 5) and $X_{k+1} = 41X_k + 1 \bmod 1024$ (Fig. 6), e.g., differ only by the additive constant which does not enter Eq. (1). The lattices of pair distributions (type II in the figures) are similar whereas the plots of X_k over k show different behavior. The spectral test not even makes a difference between a prime number and a power of two modulus (cf. Fig. 1 vs. Fig. 4).

Therefore it is desirable to include the analysis of the correlation between k and X_k into the valuation of the test. In fact it is possible to analyze the accumulation of random numbers along certain lines (which is often seen in the figures) by Fourier transformation. More generally we extend the spectral test by analyzing the correlation between k and the n -tuple $(X_k, X_{k+1}, \dots, X_{k+n-1})$. The generators mentioned above (Figs. 5, 6) acquire

different valuations. Fig. 6 is preferred since the random numbers spread more uniformly in Fig. 6I than in Fig. 5I (cf. Ex. 4.3 1.(a)).

We will develop a powerful theorem (Thm. 3.4, Cor. 3.5) on the harmonic analysis of multiplicative groups of residue class rings that allows us to algebraically perform the test for the standard generators. It becomes even possible to evaluate the extended test on more generators than the original spectral test has yet been applied. This has the advantage to have more freedom for the search after an optimum generator.

In fact we will find that the commonly used mixed multiplicative generator always shows correlations along certain lines if the modulus is not a prime number. We will improve the generator until these correlations will essentially disappear (from Fig. 4 via Fig. 9 to Fig. 11). We finally recommend the recursion formula

$$X_{k+1} = aX_k + c \operatorname{int}(k/2) \bmod 2^d \quad (2)$$

with the parameters

$$\begin{aligned} d &= 2^k d_0, \quad a = 2^{2^{k-1}d_0} + 2^{2^{k-2}d_0} + \dots + 2^{2d_0} + (3\,580\,621\,541 \bmod 2^{d_0}), \\ c &= \left(2^{\operatorname{int}(2^{k+1}/3)d_0} + 1\right) (3\,370\,134\,727 \bmod 2^{d_0}). \end{aligned} \quad (3)$$

In particular, the case $d_0 = 16$, $k = 4$ is discussed in Ex. 5.1 1.

This generator is supposed to be a good choice with respect to the following three criteria.

Firstly, the sequence of numbers provided by the generator should behave as close to a true random sequence as possible.

Secondly, the calculation of random numbers should be as fast as possible. The generator given in Eqs. (2), (3) is explicitly constructed to have best performance. It is important to note that this is not independent from the first criterion. It is possible to produce better random numbers the more effort one spends in calculating the numbers. Figs. 4 and 8 show how a simple doubling of the digits of the modulus improves the randomness of the generator. In general we can produce arbitrarily good random numbers with e.g. $d_0 = 32$ and large k in Eq. (3).

Thirdly, the properties of the random numbers should be known as detailed as possible. It is not sufficient to use a messy, opaque formula. It has often been seen that this leads to numbers which are far from being random [2]. As long as one is not familiar with the qualities of the generator one can never rely on the results gained with it. The full evaluation of the generalized spectral test is supposed to provide a profound knowledge of the generator.

We start with the development of the generalized spectral test in the next section. In Sec. 3 we derive some mathematical results on the Fourier transformation of residue class rings. In Sec. 4 we apply the result of the previous section, Thm. 3.4, to a series of commonly used and some new generators. Finally we discuss the choice of parameters in Sec. 5.

2 The generalized spectral test

2.1 Review of the spectral test

We start with a short review of the spectral test [1, 2] in which we try to stress its geometrical meaning. The idea is to plot all n -tuples of successive random numbers in an n -dimensional diagram. This is done, e.g. for $n = 2$ in the figures of type II.

Mathematically a figure is presented as a function g which is 1 at every dot and 0 elsewhere. If N_X is the period of the generator X , that is the smallest number with $X_{k+N_X} = X_k \forall k$, then

$$g(x_1, \dots, x_n) = \sum_{k=1}^{N_X} \delta_{x_1, X_k} \cdots \delta_{x_n, X_{k+n-1}} \equiv \sum_{\mathbf{x} \in \mathbb{Z}_{N_X}^n} \delta_{\mathbf{x}, \mathbf{X}_k}, \quad (4)$$

where $\delta_{a,b} = 1$ if $a = b$ and $\delta_{a,b} = 0$ if $a \neq b$ (for later convenience we also write the Kronecker δ as $\delta_{a=b}$). Moreover we have introduced the notation

$$\mathbf{X}_k = (X_k, X_{k+1}, \dots, X_{k+n-1}), \quad \mathbf{x} = (x_1, x_2, \dots, x_n), \quad \mathbb{Z}_{N_X} = \mathbb{Z}/N_X\mathbb{Z}. \quad (5)$$

We want to check whether the dots accumulate along certain hyper-planes (see e.g. the lines in Fig. 1II). To this end we select a hyper-plane and project all the dots onto a line perpendicular to it. If points accumulate along the plane many dots will lie on top of each other, otherwise the dots are spread uniformly over the line.

The hyper-plane H is determined by its Hesse normal form

$$H = \{\mathbf{x} : s_1 x_1 + s_2 x_2 + \dots + s_n x_n \equiv \mathbf{s} \cdot \mathbf{x} = 0\}, \quad |\mathbf{s}| \equiv \sqrt{\mathbf{s} \cdot \mathbf{s}} \equiv \sqrt{s_1^2 + \dots + s_n^2} \neq 0. \quad (6)$$

The line is stretched by the factor $|\mathbf{s}|$. The position of a point \mathbf{X}_k on the line perpendicular to the plane is given by the number $\mathbf{s} \cdot \mathbf{X}_k$.

Next we wind the line up to a circle so that the modulus M as point on the line lies on top of the 0. For a suitable choice of \mathbf{s} , namely $\mathbf{s} = (-3, 7)$ all points in Fig. 1II lie now on the point represented by the number 256.

The points are realized as complex phases on the unit circle. We obtain the assignment

$$\mathbf{X}_k \mapsto \exp\left(\frac{2\pi i}{M} \mathbf{s} \cdot \mathbf{X}_k\right). \quad (7)$$

Finally we draw arrows from the center of the circle to all the dots and add them. The length of the resulting vector describes how the dots are balanced on the circle. If the dots spread uniformly the arrows cancel each other and the resulting vector is small. If, on the other hand, all dots lie on top of each other the length of the arrows sums up to N_X .

If we restrict ourselves to integer s_1, \dots, s_n (accumulation of random numbers always occur along hyper-planes given by integer s_i) the resulting vector is given by the Fourier transform of g ,

$$\hat{g}(\mathbf{s}) = \frac{1}{\sqrt{N_X}} \sum_{\mathbf{x} \in \mathbb{Z}_{N_X}^n} g(\mathbf{x}) \exp\left(\frac{2\pi i}{M} \mathbf{s} \cdot \mathbf{x}\right) = \frac{1}{\sqrt{N_X}} \sum_{\mathbf{k} \in \mathbb{Z}_{N_X}^n} \exp\left(\frac{2\pi i}{M} \mathbf{s} \cdot \mathbf{X}_k\right), \quad (8)$$

where we have introduced the normalization factor $N_X^{-1/2}$. The information about accumulations along the hyper-plane is contained in $|\hat{g}|^2$, the phase of \hat{g} is irrelevant.

We remember that for the mixed multiplicative generator the n -tupels form a lattice (which is displaced off the origin). So $|\hat{g}|^2(\mathbf{s})$ will assume the maximum value N_X if \mathbf{s} lies in the dual lattice, $\mathbf{s} \cdot \mathbf{X}_k = C + \ell M$, $C, \ell \in \mathbb{Z}$, otherwise $|\hat{g}|^2(\mathbf{s})$ is zero. Since $X_k = c(a^k - 1)/(a - 1) \bmod M$ this means, if $\gcd(c, M) = 1$ and X has full period, that $\forall k : (a^k - 1)s_a = 0 \bmod M \gcd(a - 1, M)$ from which Eq. (1) follows (cf. Ex. 4.3 1).

2.2 Generalization of the spectral test

We generalize the spectral test by caring for the sequence in which the n -tupels are generated. The index k is added to the n -tuple \mathbf{X}_k as zeroth component and we define g as

$$g(x_0, \mathbf{x}) = \sum_{k \in \mathbb{Z}_{N_X}} \delta_{x_0, k} \delta_{\mathbf{x}, \mathbf{X}_k} = \delta_{\mathbf{x}, \mathbf{X}_{x_0}}. \quad (9)$$

The geometrical interpretation remains untouched but now we consider also the figures of type I. With the Fourier transform of g we introduce some notation that will be needed later,

$$\hat{g}_{\mathbb{Z}_{N_1}}[N_2, M, X](s_0, \mathbf{s}) = \frac{1}{\sqrt{N_1}} \sum_{k \in \mathbb{Z}_{N_1}} \exp\left(\frac{2\pi i}{N_2} s_0 k + \frac{2\pi i}{M} \mathbf{s} \cdot \mathbf{X}_k\right). \quad (10)$$

Normally $N_1 = N_2 = N_X$ is the period of X . We write $g[N_2, M, X]$ if $N_1 = N_2$ and we also suppress N_2 if $N_1 = N_2 = N_X$. However, sometimes it is convenient to use a multiple N_2 of the period N_X instead of the period itself. Moreover for some values of (s_0, \mathbf{s}) , e.g. $(0, \mathbf{0})$, the right hand side is periodic in k with a smaller period $N_1|N_2$. In this case we may sum over \mathbb{Z}_{N_1} only and use the subscript \mathbb{Z}_{N_1} . Note that $\sum_{k \in \mathbb{Z}_{N_1}} f(k)$ always implies that f is a function on \mathbb{Z}_{N_1} which means that f is periodic, $f(k) = f(k + N_1) \forall k$. We also suppress M and X on the left hand if the context is clear.

The sum over k is hard to evaluate since in the exponential k is combined with X_k . However in fact we are interested in $|\hat{g}|^2$ and find

$$\begin{aligned} |\hat{g}|^2(s_0, \mathbf{s}) &= \frac{1}{N_X} \sum_{k, k' \in \mathbb{Z}_{N_X}} \exp\left(\frac{2\pi i}{N_X} s_0 (k' - k) + \frac{2\pi i}{M} \mathbf{s} \cdot (\mathbf{X}_{k'} - \mathbf{X}_k)\right) \\ &= \frac{1}{N_X} \sum_{\Delta k \in \mathbb{Z}_{N_X}} \exp\left(\frac{2\pi i}{N_X} s_0 \Delta k\right) \sum_{k \in \mathbb{Z}_{N_X}} \exp\left(\frac{2\pi i}{M} \mathbf{s} \cdot (\mathbf{X}_{k+\Delta k} - \mathbf{X}_k)\right). \quad (11) \end{aligned}$$

The sum over k has no linear k -dependence, only differences of random numbers occur. Like in the standard spectral test in many cases the sum over k can be evaluated. The result is often simple enough to be able to evaluate the sum over Δk also.

If, e.g., $X_k = a^k \bmod P$ where P is a prime number and a is a primitive element of \mathbb{Z}_P^\times , the multiplicative group of \mathbb{Z}_P , we find that $\mathbf{s} \cdot (\mathbf{X}_{k+\Delta k} - \mathbf{X}_k) = s_a a^k (a^{\Delta k} - 1) = s_a \tilde{k} (a^{\Delta k} - 1) \bmod P$ for some $0 \neq \tilde{k} \in \mathbb{Z}_P$. If k runs through the $P - 1$ values of \mathbb{Z}_P^\times then \tilde{k} sweeps out the whole $\mathbb{Z}_P \setminus \{0\}$. The sum over \tilde{k} can be evaluated yielding $P \delta_{\Delta k=0} - 1$ for $s_a \neq 0$.

Finally the sum over Δk gives together with the normalization $|\hat{g}|^2 = P/(P-1) - \delta_{s_0=0}$ (cf. Eq. (52) for $d=1$).

Note that the standard spectral test corresponds to $s_0 = 0$. We give some simple results on $|\hat{g}|^2$ in the following lemma.

Lemma 2.1.

$$\begin{aligned} |\hat{g}|^2[c_1 X_{k+c_2} + c_3](s_0, \mathbf{s}) &= |\hat{g}|^2[X_k](s_0, c_1 \mathbf{s}) \\ &= |\hat{g}|^2[X_k](s_0, \mathbf{s}) \text{ if } \exists c_0 : c_1 X_k = X_{k+c_0}, \end{aligned} \quad (12)$$

$$|\hat{g}|^2_{\mathbb{Z}_{c_2 N_X}}[c_1 N_X](s_0, \mathbf{s}) = c_2 \delta_{s_0=0 \bmod c_1} |\hat{g}|^2(s_0/c_1, \mathbf{s}), \quad (13)$$

$$|\hat{g}|^2_{\mathbb{Z}_1} = 1, \quad |\hat{g}|^2(s_0, \mathbf{0}) = N_X \delta_{s_0=0 \bmod N_X}, \quad (14)$$

$$\sum_{s_0 \in \mathbb{Z}_{N_X}} |\hat{g}|^2(s_0, \mathbf{s}) = N_X, \quad \sum_{\mathbf{s} \in \mathbb{Z}_M^n} |\hat{g}|^2(s_0, \mathbf{s}) = M^n \text{ if } \mathbf{X}_k = \mathbf{X}_{k'} \Rightarrow k = k' \bmod N_X. \quad (15)$$

Proof. The proofs are straight forward. We show Eq. (13) to get used to the notation:

$$\begin{aligned} \hat{g}_{\mathbb{Z}_{c_2 N_X}}[c_1 N_X](s_0, \mathbf{s}) &= \sqrt{1/c_2 N_X} \sum_{k \in \mathbb{Z}_{c_2 N_X}} \exp\left(\frac{2\pi i}{c_1 N_X} s_0 k + \frac{2\pi i}{M} \mathbf{s} \cdot \mathbf{X}_k\right) \\ &= \sqrt{c_2/c_1^2 N_X} \sum_{k \in \mathbb{Z}_{c_1 N_X}} \exp\left(\frac{2\pi i}{c_1 N_X} s_0 k + \frac{2\pi i}{M} \mathbf{s} \cdot \mathbf{X}_k\right) \\ &= \sqrt{c_2/c_1^2 N_X} \sum_{k_1 \in \mathbb{Z}_{N_X}} \sum_{k_2 \in \mathbb{Z}_{c_1}} \exp\left(\frac{2\pi i}{c_1 N_X} s_0 (k_1 + N_X k_2) + \frac{2\pi i}{M} \mathbf{s} \cdot \mathbf{X}_{k_1}\right) \\ &= \sqrt{c_2/N_X} \delta_{s_0=0 \bmod c_1} \sum_{k_1 \in \mathbb{Z}_{N_X}} \exp\left(\frac{2\pi i}{N_X} \frac{s_0}{c_1} k_1 + \frac{2\pi i}{M} \mathbf{s} \cdot \mathbf{X}_{k_1}\right). \end{aligned}$$

□

One may also be interested in correlations between non-successive random numbers like X_k and X_{k+2} . In general it is possible to study n -tuples $\mathbf{X}_{k+\tau} \equiv (X_{k+\tau_1}, \dots, X_{k+\tau_n})$. This amounts to replacing \mathbf{X}_k by $\mathbf{X}_{k+\tau}$ and s_a by $s_{a,\tau} \equiv s_1 a^{\tau_1} + \dots + s_n a^{\tau_n}$ in our results.

2.3 Valuation with the generalized spectral test

Now we have to clarify how the calculation of $|\hat{g}|^2$ leads to a valuation of the generator.

We can not expect that $|\hat{g}|^2$ vanishes identically outside the origin since in this case g would be constant. Eq. (15) shows that the mean value of $|\hat{g}|^2$ is 1.

What would we expect for a sum of truly random phases? Real and imaginary part of a random arrow with length 1 have equal variance 1/2. For large N_X the sum of arrows is therefore normally distributed with density $1/\pi N_X \cdot \exp(-(x^2 + y^2)/N_X) dx dy = \exp(-r^2/N_X) dr^2/N_X$. Thus $z = |\hat{g}|^2$ has the density $\exp(-z)$ for a true random sequence and the expected value for $|\hat{g}|^2$ is 1.

This means that values of $|\hat{g}|^2 \leq 1$ can be accepted. It is clear that for a given $(s_0, \mathbf{s}) \neq (0, \mathbf{0})$ the correlations are worse the higher $|\hat{g}|^2(s_0, \mathbf{s}) > 1$ is. But what does the location of an (s_0, \mathbf{s}) with $|\hat{g}|^2(s_0, \mathbf{s}) > 1$ mean for the generator?

We remember that (s_0, \mathbf{s}) may be seen as normal vector on the hyper-plane along which the accumulations occur. If e.g. $n = 1$ and $(s_0, s_1) = (1, 1)$ the corresponding 1-plane has the equation $x_0 + x_1 = 0$ (cf. e.g. Figs. 4I, 5I). If the k -axis and the X_k -axis are normalized to length 1 this line has length $\sqrt{2}$. With the normal vector $(3,1)$ (cf. Fig. 6I) one obtains the equation $3x_0 + x_1 = 0 \bmod 1$ which intersects the unit cube three times and therefore has the length $\sqrt{3^2 + 1} = \sqrt{10}$. Accumulations along this longer line are less important than along the short line. In the extreme case where the line fills the whole unit cube by intersecting it very often, accumulations can hardly be recognized. Note that in this sense the normal vectors (s_0, s_1) and $(2s_0, 2s_1)$ do not determine the same line. The latter one contains e.g. the points $(1/2, 0)$, $(0, 1/2)$, $(1, 1/2)$, $(1/2, 1)$. It has twice the length of the former one and too large a $|\hat{g}|^2$ has half the effect.

We generalize these considerations to $n > 1$ by taking the area of the n -dimensional hyper-plane with normal vector (s_0, \mathbf{s}) as measure for the importance of the accumulations detected. The area is given by $|(s_0, \mathbf{s})| = (s_0^2 + \mathbf{s}^2)^{1/2}$, the Euclidean length of the normal vector.

We can relate both mechanisms by defining the quality parameter

$$Q_n(s_0, \mathbf{s}) \equiv \frac{|(s_0, \mathbf{s})|}{|\hat{g}(s_0, \mathbf{s})|^2}, \quad Q_n \equiv \max_{(s_0, \mathbf{s}) \in \mathbb{Z}_{N_X} \times \mathbb{Z}_M^n \setminus \{0, \mathbf{0}\}} Q_n(s_0, \mathbf{s}). \quad (16)$$

Good generators have $Q_1 \approx 1$. It is hard to achieve $Q_n \approx 1$ for $n > 1$ (see however Sec. 4.5). More realistic is $Q_n \approx M^{1/n-1}$ (cf. Sec. 5) which means that the distribution of n -tupels deteriorates for higher n . In general small n are more important than large n . Apart from the value of Q_n also the number of sites (s_0, \mathbf{s}) at which $Q_n(s_0, \mathbf{s}) = Q_n$ is relevant (cf. Ex. 4.3 1.(a)).

Let us try to find an interpretation for Q_n . Assume the generator produces only multiples of $t|M$. Then $|\hat{g}|^2(0, s_1 = M/t, 0, \dots, 0) = N_X$, thus $Q_n(0, M/t, 0, \dots, 0) = M/tN_X$, and $N_X Q_n$ determines the number of non-trivial digits. In general $N_X Q_n$ may be larger than M and therefore we say that $\tilde{M}_n \equiv \max(N_X Q_n, M)$ determines the number of digits we can rely on. Analogously $\tilde{N}_n \equiv \max(N_X Q_n, N_X)$ gives the quantity of random numbers for which the n -tuple distributions are reasonably random. Specifically $\tilde{M}_n(s_0, \mathbf{s}) = \max(N_X Q_n(s_0, \mathbf{s}), M)$ determines the digits and $\tilde{N}_n(s_0, \mathbf{s}) = \max(N_X Q_n(s_0, \mathbf{s}), N_X)$ the quantity of random numbers not affected by accumulations perpendicular to (s_0, \mathbf{s}) (cf. [2, ,p. 90]).

Note however that these are only crude statements. If, e.g., the 'period' of the generator is enlarged by simply repeating it then $N_X Q_n(s_0, \mathbf{s})$ remains unaffected only if $s_0 = 0$. Moreover, a high $|\hat{g}|^2(s_0, \mathbf{s})$ may be harmful even if $|(s_0, \mathbf{s})|$ is large (cf. Fig. 3I with $Q_1 > 1$).

Note that Q_n is a relative quality parameter. Although Q_n usually does not increase with larger modulus (for $n > 1$ is actually decreases) the quality of the generator gets better since N_X grows (cf. Fig. 4 vs. Fig. 8).

3 Multiplicative groups of residue class rings

This section provides the mathematical tools that are needed to analyze several random number generators. We derive Eq. (44) which determines $|\hat{g}|^2$ for $X_k = a^k \bmod M$ for various moduli M and multipliers a . There are some connections to the theory of Gauß sums (see e.g. [6, §3]) where however the calculation of the absolute is almost trivial. In our case the exponent is not quadratic but has a linear and an exponential component (cf. Cor. 3.5, but also Ex. 4.6 4). The modulus is not restricted to a prime number. We are concerned with residue class rings rather than with fields.

Throughout the paper we use the following notation,

$$\begin{aligned}
\mathbb{Z}_M &\equiv \mathbb{Z}/\mathbb{Z}M \text{ integers mod } M . \\
\mathbb{Z}_M^\times &\equiv \text{multiplicative group of } \mathbb{Z}_M , \quad a \in \mathbb{Z}_M^\times \iff \gcd(a, M) = 1 . \\
\langle a \rangle_M &\equiv \{a^k \bmod M, k \in \mathbb{Z}\} , \text{ the cyclic group of } a \bmod M . \\
s_a &\equiv \sum_{j=1}^n s_j a^{j-1} , \quad s_{a,M} \equiv \gcd(s_a, M) . \\
N &\equiv N_{a,M} \equiv |\langle a \rangle_M| , \text{ the order of } a \bmod M , \\
&\quad \text{the subscripts } a \text{ and } M \text{ are suppressed except for in } s_a \text{ and } s_{a,M} . \\
\delta_{a=b} &= 1 \quad \text{if } a = b , \quad \delta_{a=b} = 0 \quad \text{if } a \neq b .
\end{aligned} \tag{17}$$

Definition 3.1. Let $M \in \mathbb{N}$, $a \in \mathbb{Z}_M^\times$. Then $m \equiv m_a \equiv m_M \equiv m_{a,M}$ is the smallest positive integer with $(N_m = |\langle a \rangle_m|)$

$$m \text{ contains every prime factor of } M, \tag{18}$$

$$4|m \text{ if } 8|M, \tag{19}$$

$$m = \gcd(a^{N_m} - 1, M) . \tag{20}$$

Moreover

$$m_0 \equiv \gcd(m, M/m) , \quad M_0 \equiv M/m m_0 = M/\gcd(m^2, M) . \tag{21}$$

In practice m is easily determined by Eq. (28). We begin with a technical proposition.

Proposition 3.2. For $M_1|M$, $a \in \mathbb{Z}_M^\times$ we define

$$c \equiv \frac{a^{N_m} - 1}{m} \cdot \begin{cases} 1 & \text{if } M_1 \text{ odd,} \\ \left(1 + \frac{m}{2} + \frac{M}{4}\right) & \text{if } M_1 \text{ even, } M = 4 \bmod 8 \text{ and } m = 2 \bmod 4, \\ \left(1 + \frac{m}{2}\right) & \text{else.} \end{cases} \tag{22}$$

With this definition we obtain for $X_k = a^k$

$$c \in \mathbb{Z}_{M/m}^\times , \tag{23}$$

$$a^{N_m M_1 k} = 1 + cm M_1 k \bmod \gcd(m^2 M_1, M) , \tag{24}$$

$$\exists c_k \in \mathbb{Z}_{M/m}^\times \text{ with } a^{N_m k} = 1 + c_k m k \bmod M , \tag{25}$$

$$\hat{g} = \frac{\sqrt{N}}{N_m M_1} \sum_{k \in \mathbb{Z}_{N_m M_1}} \delta_{\frac{N_m M}{m N} s_0 + s_a a^k c = 0 \bmod \frac{M}{m M_1}} \exp\left(\frac{2\pi i}{N} s_0 k + \frac{2\pi i}{M} s_a a^k\right), \text{ if } M|m^2 M_1. \tag{26}$$

$$= \frac{\sqrt{N}}{N_m} \sum_{k \in \mathbb{Z}_{N_m}} \delta_{ms_0 + s_a a^k (a^{N_m} - 1) = 0 \pmod{M}} \exp\left(\frac{2\pi i}{N} s_0 k + \frac{2\pi i}{M} s_a a^k\right), \text{ if } M|m^2. \quad (27)$$

Proof. Eq. (23) is an immediate consequence of Def. 3.1. Moreover

$$\begin{aligned} a^{N_m M_1 k} - 1 &= \left(a^{N_m} - 1 + 1\right)^{M_1 k} - 1 \\ &= \left(a^{N_m} - 1\right) M_1 k \left(1 + \frac{M_1 k - 1}{2} \left(a^{N_m} - 1\right)\right) + \left(a^{N_m} - 1\right)^2 \sum_{j=3}^{M_1 k} \binom{M_1 k}{j} \left(a^{N_m} - 1\right)^{j-2}. \end{aligned}$$

First we show that the sum over j is a multiple of M_1 . Obviously $\mathbb{N} \ni \binom{M_1 k}{j} = \binom{M_1 k - 1}{j - 1} \frac{M_1 k}{j}$. Since j has at most $j - 2$ prime factors for $j \geq 3$ and $a^{N_m} - 1$ has by definition every prime factor of M_1 we obtain $\mathbb{N} \ni \binom{M_1 k - 1}{j - 1} (a^{N_m} - 1)^{j-2} k / j = \binom{M_1 k}{j} (a^{N_m} - 1)^{j-2} / M_1$.

The first term equals $(a^{N_m} - 1) M_1 k \pmod{m^2 M_1}$ if M_1 is odd, and $(a^{N_m} - 1) M_1 k (1 + m/2) \pmod{m^2 M_1}$ if M_1 is even. Finally the term $M/4$ can be added without harm if M_1 is even and $M = 4 \pmod{8}$. This gives Eq. (24).

Let $M_2 = \max_j \gcd(k, M^j)$. Then $k_2 \equiv k/M_2 \in \mathbb{Z}_M^\times$ and with $M_1 \equiv \gcd(M_2, M)$ we have $\gcd(m^2 M_1, M) = \gcd(m^2 M_2, M) = \ell_1 m^2 M_2 + \ell_2 M$ for some $\ell_1, \ell_2 \in \mathbb{Z}$. With $k_2^{-1} \in \mathbb{Z}_M^\times$, $\ell_3 \in \mathbb{Z}$ Eq. (24) gives $a^{N_m k} = 1 + cmk + \ell_3 \ell_1 m^2 M_2 k_2 k_2^{-1} \pmod{M}$. We find $c_k \equiv c + \ell_3 \ell_1 m k_2^{-1} \in \mathbb{Z}_{M/m}^\times$ from Eqs. (18), (23).

Eq. (26) is obtained if one plugs Eq. (24) into the definition (10) of \hat{g} . We find

$$\begin{aligned} \hat{g} &\stackrel{(13)}{=} \frac{1}{M_1 \sqrt{N}} \sum_{k \in \mathbb{Z}_{N M_1}} \exp\left(\frac{2\pi i}{N} s_0 k + \frac{2\pi i}{M} s_a a^k\right) \\ &= \frac{1}{M_1 \sqrt{N}} \sum_{k \in \mathbb{Z}_{N_m M_1}} \sum_{k' \in \mathbb{Z}_{N/N_m}} \exp\left(\frac{2\pi i}{N} s_0 (k + N_m M_1 k') + \frac{2\pi i}{M} s_a a^k (1 + cm M_1 k')\right). \end{aligned}$$

The sum over k' gives the Kronecker δ and we get Eq. (26).

Finally Eq. (27) will be obtained for $M_1 = 1$ with Eq. (36). This equation will next be derived independently of Eq. (27). \square

Lemma 3.3.

If m' is the smallest number that meets Eqs. (18), (19) then

$$N_m = N_{m'}, \quad m = \gcd\left(a^{N_{m'}} - 1, M\right). \quad (28)$$

$$N_{m_{2^k p_1^{k_1} \dots p_\ell^{k_\ell}}} = N_{2^{k_0} p_1 \dots p_\ell} = \text{lcm}(N_{2^{k_0}}, N_{p_1}, \dots, N_{p_\ell}),$$

$$\text{if } p_1, \dots, p_\ell \text{ are odd, prime and } k_0 = \min(k, 2). \quad (29)$$

$$N_m = 1 \Leftrightarrow m = \gcd(a - 1, M) \Leftrightarrow a - 1 \text{ meets conditions 1 and 2 of Def. 3.1.} \quad (30)$$

$$M = P^d, \quad 2 \neq P \text{ prime: } a \text{ is primitive, } \langle a \rangle_{P^d} = \mathbb{Z}_{P^d}^\times \Leftrightarrow m = P \wedge N_m = P - 1. \quad (31)$$

$$M = 2^d, \quad d \geq 3: \quad a = 1 \pmod{4} \Leftrightarrow N_m = 1, \quad a = 3 \pmod{4} \Leftrightarrow N_m = 2. \quad (32)$$

$$M' | M \Rightarrow N_{m_{M'}} | N_m, \quad m_{M'} | m. \quad (33)$$

$$m_m = m. \quad (34)$$

$$\langle a \rangle_M = \langle a \rangle_m + m\mathbb{Z}_{M/m} . \quad (35)$$

$$\frac{N}{M} = \frac{N_m}{m} . \quad (36)$$

$$m_{m_0} = m_{M/m} . \quad (37)$$

$$\frac{N_{M/m}}{N_{m_0}} = M_0 , \quad \frac{N}{N_{M/m}} = \frac{N_m m_0}{N_{m_0}} . \quad (38)$$

$$N_{m_0} = \gcd(N_m, N_{M/m}) . \quad (39)$$

$$N_{m_{a^A}} = \frac{N_m}{\gcd(N_m, A)} , \quad m_{a^A} = \frac{\gcd(N, A) m}{\gcd(N_m, A)} . \quad (40)$$

$$N_{m_a^{N_{M/m}}} = \frac{N_m}{N_{m_0}} , \quad m_a^{N_{M/m}} = \frac{M}{m_0} . \quad (41)$$

Proof. Obviously $m'|m$ and thus $N_{m'}|N_m$ since $\langle a \rangle_{m'}$ is a subgroup of $\langle a \rangle_m$. Since m is minimal we find $N_m = N_{m'}$ and thus Eq. (28). Eqs. (29)–(34) follow directly from Eq. (28).

We use Eq. (26) with $s_0 = 0$ and $n = 1$ to Fourier transform $\langle a \rangle_M$. We choose M_1 with $s_1 m^2 M_1 = 0 \pmod{M}$ and obtain that \hat{g} vanishes unless $ca^k s_1 m M_1 = 0 \pmod{M}$. Since $a \in \mathbb{Z}_M^\times$, $c \in \mathbb{Z}_{M/m}^\times$ (Eq. (23)) this implies $s_1 m M_1 = 0 \pmod{M}$. Thus for non-vanishing \hat{g} and $M'_1 = M_1 / \gcd(M_1, m)$ we have $s_1 m^2 M'_1 = 0 \pmod{M}$ which enables us to use Eq. (26) again (with M_1 replaced by M'_1) yielding the stronger condition $s_1 m M'_1 = 0 \pmod{M}$. Since m contains every prime factor of M and $M_1 | M$ we can continue until $M'_1 = 1$ and finally we obtain

$$\hat{g}[N](0, \mathbf{s}) = \sqrt{N}/N_m \delta_{s_1=0 \pmod{M/m}} \hat{g}[N_m](0, \mathbf{s}) . \quad (42)$$

This fixes $\langle a \rangle_M$ to be $\{a^k + k'm \pmod{M}, k \in \mathbb{Z}_{N_m}, k' \in \mathbb{Z}_{M/m}\}$ (Eq. (13)). This is the statement of Eq. (35) and Eq. (36) follows immediately.

From $m_{M/m} | M/m$ and $m_{M/m} | m$ (Eq. (33)) we get $m_{M/m} | m_0$. Eqs. (34) and (33) give $m_{M/m} = m_{m_{M/m}} | m_{m_0} | m_{M/m}$, thus Eq. (37) is verified.

Eq. (38) follows from Eqs. (36), (37):

$$N_{M/m} \stackrel{(36)}{=} \frac{M}{m} \frac{N_{m_{M/m}}}{m_{M/m}} \stackrel{(37)}{=} \frac{M N_{m_0}}{m m_{m_0}} \stackrel{(36)}{=} \frac{M N_{m_0}}{m m_0} \stackrel{(36)}{=} \frac{N N_{m_0}}{N_m m_0} .$$

To prove Eq. (39) we begin with

$$\frac{m_0}{N_{m_0}} \gcd(N_m, N_{M/m}) \stackrel{(36),(37)}{=} \frac{m_{M/m}}{N_{m_{M/m}}} \gcd(N_m, N_{M/m}) \stackrel{(36)}{=} \gcd\left(\frac{N_m m_{M/m}}{N_{m_{M/m}}}, \frac{M}{m}\right) .$$

We will show that the right hand side equals m_0 . From Eq. (25) we know that there exists a $c' \in \frac{\mathbb{Z}_{M/m}^\times}{m_{M/m}}$ with

$$cm \equiv a^{N_m} - 1 = a^{N_{m_{M/m}} \frac{N_m}{N_{m_{M/m}}}} - 1 = c' m_{M/m} \frac{N_m}{N_{m_{M/m}}} \pmod{\frac{M}{m}} .$$

Since $c \in \mathbb{Z}_{M/m}^\times$ we have also $c, c' \equiv cc'^{-1} \in \mathbb{Z}_{\frac{M/m}{m_0}}^\times$ and the above equation implies that there exists a $k \in \mathbb{Z}$ with $N_m m_{M/m} / N_{m_{M/m}} = kM/m + c''m$. Finally we find for the right hand side of the first equation ($c'' \in \mathbb{Z}_{\frac{M/m}{m_0}}^\times$, Eq. (37))

$$\gcd\left(m_{M/m} N_m / N_{m_{M/m}}, M/m\right) = \gcd(kM/m + c''m, M/m) = m_0.$$

Since $m | m_{aA} | a^{AN_{m_{aA}}} - 1$, we get $N_m | AN_{m_{aA}}$. On the other hand $N_{m_{aA}}$ is the smallest number with this property, so $N_{m_{aA}} = N_m / \gcd(N_m, A)$. Moreover we find

$$m_{aA} \stackrel{(36)}{=} \frac{N_{m_{aA}} M}{N_{aA}} \stackrel{(40)}{=} \frac{N_m M}{\gcd(N_m, A) N_{aA}} = \frac{N_m M \gcd(N, A)}{\gcd(N_m, A) N} \stackrel{(36)}{=} \frac{\gcd(N, A) m}{\gcd(N_m, A)}.$$

Finally the first statement of Eq. (41) follows from Eq. (40) and Eq. (39). Moreover

$$m_{a^{N_{M/m}}} \stackrel{(40)}{=} \frac{\gcd(N, N_{M/m}) m}{\gcd(N_m, N_{M/m})} \stackrel{(39)}{=} \frac{N_{M/m} m}{N_{m_0}} \stackrel{(38),(21)}{=} \frac{M}{m_0}.$$

□

Theorem 3.4. For $M \in \mathbb{N}$ let $X_k = a^k \bmod M$. If $a, \mathbf{s} \cdot \mathbf{X}_0 \equiv s_a \equiv \sum_{j=1}^n s_j a^{j-1} \in \mathbb{Z}_M^\times$ we obtain for $|\hat{g}|^2$ defined in Eq. (10) and m, m_0 given by Def. 3.1,

$$|\hat{g}|^2[N, X_\bullet](s_0, \mathbf{s}) = \frac{1}{N_m} \sum_{k \in \mathbb{Z}_{N_m}} |\hat{g}|^2[N/N_{M/m}, X_{k+N_{M/m}} \bullet](s_0, \mathbf{s} \cdot \mathbf{X}_0) \quad (43)$$

$$= \begin{cases} \frac{m_0}{N_{m_0}} |\hat{g}|^2_{\mathbb{Z}_{N_m/N_{m_0}}} [N/N_{M/m}, X_{k+N_{M/m}} \bullet](s_0, \mathbf{s} \cdot \mathbf{X}_0), \\ \text{if } \exists k \in \mathbb{Z}_{N_{m_0}} : s_0 + \mathbf{s} \cdot (\mathbf{X}_{N_m+k} - \mathbf{X}_k) / m = \frac{m_0}{2} \delta_{2|\frac{M}{mm_0}} \bmod m_0, \\ 0 \quad \text{else.} \end{cases} \quad (44)$$

Corollary 3.5. For all s_a and all generators of the type

$$X_k = c_1 a^k + c_2 k + c_3 \bmod M \quad (45)$$

with period N_X we have

$$|\hat{g}|^2[N_X, M, X](s_0, \mathbf{s}) = \frac{N_X}{N'} |\hat{g}|^2[N', M', X] \left(\frac{N'}{N_X} s_0, \frac{M'}{M} \mathbf{s} \right), \quad \text{with} \quad (46)$$

$$M' = M / \gcd(c_1 s_a, M), \quad N' = N_{M'},$$

and for the right hand side of Eq. (46) Eqs. (43), (44) apply. With $m' = m_{M'}, m'_0 = m_{0M'}, M'_0 = M' / m' m'_0$ we obtain

$$|\hat{g}|^2[N_X, X_\bullet](s_0, \mathbf{s}) = \begin{cases} \frac{N_X}{N_{m'} N_{m'_0} M'_0} |\hat{g}|^2_{\mathbb{Z}_{N_{m'}/N_{m'_0}}} \left[\frac{N_X}{N_{m'_0} M'_0}, X_{k+N_{m'_0} M'_0} \bullet \right] (s_0, \mathbf{s} \cdot \mathbf{X}_0), \\ \text{if } \exists k \in \mathbb{Z}_{N_{m'_0}} : \frac{N_{m'} s_0}{N_X} + \frac{\mathbf{s} \cdot (\mathbf{X}_{N_{m'+k}} - \mathbf{X}_k)}{M} = \frac{\delta_{2|M'_0}}{2M'_0} \bmod \frac{1}{M'_0}, \\ 0 \quad \text{else.} \end{cases} \quad (47)$$

The denominators in the above condition are understood according to

$$a/b = c/d \pmod{1/M'_0} \iff adM'_0 = cbM'_0 \pmod{bd}. \quad (48)$$

Proof of the theorem. We start with Eq. (11)

$$\begin{aligned} |\hat{g}|^2 &= \frac{1}{N} \sum_{k, \Delta k \in \mathbb{Z}_N} \exp\left(\frac{2\pi i}{N} s_0 \Delta k + \frac{2\pi i}{M} s_a a^k (a^{\Delta k} - 1)\right) \\ &\stackrel{(35)}{=} \frac{1}{N} \sum_{k \in \mathbb{Z}_{N_m}} \sum_{k' \in \mathbb{Z}_{M/m}} \sum_{\Delta k \in \mathbb{Z}_N} \exp\left(\frac{2\pi i}{N} s_0 \Delta k + \frac{2\pi i}{M} s_a (a^k + m k') (a^{\Delta k} - 1)\right) \\ &= \frac{1}{N_m} \sum_{k \in \mathbb{Z}_{N_m}} \sum_{\Delta k \in \mathbb{Z}_N} \delta_{s_a (a^{\Delta k} - 1) = 0 \pmod{M/m}} \exp\left(\frac{2\pi i}{N} s_0 \Delta k + \frac{2\pi i}{M} s_a a^k (a^{\Delta k} - 1)\right) \\ &= \frac{1}{N_m} \sum_{k \in \mathbb{Z}_{N_m}} \sum_{\Delta k \in \mathbb{Z}_{N/N_{M/m}}} \exp\left(\frac{2\pi i}{N} N_{M/m} s_0 \Delta k + \frac{2\pi i}{M} s_a a^k (a^{N_{M/m} \Delta k} - 1)\right) \\ &\quad [\text{replace } \Delta k \text{ by } \Delta k - \Delta k' \text{ and } k \text{ by } k + N_{M/m} \Delta k'] \\ &= \frac{1}{N_m} \sum_{k \in \mathbb{Z}_{N_m}} \sum_{\Delta k \in \mathbb{Z}_{N/N_{M/m}}} \exp\left(\frac{2\pi i}{N} N_{M/m} s_0 (\Delta k - \Delta k') + \frac{2\pi i}{M} s_a a^k (a^{N_{M/m} \Delta k} - a^{N_{M/m} \Delta k'})\right) \\ &\quad [\text{average over } \Delta k' \text{ with } N_{M/m}/N \sum_{\Delta k' \in \mathbb{Z}_{N/N_{M/m}}}] \\ &= \frac{1}{N_m} \sum_{k \in \mathbb{Z}_{N_m}} |\hat{g}|^2 [N/N_{M/m}, X_{\tilde{k}} = a^{k+N_{M/m} \tilde{k}}] (s_0, s_a) \end{aligned}$$

which proves Eq. (43).

Now we split the k -sum according to $k = k_0 + \gcd(N_m, N_{M/m})k' = k_0 + N_{m_0}k'$. One can replace k' by $N_{M/m}/N_{m_0}k'$ since $k' \in \mathbb{Z}_{N_m/N_{m_0}}$ and $N_{M/m}/N_{m_0} \in \mathbb{Z}_{N_m/N_{m_0}}^\times$. So $k = k_0 + N_{M/m}k'$ and the k' -dependence drops, since it amounts to a shift $\tilde{k} \mapsto \tilde{k} + k'$ of $X_{\tilde{k}} = a^{k+N_{M/m} \tilde{k}}$ (cf. Eq. (12)). The sum over k' gives simply N_m/N_{m_0} .

Since $m_a^{N_{M/m}} = 0 \pmod{m}$ and $m_a^{N_{M/m}} = 0 \pmod{M/m}$ we have $(m_a^{N_{M/m}})^2 = 0 \pmod{M}$ and Eq. (27) applies with a replaced by $a^{N_{M/m}}$ and s_a by $a^k s_a$. With Eq. (41) we get

$$\begin{aligned} |\hat{g}|^2 &= \frac{1}{N_{m_0}} \sum_{k \in \mathbb{Z}_{N_{m_0}}} \frac{N/N_{M/m}}{N_m/N_{m_0}} \cdot \frac{N_{m_0}}{N_m} \\ &\quad \left| \sum_{k' \in \mathbb{Z}_{\frac{N_m}{N_{m_0}}}} \delta_{\frac{s_0 M}{m_0} + s_a a^{k+N_{M/m}k'} (a^{N_{M/m} N_m/N_{m_0}} - 1) = 0 \pmod{M}} \exp\left(\frac{2\pi i}{N} N_{M/m} s_0 k + \frac{2\pi i}{M} s_a a^{k+N_{M/m}k'}\right) \right|^2. \end{aligned}$$

The k' -dependence drops mod M (Eq. (38)) in the argument of the Kronecker δ . The k' -sum interchanges with the Kronecker δ and we obtain with Eq. (38)

$$|\hat{g}|^2 = \frac{m_0}{N_{m_0}} \sum_{k \in \mathbb{Z}_{N_{m_0}}} \delta_{\frac{M}{m_0} s_0 + s_a a^k (a^{N_m M_0} - 1) = 0 \pmod{M}} |\hat{g}|_{\mathbb{Z}_{\frac{N_m}{N_{m_0}}}}^2 [N/N_{M/m}, X_{k+N_{M/m} \bullet}].$$

We use Eq. (24) with $M_1 = M_0$, $k = 1$ yielding $\bmod M$

$$a^{N_m M_0} - 1 = c \frac{M}{m_0} = \frac{M}{m_0} \left(\frac{a^{N_m} - 1}{m} \right) \left(1 + \frac{m}{2} \delta_{2 \mid \frac{M}{m m_0}} \right) \stackrel{(25)}{=} \frac{M}{m_0} \left(\frac{a^{N_m} - 1}{m} + \frac{m}{2} \delta_{2 \mid \frac{M}{m m_0}} \right).$$

Finally we divide the argument of the Kronecker δ by M/m_0 and notice that, if $2 \mid \frac{M}{m m_0}$, we have $m/2 = m_0/2 = -m_0/2 \bmod m_0$. Since the k -sum has at most one non-vanishing term we obtain the desired result. \square

Proof of Cor. 3.5. With the definition $\mathbf{s}' \equiv M' c_1 \mathbf{s} / M$ we find $s'_a \equiv \sum_{j=1}^n s'_j a^{j-1} = c_1 s_a / \gcd(c_1 s_a, M) \in \mathbb{Z}_{M'}^\times$. With $\tilde{N}_X \equiv \text{lcm}(N_X, M)$ we obtain

$$\begin{aligned} |\hat{g}|^2(s_0, \mathbf{s}) &= \frac{1}{N_X} \left| \sum_{k \in \mathbb{Z}_{N_X}} \exp \left(\frac{2\pi i}{N_X} s_0 k + \frac{2\pi i}{M} \left(c_1 s_a a^k + c_2 \sum_{j=1}^n s_j (k + j - 1 + c_3) \right) \right) \right|^2 \\ &= \frac{1}{N_X} \left| \sum_{k \in \mathbb{Z}_{N_X}} \exp \left(\frac{2\pi i}{\tilde{N}_X} \left(\frac{\tilde{N}_X}{N_X} s_0 + \frac{\tilde{N}_X}{M} c_2 \sum_{j=1}^n s_j \right) k + \frac{2\pi i}{M'} s'_a a^k \right) \right|^2. \end{aligned}$$

We can replace $\sum_{k \in \mathbb{Z}_{N_X}}$ by $N_X / \tilde{N}_X \sum_{k \in \mathbb{Z}_{\tilde{N}_X}}$. This sum splits into $\sum_{k_0 \in \mathbb{Z}_{N'}} \sum_{k' \in \mathbb{Z}_{\tilde{N}_X / N'}}$ with $k = k_0 + N' k'$. The exponential depends linearly on k' , thus the sum over k' gives a Kronecker δ ,

$$\frac{1}{N_X} \left| \sum_{k \in \mathbb{Z}_{N_X}} \dots \right|^2 = \frac{N_X}{N'} \delta_{\tilde{N}_X N' (s_0 / N_X + c_2 \sum_{j=1}^n s_j / M) = 0 \bmod \tilde{N}_X} \frac{1}{N'} \left| \sum_{k \in \mathbb{Z}_{N'}} \dots \right|^2.$$

The Kronecker δ assures that $s'_0 \equiv N' (s_0 / N_X + c_2 \sum_{j=1}^n s_j / M)$ is an integer. The sum over k gives $N' |\hat{g}|^2[N', M', X'_k = a^k](s'_0, \mathbf{s}')$ and Theorem 3.4 applies. With $\delta_{s'_0 \text{ integer}}$ and Eq. (48) the condition in Eq. (44) becomes

$$\begin{aligned} N' \left(\frac{s_0}{N_X} + \frac{c_2 \sum_{j=1}^n s_j}{M} \right) + \frac{M' c_1 s_a}{M m'} a^k (a^{N_{m'}} - 1) &= \frac{m'_0}{2} \delta_{2 \mid M'_0} \bmod m'_0 \\ \stackrel{(36)}{=} \frac{N'}{N_X} s_0 + \frac{M'}{M m'} \left(c_1 s_a a^{N_{m'} + k} + c_2 N_{m'} \sum_{j=1}^n s_j - c_1 s_a a^k \right) &= \frac{m'_0}{2} \delta_{2 \mid M'_0} \bmod m'_0. \end{aligned}$$

The expression in the brackets equals $\mathbf{s} \cdot (\mathbf{X}_{N_{m'} + k} - \mathbf{X}_k)$. So we have confirmed the invariance of the condition in Eq. (44) as claimed in Eq. (46). Similarly

$$\begin{aligned} &|\hat{g}|^2[N' / N_{M'/m'}, M, X'_{k+N_{M'/m'} \bullet}](s'_0, \mathbf{s}' \cdot \mathbf{X}'_0) \\ &= \left| \sum_{k'} \exp \left(2\pi i \left(\frac{N_{M'/m'}}{N_X} s_0 + \frac{N_{M'/m'}}{M} c_2 \sum_{j=1}^n s_j \right) k' + \frac{2\pi i}{M} c_1 s_a a^{k+N_{M'/m'} k'} \right) \right|^2 \\ &= |\hat{g}|^2[N' / N_{M'/m'}, M', X_{k+N_{M'/m'} \bullet}](N' / N_X \cdot s_0, M' / M \cdot \mathbf{s} \cdot \mathbf{X}_0) \\ &= |\hat{g}|^2[N_X / N_{M'/m'}, M, X_{k+N_{M'/m'} \bullet}](s_0, \mathbf{s} \cdot \mathbf{X}_0). \end{aligned}$$

Altogether we have proven that $|\hat{g}|^2[N_X, M]$ is given by Eqs. (43), (44) and Eq. (46). With Eqs. (21), (36), (38), (44) we find Eq. (47). \square

4 Generators

4.1 $X_0 = c, X_{k+1} = aX_k \bmod M$

We assume that $1 \neq a, c \in \mathbb{Z}_M^\times$. Generators of this type are called multiplicative. The recursion formula implies $X_k = ca^k \bmod M$. The harmonic analysis of many multiplicative generators is easily obtained by Eqs. (44) and (47).

Examples 4.1.

1. $N_m = 1$ (Fig. 1). We find $m = \gcd(a - 1, M)$, $N = M/m$, $m_0 = \gcd(m, M/m) = \gcd((a - 1)^2, M) / \gcd(a - 1, M)$ and $M_0 = M / \gcd((a - 1)^2, M)$.

With $M' = M / \gcd(s_a, M) = M / s_{a,M}$ we get $N_{m'} = N_{m'_0} = 1$, $m' = \gcd(a - 1, M')$ and $M/M'_0 = \gcd(m'^2 \gcd(s_a, M), M) = \gcd(\gcd((a - 1)^2, M'^2) s_a, M) = \gcd(s_a m^2, M) = mm_0 \gcd(s_a, M_0) = mm_0 s_{a, M_0}$. Thus

$$M'_0 = M_0 / s_{a, M_0} \text{ if } N_m = 1. \quad (49)$$

We obtain from Eq. (47)

$$|\hat{g}|^2(s_0, \mathbf{s}) = m_0 s_{a, M_0} \delta_{s_0 + cs_a(a-1)/m = \frac{1}{2} m_0 s_{a, M_0} \delta_{2 \mid \frac{M_0}{s_a, M_0} \bmod m_0 s_{a, M_0}}. \quad (50)$$

In the case of a power of two modulus $M = 2^d$ with $m = 4$ ($m = 2$ is not possible for $d > 2$) we obtain for a proper choice of a (cf. Sec. 5)

$$N_X = M/4, \quad Q_1 = \sqrt{2}/4, \quad Q_{n \geq 2} \approx M^{1/n-1}. \quad (51)$$

If we look at correlations of k with X_k , disregarding higher n -tuples, we get $\tilde{N}_1 = \tilde{M}_1 = NQ_1 = \sqrt{2}M/16$ reasonable random numbers with $\log(\sqrt{2}M/16)$ digits.

A detailed discussion is postponed to the next section where we analyze the mixed multiplicative generator which is very similar but more popular than the multiplicative generator.

2. $M = P^d$, P is odd, prime and a is a primitive element of $\mathbb{Z}_{P^d}^\times$, $\langle a \rangle_{P^d} = \mathbb{Z}_{P^d}^\times$, $c \in \mathbb{Z}_{P^d}^\times$ (Figs. 2, 3). We find $N_m = P - 1$, $m = P$, $N = (P - 1)P^{d-1}$, $m_0 = 1$ if $d = 1$ and $m_0 = P$ if $d \geq 2$.

For the case $d = 1$ Eq. (44) is useless. However, we saw in Sec. 2.2 how to calculate $|\hat{g}|^2$ from the very definition. In fact it is even simpler to observe that $|\hat{g}|^2$ is constant for all $s_a \neq 0 \bmod P$ (Eq. (12)). With Eqs. (14), (15) we obtain $(P - 1)\delta_{s_0=0} + (P - 1)|\hat{g}|^2(s_0, s_a \neq 0) = P$ with the result given in Eq. (52).

If $d \geq 2$ we obtain for $s_a \neq 0 \bmod P$ from Eq. (44) $|\hat{g}|^2(s_0, \mathbf{s}) = P/(P - 1) \cdot \sum_{k \in \mathbb{Z}_{P-1}} \delta_{s_0 + s_a a^k(a^{P-1}-1)/P \bmod P} = P/(P - 1) \cdot \delta_{s_0 \neq 0 \bmod P}$. For general s_a we use Eq. (46) and

obtain the result

$$\begin{array}{c|cc}
|\hat{g}|^2(s_0, \mathbf{s}) & s_0 = 0 & s_0 \neq 0 \\
\hline
s_a = 0 & P^{d-1}(P-1) & 0 \\
\lambda = d-1 & P^{d-1}/(P-1) & P^d \delta_{\mu=d-1}/(P-1) \\
\lambda \leq d-2 & 0 & P^{\lambda+1} \delta_{\mu=\lambda}/(P-1) \\
\text{where } s_{a,P^d} \equiv \gcd(s_a, P^d) \equiv P^\lambda, \gcd(s_0, P^d) \equiv P^\mu. & &
\end{array} \quad (52)$$

We find that $Q_1 = Q_1(P^\lambda, P^\lambda) = \sqrt{2}(P-1)/P$ is independent of a and even greater than 1. For $n \geq 2$ only the case $(s_0, s_a) = (0, 0)$ contributes to Q_n and the discussion is equal to the case with power of two modulus presented in Sec. 5. We find

$$N_X = (P-1)P^{d-1}, \quad Q_1 = \sqrt{2}(P-1)/P, \quad Q_{n \geq 2} \approx P^{1/n-1}. \quad (53)$$

From a mathematical point of view odd prime number moduli give good random number generators. In particular $\tilde{N}_1 = P-1$, $\tilde{M}_1 = P$ whereas for a power of two modulus M we had $\tilde{N}_1 = \tilde{M}_1 = \sqrt{2}M/16$. So we need $M > 16P^d/\sqrt{2}$ to obtain power of two multiplicative generators which behave better than generators with powers of odd prime numbers. However, one has to take into account that computers calculate automatically modulo powers of two. Moreover, the power of two generator will be improved in the next sections until we achieve $Q_1 = 1$ (cf. Sec. 4.4). As a byproduct a better behavior of Q_n for $n \geq 2$ is obtained, too.

Best performance allow prime numbers of the form $P = 2^k \pm 1$ [2]. In this case $a \cdot b = c_1 2^k + c_2$ leads to $a \cdot b = c_2 \mp c_1 \pmod{P}$. The extra effort, compared with a calculation $\pmod{2^k}$ is one addition and, which is more important, the calculation of c_1 . In Ex. 5.1 1 we discuss the improved generator with $M = 2^{256}$ which can most easily be changed to $M = 2^{128}$. Alternatively one may construct a generator $\pmod{2^{127} - 1}$ which is a prime number. This generator will however be more time consuming and moreover it has worse quality $\tilde{N}_1 \approx 2^{127}$, $\tilde{N}_2 \approx 2^{63.5}$, $\tilde{N}_3 \approx 2^{42.3}$, etc. vs. $\tilde{N}_1 = 2^{129}$, $\tilde{N}_2 \approx 2^{86.3}$, $\tilde{N}_3 \approx 2^{65}$, etc. for the generator with power of two modulus (cf. Sec. 4.4, Sec. 5). So, power of two generators are more efficient than multiplicative generators with prime number modulus. The situation is slightly different if one considers multiply recursive generators with prime number modulus, analyzed in Sec. 4.5 and Ex. 5.1 2.

Multiplicative generators with prime number modulus and primitive a produce every random number $\neq 0 \pmod{P}$ exactly once in a period. We recommend to use a prime number modulus only if one needs this quality.

3. $M = 2^d$, $c = 1$, $a = 3 \pmod{8}$ (the cases $a = 1$, $a = 5 \pmod{8}$ were discussed in Ex. 1). This example and the following ones are less interesting from the random number point of view. They are discussed to demonstrate how Eq. (44) applies in less trivial cases. We restrict ourselves to $s_a \in \mathbb{Z}_M^\times$ and find

$$N_m = \begin{cases} 2 & \text{if } d \geq 3 \\ 1 & \text{if } d = 1, 2 \end{cases}, \quad m = \begin{cases} 8 & \text{if } d \geq 3 \\ 2 & \text{if } d = 1, 2 \end{cases}, \quad N = \begin{cases} 2^{d-2} & \text{if } d \geq 3 \\ 2^{d-1} & \text{if } d = 1, 2 \end{cases},$$

$$m_0 = \begin{cases} 8 & \text{if } d \geq 6 \\ 2^{d-3} & \text{if } d = 3, 4, 5 \\ 2 & \text{if } d = 2 \\ 1 & \text{if } d = 1 \end{cases}, \quad N_{m_0} = \begin{cases} 2 & \text{if } d \geq 5 \\ 1 & \text{if } d \leq 4 \end{cases}.$$

The most complicated case is $d = 4$ where we get $|\hat{g}|^2(s_0, \mathbf{s}) = \delta_{s_0+s_a(a^2-1)/8=0 \bmod 2} \cdot \left| \exp(\frac{2\pi i}{16}s_0) + \exp(\frac{2\pi i}{16}(4s_0 + as_a)) \right|^2 = 2\delta_{s_0=1 \bmod 2}(1 + \cos(\frac{\pi}{8}(4s_0 + (a-1)s_a)))$. We obtain the following table

$M = 2^d$	$ \hat{g} ^2(s_0, \mathbf{s})$	
$d \geq 7$	$4 \sum_{k=0,1} \delta_{s_0+s_a 3^k(a^2-1)/8=4 \bmod 8}$	
$d = 6$	$4 \sum_{k=0,1} \delta_{s_0+s_a 3^k(a^2-1)/8=0 \bmod 8}$	
$d = 5$	$2\delta_{s_0=1 \bmod 2}$	
		$s_a = 1, 3 \bmod 8$ $s_a = 5, 7 \bmod 8$
$d = 4$	$s_0 = 0, 2 \bmod 4$	0 0
	$s_0 = 1 \bmod 4$	$2 \mp \sqrt{2}$ $2 \pm \sqrt{2}$
	$s_0 = 3 \bmod 4$	$2 \pm \sqrt{2}$ $2 \mp \sqrt{2}$
	upper sign: $a = 3 \bmod 16$, lower sign: $a = 11 \bmod 16$	
$d = 3$	1	
$d = 2$	$2\delta_{s_0=1 \bmod 2}$	
$d = 0, 1$	1	

(54)

and $Q_1 = \sqrt{2}/4$, $Q_{n \geq 2} \approx M^{1/n-1}$ for $d \geq 6$ like in the case $a = 5 \bmod 8$.

4. $M = 10^d$, $c = 1$, $a = 3$, $\gcd(s_a, 10) = 1$. We find

$M = 10^d$	N_m	m	N	m_0	N_{m_0}	$ \hat{g} ^2(s_0, \mathbf{s})$
$d \geq 9$	4	80	$5 \cdot 10^{d-2}$	80	4	$20 \sum_{k=0}^3 \delta_{s_0+3^k s_a=40 \bmod 80}$
$5 \leq d \leq 8$	4	80	$5 \cdot 10^{d-2}$	$5 \cdot 2^{d-4}$	4	$5 \cdot 2^{d-6} \sum_{k=0}^3 \delta_{s_0+3^k s_a=0 \bmod 5 \cdot 2^{d-4}}$
$2 \leq d \leq 4$	4	$5 \cdot 2^d$	$4 \cdot 5^{d-1}$	5	4	$5/4 \cdot \delta_{s_0 \neq 0 \bmod 5}$
$d = 1$	4	10	4	1	1	$1/4 + \delta_{s_0 \neq 0 \bmod 4}$

(55)

and $Q_1 = \sqrt{2}/20$, $Q_n \leq Q_n(0, -3, 1, 0, \dots, 0) = 2 \cdot 10^{3/2-d}$, if $d \geq 8$.

5. $M = 2^7 \cdot 7$, $c = 1$, $a = 3$, $\gcd(s_a, 14) = 1$. This example illustrates all aspects of calculating $|\hat{g}|^2$. We find $N_m = 6$, $m = 8 \cdot 7$, $N = 2^5 \cdot 3$, $M/m = 2^4$, $N_{M/m} = 4$, $m_0 = 8$, $N_{m_0} = 2$, $(a^{N_m} - 1)/m = -3 \bmod m_0$. Eq. (44) gives $|\hat{g}|^2(s_0, \mathbf{s}) = 4/3 \cdot \sum_{k=0,1} \delta_{s_0-3^{k+1}s_a=4 \bmod 8} |\hat{g}|_{\mathbb{Z}_3}^2[N=24, M=2^7 \cdot 7, a=3^4](s_0, 3^k s_a)$.

Firstly, $-3^{k+1}s_a = 3^k(1-4)s_a = 3^k s_a + 4 \bmod 8$.

Secondly, in the $|\hat{g}|_{\mathbb{Z}_3}^2$ we sum over $k' \in \mathbb{Z}_3$. Since $8 \in \mathbb{Z}_3^\times$ we can replace k' by $8k'$ yielding $|\hat{g}|^2[N=3, M=2^7 \cdot 7, a=3^{32}](s_0, 3^k s_a)$.

Finally, we notice that $3^{32} = 1 \pmod{2^7}$. With the Euclidean algorithm we find integers c_1, c_2 with $1 = 2^7 c_1 + 7c_2$. This plugged into the definition of \hat{g} gives $\exp(\frac{2\pi i}{M} s_a 3^{32k'} (2^7 c_1 + 7c_2)) = \exp(\frac{2\pi i}{7} s_a 3^{32k'} c_1 + \frac{2\pi i}{2^7} s_a c_2)$. The second term is independent of k' and drops in $|\hat{g}|^2$. Since $3^{32} = 2 \pmod{7}$ and $c_1 = 2^{-7} = 4 \pmod{7}$ we obtain with Eq. (12)

$$|\hat{g}|^2(s_0, \mathbf{s}) = \frac{4}{3} \sum_{k=0,1} \delta_{s_0+3^k s_a=0 \pmod{8}} |\hat{g}|^2[N=3, M=7, a=2](s_0, 3^k s_a) .$$

An explicit calculation (cf. Eq. (91)) is needed to obtain

$ \hat{g} ^2(s_0, \mathbf{s})$	$s_a = 1, 9, 11 \pmod{14}$	$s_a = 3, 5, 13 \pmod{14}$	
$s_0 = 0 \pmod{3}$	$8/3$	$8/3$	
$s_0 = 1 \pmod{3}$	$2/3 \cdot (7 - \sqrt{21})$	$2/3 \cdot (7 + \sqrt{21})$	if $\exists k \in 0, 1$ with
$s_0 = 2 \pmod{3}$	$2/3 \cdot (7 + \sqrt{21})$	$2/3 \cdot (7 - \sqrt{21})$	$s_0 + 3^k s_a = 0 \pmod{8}$
$ \hat{g} ^2(s_0, \mathbf{s}) = 0$			else .

(56)

4.2 $X_0 = 0, X_{k+1} = aX_k + c \pmod{M}$

Let $1 \neq a, c \in \mathbb{Z}_M^\times$. The recursion formula implies $X_k = c(a^k - 1)/(a - 1) \pmod{M}$. Generators of this type are called mixed multiplicative.

There are two ways of deriving the mixed multiplicative generator from the multiplicative generator.

Firstly, we expect from a good generator to have random differences $\Delta X_k \equiv X_{k+1} - X_k$. For the multiplicative generator we have $\Delta X_k = (a - 1)X_k \pmod{M}$ and in deed for the case $M = P^d$, (Ex. 4.1 2) where the multiplicative generator was good, the difference generator has the same quality as the original one. However if $M = 2^d$ obviously $a - 1$ and M have common divisors. If e.g. $a = 5 \pmod{8}$ then $(\Delta X_k)_k$ produces only multiples of 4 which deteriorates the randomness of the sequence. This suggests to use the sum generator $\Sigma X_k \equiv \sum_{j=0}^{k-1} X_j = c(a^k - 1)/(a - 1)$ which is the mixed multiplicative generator.

Secondly, we observe that $a - 1$ divides $X_k - c = c(a^k - 1) \pmod{M}$. Since $X_k - c$ and X_k differ only by a shift they have the same quality. The flaw that $X_k - c$ produces only multiples of $\gcd(a - 1, M)$ can be corrected by a division by $a - 1$ which yields the mixed multiplicative generator.

Theorem 4.2. Let B be defined by

$$B \equiv \max_k \gcd(a - 1, M^k) \quad (57)$$

then the Fourier transform of the mixed multiplicative generator $X_0 = 0, X_{k+1} = aX_k + c \pmod{M}, 1 \neq a, c \in \mathbb{Z}_M^\times$ is given by Thm. 3.4 and Cor. 3.5 with MB and XB instead of M and X , respectively.

Proof. From $a, c, (a - 1)/B \in \mathbb{Z}_M^\times$ we conclude $a, c, (a - 1)/B \in \mathbb{Z}_{MB}^\times$. If we denote the inverse of $(a - 1)/B \pmod{MB}$ by $\frac{B}{a-1}$ we have $X_k/M = c \frac{B}{a-1} (a^k - 1)/MB \pmod{1}$. Cor. 3.5 applies with XB and MB instead of X and M . \square

Example 4.3.

1. $N_{m_{MB}} = 1$ which is equivalent to

$$1. a - 1 \text{ contains every prime factor of } M, \quad 2. 4 | (a - 1) \text{ if } 4 | M. \quad (58)$$

(Figs. 4–8). With

$$b = \gcd(a - 1, M) = \gcd(B, M) \quad (59)$$

we find $m_{MB} = \gcd(a - 1, MB) = B$, $m_{0MB} = b$, $M_{0MB} = M/b$, $N_X \stackrel{(36)}{=} MB/m_{MB} = M$ and $\mathbf{s} \cdot (\mathbf{X}_1 - \mathbf{X}_0) = s_a c$. We obtain from Eqs. (47), (49)

$$|\hat{g}|^2(s_0, \mathbf{s}) = b s_{a, M/b} \delta_{s_0 + c s_a = \frac{1}{2} b s_{a, M/b} \delta_{2 | \frac{M}{b s_{a, M/b}} \bmod b s_{a, M/b}}}. \quad (60)$$

In particular for $s_0 = 0$ we observe that \hat{g} is only non-zero if $M/b s_{a, M/b}$ is odd and $s_a = 0 \bmod b s_{a, M/b}$. From the second identity we conclude $s_a = 0 \bmod M$ and thus

$$|\hat{g}|^2(0, \mathbf{s}) = M \delta_{s_a = 0 \bmod M} \quad (61)$$

For $n = 1$ we get $s_a = s_1$ and \hat{g} is the Fourier transform of the uniform distribution. So, X_k has the property to produce every number in \mathbb{Z}_M exactly once in a period. The generator is called to have a full period.

We proceed with a discussion of the parameters a and c .

- (a) Choice of c . We can restrict ourselves to $1 \leq c \leq b/2$ since every c emerges from a $c \in (0, b/2)$ via translations ($X_k \mapsto X_{k+\Delta k} - X_{\Delta k} = a^{\Delta k} X_k$) or reflection ($X_k \mapsto -X_k$). We can determine c by the condition that there should be no small (s_0, s_a) , $\gcd(M, s_a) = 1$ with $s_0 + s_a c = b/2 \cdot \delta_{2 | M/b} \bmod b$. If M/b is odd $c \approx \sqrt{b}$ gives $Q_1(s_0 \approx \sqrt{b}, -1) \approx \sqrt{b+1}/b \approx b^{-1/2}$. In the case where M/b is even and b is small the choice $c = 1$ is best with the result $Q_1(s_0 \approx s_1 \approx b/4) \approx \sqrt{2} \cdot (b/4)/b = \sqrt{2}/4 \approx 0.35$.

In the case of Fig. 5 with the 'wrong' choice $c = 3$ one has $a = 9 \bmod 16$, $b = 8$ and the smallest (s_0, s_1) with non-vanishing \hat{g} is $(1, 1)$. Since $|\hat{g}|^2(1, 1) = 8$ we obtain $Q_1(1, 1) = \sqrt{2}/8 \approx 0.18$ (notice the correlations perpendicular to the $(1, 1)$ -direction in Fig. 5I). With the right choice $c = 1$ (Fig. 6) it takes an $(s_0, s_1) = (1, 3)$ (or $(3, 1)$) to get $|\hat{g}|^2 = 8$. Therefore $Q_1(1, 3) = \sqrt{10}/8 \approx 0.40$ which means that the random numbers are more uniformly distributed in Fig. 6I. The large value of $Q_1(1, 3)$ is yet misleading since $Q_1 = Q_1(-M/8, M/8) = \sqrt{2}/8$. However $|\hat{g}|^2$ assumes the small value of Q_1 at much less sites as in the case of $c = 3$ which means that the choice $c = 1$ is better than $c = 3$.

Notice the similar pair distributions in Fig. 5II and Fig. 6II. In general the quality dependence on c can not be obtained by the standard spectral test (corresponding to $s_0 = 0$) since the n -tuple distributions are only shifted by changing c .

- (b) Choice of b . In general b should be as small as possible in order to prevent $|\hat{g}|^2$ from being concentrated on too few points. If M/b is odd, $c \approx \sqrt{b}$ then Q_1 behaves like $b^{-1/2}$. If M/b is even, $c = 1$ then $Q_1(s_0, s_1) = Q_1(s_0 \approx s_1 \approx b/4) \approx \sqrt{2}/4$ for small (s_0, s_1) (cf. (a)). However $Q_1(-M/b, M/b) = \sqrt{2}/b$ which forbids large values of b .

For a power of two modulus the smallest value possible is $b = 4$ which implies $Q_1 = \sqrt{2}/4$ (Fig. 4). In particular $M = 10^d$ (Fig. 7) should be avoided since in this case $b \geq 20$.

These arguments require $s_0 \neq 0$. They are not obtained by the standard spectral test.

- (c) Choice of a . Up to now we have evaluated $|\hat{g}|^2(s_0, s_1)$ for $n = 1$ which is given by b and c . In order to determine a more precisely we have to look at the distribution of n -tuples for $n \geq 2$. In this case $Q_n = \min_{\mathbf{s}} Q_n(s_0 = 0, s_a = 0) = \min_{\mathbf{s}: s_a=0} |\mathbf{s}|/M$. A further discussion of the choice of a is postponed to Sec. 5. We will see that a reasonable a gives $Q_n \approx M^{1/n-1}$.

Since $s_0 = 0$ this part of the choice of a is identical with the standard spectral test.

Let us summarize the result for $M = 2^d$,

$$c = 1, \quad a = 5 \bmod 8, \quad \max_a \min_{\mathbf{s}: s_a=0} |\mathbf{s}|, \quad \text{for } n = 2, 3, \dots \text{ gives} \quad (62)$$

$$N_X = M, \quad Q_1 = \sqrt{2}/4, \quad Q_n \approx M^{1/n-1}. \quad (63)$$

A loss of randomness for n -tuples is avoided if one takes $\gcd(n, M) = 1$.

2. $a = 3 \bmod 8$, $M = 2^d$. If $s_{a,M} \leq M/32$ then $B = 2$, $m'_{MB} = m_{0'MB} = 8$, $M'_{0'MB} = M/32s_{a,M}$, $N_{m'_{MB}} = N_{m_{0'MB}} = 2$ and from Eq. (47) we get

$$|\hat{g}|^2(s_0, \mathbf{s}) = \frac{8N_X s_{a,M}}{M} \sum_{k=0,1} \delta_{\frac{M}{2N_X} s_0 + 3^k c \frac{a+1}{4} s_a = 4s_{a,M}} \delta_{64 | \frac{M}{s_{a,M}} \bmod 8s_{a,M}}. \quad (64)$$

We obtain $N_X = M/2$ (cf. Eq. (13)) and either $Q_1(1, 1) = \sqrt{2}/4$ or $Q_1(-1, 1) = \sqrt{2}/4$. The period is doubled compared with the multiplicative case and the quality remains unchanged. Since $a = 3 \bmod 8$ has only half the period of $a = 5 \bmod 8$ the latter should be preferred.

The only improvement we achieved was an increased period by a factor of B . The mixed multiplicative generator mod M equals the multiplicative generator mod MB . For a power of two modulus we still have $Q_1 = \sqrt{2}/4 < 1$.

This does not mean that one can not use the mixed multiplicative generator if the modulus is large enough. In Fig. 8 we see that all problems dissolve if the modulus is much larger than the range of random numbers used. Nevertheless it will be profitable to look for improvements in the next sections.

We close this section with a well known theorem which is a corollary of our general theory.

Corollary 4.4 (Greenberger [7], Hull and Dobell [8]). The mixed multiplicative generator has a full period if and only if (58) holds.

Proof. We saw in Ex. 4.3 1 that (58) implies a full period. If on the other hand $N_{m_{MB}} > 1$, due to Eq. (29) there either exists a prime factor $P \neq 2$ of M with $N_P > 1$ or $4|M$ and $N_4 > 1$. In the first case we look at the generator mod P and find $B = 1$. Hence $N_{X \bmod P} = N_P < P$ and the generator has no full period. In the second case $a = 3 \bmod 4$ and $\forall k: X_k = 0 \bmod 4$ or $X_k = c \bmod 4$. \square

4.3 $X_0 = 0, X_{k+1} = aX_k + ck \bmod M$

Let $1 \neq a, c \in \mathbb{Z}_M^\times$. The recursion formula gives $X_k = \frac{c}{a-1} \left(\frac{a^k - 1}{a-1} - k \right) \bmod M$.

The generator of this section improves the mixed multiplicative generator according to both ways presented in the last section. Firstly, it is the sum generator $\sum_{j=0}^{k-1} X_j^{\text{mm}} = \sum_{j=0}^{k-1} c(a^k - 1)/(a - 1)$ of the mixed multiplicative generator. Secondly, we observe that $X_k^{\text{mm}} - ck = c \sum_{j=0}^{k-1} (a^j - 1) \bmod M$ can be divided by $a - 1$. On the other hand the randomness of X_k should not differ much from that of $X_k - ck$ and the division by $a - 1$ improves the generator.

Theorem 4.5. Let B be defined by Eq. (57) then the Fourier transform of the generator $X_0 = 0, X_{k+1} = aX_k + ck \bmod M, 1 \neq a, c \in \mathbb{Z}_M^\times$ is given by Cor. 3.5 with

$$X \mapsto XB^2, \quad M \mapsto MB^2. \quad N_X = \text{lcm}(N_m, 2^{\delta_{2|M}} M) \quad (65)$$

is the period of X .

Proof. Analogously to the proof of Thm. 4.2 we find that $X_k/M = c \left(\left(\frac{B}{a-1} \right)^2 (a^k - 1) - \frac{B}{a-1} Bk \right) / MB^2 \bmod 1$ where $\frac{B}{a-1}$ is the inverse of $(a-1)/B$ in \mathbb{Z}_{MB^2} . With Cor. 3.5 it only remains to show that the period of X is given by Eq. (65).

Since $0 = X_1 = X_{N_X+1} = aX_{N_X} + cN_X = cN_X \bmod M$ we know that $M|N_X$ and since $a^{N_X} - 1 = 0 \bmod M$ implies $N_m|N_X$ we have $\text{lcm}(N_m, M)|N_X$. If we split M into its prime components $M = 2^k p_1^{k_1} \cdots p_\ell^{k_\ell}$, it suffices to show that $X_{N_X} = 0 \bmod p_j^{k_j} \forall j = 1, \dots, \ell$ and $X_{2^k} = 2^{k-1} \bmod 2^k$. If $N_{p_j} > 1$ then $a - 1 \in \mathbb{Z}_{p_j}^\times$ and one obtains immediately $X_{N_X} = \frac{c}{a-1} \left(\frac{a^{N_X} - 1}{a-1} - N_X \right) = 0 \bmod p_j^{k_j}$. The case $N_{p_j} = 1$ is treated in Ex. 4.6 1. For $M = 2$ we get $X_2 = 1$ and for $M = 2^k$ the result follows by induction since

$$X_{2M} = \frac{c}{a-1} \left(\frac{a^{2M} - 1}{a-1} - 2M \right) = \frac{2c}{a-1} \left(\frac{a^M - 1}{a-1} - M \right) + c \left(\frac{a^M - 1}{a-1} \right)^2 = 2X_M \bmod 2M$$

for $M \geq 2$. \square

Examples 4.6.

1. $N_{m_{MB^2}} = 1$ which means that $a - 1$ contains every prime factor of M and $4|(a - 1)$ if M is even (Fig. 9). We find $m_{MB^2} = m_{0MB^2} = B, M_{0MB^2} = M$ and for odd M we obtain

$$|\hat{g}|^2(s_0, \mathbf{s}) = \frac{N_X}{M} s_{a,M} \delta_{\frac{M}{N_X} s_0 + \mathbf{s} \cdot \mathbf{X}_0^{\text{mm}} = 0 \bmod s_{a,M}}, \quad X_k^{\text{mm}} = c \frac{a^k - 1}{a - 1}. \quad (66)$$

With Eq. (13) we can conclude that $N_X = M$ since any $N_X = \lambda M$ leads to $|\hat{g}|^2(s_0, \mathbf{s}) = 0$ unless $\lambda|s_0$. This completes the proof of Theorem 4.5.

If M is even we have $N_X = 2M$ yielding

$$|\hat{g}|^2(s_0, \mathbf{s}) = 2s_{a,M} \delta_{s_0+2\mathbf{s} \cdot \mathbf{X}_0^{\text{mm}}=s_{a,M} \delta_{2 \lfloor \frac{M}{s_{a,M}} \rfloor \bmod 2s_{a,M}}. \quad (67)$$

For $n = 1$ we have $s_{a,M} = s_{1,M} = \gcd(s_1, M)$ and $\mathbf{s} \cdot \mathbf{X}_0^{\text{mm}} = s_1 X_0^{\text{mm}} = 0$. Thus for odd M we have $Q_1 = Q_1(0, s_{1,M}) = 1$. If M is even then $Q_1(1, 1) = \sqrt{2}/2$ and if $\exists k \in \mathbb{N}$ so that $1 \neq M/2^k$ is odd then $Q_1(0, 2^k) = 1/2$. Therefore

$$N_X = 2^{\delta_{2|M}} M, \quad Q_1 = \begin{cases} 1 & \text{if } M \text{ is odd} \\ \sqrt{2}/2 & \text{if } M = 2^d \\ 1/2 & \text{else} \end{cases}, \quad Q_2 \approx M^{-1/3}, \quad Q_{n \geq 3} \approx M^{1/(n-1)-1}. \quad (68)$$

In case of a power of two modulus we have increased Q_1 from $\sqrt{2}/4$ for the mixed multiplicative generator to $\sqrt{2}/2 \approx 0.70$ and N_X from M to $2M$. Notice also the better behavior of Q_n for $n \geq 2$ which we will derive in Sec. 5.

For $s_0 = 0$ we obtain $|\hat{g}|^2(0, s_1) = 2^{\delta_{2|M}} s_{1,M} \delta_{M/s_{1,M} \text{ odd}}$. Only for $M = 2^d$ this is $N_X \delta_{s_1=0}$, the Fourier transform of the uniform distribution. In this case one obtains two full periods, every random number occurs twice in a period. Analogously to the proof of Cor. 4.4 one can show that for $N_{m_{MB^2}} > 1$ a full period is not possible.

Thus the generator $X_{k+1} = aX_k + ck \bmod M$ produces exactly uniformly distributed random numbers if and only if M is a power of two and $a = 1 \bmod 4$.

The distribution of n -tupels is no longer a lattice as can be seen from Fig. 9II. So even for the standard spectral test ($s_0 = 0$) one would need Eq. (47) to analyze the generator. We skip a further discussion here since in the next section we will present an improved generator for a power of two modulus.

2. $M = 2^d$, $a = 3 \bmod 8$. Let $s_{a,M} \leq M/16$ then $B = 2$, $m'_{MB^2} = m'_{0MB^2} = 8$, $M'_{0MB^2} = M/16s_{a,M}$, $N_{m'_{MB^2}} = N_{m'_{0MB^2}} = 2$ and we obtain

$$|\hat{g}|^2(s_0, \mathbf{s}) = 8s_{a,M} \sum_{k=0,1} \delta_{s_0+\mathbf{s} \cdot (\mathbf{X}_{k+1}^{\text{mm}} + \mathbf{X}_k^{\text{mm}}) = 8s_{a,M} \delta_{32 \lfloor \frac{M}{s_{a,M}} \rfloor \bmod 16 s_{a,M}}. \quad (69)$$

For e.g. $c = 1$ we obtain $Q_1(3, 1) = \sqrt{10}/8 \approx 0.40$ or $Q_1(1, 3) = \sqrt{10}/8$. The improvement in the quality is very little in comparison with the mixed multiplicative generator. The period increases from $M/2$ to $2M$. The generator with $a = 5 \bmod 8$ behaves clearly better.

3. $M = P^d$, P is an odd prime number and a is primitive, $\langle a \rangle_{P^d} = \mathbb{Z}_{P^d}^\times$ (Fig. 10). We find $B = 1$, $N_X = (P-1)P^d$. In the following $\frac{c}{a-1} \in \mathbb{Z}_{P^d}^\times$ is c times the inverse of $a-1 \bmod P^d$. We have to distinguish three cases:

1. $s_{a,P^d} = 0 \bmod P^d$, $m' = m'_0 = M'_0 = 1$, $N_{m'} = N_{m'_0} = 1$. The condition in Eq. (47) is $s_0 + (P-1)\mathbf{s} \cdot (\mathbf{X}_1 - \mathbf{X}_0) = 0 \bmod (P-1)P^d \Leftrightarrow s_0 = 0 \bmod P-1$ and

$s_0 + (P-1)c(s_a - \sum_{j=1}^n s_j)/(a-1) = s_0 - (P-1)\frac{c}{a-1}\sum_{j=1}^n s_j = 0 \pmod{P^d}$. With the pre-factor $(P-1)P^d$ we obtain the first line in Eq. (70).

2. $s_{a,P^d} = P^{d-1}$, $m' = P$, $m'_0 = 1 = M'_0$, $N_{m'} = P-1$, $N_{m'_0} = 1$. We obtain from Eq. (47) $|\hat{g}|^2(s_0, \mathbf{s}) = P^d |\hat{g}|^2_{\mathbb{Z}_{P-1}}[(P-1)P^d, X_\bullet](s_0, \mathbf{s}) \delta_{s_0 + \mathbf{s} \cdot (\mathbf{X}_{P-1} - \mathbf{X}_0) = 0 \pmod{P^d}}$. Since $P^d \in \mathbb{Z}_{P-1}^\times$ we get $P^d |\hat{g}|^2[P-1, X_{P^d \bullet}](s_0, \mathbf{s}) \delta_{s_0 + \frac{c}{a-1}(s_a(a^{P-1}-1)/(a-1) - (P-1)\sum_{j=1}^n s_j) = 0 \pmod{P^d}} = P^d |\hat{g}|^2[N = P-1, M = P, X_k = \frac{c}{(a-1)^2} a^{P^d k}](s_0, \mathbf{s}/P^{d-1}) \delta_{s_0 = (P-1)\frac{c}{a-1}\sum_{j=1}^n s_j \pmod{P^d}}$. Since $a^{P^d k} = a^k \pmod{P}$ we can use the result of the multiplicative generator, Eq. (52), $d = 1$, yielding the second line in Eq. (70).

3. $s_{a,P^d} \equiv P^\lambda \leq P^{d-2}$, $m' = m'_0 = P$, $M'_0 = P^{d-\lambda-2}$, $N_{m'} = N_{m'_0} = P-1$. We obtain $|\hat{g}|^2(s_0, \mathbf{s}) = P^{\lambda+2}/(P-1) \cdot \sum_{k \in \mathbb{Z}_{P-1}} \delta_{s_0 + \mathbf{s} \cdot (\mathbf{X}_{P-1+k} - \mathbf{X}_k) = 0 \pmod{P^{\lambda+2}}} = P^{\lambda+2}/(P-1) \cdot \sum_{k \in \mathbb{Z}_{P-1}} \delta_{s_0 + \frac{c}{a-1}(s_a a^k (a^{P-1}-1)/(a-1) - (P-1)\sum_{j=1}^n s_j) = 0 \pmod{P^{\lambda+2}}} = P^{\lambda+2}/(P-1) \cdot \sum_{k' \in \mathbb{Z}_P} \delta_{s_0 - \frac{c}{a-1}(P-1)\sum_{j=1}^n s_j = k' s_a P \pmod{P^{\lambda+2}}}$. Altogether,

$ \hat{g} ^2(s_0, \mathbf{s})$	$\mu = d, s_0 = 0 \pmod{P-1}$	$\mu = d, s_0 \neq 0 \pmod{P-1}$	$\mu < d$
$s_a = 0$	$(P-1)P^d$	0	0
$\lambda = d-1$	$P^d/(P-1)$	$P^{d+1}/(P-1)$	0
$\lambda \leq d-2$	0	0	$P^{\lambda+2} \delta_{\mu=\lambda+1}/(P-1)$

with $s_{a,P^d} \equiv \gcd(s_a, P^d) \equiv P^\lambda$, $\gcd((a-1)s_0 - c(P-1)\sum_{j=1}^n s_j, P^d) \equiv P^\mu$. (70)

We find that a proper choice of a and c leads to $Q_1 \approx \sqrt{P}(P-1)/P^2 \approx P^{-1/2}$. The by a factor of P longer period compared with the multiplicative case (Ex. 4.1 2) is to some extent compensated by a worse relative quality Q_1 .

If we set $s_0 = 0$ and $n = 1$ we find $\lambda = \mu$ and therefore $|\hat{g}|^2 = N_X \delta_{s_1=0}$. The random numbers are exactly uniformly distributed, the generator produces $P-1$ full periods.

Although $N_X Q_n$ is larger than for the multiplicative generator we can not recommend the generator. If one is not interested in having full periods, generators with a power of two modulus are more efficient. If one needs a full period the velocity of the generator is not important since M has to be comparatively small. Then only the relative quality Q_n is essential and the multiplicative generator is better.

4. $X_k = c(k^2 - k)/2$. This quadratic polynomial is obtained with $a = M+1$. Since, of course, $N_{m_{MB^2}} = 1$ Eqs. (66) and (67) of Ex. 1 for odd and even M are valid, respectively. Although this generator has reasonable Q_1 it is too simple to have good pair and n -tupel distributions (cf. Sec. 5).

We close this section with a lemma which will play an essential role in Sec. 4.4.

Lemma 4.7. Let $A \in \mathbb{N}$, $M' = MB^2/s_{a,MB^2}$, $m' = m_{a^A, M'}$, $m'_0 = m_{0_{a^A}, M'}$, $M'_0 = M'/m'm'_0$. Moreover $\tilde{M}' = \tilde{M}B^2/s_{a, \tilde{M}B^2}$, $\tilde{m}' = m_{a^A, \tilde{M}'}$, $\tilde{m}'_0 = m_{0_{a^A}, \tilde{M}'}$, $\tilde{M}'_0 = \tilde{M}'/\tilde{m}'\tilde{m}'_0$. If one of the following conditions holds there exists at most one $C \in \mathbb{Z}_A$ with $\hat{g}[N, M, \mathbf{X}_\bullet =$

$$(X_{A\bullet+C+j-1})_{j=1\dots n}] \neq 0.$$

$$1. \quad \exists M_A \in \mathbb{N} \text{ with } N_{M_A} = A \text{ and } M_A | (M'/m'). \quad (71)$$

$$2. \quad \exists \tilde{M} | M \text{ with } a = 1 \pmod{\tilde{m}'_0} \text{ and}$$

$$\frac{MN_{a^A, m'}}{N_X} A s_0 + \mathbf{s} \cdot (\mathbf{X}_{AN_{a^A, m'}} - \mathbf{X}_0) = \frac{M}{2M'_0} \delta_{2|M'_0} \pmod{\frac{\tilde{M}}{\tilde{M}'_0}}. \quad (72)$$

Proof. Since $M_A | (M'/m')$ we get $M_A | M'$. Thus $M_A | \gcd(a^A - 1, M') | \gcd(a^{AN_{m'}} - 1, M') = m'$, hence $M_A | m'_0$. Because of the condition in Eq. (44) and Eq. (46) with XB^2 and MB^2 instead of X and M we obtain as a necessary condition for $\hat{g}[\mathbf{X}_\bullet = (X_{A\bullet+C_1+j-1})_j] \neq 0 \neq \hat{g}[\mathbf{X}_\bullet = (X_{A\bullet+C_2+j-1})_j]$:

$$\begin{aligned} & \exists k_1, k_2, \text{ with } \frac{M'}{MB^2 m'} \sum_{i=1,2} (-1)^i \sum_{j=1}^n s_j B^2 (X_{A(N_{m'}+k_i)+C_i+j-1} - X_{A k_i+C_i+j-1}) = 0 \pmod{m'_0} \\ \Leftrightarrow & \frac{s_a}{s_{a, MB^2}} \frac{cB^2}{(a-1)^2} \frac{a^{AN_{m'}} - 1}{m'} (a^{A k_1+C_1} - a^{A k_2+C_2}) = 0 \pmod{m'_0} \Rightarrow a^{C_1} = a^{C_2} \pmod{M_A} \end{aligned}$$

and therefore $C_1 = C_2$.

In case of Eq. (72) we may relax the condition in Eq. (47) and replace (after multiplication with M) M/M'_0 by \tilde{M}/\tilde{M}'_0 . Since $a = 1 \pmod{\tilde{m}'_0}$ we see from the above calculation that in this case the condition is independent of C . Therefore all the $\hat{g}[\mathbf{X}_\bullet = (X_{A\bullet+C+j-1})_j]$ are zero if $\hat{g}[\mathbf{X}_\bullet = (X_{A\bullet+j-1})_j]$ is zero. The dependence on k_1, k_2 drops, too, and we end up with the condition in Eq. (72). \square

If \hat{g} is decomposed $\sqrt{N_X} \hat{g}[N_X] = \sum_{C \in \mathbb{Z}_A} \exp(2\pi i C s_0 / N_X) \sqrt{N_X/A} \hat{g}[N_X/A, (X_{A\bullet+C+j-1})_j]$ only one of the terms on the right hand side can be non-zero. Therefore $N_X |\hat{g}|^2[N_X] = \sum_{C \in \mathbb{Z}_A} N_X/A |\hat{g}|^2[N_X/A, (X_{A\bullet+C+j-1})_j]$.

This shows explicitly that the quality of n -tupels deteriorates if $A|n$ and $A|N_X$ because the period reduces by A and $\max_{C \in \mathbb{Z}_A} |\hat{g}|^2[N_X/A, (X_{A\bullet+C+j-1})_j] = A |\hat{g}|^2[N_X, \mathbf{X}_\bullet]$.

4.4 $X_0 = 0, X_{k+1} = aX_k + c \text{int}(k/t) \pmod{M}$

Let $1 \neq a, c \in \mathbb{Z}_M^\times, 2|t|M$ and $N_{MB^2} = 1$ (Fig. 11).

This section is restricted to even M since for odd M the random number generator of Sec. 4.3 was already satisfactory. We only discuss $N_{MB^2} = 1$ since this suffices to find a power of two generator with $Q_1 = 1$.

If one tries to improve the generator of the last section by building sum generators one would obtain the recursion relation $X_{k+1} = aX_k + P(k) \pmod{M}$, where P is a polynomial of degree greater than one. Such generators may be interesting from a mathematical point of view, however they are not easy to analyze and the calculation of the random numbers becomes more time consuming.

We follow the second way to improve the generator of the last section. Looking at this generator $\pmod{2}$ one obtains the sequence $0, 0, 1, 1, 0, 0, 1, 1, \dots$ and to make all random numbers even one could perform the map $X_k \mapsto X_k + \text{int}(k/2)$ which does not seriously

affect the quality of the generator. If we afterwards divide the random numbers by 2 we should end up with an improved generator. A slightly more general framework leads to the recursion formula of the generator of this section (cf. Prop. 4.9). It is perhaps surprising that even this generator can be Fourier transformed algebraically at almost all points (s_0, \mathbf{s}) .

It would be possible to analyze this generator for $N_{MB^2} > 1$. However this would cause some extra effort and for practical purposes this is not needed.

The Fourier transform of the generator is again derived from Eq. (47).

Theorem 4.8. Let $X_0 = 0$, $X_{k+1} = aX_k + c \operatorname{int}(k/t) \bmod M$, $1 \neq a, c \in \mathbb{Z}_M^\times$, $2|t|M$ and $N_{MB^2} = 1$ then

$$|\hat{g}|^2(s_0, \mathbf{s}) = S \delta_{s_0 + \mathbf{s} \cdot \mathbf{X}_0^{\text{mm}} = 0 \bmod s_{a,M}} \text{ with } S = s_{a,M} \text{ if } s_{a,M} | M/t. \quad (73)$$

$X_k^{\text{mm}} = c(a^k - 1)/(a - 1)$ is the mixed multiplicative generator related to X . The period is $N_X = Mt$.

Proposition 4.9. There exists a $c' \in \mathbb{Z}_M^\times$, a $d' \in \mathbb{Z}$, odd, and a periodic function R , $R(k) = R(k + t) \in \mathbb{Q}$, $R(0) = 0$, so that we get with $X'_k = \frac{c'}{a-1}(\frac{a^k-1}{a-1} - k)$,

$$X_k = \frac{1}{t} \left(X'_k - \frac{d'}{2}k + R(k) \right) \bmod M. \quad (74)$$

Proof. The equation is trivial for $k = 0$. We can assume by induction that the equation holds for k and prove it for $k + 1$. With $k = tk' + k_0$, $0 \leq k_0 < t$ we get $X_{k+1} = \frac{1}{t}(aX'_k - ad'k/2 + aR(k) + tc \operatorname{int}(k/t)) = \frac{1}{t}(X'_{k+1} - c'k - ad'k/2 + aR(k) + c(k - k_0))$. If we compare this with $\frac{1}{t}(X'_{k+1} - d'(k+1)/2 + R(k+1)) \bmod M$ we find (a) $c' + ad'/2 - c = d'/2$. Further on, $R(k+1)$ is determined by $R(k)$ and k_0 . Therefore the periodicity of R is equivalent to $R(t) = R(0) = 0$. This means (b) $X_t = \frac{c'}{a-1}(\frac{a^t-1}{t(a-1)} - 1) - d'/2$. To solve Eqs. (a) and (b) we need the following observation. Due to Eq. (25) (replace M by MBt^2 , $B = m = \gcd(a-1, MB)$) we know that there exists a $c_t \in \mathbb{Z}_{Mt^2}$ with $a^t - 1 = c_t Bt \bmod MBt^2$. Thus $\frac{a^t-1}{t(a-1)} \in \mathbb{Z}_{Mt}^\times$ and it has an inverse mod Mt which we will denote by $\frac{t(a-1)}{a^t-1}$. Now we can solve Eqs. (a) and (b) for c' and d' mod Mt ,

$$c' = \frac{t(a-1)}{a^t-1} ((a-1)X_t + c), \quad d' = \frac{2c}{a-1} \left(1 - \frac{t(a-1)}{a^t-1} \right) - 2\frac{t(a-1)}{a^t-1}X_t.$$

Since every prime factor of M is contained in $a-1$ and $c \in \mathbb{Z}_M^\times$ we have $(a-1)X_t + c \in \mathbb{Z}_M^\times$ and therefore $c' \in \mathbb{Z}_M^\times$. It remains to show that d' is odd. We obtain mod 2:

$$d' = 2\frac{a-1}{a^t-1} \frac{c}{a-1} \left(\frac{a^t-1}{a-1} - t \right) = 2\frac{a-1}{a^t-1} X_t^{\text{Sec. 4.3}} = 2\frac{a-1}{a^t-1} \frac{t}{2} = 1 \bmod 2.$$

□

Proof of Thm. 4.8. We start with Prop. 4.9. Let $k = tk' + k_0$ and $|P(k_0)|^2 = 1$ then $|\hat{g}|^2$ equals

$$\frac{1}{N_X} \left| \sum_{k_0 \in \mathbb{Z}_t} P(k_0) \sum_{k' \in \mathbb{Z}_{N_X/t}} \exp \left(\frac{2\pi i}{N_X} s_0 (tk' + k_0) + \frac{2\pi i}{Mt} \sum_{j=1}^n s_j \left(X'_{tk'+k_0+j-1} - \frac{d'}{2} (tk' + k_0) \right) \right) \right|^2.$$

Now we combine the $d'tk'/2$ -term with the s_0tk' -term yielding $(s_0 - N_X/2Mt \cdot d' \sum_{j=1}^n s_j) \cdot (tk' + k_0)$. For the moment we set $N_X = 2Mt$ since we want to apply Lemma 4.7 on the generator X' . Later we will show that actually we have $N_X = Mt$.

We assume that one of the conditions (71), (72) is valid (which we will show later). Then only one term in the sum over k_0 can be non-zero. Therefore $|\hat{g}|^2 = 1/N_X \cdot \sum_{k_0} |P(k_0) \sum_{k' \dots}|^2$ and $P(k_0)$ drops. Afterwards we interchange the sum over k_0 and taking the square once more and recombine the k_0 -sum with the k' -sum. We end up with the squared Fourier transform of X' which was already analyzed in Ex. 4.6 1. The result (Eq. (67)) is

$$|\hat{g}|^2[N_X = 2Mt](s_0, \mathbf{s}) = 2s_{a,Mt} \delta_{s_0 - d' \sum_{j=1}^n s_j + 2\mathbf{s} \cdot \mathbf{X}_0^{\text{mm}} = s_{a,Mt}} \delta_{2|\frac{Mt}{s_{a,Mt}} \bmod 2s_{a,Mt}}.$$

We find $-d' \sum_{j=1}^n s_j + 2\mathbf{s} \cdot \mathbf{X}_0^{\text{mm}} = -d' \sum_{j=1}^n s_j + 2c'(s_a - \sum_{j=1}^n s_j)/(a-1) = (d'(a-1) + 2c')(s_a - \sum_{j=1}^n s_j)/(a-1) - d's_a$ and with Eq. (a) in the proof of Prop. 4.9 this equals $2\mathbf{s} \cdot \mathbf{X}_0^{\text{mm}} - d's_a$. Now we assume that $Mt/s_{a,Mt}$ is even. Then $s_a/s_{a,Mt}$ is odd and since d' is odd $d's_a = s_{a,Mt} \bmod 2s_{a,Mt}$. Altogether the equation in the Kronecker δ in $|\hat{g}|^2$ gives $s_0 + 2\mathbf{s} \cdot \mathbf{X}_0^{\text{mm}} = d's_a \delta_{Mt/s_{a,Mt} \text{ odd}} \bmod 2s_{a,Mt}$. We recognize that $Mt/s_{a,Mt}$ can only be odd if s_a is even so that $|\hat{g}|^2[N_X = 2Mt](s_0, \mathbf{s})$ vanishes for odd s_0 . From Eq. (13) for $c_1 = c_2 = 2$ we see that X has actually the period $N_X = Mt$ and since d' is odd

$$|\hat{g}|^2[N_X = Mt](s_0, \mathbf{s}) = s_{a,Mt} \delta_{s_0 + \mathbf{s} \cdot \mathbf{X}_0^{\text{mm}} = \frac{s_a}{2} \delta_{Mt/s_{a,Mt} \text{ odd}} \bmod s_{a,Mt}}.$$

Now we check the conditions of Lemma 4.7. We set $M_t = \max_{k \in \mathbb{N}} \gcd(tB, t^k)$. Since $m_{M_t} = \gcd(a-1, M_t) = M_t/t$ there exists a $c_k \in \mathbb{Z}_t^\times$ (Eq. (25)) with $a^k - 1 = c_k k M_t / t \bmod M_t$, hence $N_{M_t} = t$. Assume $s_{a,M} | M/t$. Since M_t consists only of prime factors of t and $\gcd(M_t, t^k) = \gcd(Bt, t^k) | \gcd(MB/s_{a,M}, t^k)$ it suffices to show that $\gcd(MB/s_{a,M}, t^k) | \gcd(M'/m', t^k)$ for all k ($M' = MB^2t/s_{a,MB^2t}$). Since $s_{a,M} | M/t$ we get $\gcd(s_{a,M}, t^k) = \gcd(s_{a,MB^2t}, t^k)$ and therefore $\gcd(MB/s_{a,M}, t^k) = \gcd(M'/Bt, t^k)$. Finally from Eq. (25) we get $\gcd(a^t - 1, MB^2t) = Bt$, hence $m' = \gcd(a^t - 1, M') | Bt$. So Eq. (71) holds if $s_{a,M} | M/t$. Moreover, in this case $s_{a,Mt} = s_{a,M}$ and $2|t|Mt/s_{a,M}$ which proves Eq. (73) if $s_{a,M} | M/t$.

If $s_{a,M}$ does not divide M/t we take $\tilde{M} = ts_{a,M}$ in Eq. (72). So $\tilde{M} | Mt$ (notice that M has to be replaced by Mt in Lemma 4.7). Since $\tilde{M}' = s_{a,M} B^2t/s_{a,MB^2t} | B^2t$ and $\tilde{m}' = \gcd(a^t - 1, \tilde{M}') = \gcd(Bt, \tilde{M}')$ we have $\tilde{m}'_0 | (\tilde{M}'/\tilde{m}') | B$. Therefore $a = 1 \bmod \tilde{m}'_0$ and $\tilde{M}'_0 = \tilde{M}'/\tilde{m}'\tilde{m}'_0 = 1$. We can use Lemma 4.7 if $\frac{Mt}{2\tilde{M}'} t(s_0 - d' \sum_{j=1}^n s_j) + \mathbf{s} \cdot (\mathbf{X}'_t - \mathbf{X}'_0) \neq \frac{Mt}{2\tilde{M}'_0} \delta_{2|M'_0} \bmod \tilde{M}$. Now $\mathbf{s} \cdot (\mathbf{X}'_t - \mathbf{X}'_0) = \frac{c'}{a-1} (s_a \frac{a^t-1}{a-1} - t \sum_{j=1}^n s_j) = s_a X'_t + t \frac{c'}{a-1} (s_a - \sum_{j=1}^n s_j)$ and with Eq. (a) in the proof of Prop. 4.9 we get $\frac{c'}{a-1} (s_a - \sum_{j=1}^n s_j) = \mathbf{s} \cdot \mathbf{X}_0^{\text{mm}} - \frac{d'}{2} (s_a - \sum_{j=1}^n s_j)$. Collecting all pieces we obtain the condition $ts_0/2 + ts \cdot \mathbf{X}_0^{\text{mm}} + s_a (X'_t - d't/2) \neq \frac{Mt}{2M'_0} \delta_{2|M'_0} \bmod \tilde{M}$.

Since $m_{a^t, MB^2t} = m_{0a^t, MB^2t} = Bt$ we get with Eq. (49) $M'_0 = M/\gcd(ts_a, M)$. Therefore $\frac{Mt}{2M'_0} = t \gcd(ts_a, M)/2 = 0 \bmod \tilde{M}$ if $2|M'_0$. With Eq. (74) we get $s_a (X'_t - d't/2) = s_a t X_t = 0 \bmod \tilde{M}$. We can divide the condition by t and get $s_0/2 + \mathbf{s} \cdot \mathbf{X}_0^{\text{mm}} \neq 0 \bmod s_{a,M}$.

This condition holds for odd s_0 which completes the proof that $\hat{g}[N_X = 2Mt](s_0, \mathbf{s})$ vanishes for odd s_0 . The period is $N_X = Mt$ and due to Eq. (13) we may replace $s_0/2$ by

s_0 if we calculate $\hat{g}[N_X = Mt](s_0, \mathbf{s})$. This means that Eq. (73) is valid if the Kronecker δ vanishes. Otherwise the equation holds trivially with $S \equiv |\hat{g}|^2(s_0, \mathbf{s})$. \square

If $s_{a,M}$ fails to be a divisor of M/t then $|\hat{g}|^2$ remains undetermined for $Mt/s_{a,M}$ values of s_0 . At these points we only know that the average of $|\hat{g}|^2$ is $s_{a,M}$ (Eq. (15)).

Therefore one should choose t as small as possible, namely $t = 2$. In this case $|\hat{g}|^2$ is known if $s_{a,M} | M/2$ and an explicit calculation using Eq. (74) (note that $a^k - 1 = (a^2 - 1)k/2 - (a - 1)^2 \delta_{k \text{ odd}} / 2 \pmod{2B^2}$) gives

$$S = M \left(1 + \cos \left(\frac{\pi}{M} \left(s_0 + 2c \sum_{j=3}^n \frac{a^{j-1} - a^{\delta_{2|j}}}{a^2 - 1} s_j \right) \right) \right) \quad \text{if } s_a = 0 \pmod{M}, \quad t = 2. \quad (75)$$

In particular for $n = 1$ we find $|\hat{g}|^2(s_0, 0) = 2M\delta_{s_0=0}$ (cf. Eq. (14)), and $n = 2$ gives $|\hat{g}|^2(s_0, s_a = 0) = M(1 + \cos(\pi s_0/M)) \approx 2M$ for small s_0 .

If moreover M is a power of two then $|\hat{g}|^2$ is completely determined by Eqs. (73), (75) and the generator can also best be implemented (cf. Ex. 5.1 1). We obtain

$$N_X = 2M, \quad Q_1 = 1, \quad Q_2 \approx M^{-1/3}, \quad Q_n \approx M^{1/(n-1)-1} \text{ for } n \geq 3 \quad (76)$$

as will be shown in Sec. 5. It is advantageous to have two parameters a and c at hand to optimize the quality of higher n -tuples and not only a as in the case of the mixed multiplicative generator.

The generator does not provide full periods since $|\hat{g}|^2(0, s_1) = s_{1,M} \neq 2M\delta_{s_1=0}$. However the deviation from an exact uniform distribution is not larger than in a finite true random sequence. If one does not use the entire period of the generator (and this is not recommended because of the n -tuple distribution) the feature of having a full period is anyway irrelevant. If, for some reasons, one insists in a full period we recommend to use a multiplicative generator with prime number modulus or the multiply recursive generator which will be analyzed next.

The generator of this section behaves in every aspect better than the widely used mixed multiplicative generator. This is also confirmed by the figures (cf. Fig. 4 vs. Fig. 11). The extra effort in calculating random numbers is little (cf. Ex. 5.1 1). If n -tuples are used one should take odd n and occasionally omit one random number.

Nevertheless the most essential step for producing good random numbers is to use large moduli (cf. Fig. 8 and Sec. 5).

4.5 $X_0 = 1, X_{-1} = \dots = X_{-r+1} = 0, X_{k+1} = a_{r-1}X_k + \dots + a_0X_{k-r+1} \pmod{P}$

Let P be a prime number and X_k have the maximum period of $P^r - 1$ (Fig. 12). In this case the random number generator has a full period in the sense that every r -tuple $(X_0, \dots, X_{r-1}) \neq (0, \dots, 0)$ occurs exactly once in a period.

Theorem 4.10 (Grube [9]). Let

$$P(\lambda) = \lambda^r - a_{r-1}\lambda^{r-1} - \dots - a_0. \quad (77)$$

The corresponding generator has maximum period if and only if P is a primitive polynomial over \mathbb{Z}_{P^r} .

The proof is found in [9, Satz 2.1].

Theorem 4.11. Let X_k be defined as above and $\mathbf{s}_a \equiv (\mathbf{s} \cdot \mathbf{X}_k)_{0 \leq k < r} = (\sum_{j=1}^n s_j X_{k+j-1})_{0 \leq k < r}$ then $|\hat{g}|^2$ is given by the following table.

$$\begin{array}{c|cc}
 |\hat{g}|^2(s_0, \mathbf{s}) & s_0 = 0 & s_0 \neq 0 \\
 \hline
 \mathbf{s}_a = \mathbf{0} & P^r - 1 & 0 \\
 \mathbf{s}_a \neq \mathbf{0} & 1/(P^r - 1) & P^r/(P^r - 1)
 \end{array} \tag{78}$$

Proof. First we notice that $(\mathbf{s} \cdot \mathbf{X}_k)_k$ obeys the same recursion relation as $(X_k)_k$ since $\mathbf{s} \cdot \mathbf{X}_{k+1} = \sum_{j=1}^n s_j X_{k+j} = \sum_{\ell=1}^r a_{r-\ell} \sum_{j=1}^n s_j X_{k+j-\ell} = \sum_{\ell=1}^r a_{r-\ell} \mathbf{s} \cdot \mathbf{X}_{k+1-\ell}$. So, $(\mathbf{s} \cdot \mathbf{X}_k)_k$ is either identically zero or it has maximum period. In the latter case every number $\in \mathbb{Z}_P^\times$ is produced P^{r-1} times in a period and the zero is generated $P^{r-1} - 1$ times. Since the same holds for $(\mathbf{s} \cdot (\mathbf{X}_{k+\Delta k} - \mathbf{X}_k))_k$ we get

$$\sum_{k \in \mathbb{Z}_{P^r-1}} \exp\left(\frac{2\pi i}{P} \mathbf{s} \cdot (\mathbf{X}_{k+\Delta k} - \mathbf{X}_k)\right) = P^r \delta_{\mathbf{s} \cdot (\mathbf{X}_{k+\Delta k} - \mathbf{X}_k) = 0 \quad \forall 0 \leq k < r} - 1.$$

If $\mathbf{s}_a = \mathbf{0}$ then $\mathbf{s} \cdot \mathbf{X}_k = 0 \quad \forall k$, the Kronecker δ gives 1 and from Eq. (11) we obtain $|\hat{g}|^2(s_0, \mathbf{s}_a = \mathbf{0}) = (P^r - 1)\delta_{s_0=0}$. If on the other hand $\mathbf{s}_a \neq \mathbf{0}$ then $(\mathbf{s} \cdot \mathbf{X}_k)_k$ has maximum period and the Kronecker δ vanishes unless $\Delta k = 0$. In this case Eq. (11) yields $P^r/(P^r - 1) - \delta_{s_0=0}$. \square

The choice of parameters is determined by avoiding small s with $\mathbf{s}_a = \mathbf{0}$. For practical purposes it is more convenient to replace the condition $\mathbf{s}_a = (\mathbf{s} \cdot \mathbf{X}_k)_{0 \leq k < r} = \mathbf{0}$ by the equivalent requirement $\mathbf{0} = (\mathbf{s} \cdot \mathbf{X}_{1-k})_{1 \leq k \leq r} \Leftrightarrow \sum_{j=k}^n s_j X_{j-k} = 0 \pmod{P}$, $k = 1, 2, \dots, \min(r, n)$. If $n \leq r$ the only solution is $\mathbf{s} = \mathbf{0} \pmod{P}$. For $n > k$ one has the problem of finding the smallest lattice vector of an n -dimensional lattice. The unit cell of this lattice has the volume P^r (cf. Sec. 5). Thus for proper parameters the quality of the generator is

$$N_X = P^r - 1, \quad Q_1 = Q_2 = \dots = Q_r = \sqrt{2}/(1 - P^{-r}), \quad Q_{n>r} \approx P^{r/n-r}. \tag{79}$$

This is the first generator which has $Q_n \geq 1$ for $1 \leq n \leq r > 1$. For $2 \leq n \leq r$ the generator has higher $\tilde{N}_n = \max(N_X Q_n, N_X) = P^r - 1$ but lower $\tilde{M}_n = \max(N_X Q_n, M) = P$ than the multiplicative generator mod P^r (Ex. 4.1 2, with $\tilde{N}_n \approx \tilde{M}_n \approx P^{r/n}$).

In particular if one needs the full periods this generator may be recommended. For prime numbers of the form $P = 2^k \pm 1$ the generator has good performance, too. If the prime factors of $P^r - 1$ are known it is no problem to find multipliers which lead to a full period. A short discussion of the choice of parameters for large P and r is given in the next section and an implementation is presented in Ex. 5.2 2.

5 Choice of parameters

We start with a discussion of the mixed multiplicative generator (the multiplicative generator is analogous). For practical purposes we can restrict ourselves to $M = 2^d$ and $a = 5 \pmod{8}$. We set $c = 1$ which is equivalent to any other odd c and assume $n \geq 2$ since the case $n = 1$ depends only on b which is 4 for $a = 5 \pmod{8}$.

From Eq. (60) we obtain, as long as $bs_{a,M/b} < M$, that \hat{g} vanishes unless $s_{a,M/b}|s_0 \neq 0$ and therefore (A) $Q_n(s_0, \mathbf{s}) = \sqrt{1 + \mathbf{s}^2/s_{a,M/b}^2}/4 > 1/4$. However if $s_{a,M/b} = M/b$ we get $|\hat{g}|^2 = M$ for (B) $s_0 = s_a = 0 \pmod{M}$. This leads to $Q_n = |\mathbf{s}|/M$ which for some \mathbf{s} is much smaller than $1/4$.

So Eq. (B) is more important. We solve it for s_1 yielding $s_1 = kM - as_2 - a^2s_3 - \dots - a^{n-1}s_n$ depending on the free integer constants k, s_2, s_3, \dots, s_n which give rise to an n -dimensional lattice (cf. [2]). The lattice is given by an n by n matrix A according to $\mathbf{s} = A \cdot (k, s_2, \dots, s_n)^T$ and we read off

$$A = \begin{pmatrix} M & -a & -a^2 & \dots & -a^{n-1} \\ & 1 & & & \\ & & 1 & & \\ & & & \ddots & \\ & & & & 1 \end{pmatrix} \sim \begin{pmatrix} M & -a & & & \\ & 1 & -a & & \\ & & 1 & \ddots & -a \\ & & & & 1 \end{pmatrix}, \quad (80)$$

where zeros have been omitted and both matrices define the same lattice since they differ only by $SL(n, \mathbb{Z})$ lattice transformations.

We denote the length of the smallest non-vanishing lattice vector by ν_n . Since the quality of the random numbers is determined by $\nu_n = MQ_n$ we search for an a which large ν_n . Most important are small n , in particular the pair correlation $n = 2$. In the best case the lattice has a cubic unit-cell and ν_n is determined by the dimension of the lattice and the volume of the unit-cell. Since the volume is given by the determinant of A we get as an approximate upper bound $\nu_n \lesssim M^{1/n}$. The calculation of ν_n is a standard problem in mathematics for which efficient algorithms exist [10].

To simplify the search for reasonable multipliers it is useful to have also a lower bound for ν_n . Due to the specific form of A it is easy to see that ν_n has to be larger than the smallest ratio > 1 between two elements of then set $\{1, a, a^2 \pmod{M}, \dots, a^{n-1} \pmod{M}, M\}$. If we take e.g. $a \approx M^{1/2}$ we find $\nu_2 \gtrsim M^{1/2}$ which is identical with the upper bound.

Similarly we obtain $\nu_3 \approx M^{1/3}$ if we take $a \approx M^{1/3}$ or $a \approx M^{2/3}$. However this is not compatible with $a \approx M^{1/2}$ and we only get $\nu_2 \gtrsim M^{1/3}$. On the other hand we can take $a \approx M^{1/2} + \frac{1}{2}M^{1/4}$ which differs little from $M^{1/2}$. Therefore $\nu_2 \approx M^{1/2}$ and since $a^2 \approx M + M^{3/4} + \frac{1}{4}M^{1/4} \approx M^{3/4} \pmod{M}$ we have $\nu_3 \gtrsim M^{1/4}$. Generally, with $a \approx M^{1/2} + \frac{1}{2}M^{1/4} + \dots + \frac{1}{k-1}M^{1/2^{k-1}}$ (the plus signs may as well be replaced by minus signs) we get $\nu_n \gtrsim M^{1/2^{n-1}}$ as long as $k \geq n$ and $M^{1/2^{n-1}} \gg 1$. Note that $M^{1/2^{n-1}}$ is only a lower bound for ν_n . In the generic case ν_n will be close to $M^{1/n}$ (cf. Ex. 5.1 1).

Obviously ν_n increases with M . For all practical purposes the magnitude of M is only limited by the performance of the generator. In practice one has to split M into groups of digits (16 or 32 bit) that can be treated on a computer. The multiplication by a performs best if the pre-factors $1/j$ are omitted. This should be done even though for $a \approx M^{1/2} + M^{1/4} + \dots + M^{1/2^{k-1}}$ the lower bounds for ν_n decrease, $\nu_n \gtrsim M^{1/2^{n-1}}/(n-1)!$. Note that the number of digits of M is much more important for randomness than the fine-tuning of a .

Finally, we have to add not too small a constant $a_0 = 5 \pmod{8}$ (16 or 32 bit) to the sum of powers of M . This constant can be fixed by explicit calculation of the ν_n or by looking

at (A) from the beginning of this section which implies that a_0 should have large $|\mathbf{s}|$ for all $16 < m = s_{a,M} |M|^{1/2^{k-1}}$. A suitable choice is e.g. $a_0 = 3\,580\,621\,541 = 62\,181 \bmod 2^{16}$. With this value of a_0 we find $|\mathbf{s}| \approx m^{1/n}$ for $n = 2, 3$.

We summarize the result for the parameters of the mixed multiplicative generator:

$$\begin{aligned} M &= 2^{2^k d_0}, \quad c = 1, \quad a = 2^{2^{k-1} d_0} + 2^{2^{k-2} d_0} + \dots + 2^{2 d_0} + a_0, \quad \text{with} \\ a_0 &= 5 \bmod 8, \quad a_0 \approx 2^{d_0}, \quad \text{e.g. } a_0 = 3\,580\,621\,541 \bmod 2^{d_0}, \quad \text{leads to} \\ N_X &= 2^{256}, \quad Q_1 = \sqrt{2}/4, \quad Q_n \approx M^{1/n-1}. \end{aligned} \quad (81)$$

Now we turn to the improved generator of Sec. 4.4. The discussion of the generator of Sec. 4.3 is analogous.

The Fourier transform of the generator is given by Eq. (73). We set $n \geq 2$ since independently of the parameters $Q_1 = 1$. Further on, we fix an $m|M$ and find that $|\hat{g}|^2 = m$ if and only if (C) $s_a = km$, k odd if $m < M$, and (D) $s_0 + \frac{c}{a-1} \sum_{j=2}^n (a^{j-1} - 1) s_j = \ell m$. (We neglect here that $|\hat{g}|^2$ may even be $2M$ for $m = M$, cf Eq. (75).) Eq. (C) can be solved for s_1 and Eq. (D) for s_0 depending on the integer parameters k, ℓ, s_2, \dots, s_n . This gives rise to an $(n+1)$ -dimensional lattice (for $m < M$ we actually obtain an affine sub-lattice since k has to be odd) determined by the matrix B via $(s_0, \mathbf{s}) = B \cdot (\ell, k, s_2, \dots, s_n)^T$,

$$\begin{aligned} B &= \begin{pmatrix} m & -c & \dots & -c(a^{n-2} + \dots + 1) \\ & m & -a & \dots & -a^{n-1} \\ & & 1 & & \\ & & & \ddots & \\ & & & & 1 \end{pmatrix} \sim \begin{pmatrix} m & -c & -c & \dots & -c \\ & m & -a & & \\ & & 1 & -a & \\ & & & 1 & \ddots & -a \\ & & & & & 1 \end{pmatrix} \quad (82) \\ &\sim \begin{pmatrix} m & -c & & & & & \\ & m & -a & a & a^2 + a & \dots & a^{n-2} + \dots + a \\ & & 1 & -a - 1 & -a^2 - a - 1 & \dots & -a^{n-2} - \dots - 1 \\ & & & 1 & & & \\ & & & & 1 & & \\ & & & & & \ddots & \\ & & & & & & 1 \end{pmatrix}, \quad (83) \end{aligned}$$

where again zeros have been omitted.

B describes an $(n+1)$ -dimensional lattice which has a unit-cell with volume m^2 . However this does not imply that the smallest lattice vector ν_n has length of about $m^{2/(n+1)}$. We see from (83) that there exists an $(n-1)$ -dimensional sub-lattice with $s_0 = 0$ and $s_2 = -s_1 - s_3 - \dots - s_n$ (delete the first and the third row and column in (83)). The unit-cell of the sub-lattice has volume m and $\nu_n \approx m^{1/(n-1)}$ which, for $n \geq 4$, is smaller than $m^{2/(n+1)}$. The smallest lattice vector for $n \geq 4$ will have the form $(0, s_1, -s_1 - s_3 - \dots - s_n, s_3, \dots, s_n)$ with the length $(s_1^2 + s_3^2 + \dots + s_n^2 + (s_1 + s_3 + \dots + s_n)^2)^{1/2}$. Since this is of about the same magnitude as $(s_1^2 + s_3^2 + \dots + s_n^2)^{1/2}$ we may simply omit s_2 and reduce the problem to the $(n-1)$ dimensions given by (s_1, s_3, \dots, s_n) . Geometrically this means that the lattice

corresponding to B for $n \geq 4$ never has an approximately cubic unit-cell. Note moreover that the sub-lattice is independent of c which means that c can not be fixed by looking at the n -tupel distributions for $n \geq 4$.

The smallest value of $Q_n = \nu_n/m$ is obtained for $m = M$ which is thus the most important case. For $m = M$ we are not restricted to odd k . The situation is similar to the $(n-1)$ -dimensional case of the mixed multiplicative generator, Eq. (80), with $-a^j$ replaced by $a^j + a^{j-1} + \dots + a$. This allows us to use $a = M^{1/2} + M^{1/4} + \dots + M^{1/2^{k-1}} + a_0$ again. Since $1 \ll a \approx M^{1/2} \ll a^2 \bmod M \approx 2M^{3/4} \ll \dots \ll a^{n-2} \bmod M \approx (n-2)!M^{1-2^{2-n}} \ll M$ we have $a^j + a^{j-1} + \dots + a \approx a^j \bmod M$. The minus sign is irrelevant, thus we can copy the corresponding lower bounds from the mixed multiplicative generator: $\nu_n \gtrsim M^{1/2^{n-2}}/(n-2)!$ for $k+1 \geq n \geq 4$. The constant a_0 is given by the case $m < M$ as will be discussed below.

The constant c can be fixed by the case $n = 2$. We have to meet two equations (E) $s_1 + as_2 = 0 \bmod M$ and (F) $s_0 + cs_2 = 0 \bmod M$ to get $|\hat{g}|^2 = M$. Both equations are solved by e.g. $s_0 = -c, s_1 = -a \approx -M^{1/2}, s_2 = 1$ with $|(s_0, \mathbf{s})| \approx (c^2 + M)^{1/2}$. In order to reach the theoretical limit $\nu_2 \approx M^{2/3}$ one needs $c \gtrsim M^{2/3}$. So, the simplest ansatz for c is $c = M^\lambda + 1$ for $\lambda \geq 2/3, M^\lambda \in \mathbb{N}$. On the other hand, if $s_1 = M^{1-\lambda}s'_1, s_2 = M^{1-\lambda}s'_2$ then $s'_1 + as'_2 = 0 \bmod M^\lambda$ has a solution with $|\mathbf{s}'| \lesssim M^{\lambda/2}$. Since (F) is solved by $s_0 = -M^{1-\lambda}s'_2$ we find $|(s_0, \mathbf{s})| \approx |s_0| \lesssim M^{1-\lambda}M^{\lambda/2} = M^{1-\lambda/2}$. To allow for the maximum value $M^{2/3}$ one needs $\lambda \leq 2/3$. In general, c should not have more successive zero digits than $M^{2/3}$ has. The simplest reasonable choice is therefore $c = M^{2/3} + 1$. We can generalize this slightly to $c = (2^{d_1} + 1)c_0$, where c_0 is a 16 or 32 bit number and $2^{d_1} \leq M^{2/3} \leq c_0 2^{d_1}$. This choice of c leads to best performance among all reasonable c . We will see in Ex. 5.1 1 that it actually gives $\nu_2 \approx M^{2/3}$ and $\nu_3 \approx M^{1/2}$. As a lower bound for ν_2, ν_3 one has only the values $M^{1/2}, M^{1/4}$ that are obtained from Eqs. (E), (C) alone.

Now we determine c_0 and a_0 by looking at $s_{a,M} = m < M$. The case $m < M$ is more important than for the mixed multiplicative generator since Q_n is not limited by $1/4$. To some extent the smaller Q_n for $m < M$ is compensated by the fact that for small m there are more points with $s_a = \text{odd} \cdot m$. We use $a_0 = 3\,580\,621\,541$ as for the mixed multiplicative generator and find with $c_0 = 3\,370\,134\,727 = 11\,463 \bmod 2^{16}$ that $Q_2(s_0, \mathbf{s}) \approx m^{2/3-1}$ and $Q_3(s_0, \mathbf{s}) \approx m^{1/2-1}$ if $s_{a,M} = m$.

We summarize the result for the generator of Sec. 4.4:

$$\begin{aligned} M &= 2^{2^k d_0}, \quad a = 2^{2^{k-1} d_0} + 2^{2^{k-2} d_0} + \dots + 2^{2 d_0} + a_0, \quad c = \left(2^{\text{int}(2^{k+1}/3)d_0} + 1\right) c_0, \quad \text{with} \\ a_0 &= 5 \bmod 8, \quad a_0 \approx 2^{d_0}, \quad c_0 \text{ odd}, \quad c_0 \geq 2^{2/3 d_0}, \\ \text{e.g. } a_0 &= 3\,580\,621\,541 \bmod 2^{d_0}, \quad c_0 = 3\,370\,134\,727 \bmod 2^{d_0} \quad \text{leads to} \\ N_X &= 2^{257}, \quad Q_1 = 1, \quad Q_2 \approx M^{2/3-1}, \quad Q_{n \geq 3} \approx M^{1/(n-1)-1}. \end{aligned} \quad (84)$$

Finally we give a short discussion of the multiply recursive generator of Sec. 4.5 (cf. Ex. 5.1 2).

P should not be taken too small to provide enough digits for the random numbers. To optimize the performance one should use a prime number of the form $P = 2^d \pm 1$, e.g. $P = 2^{31} - 1$. Moreover we set $a_{r-1} = 1, a_{r-2} = \dots = a_1 = 0$.

of $j \in \{-1, \dots, -r\}$ with $\mathbf{X}_j = \mathbf{0}$ (see the remark at the end of Sec. 2.2). In particular if $X_{k-1} = \dots = X_{k-r+1} = 0$ the pair (X_0, X_k) has quality of less than $P^{1/2-r}$ because $aX_\ell = bX_{k+\ell} \forall \ell$ if $a = bX_k \bmod P$. From Eq. (85) we see immediately that this happens for multiples of $k = (P^r - 1)/(P - 1)$ (notice the equidistant zeros in Fig. 12I). This makes it not desirable to use more than $(P^r - 1)/(P - 1)$ multiply recursive random numbers.

Example 5.1.

1. We set $M = 2^{256} = 2^{2^4 \cdot 16}$, $a = 2^{128} + 2^{64} + 2^{32} + 62\,181$ and in case of the generator of Sec. 4.4 $c = (2^{160} + 1) \cdot 11\,463$. In the following table we compare the mixed multiplicative generator with the generator of Sec. 4.4. The results can easily be obtained with a computer algebra program and Eq. (75).

$Q_n \equiv M^{\alpha_n - 1}$	$X_{k+1} = aX_k + 1$ Eq. (81)		$X_{k+1} = aX_k + c \operatorname{ink}(k/2)$ Eq. (84)	
α_1	0.99414	0.99414	1.00000	1.00000
α_2	0.50000	0.50000	0.65658	0.66667
α_3	0.33203	0.33333	0.49783	0.50000
α_4	0.24859	0.25000	0.33436	0.33333
α_5	0.19721	0.20000	0.24636	0.25000
α_6	0.16335	0.16667	0.19882	0.20000

(88)

We see a good agreement of the quality parameters with the approximate upper bounds. This means that our choice of parameters is satisfactory. Moreover the table confirms that the quality parameter of the generator of Sec. 4.4 lies above the quality of the mixed multiplicative generator.

Finally we present an implementation of the generator in Pascal. We group the digits of X_k to 16 blocks of 16 digits $X[1], \dots, X[16]$ starting from the highest digits.

```

unit random1;
interface
const n=16; n0=(n+2) div 3; a0=62181; c0=11463;
var X:array[1..n] of longint;
procedure nextrandom;
implementation
var even:boolean; i:word; c:longint;
procedure nextrandom;
var j,k:word;
begin
if even then inc(c,c0); even:=not even;
for j:=1 to n do begin
  X[j]:=X[j]*a0;
  k:=2;while j+k<=n do begin inc(X[j],X[j+k]);k:=k shl 1 end end;
inc(X[n-1],X[n] shr 16); X[n]:=(X[n] and $FFFF)+c;

```



```

inc(X[n0-1],X[n0] shr 16); X[n0]:=X[n0] and $FFFF)+c;
for j:=n downto 2 do begin
    inc(X[j-1],X[j] shr 16); X[j]:=X[j] and $FFFF end;
X[1]:=X[1] and $FFFF
end;
begin for i:=1 to n do X[i]:=0; c:=0; even:=true end.

```

The corresponding mixed multiplicative generator is obtained by omitting or changing the lines containing *c*. On a 100MHz Pentium computer this (not optimized) program produces 19 563 random numbers per second whereas 20 938 mixed multiplicative random numbers can be produced. A loss of speed of about 6.6% seems us worth the gain of better random numbers. Note that the number *c* suffers an overflow every about 750 000th random number. This does not affect randomness and it is not worth the effort to correct this flaw.

2. We set $P = 2^{31} - 1$, $r = 8$ which leads to $P^r - 1 = 2^{34} \cdot 3^2 \cdot 5 \cdot 7 \cdot 11 \cdot 17 \cdot 31 \cdot 41 \cdot 151 \cdot 331 \cdot 733 \cdot 1709 \cdot 21529 \cdot 368140581013 \cdot 708651694622727115232673724657$. Moreover we take $a_{r-1} = 1$, $a_{r-2} = \dots = a_1 = 0$, $a_0 = 60\,045$ yielding

$$\begin{aligned}
 X_0 = 1, X_{-1} = \dots = X_{-7} = 0, \quad X_{k+1} = X_k + 60\,045X_{k-7} \bmod 2^{31} - 1, \quad (89) \\
 N_X = P^8 - 1 \approx 2^{248}, \quad Q_1 = \dots = Q_8 = (P^8)^{1.00202-1}, \quad Q_9 = \dots = Q_{16} = (P^8)^{0.06368-1}.
 \end{aligned}$$

The following program gives on a 100MHz Pentium 74 473 random numbers ($X[k]$) per second.

```

unit random2;
interface
var X:array[0..7] of longint; k:integer;
procedure nextrandom;
implementation
const a0=60045;
var i:integer; x0,x1,x2:longint;
procedure nextrandom;
begin
x0:=X[(k+1) and 7];
x2:=(x0 and $FFFF)*a0; x1:=(x0 shr 16)*a0+(x2 shr 16);
x2:=(x2 and $FFFF)+(x1 shr 15)+((x1 and $7FFF) shl 16);
if (x2 shr 31)=1 then x2:=(x2 xor $80000000)+1;
inc(x2,X[k]);
while (x2 shr 31)=1 do x2:=(x2 xor $80000000)+1;
k:=(k+1) and 7;
if x2=$7FFFFFFF then X[k]:=0 else X[k]:=x2
end;
begin k:=0; X[0]:=1; for i:=1 to 7 do X[i]:=0 end.

```

6 Results and outlook

We have generalized the spectral test. As the new feature we analyze the sequence of random numbers (I in the figures) not only the distribution of n -tupels (II in the figures).

We saw that the mixed multiplicative generator did not pass the test with an ideal result. We were able to construct an improved generator which has the recursion formula

$$X_0 = 0, \quad X_{k+1} = aX_k + c \operatorname{int}(k/2) \bmod 2^d. \quad (90)$$

For the choice of the parameters a , c , d we made suggestions in Eq. (84). This generator (or the multiply recursive generator given in Eq. (89)) seems us to be the best choice in quality and performance. An implementation of a generator of this type with modulus $2^d = 2^{256} \approx 10^{77}$ was presented in Ex. 5.1 1. The calculation of random numbers is fast even though the modulus is that large. We think that for all practical purposes pseudo random numbers generated with this generator can not be distinguished from a true random sequence.

We were able to analyze this generator and several others by virtue of a remarkable formula on the harmonic analysis of multiplicative rings of remainder class rings (cf. Thm. 3.4 and Eq. (47)). The choice of parameters was discussed in Sec. 5.

For practical purposes there is essentially no need for further improvements. From a purely mathematical point of view however there are lots of open questions.

First of all one could be interested in the cases where Eq. (47) does not provide the result (take e.g. $M = P$ prime and a no primitive element of \mathbb{Z}_P^\times , cf. Ex. 4.1 5). In these cases $N|\hat{g}|^2(s_0, s_1)$ is given as zero of the polynomial

$$P_{s_0}(Y) \equiv \prod_{s_1 \in \mathbb{Z}_M} \left(Y - N|\hat{g}|^2(s_0, s_1) \right). \quad (91)$$

For multiplicative generators $P_{s_0}(Y) = Y^M - MNY^{M-1} + \dots$. Numerical calculations show that P_{s_0} has integer coefficients. We were not able to prove this for $s_0 \neq 0$ nor to analytically determine the coefficients for non-trivial examples.

Further on, generators involving polynomials may be of interest. An example with a quadratic polynomial was presented in Ex. 4.6 4.

Finally we would be interested in multiply recursive generators. Those generators are given by a matrix-valued multiplier. The simplest example with a prime number modulus was presented in Sec. 4.5. In this section we saw that multiply recursive generators are also the best candidates for being even more efficient than the generator given in (90). In this connection multiply recursive generators with power of two modulus may be of special interest.

Acknowledgement

I am grateful to Manfred Hück who motivated me to this work by showing me some figures of random number generators.

Figures

Some graphs of random number generators are presented to give a visual impression of what the generator looks like. There are two possibilities to draw a two-dimensional plot: first (I), to plot the k -th random number X_k over k and second (II), to plot X_{k+1} over X_k presenting the pair correlation. The third part of the figures give the absolute of the Fourier transform of I. $|\hat{g}|^2(s_0, s_1)$ is a measure for the correlations along a line perpendicular to (s_0, s_1) in I (cf. Eq. (16)). For ideal generators $|\hat{g}|^2$ should be ≤ 1 and Figs. I and II should look like first rain drops on a dry road.

Fig. 1: $X_0 = 1, X_{k+1} = 37X_k \text{ mod } 1024$

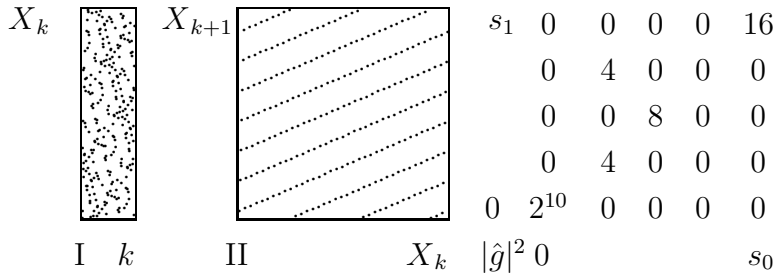


Fig. 2: $X_0 = 1, X_{k+1} = 195X_k \text{ mod } 1009$

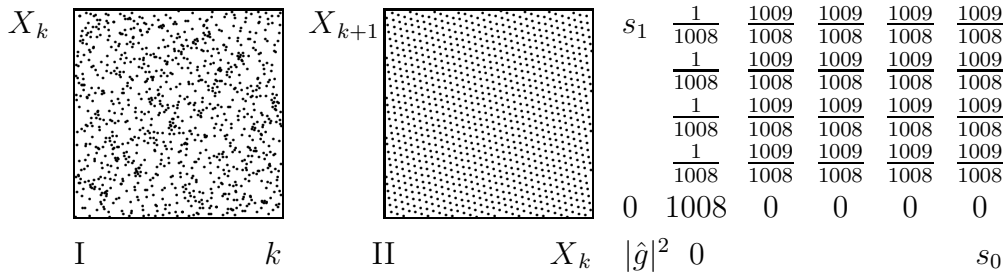


Fig. 3: $X_0 = 1, X_{k+1} = 44X_k \text{ mod } 31^2$

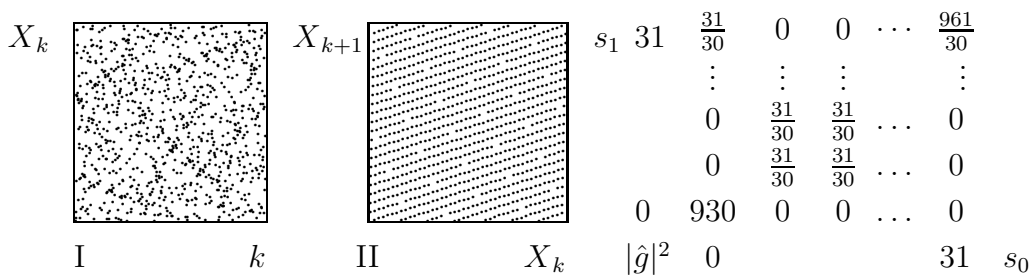


Fig. 4: $X_0 = 0, X_{k+1} = 37X_k + 1 \pmod{1024}$

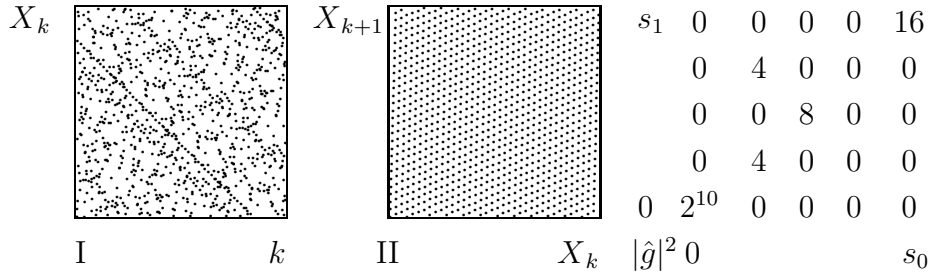


Fig. 5: $X_0 = 0, X_{k+1} = 41X_k + 3 \pmod{1024}$

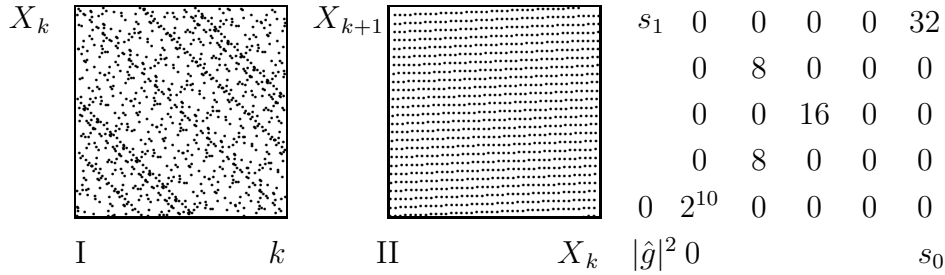


Fig. 6: $X_0 = 0, X_{k+1} = 41X_k + 1 \pmod{1024}$

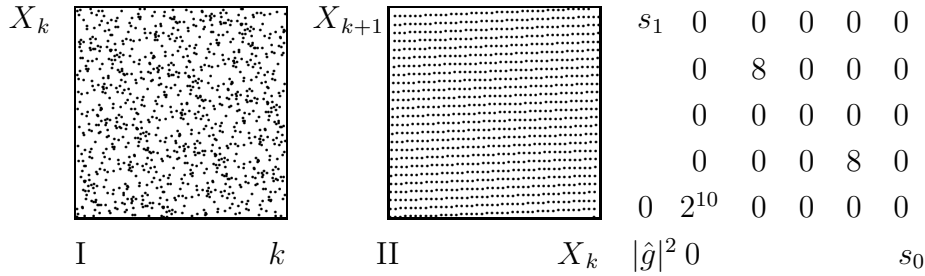


Fig. 7: $X_0 = 0, X_{k+1} = 21X_k + 1 \pmod{1000}$

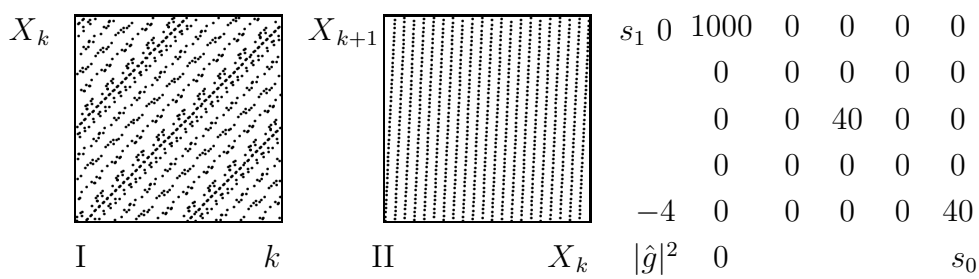


Fig. 8: $X_0 = 0, X_{k+1} = (37 + 1024)X_k + 1 \pmod{1024^2}$

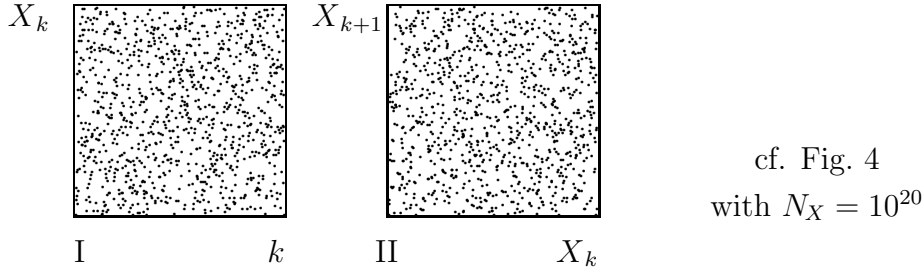


Fig. 9: $X_0 = 0, X_{k+1} = 37X_k + 129k \pmod{1024}$

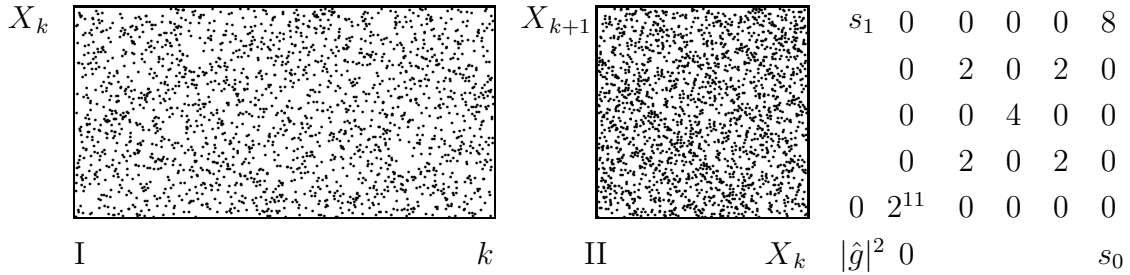


Fig. 10: $X_0 = 0, X_{k+1} = 30X_k + 25k \pmod{11^2}$

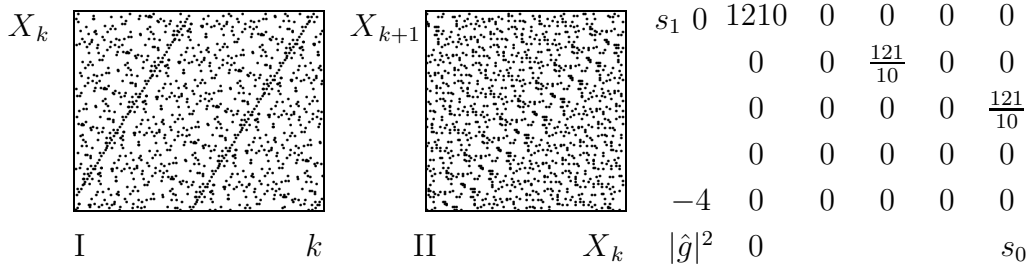


Fig. 11: $X_0 = 0, X_{k+1} = 37X_k + 129 \text{int}(k/2) \pmod{1024}$

