

Fast Concurrent Cuckoo Kick-out Eviction Schemes for High-Density Tables

William Kuszmaul
Stanford University
450 Serra Mall
Stanford, CA 94305
kuszmaul@stanford.edu

ABSTRACT

Cuckoo hashing guarantees constant-time lookups regardless of table density, making it a viable candidate for high-density tables. Cuckoo hashing insertions perform poorly at high table densities, however. In this paper, we mitigate this problem through the introduction of novel kick-out eviction algorithms. Experimentally, our algorithms reduce the number of bins viewed per insertion for high-density tables by as much as a factor of ten.

We also introduce an optimistic concurrency scheme for transactional multi-writer cuckoo hash tables (not using hardware transactional memory). For delete-light workloads, one of our kick-out algorithms avoids all competition between insertions with high probability, and significantly reduces transaction-abort frequency. This result is extended to arbitrary workloads using a new synchronization mechanism called a claim flag.

CCS Concepts

•**Information systems** → *Data locking; Key-value stores;*

Keywords

Cuckoo hashing; kick-out victim; transactional correctness; serializability; transaction abort; optimistic concurrency

1 Introduction

Unlike traditional hashing, Cuckoo hashing maps each key to two distinct bins using two hash functions. To insert a key, we simply look through the bins identified by the two hash functions and insert into the first containing a free slot. However, if neither bin contains an empty slot, then we pick one of two bins and *kick-out* one of the keys it contains. The displaced key, the *victim*, is then recursively reinserted into the table. The sequence of kick-outs that results from the initial insert is called a *kick-out chain*.

Introduced in 2004, Cuckoo hashing guarantees constant-time reads, overwrites, and deletes [9]. In particular, once a key is inserted into the table, it is guaranteed to be among the two bins to which it is hashed – regardless of the table density. In settings where memory is expensive this makes Cuckoo hashing especially valuable. See, for example, the flash-based key-value store system FlashStore [1].

High performance implementations of cuckoo hashing in both serial [10] and parallel [2, 8] have proven cuckoo hashing to have practical potential. Typically, designs choose for each bin to contain either four or eight slots.

Unfortunately, whereas cuckoo hashing reads are constant time regardless of table-density, inserts become very slow for high-density tables. The kick-out chain resulting from an insertion in a high-density table results in the viewing of dozens (or hundreds) of bins, making cache-friendly or multi-threaded cuckoo hashing difficult [8]. Commonly kick-out victims are selected in one of two manners: *random kicking* selects the victim randomly; and *breadth-first search* performs a search to find the shortest possible kick-out chain. Experimentally, at high table densities both kick-out eviction algorithms are equally bad in terms of bins viewed per insertion (Figure 1).

This short paper demonstrates that simple algorithmic changes to both breadth-first search and random kicking can yield significant improvements. We introduce five mechanisms for reducing bins viewed per insertion: ghost insertions, sorted search, queue-kicking, and rattle-kicking.

- **Ghost insertions:** Ghost insertions allow a record to reside in two bins at once, marked as a duplicate in each (Section 4). Duplicates make good kick-out victims because they are guaranteed not to cause additional kick-outs.
- **Sorted Search:** Whereas breadth-first search essentially maintains a queue of records whose children have not yet been examined, sorted search instead maintains a list sorted by a statistic called *spawn count* (Section 5); records with small spawn counts are more likely to lead to small kick-out chains.
- **Queue-Kicking:** To select kick-out victims, queue-kicking picks the record present in the bin for the longest (Section 6). For delete-light workloads, by preemptively updating the queue, queue-kicking can be further harnessed to prevent concurrently planned kick-out chains from overlapping.
- **Rattle-Kicking:** In d -ary cuckoo hashing, records are hashed to d single-slot bins [3]. Rattle-kicking ensures that each of a record’s hash functions are used once before any of them are used a second time (Section 7).

Although we sometimes are able to provide theoretical justification for our results, our primary method of evaluation is experimental. At high table densities (using bins of size four) we obtain a factor of ten improvement by combining sorted search and ghost insertions. At high table densities for 4-ary cuckoo hashing, rattle-kicking, sorted search, and an algorithm of Khosla [5] each perform approximately three times better than standard kick-out schemes.

In Section 8, we implement a transactional multi-writer cuckoo hash table (without using hardware transactional memory). For delete-light workloads, with 15 threads concurrently running 100-operation transactions, queue-kicking reduces the frequency of transaction aborts by a factor of around 256 in low-density tables, and 32 in high-density tables (Section 8.3). To achieve similar results for arbitrary workloads, we introduce a concurrency mechanism called a claim flag.

- **Claim Flags:** By marking which slots have been scheduled for kick-out chains (and other write operations), claim flags eliminate all competition between inserts with high probability (even for polynomially many threads).

In our experimental evaluation for delete-heavy workloads, with 15 threads concurrently running 100-operation transactions, claim flags reduce transaction-abort frequency by a factor of around 512 in low-density tables, and 20 in high-density tables (Section 8.3). Claim flags are a particularly interesting direction for future work since they can likely be applied to other transactional data structures.

The rest of this paper is organized as follows. Section 2 discusses past work on fast cuckoo insertions. Section 3 experimentally evaluates ghost-insertions, sorted search, queue-kicking, and rattle-kicking. Section 4 discusses ghost-insertions. Section 5 elaborates on sorted search, and discusses its applications to concurrent cuckoo hashing. Section 6 discusses queue-kicking, and proves for delete-light workloads that a variant of queue-kicking eliminates all competition between concurrent inserts with high probability. Section 7 discusses rattle-kicking and compares it to an algorithm of Khosla [5]. Section 8 implements an optimistic concurrency scheme for transactional cuckoo hashing and introduces claim-flags; with high probability, claim-flags eliminate all competition between inserts, regardless of workload. Finally, Section 9 concludes with directions for future work.

2 Past work on fast cuckoo insertions

Several techniques can be used to reduce kick-out chain length in serial cuckoo hashing, the simplest of which would be to just use large bins. One common technique is *load balancing* in which, upon inserting a record, one inserts into the least full of its two bins. Another is *stashing*, in which cuckoo chains longer than a certain maximum length are aborted and the homeless key is inserted into a separate stash [6]. This helps especially in the extremely rare event that no valid kick-out chain exists or if a kick-out chain is abnormally long. Stashing was used, for example, in the flash-based key-value store system FlashStore [1]. One of the cleverest modifications to cuckoo hashing is that of [7], in which rather than hashing keys to bins of size B , one hashes

keys to B adjacent slots – essentially allowing bins to overlap. This simple improvement yields surprising performance improvements. Although these techniques can be useful, to maintain generality we evaluate our kick-out eviction algorithms in the standard setting. In Section 8, however, we do take advantage of load balancing to reduce contention in the multi-writer setting.

Until now, not much work has been done on finding good kick-out eviction schemes. For d -ary cuckoo hashing (i.e., using bins of size one and d hash functions), however, algorithmic improvements to random-kicking have been proposed by Khosla [5], the performance of which we compare to our results in Section 6.

3 Experimental Evaluation of Kick-Out Eviction Algorithms

In the following sections, we will introduce a number of techniques for reducing bins-viewed-per-insert in cuckoo hashing. In this section we compare these techniques experimentally. Note that, in order to facilitate comparison between algorithms, our graphs are on logarithmic scales.

Figure 1 compares random kicking, breadth-first-search, sorted search (Section 5), and queue-kicking¹ (Section 6). For each algorithm, we fill 1,000 hash tables to 97.5% full and graph the average number of bins viewed for insertions at each density. Each table consists of 2^{13} bins, each of which has four slots. For each algorithm, we also consider in Figure 2 the version of the algorithm in which ghost insertions have been implemented (Section 4). Figure 1 additionally tests the sorted search / breadth-first search hybrid discussed in Section 5.

Some implementations of cuckoo hashing use a variant called *d-ary cuckoo hashing*. In this variant, bins are of size one and, in order to still get good performance, d hash functions are used. Figure 3 compares kick-out algorithms for 4-ary cuckoo hashing, evaluating random-kicking, breadth-first search, sorted search, rattle-kicking, and an algorithm due to Khosla [5], the final two of which are discussed in Section 7. Just as in Figure 1, Figure 3 reports the average number of bins viewed per insertion over the course of 1000 trials; we use tables with 2^{13} single-slot bins.

Our experiments use uniformly randomly generated hashes. Moreover, insertions assume that the key being inserted is not already present, and are not responsible for verifying this themselves.

All of our experiments appear to scale. That is, if one runs the same experiments on tables with arbitrarily many bins, then the data-points will remain essentially unchanged.

4 Ghost Insertions

In this section, we introduce the notion of ghost insertion, which can be used to improve an any kick-out algorithm’s performance for high-density tables. When we insert a record R_1 , we may have room for it in both bins b_1 and b_2 to which it is hashed. Preferably, we would insert R_1 into whichever of b_1 or b_2 there will be the least demand for later. Ghost insertions simulate this by temporarily inserting the record

¹Our implementation of queue-kicking additionally uses hit-balancing, which is described in Section 6.

in both bins. Each copy of the record is marked as a *duplicate*, indicating to future insertions that it can easily be removed to make space for another record.

Later we may find ourselves trying to insert a record R_2 into bin b_1 , only to discover that no slots are available. Fortunately, because R_1 appears in both b_1 and b_2 , we can simply remove it from b_1 . At this point, the copy of R_1 in b_2 is marked as no longer being a duplicate record.

Surprisingly, all kick-out chains are guaranteed to terminate in a bin containing a duplicate.

Proposition 4.1. *Let C be a cuckoo-hash table built using only insert operations, and with ghost-insertions enabled. Let b be the final bin in a kick-out chain in C . Then prior to the kick-out chain, b contained at least one duplicate.*

Proof. Call a bin *available* if it contains either a free slot or a duplicate. Call a bin *reachable* if some record in C is hashed to the bin but is contained (perhaps as a duplicate) in a different bin.

It suffices to show that there does not exist a bin b which is available, reachable, and free of duplicates. Suppose otherwise. As an available and duplicate-free bin, b must contain at least one free slot. It follows that no record (duplicate or otherwise) has ever been kicked out of b . But since b is reachable, some record r is hashed to b and contained in a different bin. However, because b contained a free slot when r was inserted, and since no record has ever been kicked out of b , record r must be present in b as a duplicate, a contradiction. \square

Our experiments in Section 3 show that ghost insertions can significantly reduce the number of bins viewed per insertion for each kick-out eviction scheme. At high table densities, random kicking is improved by a factor of roughly 2.5, and breadth-first search is improved by a bit less than a factor of two.

The factor of two is hinted at by Proposition 4.1. At high table densities, almost all available bins contain only one free or duplicate slot. Proposition 4.1 tells us that only those bins containing a duplicate are reachable. Thus ghost-insertions essentially double the number of available reachable bins.

5 Sorted Search

In this section, we introduce sorted search, a kick-out eviction algorithm based on breadth-first search. Experimentally, at high table densities, sorted search can reduce the bins viewed per insertion by a factor of eight (Figure 1).

We begin with a convention. A record’s *children* is the set of slots which are in bins hashed to the record but not containing the record. When conducting a search algorithm for a kick-out path, we use the term *spawning a record* to mean looking at the record’s children as part of the search. In turn, the record’s children are its *spawn victims*.

Breadth-first search essentially maintains a queue of records that have been viewed but not yet spawned in the search. At each step in the search, we pop a record from the queue and check if any of its children slots are free. If any are, then the search is complete. Otherwise, we update the queue and continue.

Rather than maintaining a queue, sorted search maintains a list sorted by some statistic. At each step, rather than picking the record which has been in the list the longest to

spawn next (as in breadth-first search), we pick the smallest record according to the statistic.

After experimenting with many statistics, we have found one in particular, which we call spawn count, to be the most effective by far. The *spawn count* of a record in bin b is the number of times since the conception of the hash table that any search has previously spawned any record that was, at the time, contained in b . Surprisingly, even statistics using information specific to the record (and not just the bin) appear unable to perform better than spawn count.

For delete-heavy workloads, spawn count could potentially get large. One might choose to cap it at a given value. In our (delete-free) experiments, four bits (per bin) is easily sufficient to store spawn count. Consequently bucket sort can be used to efficiently maintain the sorted list during each search.

Unlike breadth-first search, which guarantees to return the shortest possible cuckoo path, sorted search could potentially return a path containing a cycle – that is, we may accidentally try to kick-out the same record from the same bin twice in the same kick-out chain. One low-overhead method to avoid revisiting buckets is to maintain a small hash table of the already visited buckets; in particular, the index of a bucket can be used as its hash. In order to fairly compare breadth-first search and sorted search, we eliminate the revisiting of buckets in our implementations of both.

Sorted search maintains two significant concurrency advantages of breadth-first search over random kicking. It can be implemented to take advantage of prefetching, and it provides short kick-out chains.

Prefetching: Unlike random walking, breadth-first search tells us the next few bins that will be fetched before we actually need to fetch them. In turn, this facilitates the use of prefetching to reduce fetch latency [8].

Sorted search can also take advantage of prefetching. Indeed, sorted search may be modified to spawn the k smallest-statistic records at a time rather than just one (for an arbitrary k). Moreover, if more than two hash functions are being used, one can take advantage of prefetching even when just fetching the children of a single record.

Short Critical Path: Breadth-first search yields a kick-out chain whose size is logarithmic in the number of bins visited during the search. Previously, [8] utilized this to significantly reduce critical path size in concurrent cuckoo hashing.

Experimentally, sorted search also satisfies this property. In Figure 4, we compare the length of kick-out chains generated by sorted search and breadth-first search both with and without ghost-insertions (using the same experimental set-up as in Figure 1 from Section 3). As can be seen by comparing Figures 1, 2, and 3, at 97.5% table density, all four search-based algorithms produce kick-out chains an order of magnitude smaller than those produced by walk-based algorithms.

If we model “picking the smallest-statistic bin” as “picking a random bin,” and assume that each spawn is equally likely to terminate the search, then we can prove that sorted search’s kick-out chains are logarithmic in comparison to the number of bins viewed.

Theorem 5.1. *Suppose we search for a kick-out chain by, at each step in the search, spawning a record selected randomly from those viewed but not yet spawned. Moreover, suppose that each spawn is equally likely to terminate the search.*

Then the expected length of the resulting kick-out chain is $O(\lg r)$, where r is the total number of spawns in the search.

Proof. Let B be the size of each bin and H be the number of hash functions. We require that $B(H - 1) > 1$. Then for $k \geq 0$, at step k we have viewed $2B + kB(H - 1)$ records. Since each step (after zero) spawns one record, that leaves $2B + kB(H - 1) - k$ records which have been viewed but not spawned. Let $f(k)$ be the average search-tree depth of the records so far viewed but not yet spawned after k steps, with $f(0) = 0$. The k -th step in the algorithm eliminates one record with expected depth $f(k - 1)$ and introduces $B(H - 1)$ records with expected depth $f(k - 1) + 1$ each. Since after the k -th step there are $2B + kB(H - 1) - k$ unspawned but viewed records, we can treat all but $B(H - 1)$ of those records as having average depth $f(k - 1)$ and $B(H - 1)$ as having average depth $f(k - 1) + 1$, yielding total average depth of

$$\begin{aligned} f(k) &= f(k - 1) + \frac{B(H - 1)}{2B + kB(H - 1) - k} \\ &\leq f(k - 1) + \frac{1}{k - k/(B(H - 1))}. \end{aligned}$$

Since $B(H - 1) \geq 2$, it follows that $f(k) \leq 2(1 + 1/2 + 1/3 + \dots + 1/k) \approx 2 \ln k$. Thus in a search with r spawns, the expected depth of the final spawn is $O(\lg r)$. \square

One may wish to use a sorted search and breadth-first search hybrid. Here, a record’s position in the sorted list is determined first by the depth in the search at which it was a spawn victim, and then secondarily by its spawn count. This erases the necessity of monitoring for cycles and guarantees the kick-out path-length being logarithmic in bins viewed. As expected, the hybrid’s performance is experimentally between that of sorted search and breadth-first search (Section 3).

6 Queue-Kicking

Random walking is easy to implement and extremely low overhead. Unfortunately, at high table densities it does poorly at finding short kick-out chains. In this section, we introduce queue-kicking, which improves upon random kicking in order to significantly reduce bins viewed per insertion.

In order to develop a variant of random walking which will find shorter kick-out chains, we must first understand why random walking does poorly. Suppose one starts with an empty hash table (using bins of size four), and then fills the table to 97% full. Then the total number of kick-outs during all of the insertions combined will only be around the half the total number of records inserted²

But if we pick kick-outs within a bin randomly, balls-in-bins suggests that some slots will get picked several times while others won’t get picked at all. Consequently, we will end up kicking records back into a bin they previously got kicked out of, when we instead could have kicked out a record who had never been kicked around before.

A simple resolution is to implement each bin as a queue. Rather than selecting kick-out victims randomly, one simply selects the record which has been in the bin the longest. We call this *queue-kicking*. Queue-kicking’s performance is

²Experimentally, regardless of table size, each bin tends to average 2.07 kick-outs.

additionally bolstered by the fact that the earlier a record is inserted into a bin, the less likely it is there only because the other bin to which it was hashed was full.

Our experiments in Section 3 show that experimentally queue-kicking results in far shorter kick-out chains than does random-walking, at least for high-density tables. We may not be the first to observe the benefits of queue-kicking; in fact, it is the kick-out scheme used by Kenneth Ross in his high-performance cuckoo hash table implementation [10]. We are the first, however, to explicitly observe its benefits – previously it appeared only in a single clause of a single sentence.

For delete-light loads, one could simulate queue-kicking by using a counter for each bin. This counter, known as the *hit-counter*, is incremented each time a record is inserted into a bin. The record is then placed in the slot whose index is congruent to the hit-counter modulo the size of the bin, kicking out another record if needed.³

Using hit-counters would not work well for delete-heavy workloads since they could result in a kick-out in a bin which has free slots. For a workload not containing many deletes, however, hit-counters have two surprising consequences, the first a small benefit for performance, and the second a major benefit for concurrency.

Hit Balancing: Previously we discussed a common technique called *load balancing* in which, upon inserting a record, one views both hashed bins and picks the less full one. When both bins are full, however, we can generalize load balancing to *hit balancing* by picking the bin with a smaller hit-counter. So that they can utilize hit balancing, our experiments in Section 3 use hit counters to implement queue-kicking.

Scheduling Kick-Out Chains: One problem with long kick-out chains is that, in multi-threaded systems, two concurrent insertions may plan overlapping chains, forcing one of the insertions to start over [8]. As we will see in Section 8, this can lead to a problematic number of transaction aborts in the context of transactional cuckoo hashing. In particular, in transactional cuckoo hashing, hundreds or thousands of inserts may be planned before any of them are committed to the table. Any overlaps in their kick-out chains will lead to transaction aborts. Worse still, if two kick-out chains terminate in the same bin which contains only a single free slot, they are guaranteed to compete for the slot.

Interestingly, this problem can be resolved using hit-counters. If hit-counters are incremented with atomic fetch-and-adds, then we are guaranteed that any B threads trying to insert into the same bin will all be assigned different slots. (Here, B is the number of slots in the bin.) In practice, for delete-light workloads, this is enough to reduce transaction aborts by a factor of 30 (Section 8).

In fact, we can prove with high probability that the use of hit-counters completely eliminates overlaps between concurrent inserts. This is formalized through the following lemma.

Lemma 6.1. *Consider a cuckoo hash table with n bins, each containing B slots. Suppose t threads concurrently each perform D operations, with each operation randomly*

³In our experiments the hit-counter can easily be stored within a single byte (similarly to spawn-count for sorted search). One could choose to store the hit-counter modulo the number of slots in each bin.

touching at most j slots. If $D \in O(n)$, then with probability $O((tj)^{B+1}n^{1-B})$ no bin will ever simultaneously receive more than B touches.

Proof. Observe that at most $t \cdot j$ touches can occur simultaneously. Consider an arbitrary bin b . Out of the $n^{t \cdot j}$ ways to assign $t \cdot j$ distinct touches to n bins, at most

$$\binom{t \cdot j}{B+1} n^{t \cdot j - (B+1)}$$

of them assign more than B touches to bin b . By the union bound, the probability of any bin being over-subscribed is at most

$$\frac{\binom{t \cdot j}{B+1}}{n^B} \leq t \cdot j \cdot \left(\frac{t \cdot j}{n}\right)^B.$$

Applying the union bound to the D operations, the probability of any bin is ever over-subscribed is at most

$$D \cdot t \cdot j \cdot \left(\frac{t \cdot j}{n}\right)^B \in O((tj)^{B+1}n^{1-B}).$$

□

7 Rattle-Kicking

Until now, we have focused on cuckoo hash tables using two hash functions and bins with several slots. Some applications, however, use *d -ary cuckoo hashing*, in which bins contain one slot only and d hash functions are used [3].⁴

For d -ary cuckoo hashing, random kicking performs poorly with respect to bins viewed per insertion, even for tables at smaller densities. In this section, we resolve this with a simple technique called rattle-kicking.

Refer to the d hash functions as h_0, h_2, \dots, h_{d-1} . For each key x in the hash table, we maintain a *rattle-counter* denoted by $r(x)$ which is initially zero and is incremented every time we try to insert x into a bin. When a key x is either introduced to the table or displaced from its previous bin, we try to insert it into bin $h_{r(x) \pmod{d}}$. If that bin already contains a key y , however, then whichever of x or y has a higher rattle-counter gets to stay in the bin. We increment the other’s rattle-counter and recursively try to insert it into another bin.

We refer to the act of picking the key with the smaller rattle-counter as *rattle-balancing*. Similarly to load balancing, rattle-balancing ensures that there is little variance between rattle-counters of records throughout the hash table.

At the cost of a small overhead (rattle-counters) per key, our algorithm appears to significantly reduce the length of kick-out chains. (See Section 3.) At table density below 85%, our algorithm performs close to as best as one could hope. If a table has density δ , then we would hope each insert and kick-out would have a $(1 - \delta)$ chance of not inducing another kick-out. In turn, this would yield chains of average length $1/(1 - \delta)$.

Random kicking performs poorly because it reuses hash functions unnecessarily. According to our data for 4-ary cuckoo hashing, when we fill a table from empty to 95% using random kicking, each record has visited a total of only

⁴Two examples of systems using this technique include Shore-MT [1] and FlashStore [4].

around 5.6 bins⁵. But if we stick 5.6 balls randomly in four cups (the number of hash functions), some cups will get several balls while others may be totally empty. When we try a hash function we’ve never used before for a key, we are effectively picking a random bucket in the hash table in which to insert that record – this will lead to the $1/(1 - \delta)$ performance that we desire. But when we instead reuse a hash function, we are sending the record to a slot we already know is full.

Rattle counters solve this problem by going through all the hash functions for a record before reusing any. Moreover, rattle-balancing keeps rattle-counters for all records relatively balanced, rather than some records having many unused hash functions while others have none. Using rattle-counters to fill a table to 95% full results in records having used only 3.3 of their hash functions on average. Consequently, most records have not reused a single hash function.

In addition to testing random-walking, rattle-kicking, breadth-first search, and sorted search for d -ary cuckoo hashing (Section 3), we test an interesting kick-out eviction algorithm due to Khosla [5]. For high-density tables Khosla’s algorithm performs similarly to rattle-kicking.

The computations in Section 3 assume a record’s prior absence for each insertion. Consequently, when the table is near empty, our algorithms view fewer than d slots per insertion. Khosla’s algorithm must maintain certain invariants which prevent it from easily doing this [5].

Rattle-kicking can be thought of as a d -ary analogue for queue-kicking. Is there a natural analogue for Khosla’s algorithm as well?

8 Transactional Multi-Writer Cuckoo Hashing

In sections 5 and 6, we discussed the relation of several of our kick-out algorithms to the multi-writer setting. In this section we apply queue-kicking to the multi-writer setting, and introduce a novel concurrency scheme which allows a multi-writer Cuckoo hash table to achieve transactional correctness without being inhibited by transaction aborts. Past authors have proven cuckoo hashing’s potential as a multi-writer table with threads performing single operations at a time [2, 8]. Our work extends this to transactional Cuckoo hashing, where each thread wants transactions comprising many operations to be performed atomically.

Each thread in a multi-writer hash table may wish to perform a series of transactions, where each transaction comprises a collection of reads, writes, deletes, and overwrites which are dependent on each other. For example, if a thread were managing bank data, it might wish to move \$1000 from Ann’s account to Bill’s account under the condition that Bill’s account contains less than \$1000 and his friend Liz’s account contains less than \$500. Transactional correctness is a property which prevents inter-dependencies between concurrent transactions from producing unexpected results. A table is said to be *transactional* if after all the transactions have been performed in parallel, there exists a serial schedule for the transactions which would have resulted in the same end-result hash table.

⁵This average appears to be mostly independent of table size.

Past non-transactional multi-threaded Cuckoo hash tables have avoided locking slots for read operations by using version counters on each slot, and having reads check that the counter did not change between the start and end of the read [2, 8]. In order to achieve transactional correctness, we use a more complicated notion of version IDing based on an optimistic-concurrently scheme of SILO, a high-performance in-memory database [11]. In particular, all of the slots in a transaction are assigned a new version ID at the end of the transaction; and the final hash table will be the same as the one obtained from any serial scheduling of the transactions weakly ordered by version-ID number.

Our experiments find that a naive adaption of SILO’s optimistic concurrency scheme to Cuckoo hashing results in frequent transaction aborts, even at low table densities. We introduce a number of techniques for reducing these aborts, including an application of queue-kicking (introduced in Section 6), local retries, and claim flags. Using fifteen threads to concurrently build a table, our techniques can be combined to reduce abort-frequency by a factor of more than 7,000 for low-density tables and 450 for high-density tables (Figure 6). In particular, with high probability, claim flags allow threads to schedule inserts and kick-out chains without competing. In our experiments for delete-heavy loads, claim flags bring the percent of transaction attempts that abort down from more than 5% to approximately .02% at low table densities, and from more than 10% to approximately .5% at high table densities (Subsection 8.3). These percentages will vary depending on the size of the table, the number of threads, and the number of operations per transaction. For example, a larger table with the same number of threads and number of operations per transaction will yield smaller percentages.

8.1 A Naive Optimistic Concurrency Scheme

We implemented the following transactional multi-writer cuckoo hash table, using an optimistic concurrency scheme based on the techniques of in-memory database SILO [11].

Each slot and each bin has its own spin lock and version ID number, the latter of which guards the former. Each transaction has three stages:

Stage 1: The Planning Stage. The thread performs a transaction comprising inserts, look-ups, overwrites, and deletes; each of which may depend on the outcome of previous operations. In this stage, however, the transaction does not apply its edits to the table. In order to achieve transactional correctness, the edits are applied in Stage 3.

Prior to reading a slot’s contents, the slot’s version ID is added to the *transaction’s read set*. Whenever the transaction plans to edit a slot, however, the slot’s version ID is instead added to the *transaction’s write set*⁶. In addition, the transaction will sometimes wish to verify that a record r is not in a bin b . Instead of using the version ID of each of b ’s slots, the transaction inserts b ’s version ID into the read set. In turn, insertions add to the write set the version ID of the bin into which they plan to insert.

Stage 2: The locking and verification stage. The transaction locks the slots and bins whose version IDs are

⁶After reading a slot’s contents, the transaction should check that the version ID is unchanged, in order to guarantee the integrity of the data read.

in the write set⁷. The transaction then checks whether any version ID in either the read set or write set has changed since being added to the set. If any have, then the transaction releases all of its locks and aborts. Version IDs in the write set can be checked immediately after the corresponding slot/bin has been locked.

Stage 3: The apply/commit stage. The transaction applies each of the write-operations from Stage 1. Additionally, prior to releasing the locks, the transaction updates the version ID of every slot and bin in the write set to a new version ID, the *transaction ID*. The transaction ID is the maximum of all the IDs in the read set along with all the IDs in the write set, except additionally incremented by one⁸.

Observe that each transaction effectively occurs atomically, in the instant when the final lock in Stage 2 is taken. Moreover, no other transaction with a smaller transaction ID can possibly have made edits depending on those of the current transaction, a property which can prove useful for logging and snapshots.

Surprisingly, even at low table-densities transaction aborts can pose a major obstacle. More than 40% of transaction attempts abort, for example, when 15 threads concurrently perform 100-operation transactions to fill a 2^{17} slot table to 60% full using a delete-heavy workload. (See Subsection 8.3 for more details.) Most of these aborts are overly conservative, and can be eliminated through the use of local retries, which we will introduce in the next section.

Even with local retries, however, more than 5% of attempted transactions abort, and for a table filled to 95% full, more than 10% of attempted transactions abort. In the next section, we will eliminate almost all of these aborts using a new mechanism called a claim flag. Note that these percentages are specific to the parameters of our experiment, and would shrink, for example, if we increased the table size without changing the number of threads or size of transactions.

8.2 Mechanisms for Reducing Aborts

The concurrency scheme described so far falls apart for high-density tables due to an excess of transaction aborts. In addition to queue-kicking (which was discussed in Section 6), we experimentally evaluate three mechanisms for reducing transaction aborts: local retries, system-transaction kick-outs, and claim flags.

Local Retries: Local retries eliminate a class of aborts which are overly conservative. In Stage 1, the success of an insertion, or the failure of a read, overwrite, or delete is contingent upon a particular record being absent from the table. In Stage 2, the continued absence of this record is confirmed using bin IDs in the read and write sets. If one of these IDs has changed, however, then the entire transaction aborts. Most likely, however, the bin-transaction-ID change was not a result of the relevant record appearing in the table. Thus when a thread T finds during Stage 2 that a bin version ID used to confirm the absence of a record k has changed, thread T 's transaction should not abort. Instead it should

⁷This must be done in a globally sorted order to avoid deadlock.

⁸Additionally, we may require that it is at least one greater than the transaction IDs of any previous transactions run by the same thread.

release its locks, verify that k is still absent from the bin, and restart Stage 2 using the bin's new version ID. This is referred to as a *local retry*.

Local retries for bin IDs in the write set can be performed without releasing already acquired locks. In particular, by locking bins before slots in Stage 2, one can perform local retries (without risk of deadlock) on write-set bin IDs right before locking the corresponding bin.

System-Transaction Kick-Outs: Kick-out chains need not wait until Stage 3 to be performed. Instead, they can be performed as individual transactions during Stage 1. In fact, by performing a kick-out chain in reverse order, each individual kick-out can be performed as a mini-transaction.

Surprisingly, without the aid of claim flags or queue-kicking, system-transaction kick-outs would actually *increase* the number of kick-out chain collisions. Competition for the slot freed by the kick-out chain leads to aborts.

Claim Flags: In stage 1, whenever a thread adds a slot to the write set, it atomically *claims* the slot using a one-bit flag. Claims do not restrict read-access to a slot or to its version ID.

Whenever an insertion or kick-out chain comes across a claimed slot, it simply ignores that slot. If all of the slots in a bin are claimed or locked, then the insertion / kick-out chain is forced to abort. Lemma 6.1 tells us with high probability, however, this will never happen within a n -bin table's entire $O(n)$ -operation lifespan.

In order to avoid deadlock, no operation can ever wait on a claim flag. Instead, when overwrites, or deletes see a claimed slot, they must abort the transaction. In the same situation without claim flags, however, one of the conflicting transactions would have been forced to abort later regardless of the concurrency scheme.

Once a claim flag is taken, the slot's version ID is guaranteed not to change before the transaction's completion. Consequently, slots need not be locked until Stage 4, and slot locks need not be acquired atomically.

Besides the occurrence that a bin is completely claimed / locked (which Lemma 6.1 tells us is rare), claim flags and local retries leave only four possible causes for aborts: a slot is read by one transaction but then modified by another; two deletes / overwrites try to edit the same record concurrently; a delete / overwrite tries to edit a slot already claimed for a kick-out chain; or a transaction inserts a key which another transaction is relying on as not being present.

8.3 Experimental Results on Multi-Threaded Cuckoo Hashing

We gather data on six variants of transactional multi-threaded cuckoo hashing. The first uses neither local retries, claiming, system transaction kick-out chains, nor queue-kicking. We significantly improve this with the second, which adds in local retries. In the third, we introduce queue-kicking (using hit-counters). For a delete-light workload this both decimates transaction aborts and shortens kick-out chains. In the fourth implementation, we introduce system-transaction kick-out chains, achieving additional improvements. The fifth implementation replaces queue-kicking and system-transaction kick-outs with claim flags, resulting good performance regardless of workload. Finally, the sixth implementation in-

roduces system-transaction kick-out chains again⁹.

We run tests on a table with 2^{14} bins, each containing 8 slots. We consider two workloads, one of which is light on deletes and one of which is delete heavy; the relative frequencies of inserts, deletes, overwrites, and reads is 1:0:1:1 and 2:1:2:2 in the two tests. Our experiments use 15 threads, each of which runs transactions batching together 100 operations. Each insert uses a randomly generated pair of hashes and a randomly generated integer payload; insertions use load balancing, but not hit balancing. To randomly select a record for an overwrite, delete, or read, a thread picks out of all records ever inserted into the table by the thread.

Figure 5 shows the results for the delete-light load, and Figure 6 shows the results for the delete-heavy load. In each case, we examine the total number of aborts for a table filled to each density, and average our results over 100 trials. Note that both graphs are on a log scale.

In general, one expects the total number of aborts to grow proportionally to the number of threads and number of operations per transaction, but to not depend on table size. Running our experiments on tables with varying parameters indicates that this is roughly the case, but it would be interesting to study the scaling properties of each implementation in more detail.

9 Directions for Future Work

Several directions for future work present themselves.

Our results are mostly experimental. Can one theoretically quantify the improvements obtained by our algorithms? Ghost insertions seem particularly interesting to study.

What other data structures can claim flags be applied to in order to achieve transactional correctness with low risk of transaction aborts? Is their applicability widespread?

Our tests use uniformly random hash functions. How do the relative performances of the algorithms change when bias hash functions are introduced?

Our tests compare kick-out eviction schemes by bins viewed per insertion, and concurrency schemes by transaction-abort frequency. It would be interesting to also compare runtime performances in various settings.

10 Acknowledgments

This research was conducted at HP Labs. The author thanks Harumi Kuno, Hideaki Kimura, and Bradley Kuszmaul for offering advice on exposition and directions of research. The author additionally thanks Hideaki Kimura for suggesting the notion of system-transaction kick-out chains.

11 References

- [1] B. Debnath, S. Sengupta, and J. Li. Flashstore: high throughput persistent key-value store. *Proceedings of the Very Large Databases Endowment*, 3(1-2):1414–1425, 2010.
- [2] B. Fan, D. G. Andersen, and M. Kaminsky. Memc3: Compact and concurrent memcache with dumber caching and smarter hashing. In *10th USENIX Symposium on Networked Systems Design and Implementation*, pages 371–384, 2013.
- [3] D. Fotakis, R. Pagh, P. Sanders, and P. Spirakis. Space efficient hash tables with worst case constant access time. In *Symposium on Theoretical Aspects of Computer Science 2003*, pages 271–282. Springer, 2003.
- [4] R. Johnson, I. Pandis, N. Hardavellas, A. Ailamaki, and B. Falsafi. Shore-*mt*: a scalable storage manager for the multicore era. In *Proceedings of the 12th International Conference on Extending Database Technology: Advances in Database Technology*, pages 24–35. ACM, 2009.
- [5] M. Khosla. Balls into bins made faster. In *21th Annual European Symposia on Algorithms*, pages 601–612. Springer, 2013.
- [6] A. Kirsch, M. Mitzenmacher, and U. Wieder. More robust hashing: Cuckoo hashing with a stash. *SIAM Journal on Computing*, 39(4):1543–1561, 2009.
- [7] E. Lehman and R. Panigrahy. 3.5-way cuckoo hashing for the price of 2-and-a-bit. In *17th Annual European Symposia on Algorithms*, pages 671–681. Springer, 2009.
- [8] X. Li, D. G. Andersen, M. Kaminsky, and M. J. Freedman. Algorithmic improvements for fast concurrent cuckoo hashing. In *Proc. 9th EuroSys*, page 27. ACM, 2014.
- [9] R. Pagh and F. F. Rodler. Cuckoo hashing. *Journal of Algorithms*, 51(2):122–144, 2004.
- [10] K. A. Ross. Efficient hash probes on modern processors. In *Proc. 23rd ICDE*, pages 1297–1301. IEEE, 2007.
- [11] S. Tu, W. Zheng, E. Kohler, B. Liskov, and S. Madden. Speedy transactions in multicore in-memory databases. In *Proc. 24th SOSP*, pages 18–32. ACM, 2013.

⁹Note that unlike for queue-kicking, abort reductions from system-transaction kick-out chains are not already obtained by claim flags.

12 Figures

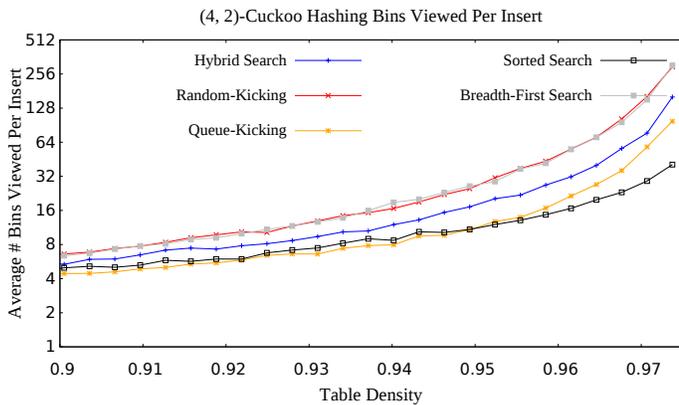


Figure 1: The average number of bins viewed per insertion at varying table densities, for various kick-out algorithms.

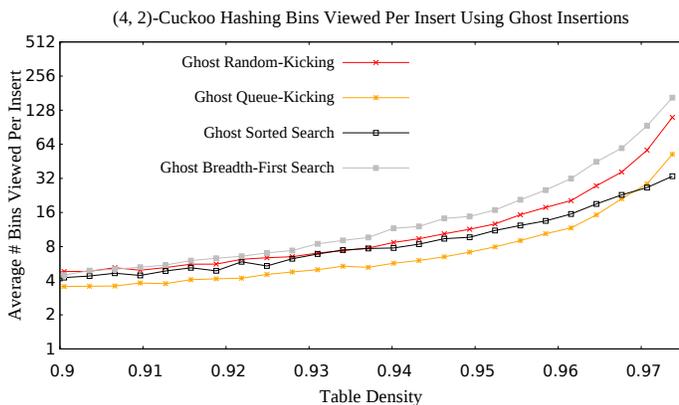


Figure 2: The average number of bins viewed per insertion at varying table densities, for various kick-out algorithms using ghost-insertions.

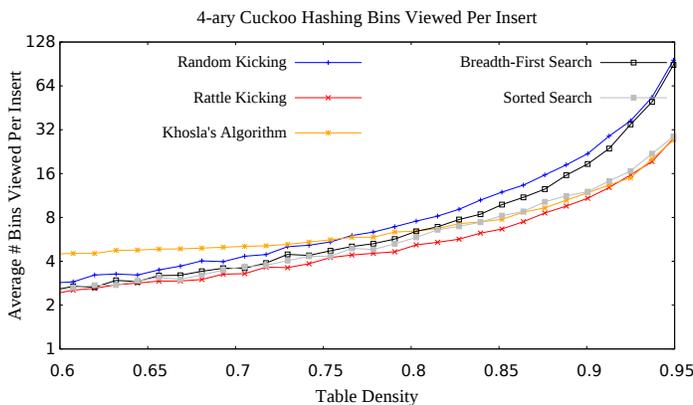


Figure 3: The average number of bins viewed per insertion at varying table densities, for various 4-ary kick-out algorithms.

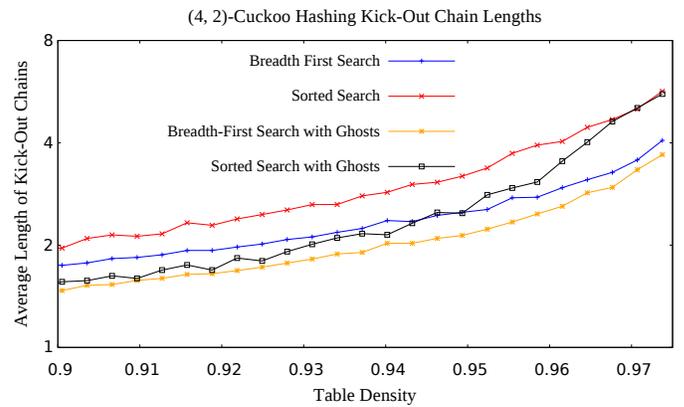


Figure 4: The average length of kick-out chains at varying table densities, for various search-based kick-out algorithms.



Figure 5: The average number of transaction aborts over the lifetime of tables filled to varying densities, for various transactional cuckoo hashing implementations, using a delete-light workload and 15 threads.

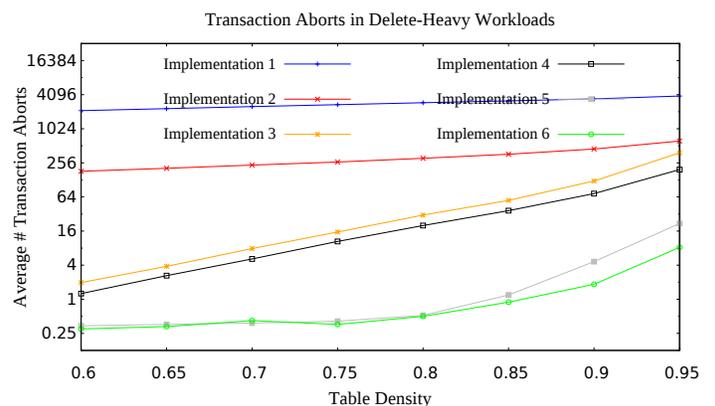


Figure 6: The average number of transaction aborts over the lifetime of tables filled to varying densities, for various transactional cuckoo hashing implementations, using a delete-heavy workload and 15 threads.