

A diabatic frequency conversion of optical information in atomic vapor

Frank Viewinger,¹ Jurgen Appel, Eden Figueroa, A. I. Lvovsky

Institute for Quantum Information Science, University of Calgary, Calgary, Alberta T2N 1N4, Canada

<http://www.iqis.org/>

Compiled February 14, 2021

We experimentally demonstrate a communication protocol that enables frequency conversion and routing of quantum information in an adiabatic and thus robust way. The protocol is based on electromagnetically-induced transparency (EIT) in systems with multiple excited levels: transfer and/or distribution of optical states between different signal modes is implemented by adiabatically changing the control fields. The proof-of-principle experiment is performed using the hyperfine levels of the rubidium D1 line.

© 2021 Optical Society of America

An essential element of a quantum optical communication network is a tool for transferring and/or distributing quantum information between optical modes (possibly of different frequencies) in a loss- and decoherence-free fashion. This is important not only for routing quantum information, but also for interfacing quantum communication lines of different wavelength (e.g. fiber-optical and open-air) between each other and with memory-based quantum repeaters.^{2,3}

Some experiments on frequency conversion of quantum states of light have been performed using nonlinear optical effects in crystals^{4,6} and periodically-poled waveguides.^{7,8} An alternative approach^{9,10} involves storage of light by means of EIT¹¹ and its subsequent retrieval on another optical transition.

In this paper, following our group's recent proposal,¹⁴ we experimentally demonstrate a protocol for routing and frequency conversion of optical quantum information via EIT in an atomic system with multiple excited levels. Our method is related to that of Zibrov et al.⁹ and Wang et al.,¹⁰ but here the information is transferred during the propagation, thus avoiding the losses associated with the storage of light. By means of the EIT control fields we steer the composition of the optical component of the dark-state polariton, and can convert, completely or partially, the incoming signal state into another optical mode.

Our scheme (that we call RATOS, Raman adiabatic transfer of optical states) resembles stimulated Raman adiabatic passage (STIRAP),¹² but applies to optical rather than atomic states. Thanks to its adiabatic character, the efficiency of RATOS does not strongly depend on the parameters of the control fields, but only on their initial and final values, which is favorable for possible practical applications of the method.

We consider a double- Λ system as shown in Fig. 1 (a), with the rubidium D1 transition (where the ground $5S_{1=2}$ and excited $5P_{1=2}$ levels are each split into two hyperfine sublevels) as a model. The energy levels are coupled by two weak signal fields, described by their annihilation operators \hat{a}_1 and \hat{a}_2 , and two strong control fields, described by their Rabi frequencies Ω_1 and Ω_2 . Such a

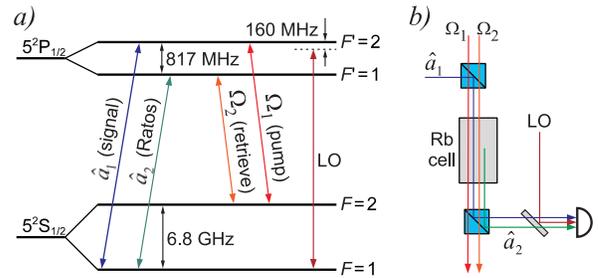


Fig. 1. a) Transitions used in the experiment, as described in the text. Also shown is the local oscillator field (LO) used for heterodyne detection. b) A sketch of the experimental setup. In the actual experiment, the beams are overlapping in the cell, the separation in the drawing is for clarity.

system exhibits EIT for the superposition

$$\hat{b} / \frac{1}{g_1} \hat{a}_1 + \frac{2}{g_2} \hat{a}_2 ; \quad (1)$$

of the signal fields, with g being the vacuum Rabi frequency for the i th signal mode.^{13,15}

RATOS proceeds as follows. With only control field 1 (hereafter called pump) initially present, a pulsed optical state in mode \hat{a}_1 (signal) is coupled into the medium. While it is propagating, control field 2 (retrieve) is turned on slowly, so the EIT signal mode is adiabatically converted into a superposition (1), which continues to propagate losslessly through the cell.¹⁴

If the pump field is left on, the optical state that has entered the cell in mode \hat{a}_1 will leave it in mode \hat{b} . This allows the implementation of beam splitting for optical modes of different frequency, with the final intensities of the two control pulses determining the outcome of the process. The beam splitting ratio is given by

$$\frac{\hbar \hat{a}_2 i}{\hbar \hat{a}_1 i} = \frac{g_1}{g_2} ; \quad (2)$$

If the pump field is instead adiabatically switched off while mode \hat{b} is still inside the cell, the initial quantum state of mode \hat{a}_1 will be fully transferred to the Ratos mode \hat{a}_2 , thus completing the RATOS protocol.

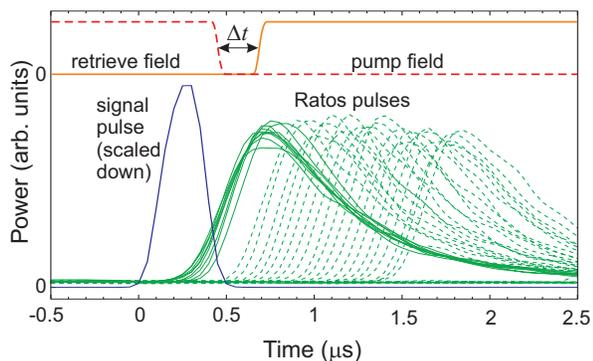


Fig. 2. Temporal profiles of the fields. Ratos pulses are shown for the case the retrieved field is turned on before (solid lines) and after (dashed lines) the pump field has been turned on.

The experiment was performed in warm rubidium-87 vapor at 60 C in a 5-cm long cell filled with 5 Torr of neon as a buffer gas. The cell was mounted within a magnetically shielded oven. The signal field was provided by a Coherent MBR-110 Ti:Sapphire laser with a narrow spectral width (40 kHz) and high long-term stability. The pump and retrieve fields were obtained from external-cavity diode lasers sequentially phase-locked to each other and the Ti:Sapphire laser. Both phase lock circuits were programmed to ensure that the frequency difference among the three fields entering the cell corresponded to the hyperfine splitting frequencies of the ground and excited levels of the rubidium D1 transition: 6835 and 817 MHz, respectively. All three laser beams were controlled by acousto-optical modulators. All polarizations were linear, with the polarization of the control beams orthogonal to that of the signal and Ratos beams.

After passing through the cell, the two signal fields were separated from the control beams using a polarizing beam splitter, and subjected to heterodyne detection on a fast photodiode [Fig. 1 (b)]. The role of the local oscillator was played by the unmodulated field of the Ti:Sapphire

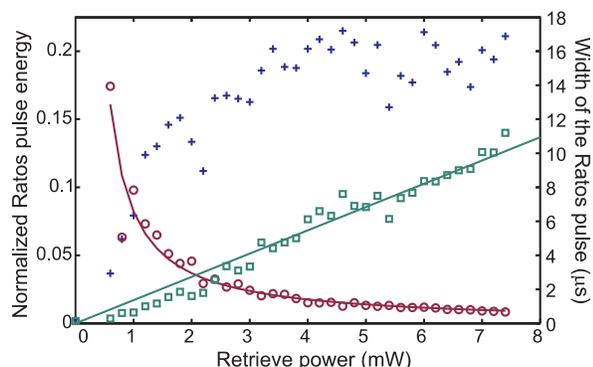


Fig. 3. Peak power of the retrieved Ratos pulse (\times), its temporal width (\square), and energy (\circ) as a function of the power of the retrieve laser. The energy is normalized to the energy of the slowed down pulse. The peak intensity plot is in arbitrary units. The solid lines are a linear and inverse linear fits.

laser. The beat note at 160 MHz (signal field) or 657 MHz (Ratos field) was measured using a spectrum analyzer in the zero span mode, with a temporal resolution of 200 ns.

We performed a set of preliminary measurements to verify the functionality of our setup. First, with all three input fields continuously on, we observed generation of a field on the Ratos transition due to four-wave mixing. Second, we checked that the signal field experienced EIT when only the pump was present and observed slow-down of the 400-ns signal pulse. Third, we performed a "storage of light experiment" by turning the pump field off after the signal pulse entered the cell, and turning it back on after a few hundred ns. Fourth, we stored the signal pulse and then recovered it on the Ratos transition using the retrieve field akin to Zibrov and co-workers.⁹ Finally, by reducing the delay t between the turn-off of the pump and the turn-on of the retrieve field to small negative values, we observed RATOS [Fig. 2].

Fig. 2 shows the observed waveforms with the values of t varied between $-???$ and $???$ ns. In contrast to optical storage ($t > 0$), the position of the retrieved pulse with negative values of the delay does not depend on t , which shows the adiabatic character of RATOS.

In classical four-wave mixing, the electric field of the created mode is proportional to the electric field of the three mixing fields: $\hat{h}_i / \omega_i \hat{a}_i$. In contrast, the adiabatic transfer process studied here should not depend on the exact parameters of the control fields, as long as the switching takes place while the signal pulse is inside the cell. We verified the adiabatic nature of our experiment by varying the intensity of the retrieve field and monitoring the shape of the output Ratos pulse.

The result of this measurement is shown in Fig. 3. As expected, the time integrated intensity of the Ratos pulse shows only a weak dependence of the created field mode for sufficiently high retrieve field intensities. With the retrieve field below 2 mW, the EIT effect was not sufficiently pronounced so the Ratos pulse experienced partial absorption. The residual dependence for higher powers is due to a Gaussian geometric profile of the control fields, so the EIT was spoor in the wings of the beams.

The Ratos pulse shape, on the other hand, depends strongly on the control field parameters. As evidenced by Fig. 3, the peak intensity and the temporal width of the Ratos pulse are, respectively, proportional and inversely proportional to the power of the retrieve laser P_2 . This is because the group velocity of the signal pulse in an EIT medium is proportional to the width of the EIT resonance.¹¹ The latter, in a Doppler-broadened, weakly decohering medium is essentially proportional to the control field intensity.¹⁶

In order to realize an optically controlled beam splitter, the pump field ω_1 was kept on continuously, while ω_2 was turned on when the signal pulse had fully entered the Rubidium cell. In this case the quantum state of the signal mode \hat{a}_1 was transferred into a superposition \hat{b} of the modes \hat{a}_i , given by Eq. (1). The power of the pump field was kept constant at 4 mW, and the

signal fields \hat{a}_1 and \hat{a}_2 were measured for different powers of the retrieved field. The results of this experiment are shown in Fig. 4. The three waveforms of the output signal and Ratos fields at different retrieved field powers [Fig. 4 (a)] illustrate the dynamics of multimode dark-state polaritons in the EIT medium. Even though the pump field remains the same in all three plots, the group velocity of the signal pulse (which couples to the pump field through an excited level) increases with the intensity of the retrieved field. This happens because in the presence of the retrieved field, the signal is no longer an independent EIT mode, but a part of a multimode dark-state polariton whose group velocity is proportional to the weighted quadratic mean of all the control Rabi frequencies.¹⁴

Fig. 4 (b) displays the energy ratio of the Ratos and output signal fields as a function of the retrieved intensity. The observed proportional dependence is explained by Eqs. (1) and (2): the fraction of a particular signal field in a multimode polariton is proportional to the Rabi frequency of the associated control field. The observed deviation from the linear fit is due to a systematic error in evaluating the output signal energy: at high retrieved powers, the signal is small so the relative error increases.

If the energy of the retrieved pulse is plotted against the power of the retrieved field, a dependence given by $P_{\text{Ratos}} = P_{\text{signal}}P_{\text{pump}} = (cP_{\text{pump}} + P_{\text{ret}})$ is expected, where c is a constant depending on the oscillator strengths of the transitions used and the beam radii. In Fig. 4 (c), this function is fitted to the data, with an overall coefficient added to account for the efficiency of the process. The fit yields a transfer efficiency of $a=70\%$ with respect to the slowed down pulse.

In summary, we have demonstrated the possibility for adiabatic frequency conversion and routing of optical information carried by light between two signal modes in a multi-EIT configuration. We foresee that RATOS will be useful in a variety of quantum communication and quantum engineering applications. Of special interest is the extension of RATOS to solid state systems,¹⁷ where the level structure allows access to nearly arbitrary frequencies for the created Ratos pulse.

The measurements have been performed using classical light pulses, thus the efficient transfer of the quantum state is yet to be demonstrated. To this end we have set up a narrow band parametric quantum light source,¹⁸ which can be used to verify conservation of a quantum state during the transfer.

This work was supported by NSEERC, CIAR, AIF, CFI and Quantum Works. We appreciate helpful discussions with K.-P. Marzlin.

References

1. Present address: Institut für angewandte Physik, Universität Bonn, Wegelerstr. 8, 53115 Bonn, Germany
2. L.M. Duan, M. Lukin, J.I. Cirac, P. Zoller, Nature 414, 413

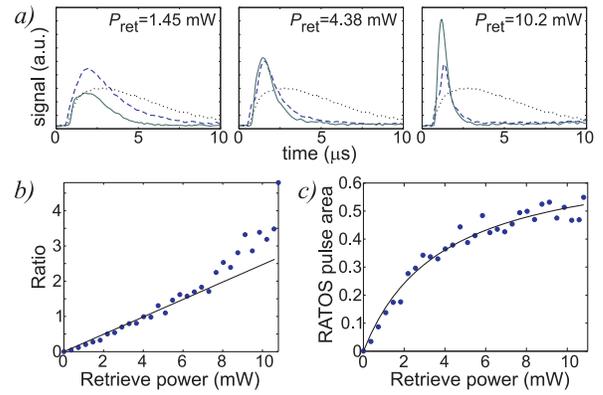


Fig. 4. Beam splitting via RATOS. a) Example waveforms for different retrieved pulse powers P_{ret} . The Ratos field (\hat{a}_2) is shown with a solid line, the transmitted signal (\hat{a}_1) with a dashed line. The dotted line displays the transmitted, slowed down signal pulse in the absence of the retrieved field (regular EIT). (b) Energy ratio of the Ratos pulse and the transmitted signal pulse, as a function of the retrieved field power. (c) Energy of the restored Ratos pulse normalized to the energy of the slowed down pulse; the solid line is a theoretical fit.

3. D. F. Phillips, A. Fleischhauer, A. Mair, R. L. Walsworth, and M. D. Lukin, Phys. Rev. Lett. 86, 783 (2001);
4. S. Tanzilli, W. Tittel, M. Halder, O. A. Libart, P. Baldi, N. Gisin, and H. Zbinden, Nature 437, 116 (2005).
5. J. Huang and P. Kumar, Phys. Rev. Lett. 68, 2153 (1992).
6. G. Giorgi, P. Matabni, and F. D. Martini, Phys. Rev. Lett. 90, 027902 (2003).
7. M. A. A. Ibot and F. N. C. Wong, Opt. Lett. 29, 1449 (2004);
8. A. P. Vandevender and P. G. Kwiat, J. Mod. Opt. 51, 1433 (2004)
9. A. S. Zibrov, A. B. Matsko, O. Kocharovskaya, Y. V. Rostovtsev, G. R. Welch, and M. O. Scully, Phys. Rev. Lett. 88, 103601 (2002).
10. B. Wang, S. Li, H. Wu, H. Chang, H. Wang, and M. Xiao, Phys. Rev. A 72, 043801 (2005).
11. M. Fleischhauer, A. Imamoglu, and J. P. Marangos, Rev. Mod. Phys. 77, 633 (2005).
12. U. Gaubatz, P. Rudecki, S. Schiemann, and K. Bergmann, J. Chem. Phys. 92, 5363 (1990).
13. X.-J. Lü, H. Jing, and M.-L. Ge, Eur. Phys. J. D 40, 297 (2006).
14. J. Appel, K.-P. Marzlin, and A. I. Lvovsky, Phys. Rev. A 73, 013804 (2006).
15. S. A. Moiseev and B. S. Ham, Phys. Rev. A 73, 033812 (2006)
16. E. Figueroa, F. Vewinger, J. Appel, and A. I. Lvovsky, Opt. Lett. 31, 2625 (2006).
17. A. V. Tunikhin, V. S. Sudarshanam, M. S. Shahriar, J. A. Musser, B. S. Ham, and P. R. Hemmer, Phys. Rev. Lett. 88, 023602 (2002).
18. J. Appel, D. Homann, E. Figueroa, A. I. Lvovsky, Phys. Rev. A 75, 035802 (2007).