

PERFECT QUANTUM ERROR CORRECTION CODE

Raymond Laflamme¹, Cesar Miquel^{1,2}, Juan Pablo Paz^{1,2} and Wojciech Hubert Zurek¹¹Theoretical Astrophysics, T-6, MS B 288
Los Alamos National Laboratory, Los Alamos, NM 87545, USA²Departamento de Física, FCEyN, Pabellón 1, Ciudad Universitaria, 1428 Buenos Aires, Argentina
(November 11, 2021)

We present a quantum error correction code which protects a qubit of information against general one qubit errors which maybe caused by the interaction with the environment. To accomplish this, we encode the original state by distributing quantum information over five qubits, the minimal number required for this task. We give a simple circuit which takes the initial state with four extra qubits in the state $|j\rangle$ to the encoded state. The circuit can be converted into a decoding one by simply running it backward. Reading the extra four qubits at the decoder's output we learn which one of the sixteen alternatives (no error plus all fifteen possible 1-bit errors) was realized. The original state of the encoded qubit can then be restored by a simple unitary transformation.

89.70.+c, 89.80.th, 02.70.fc, 03.65.w

Quantum computation – which has attracted so much attention as a result of progress in designing efficient quantum algorithms [1,2] – is still far from practical implementation. The biggest difficulty is the fragility of the quantum states required to process information. All the proposed implementations will suffer from the interaction with the environment, and even a weak coupling may result in decoherence [3,4,5]. Moreover, other sources of errors (i.e., timing of laser pulses in the linear trap computer of ref. [6]) will add to the problem.

In classical computers, errors can also occur and are handled through various error correcting techniques [7]. However, in the quantum case different error correction techniques are needed to protect quantum superposition and entanglement (which are essential ingredients of quantum computation). The simplest scheme [8] of this sort can be based on a purely quantum watchdog effect. It has been recently demonstrated to show promise [9], but it suffers from an imperfection of being essentially probabilistic (i.e., in principle only some of the correctable errors will actually be corrected by its application). Thus in the terminology of the error correction community, this scheme is not perfect [7].

Shor [10] has championed a different strategy (based on classical schemes using redundancy). The idea is to store quantum information not in a single qubit but in an entanglement of nine qubits. This scheme allows one to correct for any error incurred by any one of the nine qubits. Steane [11] and Calderbank and Shor [12] have proposed a different scheme which uses only

seven bits for this purpose and demonstrated that this is the least required for the strategies inspired by the classical coding theory which is based on linear codes [11]. However these codes are not perfect as they use more bits than is absolutely necessary to correct 1-bit errors [7].

In the quantum case at hand, classical coding theory seems to be too restrictive. All classical codes are based on the Hamming distance [13] (the number of different bits between two codewords). Efficient quantum codes will have to use a quantum analog of this distance. Below we present a perfect (i.e. capable of correcting all 1-bit errors with the minimum number of extra qubits) quantum error correction code using only five qubits (shown to be the smallest possible number). Our code is not a classical linear code [11] but a truly quantum code. Some of its mathematical properties are discussed below but others certainly deserve further study. A notable property of our error correction code is that the encoding can be done using a remarkably simple circuit which is itself the central piece of the error correction scheme enabling us to recover from general one bit errors.

Before presenting our perfect code, let us mention what are the requirements it must satisfy. An encoding of one qubit into n qubits is a representation of the logical states $|j\rangle_L$ and $|j\rangle_L$ as entangled states in the n -particle Hilbert space;

$$|j\rangle_L = \sum_{i=0}^{2^n-1} |j\rangle_i; \quad |j\rangle_L = \sum_{i=0}^{2^n-1} |j\rangle_i; \quad (1)$$

where the states $|j\rangle_i = |j_{n-1} \dots j_0\rangle_i$ form a basis of the n -particle Hilbert space with j_i denoting the binary representation of the integer i . To serve as a quantum error correction code Eq.(1) must satisfy certain conditions whose origin is best understood by analyzing the effect of the interaction with the environment. A general interaction between the k -th qubit and its environment will lead to an evolution of the form;

$$|j\rangle_i |j\rangle_k \rightarrow |j\rangle_i |j\rangle_k + |j\rangle_i |j\rangle_k + |j\rangle_i |j\rangle_k + |j\rangle_i |j\rangle_k; \quad (2)$$

where $|j\rangle_i$, $|j\rangle_{0,1}$, $|j\rangle_{0,1}$ are states of the environment which will remain arbitrary throughout this paper (apart from the obvious orthogonality and normalization constraints imposed by unitarity of the evolution in Eq.(2)). The effect of the interaction given by Eq.(2)

upon the logical states $|j_L\rangle$ and $|j_L\rangle$ is easily calculated;

$$|j_L\rangle = \frac{1}{\sqrt{2}} (|j_0\rangle + |j_1\rangle) \quad |j_L\rangle = \frac{1}{\sqrt{2}} (|j_0\rangle - |j_1\rangle) \quad (3)$$

where σ_i^k are the Pauli matrices acting on the k -th bit. The states of the environment appearing in Eq.(3) are $|j_0\rangle = (|j_0\rangle + |j_1\rangle)/\sqrt{2}$ and $|j_1\rangle = (|j_0\rangle - |j_1\rangle)/\sqrt{2}$. Four types of outcome due to interaction with the environment exhaust all possibilities. First, the state may remain unchanged (the operator I is proportional to the identity). Second, the state of the system may pick a minus sign in front of all the states with a 1 in the k -th qubit (thus corresponding to action of the operator σ_z^k). This alternative is correlated with the environment $|j_0\rangle$. Third, the state of the system may be altered by flipping the k -th bit (through the operator σ_x^k) getting correlated with the states $|j_1\rangle$. Fourth, and finally, the system may get a bit flip in the k -th bit together with a sign flip for which the operator is σ_y^k , an option correlated with $|j_1\rangle$. The second operation is denoted by S_k (for sign flip), the third by B_k (for bit flip) and the fourth one by BS_k (which is self-explanatory). Note that the same state of the environment is coupled to the respective states of $|j_L\rangle$ and $|j_L\rangle$. This is essential in what follows.

The defining property of a quantum error correction code Eq.(1) is the following: the original two dimensional Hilbert space spanned by $|j_L\rangle$ and $|j_L\rangle$ must be mapped coherently into orthogonal 2-dimensional Hilbert spaces corresponding to each of the different environment-induced errors (denoted as S_k , B_k and BS_k). This is sufficient to recover from a 1-qubit error since it is possible to measure in which 2-d Hilbert space the system is without destroying the relevant coherence. After the measurement it is possible to restore the original quantum state by means of simple unitary transformations (which depend upon the result of the measurement).

Orthogonality of the subspaces corresponding to the different errors imposes a rather stringent constraint on the dimension of the Hilbert space which must be large enough to accommodate so many orthogonal subspaces. How big should this space be? Orthogonality requires a subspace for each of the three errors every qubit can suffer and another one for the unperturbed logical state. This makes a total of $3n + 1$. We must double this to have enough space to accommodate both logical states and their erroneous descendants. Thus, the number of subspaces is $2(3n + 1)$. To have enough room in the Hilbert space the condition;

$$2(3n + 1) \leq 2^n; \quad (4)$$

must be satisfied. Both Shor's $n = 9$ (code and Steane's $n = 7$) code satisfy this constraint while $n = 5$ is the smallest number which saturates Eq.(4). The code we present has 5 bits.

The orthogonality conditions can be written as algebraic constraints on the coefficients α_i and β_i which define the encoding. For the sake of space and time we will not write them all explicitly but just mention the following simple subset;

$$\sum_{\substack{k \text{ even} \\ l \text{ even}}} \alpha_{ij}^k \beta_{ij}^l = \sum_{\substack{k \text{ even} \\ l \text{ odd}}} \alpha_{ij}^k \beta_{ij}^l = \sum_{\substack{k \text{ odd} \\ l \text{ even}}} \alpha_{ij}^k \beta_{ij}^l = \sum_{\substack{k \text{ odd} \\ l \text{ odd}}} \alpha_{ij}^k \beta_{ij}^l; \quad (5)$$

for all $k, l = 1, \dots, 5$ (and a similar condition for α_i). The sums are over k (even and k (odd) numbers: k (even) (k (odd) numbers are those with a 0 (1) in the k -th bit. If we restrict ourselves to encodings satisfying $\alpha_{ij} = \beta_{ij} = 1$, an assumption based on simplicity, the above condition implies that we need at least eight states in the superposition. Thus, five bits and eight states in the superposition seem to be the minimum required by the orthogonality conditions (and the simplicity assumption). Moreover, it is easily shown that it is impossible to satisfy all the constraints by using only positive numbers for α s or β s (+1 in our case) so either phases or minus signs are essential.

The conditions of Eq.(5), while still incomplete, are nevertheless extremely restrictive: In fact, one can prove that they essentially determine (up to permutations between bits) what are the eight states α_{ij} allowed in the superposition of Eq.(1). This determines the encoding of each of the logical states, thus defining the support of the code. It is interesting to note that the solution can be guessed from Steane's encoding [11] by dropping any two of its qubits. The only remaining freedom is in the sign distribution between states, which can be found by a computer search. This is how we have first arrived at the class of possible encodings exemplified by the following perfect 5-bit code

$$\begin{aligned} \alpha_L i &= \alpha_1 i \alpha_{0i} \alpha_3 i \alpha_{11i} + \alpha_7 i \alpha_{0i} + \alpha_5 i \alpha_{11i} \\ \beta_L i &= \alpha_2 i \alpha_{11i} \alpha_4 i \alpha_{0i} + \alpha_8 i \alpha_{11i} \alpha_6 i \alpha_{0i}; \end{aligned} \quad (6)$$

where the (unnormalized) 3-particle Bell states are defined as $\alpha_2 i = (\alpha_{00i} \alpha_{11i})$, $\alpha_4 i = (\alpha_{10i} \alpha_{01i})$, $\alpha_6 i = (\alpha_{10i} \alpha_{01i})$, $\alpha_8 i = (\alpha_{11i} \alpha_{00i})$. Other allowed codes can be found from Eq.(6) by permutations of bits and coordinated sign changes. Thus, all the allowed codes have the same sign pattern, with two minus signs in one of the logical states and four in the other (these results will be proven in detail elsewhere). The mathematical structure behind this sign distribution (which, as we said before, is the only freedom we have, save for the 'gauge transformation' in the form of sign and coordinated bit flips) still lies beyond our present understanding.

The encoding Eq.(6) can be implemented by using the circuit depicted in Figure 1a. The original information carrier is the qubit α_i which may be in a general state $\alpha_i = \alpha_i + \beta_i$. After the action of the

encoding circuit, and when the other input states are all set to α_i , the output state will always be given by $\alpha_L i + \beta_L i$. This circuit is just a combination of quantum logic gates (controlled-not, controlled rotations, etc.) which can be implemented (at least in principle) in various physical settings.

Until now we exhibited a quantum code and a quantum circuit which acts as encoder. However, the error correction method would not be complete without the circuit for actually correcting all the possible one bit errors. The most remarkable feature of our method is that the circuit for this is exactly the same as the one for encoding but run backwards (see Figure 1b). This is in contrast with all previous schemes discussed in the literature where a different decoding/correction circuit was necessary.

A heuristic argument has guided us in searching for this circuit. The fact that we are using exactly $n = 5$ bits allows us in principle to have a circuit such as the one we found. For, to distinguish the 16 different error syndromes (the 'no error alternative' plus the 15 ones corresponding to five errors of each type S_k , B_k and B_{S_k}) we would need to make four binary tests (which would provide us with 16 results). This is precisely what the circuit does: when any one of the sixteen possible states inputs the encoder from the right, the states $\alpha^0 i$, $\beta^0 i$, $\gamma^0 i$ and $\delta^0 i$ uniquely identify the input and allow us to know what the state of the qubit $\alpha^0 i$ is. All possibilities are exhibited in Table 1. Some of them are easily understood. For example, the trivial case $\alpha^0 i = \beta^0 i = \gamma^0 i = \delta^0 i = \alpha_i$ corresponds to the 'no error' alternative (since in that case the input in the left is identical to the one used for encoding). Other alternatives, such as the one corresponding to the S_1 syndrome (an error in the first bit) can be easily identified by looking at the circuit from the left to the right: In fact, if the input to the encoder is not $\alpha_i = \beta_i = \gamma_i = \delta_i = \alpha_i$ but $\alpha_i = \beta_i$, $\gamma_i = \delta_i = \alpha_i$ the output state is easily seen to be the one corresponding to the S_1 error (since the

first rotation would produce a state with a minus sign in front of the β_i state). Other alternatives are less obvious but they all work in the same way.

Thus, after using the encoding circuit in backwards direction we have a precise diagnosis of what went wrong (if anything) with our quantum bit. The state of the qubit $\alpha^0 i$ may be easily restored to the original $\alpha_i + \beta_i$ by a unitary transformation which depends upon the measurement of the states $\alpha^0 i$, $\beta^0 i$, $\gamma^0 i$ and $\delta^0 i$ [15].

Assuming that the interaction affected at most one bit in any way, we have shown that there exist a 5-qubit code which corrects perfectly, i.e. has perfect fidelity [14]. It is not difficult to convince yourself that if the probability of an error in only one qubit is p , the fidelity of the code where the restriction to only one error is lifted will be $1 - cp^2 + \dots$, for some constant c .

This is an improvement on the uncorrected evolution of a single qubit which has fidelity $1 - p$ as long as $c < p$.

The support of our code is unique under the conditions; i) that the coefficients of the codewords have unit modulus, and; ii) that under error due to the interaction with the environment the logical states would go to mutually orthogonal states [16].

Acknowledgements. We would like to thank E. Knill for many useful comments concerning classical and quantum error correction codes and A. Ekert as well as R. Hughes for general comments about quantum computation.

-
- [1] For reviews see S. Lloyd, Scientific American 273, p.140, October 1995. A. Ekert and R. Jozsa, Notes on Shor's efficient algorithm for factoring on a quantum computer, Rev. Mod. Phys., in press.
- [2] P. W. Shor. In Proc. 35th Annual Symposium on Foundations of Computer Science, ed. S. Goldwasser. (IEEE Computer Society Press, Nov. 1994) pp. 124{134.
- [3] W. H. Zurek. Physics Today, 44:36, 1991.
- [4] W. G. Unruh. Phys. Rev. A 51, 992, 1995.
- [5] I. Chuang, R. Laflamme, P. Shor and W. H. Zurek; Science 270, p.1633, 1995.
- [6] J. I. Cirac and P. Zoller. Phys. Rev. Lett., 74:4091, 1995.
- [7] F. J. MacWilliams and N. J. Sloane, The theory of Error-Correcting Codes, North-Holland Publishing Company, New-York, 1977.
- [8] W. H. Zurek. Phys. Rev. Lett., 53:391, 1984.
- [9] C. Miquel, J. P. Paz and R. Perazzo, preprint quant-ph/9601021
- [10] P. W. Shor Phys. Rev. A 52, p.2493, 1995.
- [11] A. Steane, Multiple particle interference and quantum error correction, preprint quant-ph/9601029, to be published in Proc Roy. Soc. London.
- [12] A. R. Calderbank and P. W. Shor, Good quantum error-correcting codes exist, preprint quant-ph/9512032.
- [13] E. A. Lee and D. G. Messerschmitt. Digital Communication. Kluwer Academic Publishers, 1988.
- [14] B. Schumacher, Phys. Rev. A 51, 2738, 1995.
- [15] This last unitary transform can be omitted if we redefine the meaning logical 0 and 1 in the quantum program.
- [16] This last condition is sufficient for the code to operate properly but is not necessary. It is possible to find codes such that some errors are mapped to the same 2-d subspace. This alternative, which is now under investigation does not allow less than five qubits but might allow to detect or even correct more than the 1-qubit errors (E. Knill and R. Laflamme, The theory of quantum error correcting codes, in preparation).

5-bit encoder

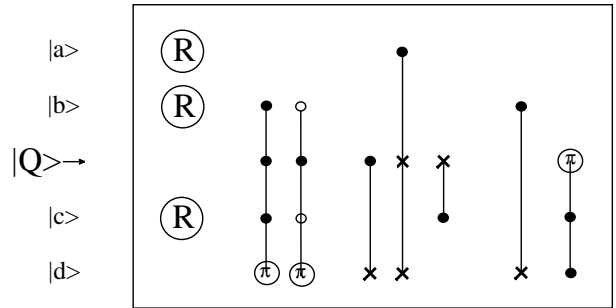


Figure 1a. Circuit for the encoding of the states described in Eq.(6). R describes the rotation $\sqrt{2}(|0\rangle + |1\rangle)$ and $\sqrt{2}(|0\rangle - |1\rangle)$. The element with an open circle corresponds to a control not (with control on the first qubit); if the control is 1 then the state at the second qubit is flipped. The element including a phase gate corresponds to a conditional rotation by a phase π , where the condition is satisfied when the state has the bit in the 0 state for the open circle and 1 for the filled one.

Error	Syndrome $a^0b^0c^0d^0i$	Resulting state $ Q^0i\rangle$
None	0000	$ 0\rangle + 1\rangle$
BS3	1101	$ 1\rangle + 0\rangle$
BS5	1111	$ 0\rangle + 1\rangle$
B2	0001	$ 0\rangle - 1\rangle$
S3	1010	
S5	1100	
BS2	0101	
B5	0011	$ 0\rangle - 1\rangle$
S1	1000	
S2	0100	
S4	0010	
B1	0110	$ 1\rangle - 0\rangle$
B3	0111	
B4	1011	
BS1	1110	
BS4	1001	

Table 1. Error with corresponding syndromes and states for the decoder shown in Figure 1. B; S; BS correspond to a bit, a sign, or a bit and a sign flipped with the following number which identifies the bit. To recover the initial state, 5 different unitary operations must be performed consisting of bit and sign flips on the state $|Q^0i\rangle$.

error finder

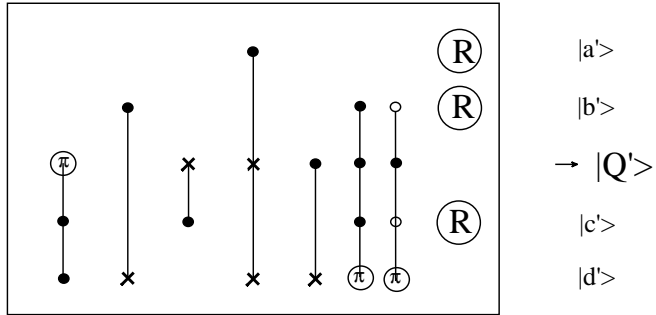


Figure 1b. Circuit of Figure 1a ran in the opposite way. The state $|a^0; b^0; c^0; d^0\rangle$ gives the syndromes of table 1. A unitary transformation brings back $|Q^0\rangle$ to $|Q\rangle$, which can be reencoded using the circuit of Figure 1a.