

Balancing New Against Old Information: The Role of Surprise in Learning

Mohammadjavad Faraji¹, **Kerstin Preuschoff**^{2,†}, and **Wulfram Gerstner**^{1,†,*}

¹School of Computer and Communication Sciences and School of Life Sciences, Brain Mind Institute, École Polytechnique Fédéral de Lausanne, 1015 Lausanne EPFL, Switzerland.

²Geneva Finance Research Institute and Center for Affective Sciences, University of Geneva, 1211 Geneva, Switzerland.

[†] Co-senior author

* Corresponding author: wulfram.gerstner@epfl.ch

Keywords: Bayesian Inference, Learning, Surprise, Neuromodulation

Abstract

Surprise describes a range of phenomena from unexpected events to behavioral responses. We propose a measure of surprise and use it for surprise-driven learning. Our

surprise measure takes into account data likelihood as well as the degree of commitment to a belief via the entropy of the belief distribution. We find that surprise-minimizing learning dynamically adjusts the balance between new and old information without the need of knowledge about the temporal statistics of the environment. We apply our framework to a dynamic decision-making task and a maze exploration task. Our surprise minimizing framework is suitable for learning in complex environments, even if the environment undergoes gradual or sudden changes and could eventually provide a framework to study the behavior of humans and animals encountering surprising events.

1 Introduction

To guide their behavior, humans and animals rely on previously learned knowledge about the world. Since the world is complex and models of the world are never perfect, the question arises whether we should trust our internal world model that we have built from past data or whether we should readjust it when we receive a new data sample. In noisy environments, a single data sample may not be reliable and in general we need to average over several data samples. However, when a structural change occurs in the environment, the most recent data samples are the most informative ones and we should put more weight on recent data samples than on earlier ones.

Indeed, both humans and animals adaptively adjust the relative contribution of old and newly acquired data during learning (Behrens et al., 2007; Nassar et al., 2012; Krugel et al., 2009; Pearce and Hall, 1980) and rapidly adapt to changing environments (Pearce and Hall, 1980; Wilson et al., 1992; Holland, 1997). To capture this be-

haviour, existing models detect and respond to sudden changes using (absolute) reward prediction errors (Hayden et al., 2011; Pearce and Hall, 1980; Roesch et al., 2012), risk prediction errors (Preuschoff and Bossaerts, 2007; Preuschoff et al., 2008), uncertainty-based jump detection (Nassar et al., 2010; Payzan-LeNestour and Bossaerts, 2011) and hierarchical modeling (Behrens et al., 2007; Adams and MacKay, 2007). Typically, in the above models, a low-dimensional variable, linked to the characteristics of the specific experimental design, is used to trigger a rebalancing between new and old information. Here we aim to generalize these approaches by using a more generic ‘surprise’ signal as a trigger for shifting the balance between old and new information.

Quantities related to surprise have been previously used in psychological theories of attention (Itti and Baldi, 2009), in statistical models of information theory (Shannon, 1948) and in machine learning (Sun et al., 2011; Frank et al., 2013; Little and Sommer, 2014; Schmidhuber, 2010; Singh et al., 2004). For example, in artificial models of curiosity, surprise is linked to sudden increases in information compression (Schmidhuber, 2010). Planning to be surprised so as to maximize information gain has been suggested as an optimal exploration technique in dynamic environments (Sun et al., 2011; Little and Sommer, 2014). Maximizing an internally generated surprise signal can drive active exploration for learning unknown environments, in the absence of external reward (Frank et al., 2013). In the framework of intrinsically motivated reinforcement learning (Singh et al., 2004; Oudeyer et al., 2007), researchers have defined ad-hoc features (Singh et al., 2004; Sutton et al., 2011; Silver et al., 2016) or information theoretic quantities (Mohamed and Rezende, 2015) that could replace the reward-prediction-error of classical reinforcement learning by a generalized model prediction error which could

be surprise-related. Furthermore, in the context of variational learning and free-energy minimization, a surprise measure has been defined via the model prediction error (Friston, 2010; Friston and Kiebel, 2009; Rezende and Gerstner, 2014; Brea et al., 2013).

Mathematically, human surprise is difficult to quantify (Baldi and Itti, 2010; Itti and Baldi, 2009; Palm, 2012; Tribus, 1961; Shannon, 1948). Existing concepts can be roughly classified into two different categories. First, the log-likelihood of a single data point given a statistical model of the world has been called Shannon surprise or information content (Shannon, 1948; Tribus, 1961; Palm, 2012). Thus, in the context of these theories an unlikely event becomes a surprising event. Information bottleneck approaches (Tishby et al., 2000; Mohamed and Rezende, 2015) fall roughly into the same class. Second, in the context of Bayesian models of attention, surprise has been defined via the changes in model parameters induced by a new data point (Itti and Baldi, 2009; Baldi and Itti, 2010). Thus, in these theories an event that causes a big change in the model of the world becomes a surprising event. Surprise as successful algorithmic compression of the agent’s world model (Schmidhuber, 2010) is a non-Bayesian formulation of a related idea. But what do we mean by (human) surprise?

The Webster dictionary defines surprise as “an unexpected event, piece of information” or “the feeling caused by something that is unexpected or unusual” [merriam-webster.com]. Note that ‘unexpected’ is different from ‘unlikely’. An event can be unlikely without being unexpected: for example, you may park your car at the shopping mall next to a green BMW X3 with a license plate containing the number 5 without being surprised, even though the specific event is objectively very unlikely. But since you did not have any expectation, this specific event was not unexpected. A pure like-

likelihood based definition of surprise, such as the Shannon information content (Shannon, 1948; Tribus, 1961) cannot capture this aspect. Note that something can be *unexpected* only if the subject is committed to a belief about what to expect. As Matthew M. Hurley, Daniel C. Dennett and Reginald B. Adams have put it: “ what surprises us is ... things we expected *not* to happen – because we expected something else to happen instead. ” (Hurley et al., 2011). In other words, surprise arises from a mismatch between a strong opinion and a novel event, but this notion needs a more precise mathematical formulation.

In practice, humans know when they are surprised (egocentric view) indicating that there are specific physiological brain states corresponding to surprise. Indeed, the state of surprise in other humans (observer view) is detectable as startle responses (Kalat, 2012) manifesting itself in pupil dilation (Hess and Polt, 1960; Preuschoff et al., 2011) and tension in the muscles (Kalat, 2012). Neurally, the P300 component of the event-related potential (Pineda et al., 1997; Missonnier et al., 1999) measured by electroencephalography is associated with the violation of expectation (Jaskowski et al., 1994; Kolossa et al., 2015). Furthermore, surprising events have been shown to influence the development of the sensory cortex (Fairhall et al., 2001), and to drive attention (Itti and Baldi, 2009), as well as learning and memory formation (Ranganath and Rainer, 2003; Hasselmo, 1999; Wallenstein et al., 1998).

As the first aim of this paper, we would like to develop a theory of surprise that captures the notion of unexpectedness in the sense of a mismatch between our current world model and the world model that the new data point implies. As a second aim of the paper we want to study how surprise can influence learning. We derive a class

of learning rules that minimize the surprise if the same data point appears a second time. We will demonstrate in two examples why surprising events increase the speed of learning and show that surprise can be used as a trigger to balance new information against old one.

2 Results

In the first subsection we introduce our notion of surprise and apply it to a few examples. In the second subsection we derive a learning rule from the principle of surprise minimization. The subsequent subsections apply this learning rule to two scenarios, starting with a one-dimensional prediction task, followed by a maze exploration corresponding to a parameter space with more than two hundred dimensions

2.1 Definition of Surprise

We aim for a measure of surprise which captures the notion of a mismatch between an opinion (current world model) and a novel event (data point) and which should have the following properties.

- (i) surprise is different from statistical likelihood because it depends on the agent's commitment to her belief.
- (ii) with the same level of commitment to a belief, surprise decreases with the likelihood of an event.
- (iii) for an event with a small likelihood, surprise increases with commitment to the belief.

(iv) A surprising event will influence learning

While the final point will be the topic of the next subsection, we will present now a definition of surprise and check the properties (i) to (iii) by way of a few illustrative examples.

To mathematically formulate surprise, we assume that a subject receives data samples X from an environment that is complex, potentially high-dimensional, only partially observable, stochastic, or changing over time. In contrast to an engineered environment where we might know the overall lay-out of the world (e.g., a hierarchical Markov decision process) and learn the unknown parameters from data, we do not want to assume that we have knowledge about the lay-out of the world. Our world model may therefore be conceptually insufficient to capture the intrinsic structure of the world and would therefore occasionally make wrong predictions even when we have observed large amounts of data. In short, our model of the world is expected to be simplistic and wrong - but since we know this we should be ready to readapt the world model when necessary.

In our framework, we construct the world model from many instances of simple models, each one characterized by a parameter $\theta \in \mathbb{R}^N$. The likelihood of a data point X under model θ is $p(X|\theta)$. In a neuronal implementation, we may imagine that different instantiations of the model (with different parameter values θ) are represented in parallel by different (potentially overlapping) neuronal networks in the brain. If a new data point X is provided as input to the sensory layer, the different models respond with activity $\hat{p}_X(\theta) = c p(X|\theta)$ with a suitable constant c (which may depend on X but is the same for all models). The distribution $\hat{p}_X(\theta)$ represents the naive response of the

whole brain network (i.e., of all models) in a setting where all the models are equally likely. Formally, $\hat{p}_X(\theta)$ is the posterior probability under a flat prior (see **Mathematical Methods**). We refer to $\hat{p}_X(\theta)$ as the “scaled data likelihood” of a naive observer.

However, not all models are equally likely. Based on the past observation of n data points, the subject has formed an opinion which assigns to each model θ its relevance $\pi_n(\theta)$ for explaining the world. In a Bayesian framework, we could describe the likelihood of the new data point X under the current opinion by $p(X) = \int_{\theta} p(X|\theta)\pi_n(\theta)d\theta$ where $\pi_n(\theta)$ summarizes the current opinion of the subject and the integral runs over all possible model instantiations, be it a finite number or a continuum. In case of a finite number θ_k , $1 \leq k \leq K$, we can also think of $p(X)$ as the data likelihood in a mixture model with basis functions $p(X|\theta_k)$. However, since we are interested in surprise, we are not interested in the data likelihood but rather in the degree of commitment of the subject to a specific opinion. The commitment is defined as the negative entropy of the current opinion:

$$\text{commitment} = -H(\pi_n) = \int_{\theta} \pi_n(\theta) \ln \pi_n(\theta) d\theta. \quad (1)$$

A subject with a high commitment to her opinion (low entropy) will be viewed as a confident subject.

Surprise is the mismatch of a perceived data point X_{n+1} with the current opinion. The current opinion (after observation of n data samples $X_1, \dots, X_n$) is characterized by the distribution $\pi_n(\theta)$. The observed data point $X = X_{n+1}$ would lead in a naive observer to the scaled likelihood $\hat{p}_X(\theta)$ introduced above. We define the surprise as the

Kullback-Leibler divergence between these two distributions

$$S_{cc}(X; \pi_n) = D_{KL}[\pi_n(\theta) || \hat{p}_X(\theta)] = \int_{\theta} \pi_n(\theta) \ln \frac{\pi_n(\theta)}{\hat{p}_X(\theta)} d\theta. \quad (2)$$

We call S_{cc} a confidence corrected surprise because its definition includes the commitment to an opinion. To get acquainted with this definition, let us look at a few examples.

First, imagine that three colleagues (A, B, and C) wait for the outcome of the selection of the next CEO. Four candidates are in the running. Suppose that we have four models, $\theta_1, \dots, \theta_4$ where model θ_k means candidate $X = k$ wins with probability $(1 - \epsilon)$ (with small ϵ) and the remaining probability is equally distributed amongst the other candidates. Formally, the model (or basis function) with parameter θ_k predicts outcome probabilities $p(X = k|\theta_k) = 1 - \epsilon$, and $p(X = k'|\theta_k) = \epsilon/3$ for $k' \neq k$ (Fig. 1A, right).

The current opinion $\{\pi^A(\theta), \pi^B(\theta), \pi^C(\theta)\}$ of each colleague about the four possible models corresponds to the histogram in Fig. 1A, left. Colleague A who is usually well informed has a weighting factor $\pi^A(\theta_1) = 0.75$ for the first model, because he thinks the first candidate to be likely to win. According to his opinion, the first candidate wins with probability $p^A(X = 1) = \sum_k p(X = 1|\theta_k)\pi^A(\theta_k)$ and he gives lower probabilities to the other candidates (Fig. 1A, table). Colleague B has heard rumors and favors the third candidate while colleague C is uninformed as well as uninterested in the outcome and gives the same probabilities to each candidate. Note that colleagues A and B have the same commitment to their belief, i.e. $H(\pi^A) = H(\pi^B)$, but the likelihood of candidates differs. The commitment of colleague C is lower than that of A or B.

Evaluation of the surprise measure indicates that (see **Mathematical Methods** for the exact calculations)

(a) if candidate 1 is selected, then A and B - despite having the same overall commitment to their belief - will be differently surprised due to different likelihoods of candidate 1 in their models.

(b) if candidate 2 is selected, then A is more surprised than if candidate 1 is selected because in his model candidate 2 is less likely.

(c) if candidate 2 is selected then A will be more surprised than C. Even though both colleagues assigned the same likelihood for this candidate, A's level of commitment to his belief is larger which leads to a bigger surprise.

Second, let us look at the theory of jokes developed by philosophers and cognitive psychologists (Hurley et al., 2011) which emphasize that surprise in a joke can only work if the listener is committed to an opinion. Here is an example joke: "There are two goldfish in a tank. One turns to the other and says: You man the guns, I'll drive". The reason that some people find the joke funny is that "a perception of the world (manning the guns and driving the tank) suddenly corrects our mistaken preconception (tank as a liquid container)" (Hurley et al., 2011). Let us analyze the joke in the framework of our surprise measure. A naive English speaking adult knows that tank can have two meanings, liquid container or military vehicle (Fig. 1B, top). In the context of our theory, the two meanings correspond to two models (parameters θ_1 and θ_2 which have equal prior probability (opinion π_0). In the first sentence of the joke, the word goldfish (data point X_1) shifts the belief of the listener to a situation where he gives more weight to the liquid container. This becomes the opinion π_1 of the listener (Fig.

1B, middle). The opinion π_1 has low entropy, indicating a strong commitment. Now comes the second sentence, with the words ‘driving’ and ‘guns’ which we may consider as data point X_2 . These words trigger in a naive English speaking adult a distribution $\hat{p}_{X_2}(\theta)$ (Fig. 1B, bottom) which favors the interpretation of tank as a military vehicle. Since the Kullback-Leibler divergence between the distributions in the second and third line is big, the listener is surprised.

Third, let us return to the example of the green BMW X3 with a 5 in the license plate, mentioned in the introduction. The likelihood of finding this type of car next to you in a shopping mall parking lot is extremely low (Fig. 1C) yet you are not surprised. If it were the parking lot of a company where every morning you see a little red car on this very same parking slot, but today you see a green BMW you might be surprised - quite independent of the details of the green car. The difference arises from the degree of commitment.

The observations made in the above examples can be mathematically formalized as follows.

(1) Our measure of surprise as defined in Eq. (2) is a linear combination of Shannon surprise and Bayesian surprise (and two further terms). Because it contains Shannon surprise as one of the terms, surprise decreases with increasing likelihood of the data under the current model (see **Mathematical Methods**). This formal statement answers points (i) and (ii) from the beginning of the subsection.

(2) Our measure of surprise as defined in Eq. (2) accounts for the differences in surprise between two subjects that reflect the differences in commitment to their opinion. In particular, a less-confident individual (lower commitment to the current opinion) will

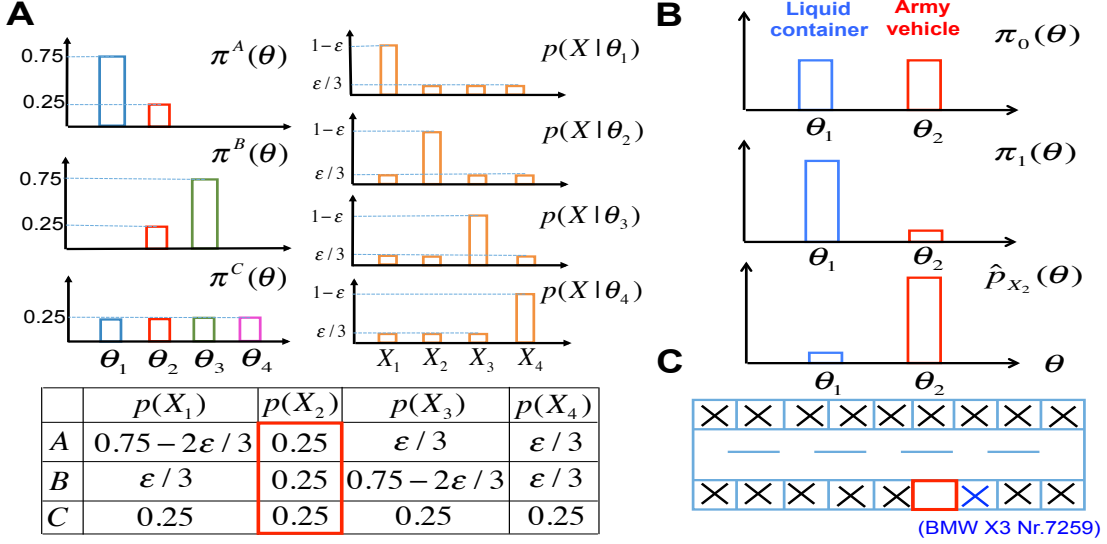


Figure 1: **Examples of surprise.** **A.** A committed person is more surprised than an uncommitted one. Three colleagues A, B and C have different beliefs (left) about the models $\theta_1, \dots, \theta_4$ that determine the likelihood (right) that one of the four candidates is chosen as the CEO. Colleague A puts a lot of weight on the first model indicating his preference for the first candidate (top left). The table (bottom) indicates the likelihood of each candidate (columns) being chosen as the CEO (after marginalization over all models) for each colleague (rows). If the candidate number 2 is selected (column highlighted by red color), subject C is less surprised than subjects A and B because C is not committed to a specific opinion, although the likelihood of candidate 2 being chosen is considered the same (0.25) for all three colleagues. **B.** Surprise occurs only if a committed belief is disturbed. The first phrase of the goldfish-joke transforms our belief about the meaning (θ) of “tank” from $\pi_0(\theta)$ (top) to $\pi_1(\theta)$ (middle). The second phrase then causes in a naive observer a distribution $\hat{p}_{X_2}(\theta)$ (bottom) that is very different from the last belief $\pi_1(\theta)$ (middle); thus the listener is surprised. **C.** For a driver who just cares about having a free park slot, finding a park slot (empty red rectangle) next to a BMW X3 with the number plate 7259 (blue cross sign) is not very surprising, although it is very unlikely to occur.

generally be less surprised than a confident individual who is strongly committed to her opinion (see **Mathematical Methods**). This formal statement answers point (iii) from the beginning of the subsection.

(3) Our measure of surprise as defined in Eq. (2) can be computed rapidly because it only uses the scaled data likelihood of a naive observer and the degree of commitment to the current opinion. In particular, evaluation of surprise needs neither the lengthy evalu-

ation of the posterior under the current model nor an update of the model parameters - in contrast to the Bayesian surprise model (Itti and Baldi, 2005; Baldi and Itti, 2010) with which our surprise measure otherwise shares important properties (see **Mathematical Methods**). The question of how surprise can be used to influence learning is the topic of the next subsection.

We emphasize that our measure of surprise is not restricted to discrete models but can also be formulated for models with continuous parameters θ (see **Mathematical Methods** - Fig. 2A). Our proposed measure of surprise is consistent with formulations of Schopenhauer that link surprise to the “incongruity between representation of perception” (in our framework: the scaled likelihood response $\hat{p}_X(\theta)$ to a data X) and “abstract representations” (in our framework: the current opinion $\pi_n(\theta)$ formed from previous data points); freely cited after (Hurley et al., 2011).

2.2 Surprise minimization: the SMiLe-rule

Successful learning implies an adaptation to the environment such that an event occurring for a second time is perceived as less surprising than the first time. In the following *surprise minimization* refers to a learning strategy which modifies the internal model of the external world such that the unexpected observation becomes less surprising if it happens again in the near future. Surprise minimization is akin to – though more general than – reward prediction error learning. Reward based learning modifies the reward expectation such that a recurring reward results in a smaller reward prediction error. Similarly, surprise-minimization learning results in a smaller surprise for recurring events.

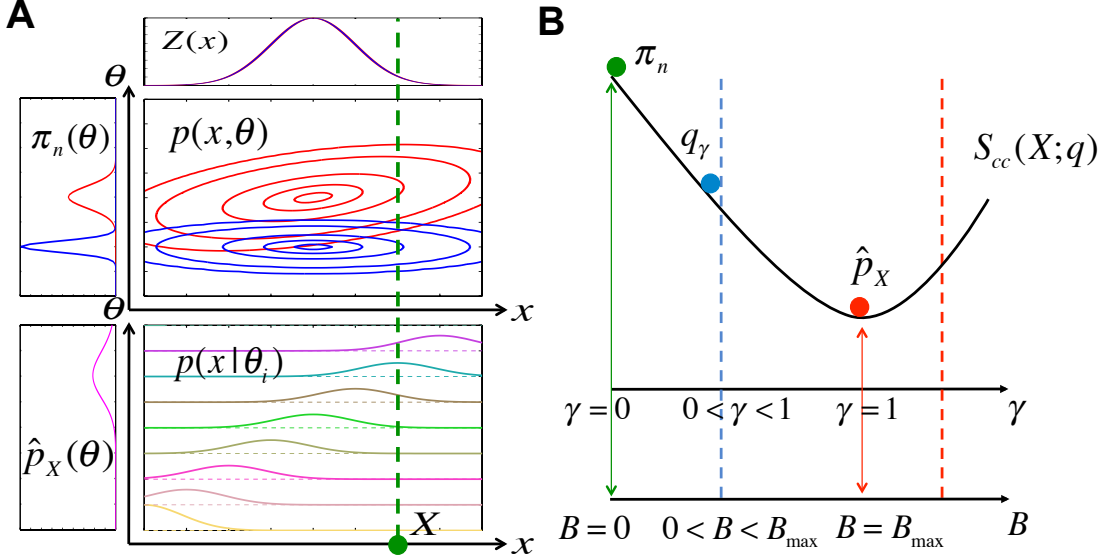


Figure 2: Confidence-corrected surprise and constraint surprise minimization. A. The impact of confidence on surprise. Top: Two distinct internal models (red and blue), described by joint distributions $p(x, \theta)$ (contour plots) over observable data x and model parameters θ , may have the same marginal distribution $Z(x) = \int_{\theta} p(x, \theta) d\theta$ (distributions along the x -axis coincide) but differ in the marginal distribution $\pi_n(\theta) = \int_x p(x, \theta) dx$ (distributions along the θ -axis). Surprise measures that are computed with respect to $Z(x)$ neglect the uncertainty as measured by the entropy $H(\pi_n)$. Therefore, a given data sample X (green dot) may be equally surprising in terms of the raw surprise $S_{raw}(X)$ [Eq (13)] but results in higher confidence-corrected surprise $S_{cc}(X)$ [Eq (2)] for the blue as compared to the red model, because π_n in the red model is wider (corresponding to a larger entropy) than in the blue model. Bottom: The scaled likelihood $\hat{p}_X(\theta)$ (magenta) for the “red” internal model is calculated by evaluating the conditional probability distribution functions $p(x|\theta_i)$ (specified by different color for each θ_i) at $x = X$ (intersection of dashed green line with colored curves). The confidence-corrected surprise $S_{cc}(X)$ is the KL divergence between $\hat{p}_X(\theta)$ (bottom, magenta) and $\pi_n(\theta)$ (top, red). **B.** Solutions to the (constraint) optimization problem in Eq (5). The objective function, i.e. the updated value of the surprise $S_{cc}(X; q)$ (black) for a given data sample X , is a parabolic landscape over γ where each γ corresponds to a unique belief distribution q_{γ} . Its global minimum is at $\gamma = 1$ (corresponding to $q_1 = \hat{p}_X$) which is equivalent to discarding all previously observed samples. The boundary B constrains the range of γ and thus the set of admissible belief distributions. At $B = 0$ no change is allowed resulting in $\gamma = 0$ with an updated belief equal to the current belief π_n (green). $B \geq B_{max} = D_{KL}[\hat{p}_X || \pi_n]$ (red dashed line) implies that we allow to update the belief to a distribution further away from the current belief than the sample itself so the optimal solution is the scaled likelihood $\hat{p}_X$ or $\gamma = 1$ as for the unconstrained problem. For $0 < B < B_{max}$ (blue dashed line) the objective function is minimized by q_{γ} in Eq (6) that fulfills the constraint $D_{KL}[q_{\gamma} || \pi_n] = B$ with $0 < \gamma < 1$.

To mathematically formulate learning through surprise minimization, we define a *learning rule* $L(X, \pi_n)$ as a mapping from the current belief $\pi_n(\theta)$ to a new belief $q(\theta)$ after receiving data sample X , i.e., $q = L(X, \pi_n)$. Moreover, we define a *belief update* as the learning step after a single data sample.

We define the class $\mathcal{L}$ of *plausible* learning rules as the set of those learning rules L for which the surprise $\mathcal{S}(X; q)$ of a given data sample X under the new belief $q(\theta)$ is *at most as surprising as* the surprise $\mathcal{S}(X; \pi_n)$ of that data sample under the current belief $\pi_n(\theta)$, i.e.,

$$\mathcal{L} = \{L : \mathcal{S}(X; q) \leq \mathcal{S}(X; \pi_n), q = L(X, \pi_n), \forall X \in \mathcal{X}\}. \quad (3)$$

In other words, if the same data sample X occurs a second time right after a belief update, it is perceived as less surprising than the first time.

After the belief update we have a new belief $\pi_{n+1} = q$ and we may ask how much the data X has impacted the internal model. To answer this question we compare the surprise of data sample X under the previous belief to its surprise under the new belief:

$$\Delta\mathcal{S}(X; L) = \mathcal{S}(X; \pi_n) - \mathcal{S}(X; \pi_{n+1}). \quad (4)$$

Given a learning rule L , a data sample X is considered more effective for a belief update than X' , if $\Delta\mathcal{S}(X; L) > \Delta\mathcal{S}(X'; L)$. Note that definitions in Eqs (3) and (4) do not depend on our specific choice of surprise measure $\mathcal{S}$. In the following we choose $\mathcal{S}$ to be the confidence-corrected surprise S_{cc} [Eq (2)].

The *impact function* $\Delta S_{cc}(X; L)$ [Eq (4)], for a given data sample X , is maximized

by the learning rule that maps the new belief $\pi_{n+1}(\theta)$ to the scaled likelihood $\hat{p}_X(\theta)$. However, as the distribution $\pi_{n+1} = \hat{p}_X$ does not depend on the current belief π_n , it discards all previously learned information. Therefore, it amounts to a valid though meaningless solution.

To avoid overfitting to the last data sample, we need to limit our search to updated beliefs q that are not too different from the current opinion π_n . This limited set can be expressed as the set of new beliefs q that fulfill the constraint $D_{KL}[q||\pi_n] \leq B$, for some non-negative upper bound $B \geq 0$. The parameter B determines how much we allow our belief to change after receiving a data sample X . Maximizing the impact function $\Delta S_{cc}(X; L)$ under such a constraint, is equivalent to the following constraint optimization problem:

$$\min_{q: D_{KL}[q||\pi_n] \leq B} S_{cc}(X; q). \quad (5)$$

Using the method of Lagrange multipliers we find the solution of the minimization problem in Eq (5) to be

$$q_\gamma(\theta) = \frac{p(X|\theta)^\gamma \pi_n(\theta)^{1-\gamma}}{Z(X; \gamma)}, \quad (6)$$

where $Z(X; \gamma) = \int_\theta p(X|\theta)^\gamma \pi_n(\theta)^{1-\gamma} d\theta$ is a normalizing factor and the parameter γ with $0 \leq \gamma \leq 1$ is uniquely determined by the bound B (see **Mathematical Methods** for the proof). Moreover, for $\gamma < 1$ the function $\gamma(B)$ increases monotonously. The unique relationship between γ and B means that once B has been chosen, γ is no longer a free parameter and vice versa. Learning is implemented by using the solution of Eq. (6) as the new opinion: $\pi_{n+1}(\theta) = q_\gamma(\theta)$.

Learning by updating according to Eq (6) will be called *surprise minimization learning* (SMiLe) and we will refer to Eq. (6) as the SMiLe-rule. The update step of the SMiLe-rule is reminiscent of Bayes' rule except for the parameter γ which modulates the relative contribution of the likelihood $p(X|\theta)$ and the current belief $\pi_n(\theta)$ to the new belief $\pi_{n+1}(\theta) = q_\gamma(\theta)$. Note that the SMiLe rule belongs to the class $\mathcal{L}$ of plausible learning rules, for all $0 \leq \gamma \leq 1$.

Choosing γ in the range $0 \leq \gamma \leq 1$ is equivalent to choosing a bound $B \geq 0$. To understand how the optimal solution in Eq (6), and thus γ , relates to the boundary B , we illustrate its limiting cases (see Fig 2B): (i) $B = 0$ yields $\gamma = 0$ and the new belief q is identical to the current belief π_n . In other words, the new information is discarded. (ii) For $B \geq B_{max} = D_{KL}[\hat{p}_X||\pi_n]$, the solution is always the scaled likelihood $\hat{p}_X$ (corresponding to $\gamma = 1$) because $q = \hat{p}_X$ fulfills the constraint $D_{KL}[q||\pi_n] \leq B$ for any $B \geq B_{max}$ and minimizes $S_{cc}(X; q)$ among all possible belief distributions q . This is equivalent to the unconstrained case, and implies that all previous information is discarded. (iii) For $0 < B < B_{max}$ the optimal solution is the new belief q_γ [Eq (6)] with $0 < \gamma < 1$ satisfying $D_{KL}[q_\gamma||\pi_n] = B$. Moreover, $B > B'$ implies $\gamma > \gamma'$ (see Fig 2B, and **Mathematical Methods** for the proof).

While the SMiLe rule [Eq (6)] depends on a parameter γ which is uniquely determined by the bound B , we have yet to indicate how to choose B . Highly surprising data should result in larger belief shifts. Therefore, the bound B should increase with the level of surprise S_{cc} .

The definition of an optimal (nonlinear) mapping from S_{cc} to B (and thus to γ) would require further assumptions about how surprise is related to the bound and we

will therefore not search for optimality. However, it is instructive to study a few examples. For instance, if the nonlinear mapping were a step function, the system would make a binary choice between either keeping the old belief or relying on the last new data point. On the other hand, an extremely slow increase would amount to largely ignoring the surprise and sticking to the same old belief. Therefore, the sharpness of the transition in the mapping function matters. The *exact* link between the bound and surprise is, however, not crucial as long as B is monotonic in surprise in a *reasonable* way.

In the following, we choose a simple monotonic function to link the bound to the surprise. For each data sample X , we take

$$B(X) = \frac{mS_{cc}(X; \pi_n)}{1 + mS_{cc}(X; \pi_n)} B_{max}(X), \quad (7)$$

where $B_{max}(X) = D_{KL}[\hat{p}_X || \pi_n]$. Here, the monotonic function depends on a subject-specific parameter m that describes an organism's propensity toward changing its belief. Note that in Eq (7), $m = 0$ indicates that the subject will never change her belief. As m increases so does a subject's willingness to change her belief. We expect that differences in m from one subject to the next will eventually allow us to capture heterogeneity in belief update strategies when fitting human behavior. Although m is inserted in Eq (7) to model subject dependence, one could also search for the best m algorithmically in a given simulated environment or other computational setting.

Note that biological correlates of surprise such as pupil dilation or the activity of a neuromodulator will normally saturate at some maximal value, consistent with our choice of a saturating function in Eq (7).

2.3 Surprise-modulated belief update

The surprise-modulated belief update combines the confidence-corrected surprise [Eq (2)] and the SMiLe rule [Eq (6)] to dynamically update our belief: after receiving a new data point X , we evaluate the surprise $S_{cc}(X; \pi_n)$ which sets the bound B [Eq (7)] for our update and allows us to solve for γ . We then update the belief, using the SMiLe rule [Eq (6)] with parameter γ (see Algorithm 1).

Algorithm 1 Pseudo algorithm for surprise-modulated belief update (SMiLe)

```

1:  $N \leftarrow$  number of data samples
2: Belief  $\leftarrow \pi_0$  (the current belief)
3:  $m \leftarrow 0.1$  (subject-dependent)
4: for  $n$ : 1 to  $N$  do
5:    $X_n \leftarrow$  a new data sample
6:   (i) evaluate the surprise  $S_{cc}(X_n; \text{Belief})$ , Eq (2)
7:   (ii-a) calculate  $B_{max}(X_n) = D_{KL}[\hat{p}_{X_n} || \text{Belief}]$ 
8:   (ii-b) choose the bound  $B(X_n) = \frac{mS_{cc}(X_n; \text{Belief})}{1+mS_{cc}(X_n; \text{Belief})} B_{max}(X_n)$ 
9:   (iii) find  $\gamma$  by solving  $D_{KL}[q_\gamma || \text{Belief}] = B(X_n)$ 
10:  (iv) update using SMiLe, Eq (6):  $\text{Belief}(\theta) \leftarrow \frac{p(X_n|\theta)^\gamma \text{Belief}(\theta)^{1-\gamma}}{\int_\theta p(X_n|\theta)^\gamma \text{Belief}(\theta)^{1-\gamma} d\theta}$ 
11: Return Belief;
```

Note 1: In each iteration, we first calculate the surprise, step (i), before the model is updated in step (iv).

Note 2: The steps (ii-a), (ii-b), and (iii) can be merged and approximated by $\gamma = f(S_{cc}(X_n; \text{Belief}))$ where $f(\cdot)$ is a subjective function that increases with surprise.

The parameter γ in the SMiLe rule controls the *impact* of a data sample X on belief update such that a bigger γ causes a larger impact. More precisely, the impact function $\Delta S_{cc}(X; L)$ in Eq (4), where L is replaced by the SMiLe rule [Eq (6)], is an increasing function of γ (see **Mathematical Methods** for the proof).

We note that in classical models of perception and attention (Itti and Baldi, 2009; Baldi and Itti, 2010), surprise has been defined as a measure of belief change such as $D_{KL}[\pi_{n+1} || \pi_n]$ or its mirror form $D_{KL}[\pi_n || \pi_{n+1}]$ where π_{n+1} is calculated by Bayes

formula, Eq (14). We emphasize that our model of surprise is “fast” in the sense that it can be evaluated *before* the beliefs are changed. Interestingly, the impact function is linked to the measure of *belief change* by the following equation (see **Mathematical Methods** for derivation),

$$\Delta S_{cc}(X; L) = \frac{1}{\gamma} D_{KL}[\pi_n || \pi_{n+1}] + \left(\frac{1}{\gamma} - 1 \right) D_{KL}[\pi_{n+1} || \pi_n] \geq 0, \quad (8)$$

where $\pi_{n+1} = q$ is the new belief calculated with the SMiLe rule [Eq (6)]. Therefore *a larger reduction in the surprise implies a bigger change in belief*.

2.4 Simulations

In the following we will look at two examples to illustrate the functionality of our proposed surprise-modulated belief update Algorithm 1. The first one is a simple, one-dimensional dynamic decision-making task which has been used in behavioral studies (Nassar et al., 2012; Behrens et al., 2007) of learning under uncertainty. While somewhat artificial as a task, it is appealing as it nicely isolates different forms of uncertainty. This allows us: (i) to demonstrate the basic quantities and properties of our algorithm, and (ii) to show how its flexibility allows it to capture a wide range of behaviors. The second example is a multi-dimensional maze-exploration task which we will use to demonstrate how our algorithm extends to and performs in more complex and realistic experimental environments.

Gaussian estimation

Task. In the one-dimensional dynamic decision-making task, subjects are asked to estimate the mean of a distribution based on consecutively and independently drawn samples. At each time step n , a data sample X_n is drawn from a normal distribution $\mathcal{N}(\mu_n, \sigma_x^2)$ and the subject is asked to provide her current estimate $\hat{\mu}_n$ of the mean of the distribution. Throughout the experiment, the mean may change without warning (Fig 3A). Changes occur with a *hazard rate* of $H = 0.066$. In Fig. 3C, 3D the hazard rate H is varied. The variance σ_x^2 remains fixed.

Model. We model the subject's belief *before* the n -th sample X_n is observed, as the normal distribution $\mathcal{N}(\hat{\mu}_{n-1}, \sigma_{n-1}^2)$ where $\hat{\mu}_{n-1}$ is the estimated mean and σ_{n-1}^2 determines how uncertain the subject is about her estimation. In order to keep the scenario as simple as possible, we assume $\sigma_0^2 = \sigma_x^2$.

Results for the estimation task. We find that the updated value of the mean $\hat{\mu}_n$ resulting from the surprise-modulated belief update (Algorithm 1) is a *weighted average* of the current estimate of the mean $\hat{\mu}_{n-1}$ and the new sample X_n (see **Mathematical Methods** for derivation),

$$\hat{\mu}_n = \gamma X_n + (1 - \gamma) \hat{\mu}_{n-1}. \quad (9)$$

The weight factor, that determines to what extent a new sample X_n affects the new mean $\hat{\mu}_n$, is determined by γ which increases with the surprise $S_{cc}(X_n)$ of that sample

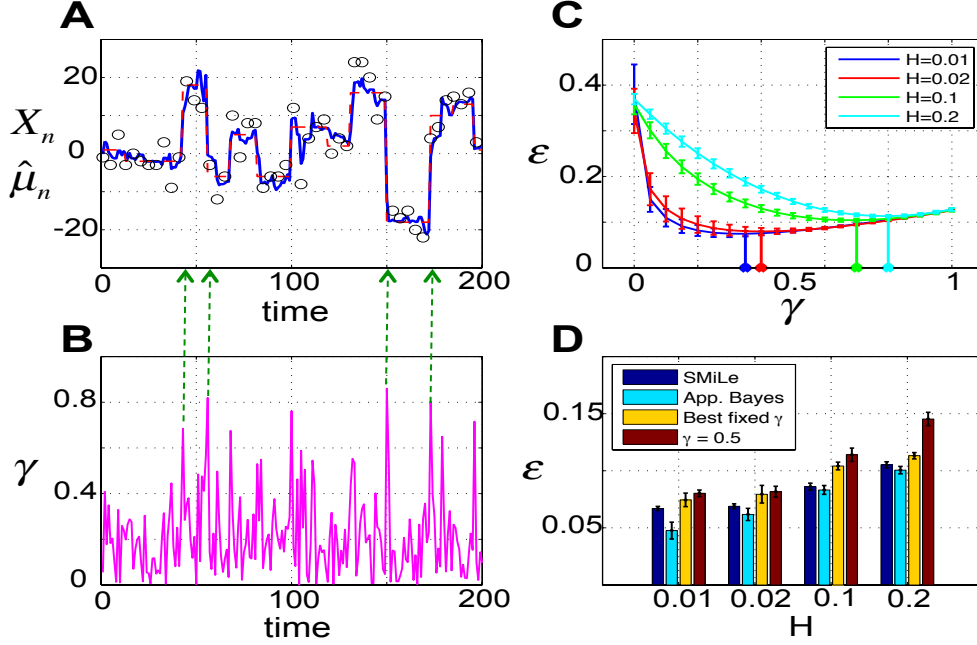


Figure 3: **Gaussian mean estimation task.** At each time step, a data sample X_n is independently drawn from a normal distribution whose underlying mean may change within the interval $[-20, 20]$ at unpredictable change points. On average, the underlying mean remains unchanged for 15 time steps corresponding to a hazard rate $H = 0.066$. The standard deviation of the distribution is fixed to 4 and is assumed to be known to the subject. **A.** Using a surprise-modulated belief update (Algorithm 1), the estimated mean (blue) quickly approaches the true mean (dashed red) given observed samples (black circles). A few selected change points are indicated by green arrows. **B.** The weight factor γ in Eq (10) (magenta) increases at the change points, resulting in higher influence of newly acquired data samples on the new value of the mean. **C.** The estimation error ϵ per time step versus the weight factor $0 \leq \gamma \leq 1$ in the delta-rule method with constant γ for four different hazard rates. The minimum estimation error (for best fixed γ) is achieved by a γ (points on the horizontal axis) that decreases with the hazard rate, indicating that a bigger γ is preferred in volatile environments. Error bars indicate standard deviation over all trials and 50 episodes. **D.** For all models, the average estimation error ϵ increases with the hazard rate. Moreover, surprise-modulated belief update (SMile, dark blue) outperforms the delta-rule with the *best* fixed γ (Best fixed γ , yellow). The best fixed γ for each hazard rate corresponds to the learning rate that has minimal estimation error (indicated by points on the horizontal axis in sub-figure C). Although the surprise-modulated SMile rule performs worse than the approximate Bayesian delta-rule (Nassar et al., 2010) (App. Bayes, light blue), the difference in the performance is not significant, except for the very small hazard rate of 0.01.

(Fig 3B), i.e.,

$$\gamma = \sqrt{\frac{mS_{cc}(X_n)}{1 + mS_{cc}(X_n)}}, \quad S_{cc}(X_n) = \frac{(X_n - \hat{\mu}_{n-1})^2}{2\sigma_x^2}. \quad (10)$$

Note that in this example, the confidence-corrected surprise measure is related to the *normalized unsigned prediction error* $|X_n - \hat{\mu}_{n-1}|/\sigma_x$. This outcome of our SMiLe-update is consistent with recent approaches in reward learning that suggest to use reward prediction errors scaled by standard deviation or variance (Preuschoff and Bossaerts, 2007).

The confidence-corrected surprise increases suddenly in response to the samples immediately after the change points, as they are unexpected under the current belief. As a consequence, surprising samples increase the influence of a new data sample on the estimated mean (Fig 3B).

We compared our surprise modulated belief update [Eqs (9) and (10)] with a delta-rule [Eq (9)] with *constant* weighting factor γ . To enable a fair comparison we consider two situations: (i) we arbitrarily fix γ at 0.5 or (ii) for a given hazard rate H , we first search for the optimal value of fixed γ so as to minimize the estimation error (Fig 3C). We find that our surprise-modulated belief update outperforms the delta-rule with *any* constant learning rate (Fig 3D). This clearly shows that an adaptive learning rate is preferable to a fixed learning rate.

We also compared our proposed algorithm with a delta-rule that approximates the optimal Bayesian solution (Nassar et al., 2010). In the optimal model, the subject knows a-priori that the mean will change at unknown points in time, i.e., the subject makes use of a hierarchical statistical model of the world. The algorithm proposed in (Nassar et al., 2010) provides an efficient approximate solution to estimate the parameters of the hierarchical model. In this algorithm, the subject increases the learning rate as a function of the probability of encountering a change point at a given time step. This probability

requires knowledge or online estimation of the hazard rate, which indicates how frequently change points occur. Although our surprise-modulated belief update does not outperform the approximate Bayesian delta-rule, the difference in performance is, in most cases, not significant (see Fig 3D). In other words, our method, which does not require any information about the hazard rate, can nearly reach the quality of the optimal Bayesian solution, with significantly reduced computational complexity. Note that the SMiLe rule is not designed for (almost) stationary environments where no fundamental change in context occurs. Therefore, in the case where the true mean is constant (low hazard rate), the SMiLe rule results in increased volatility in estimation. This is why the difference in performance of SMiLe and the optimized Bayesian delta-rule becomes more evident for smaller hazard rates than bigger ones (see Fig 3D).

Maze exploration

Task. The maze exploration task is similar to tasks used in behavioral neuroscience and robotics (Morris, 1984; Gillner and Mallot, 1998; Nelson et al., 2004; Rezende and Gerstner, 2014). There are two environments $\mathcal{A}$ and $\mathcal{B}$, each composed of the same uniquely labeled (e.g., by colors or cue cards) rooms. $\mathcal{A}$ and $\mathcal{B}$ only differ in the spatial arrangement (topology) of rooms (see Fig 4). Neighboring rooms are connected and accessible through doors. Initially, the agent is placed into either $\mathcal{A}$ or $\mathcal{B}$. At each time step, a door of the current room opens and the agent moves into the adjacent room, thus exploring the environment. After a random exploration time the environment is switched. The agent is not informed that a switch has occurred. Once the environment is changed, the agent must quickly adapt to the new environment. Note that this task

differs from a reinforcement learning task because the task at hand just consists of the *exploration* phase. In particular, there is no reward involved in learning.

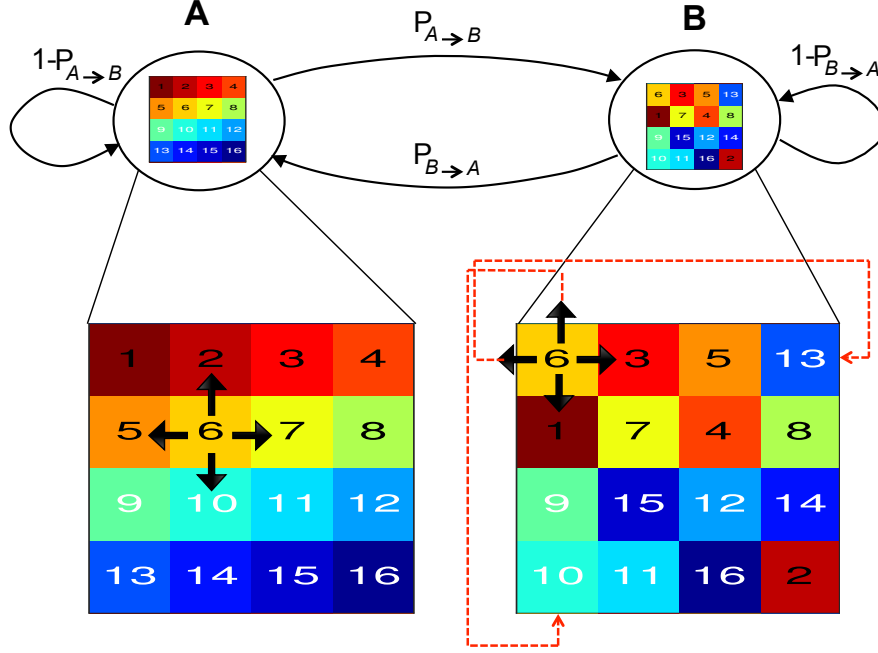


Figure 4: **Maze exploration task.** Environments $\mathcal{A}$ (left) and $\mathcal{B}$ (right) both consist of 16 rooms, but differ in topology. At each time step, one of the four available doors (up, down, right, left) in the current room (e.g. $s = 6$) is randomly opened (with probability 0.25). While the learning agent is in environment $\mathcal{A}$, the environment may change to $\mathcal{B}$ with probability $P_{\mathcal{A} \rightarrow \mathcal{B}} \leq 0.1$ in the next time step of duration Δt . Similarly, $P_{\mathcal{B} \rightarrow \mathcal{A}}$ indicates the environment switches from $\mathcal{B}$ to $\mathcal{A}$. Therefore, as the agent starts moving out of state $s = 6$, depending on the current environment and switch probabilities $P_{\mathcal{A} \rightarrow \mathcal{B}}$ and $P_{\mathcal{B} \rightarrow \mathcal{A}}$, it will end up in environment $\mathcal{A}$ (i.e., $s' \in \{2, 10, 7, 5\}$) or $\mathcal{B}$ (i.e., $s' \in \{10, 1, 3, 13\}$). The duration of a stay in environment $\mathcal{A}$ is therefore exponentially distributed with mean $\tau_{\mathcal{A}} = \Delta t / P_{\mathcal{A} \rightarrow \mathcal{B}}$, where the parameter $\tau_{\mathcal{A}}$ determines the *time scale of stability* in environment $\mathcal{A}$, i.e., for larger $\tau_{\mathcal{A}}$ an agent has more time for adapting to $\mathcal{A}$ after a change point. The *expected fraction of time spent in total* within environment $\mathcal{A}$ is equal to $\psi_{\mathcal{A}} = P_{\mathcal{B} \rightarrow \mathcal{A}} / (P_{\mathcal{B} \rightarrow \mathcal{A}} + P_{\mathcal{A} \rightarrow \mathcal{B}})$. Note that $\tau_{\mathcal{A}}$ and $\psi_{\mathcal{A}}$ are two free parameters that we can change to study how the agent performs in different circumstances (e.g., see Fig 8).

Model. We model the knowledge of the environment by a learning agent that updates a set of parameters $\alpha(s, \check{s}) \geq 1$ used for describing its belief about *state transitions* from $s \in \{1, 2, \dots, 16\}$ to $\check{s} \in \{1, 2, \dots, 16\} \setminus s$, where 16 is the number of rooms. More precisely, an agent's belief about how likely it is to visit $\check{s}$, given the current state s , is

modeled by a *Dirichlet distribution* parametrized by a *vector* of parameters $\vec{\alpha}(s) \in \mathbb{R}^{15}$. The components of the vector $\vec{\alpha}(s)$ are denoted as $\alpha(s, \check{s})$. We emphasize that the agent has a structurally incomplete model of the world since it does not know that there are two different environments.

In order to see how well our proposed surprise-modulated belief update algorithm performs in this task, we compare it with a naive Bayesian learner and an online expectation-maximization (EM) algorithm (Mongillo and Deneve, 2008). While in the former the agent assumes that there is only a single stable, but stochastic environment, the latter benefits from knowing the true hidden Markov model (HMM) of the task and approximates the optimal hierarchical Bayesian solution (see **Mathematical Methods**).

Results for the maze task. The surprise-modulated belief update (Algorithm 1), with the Dirichlet distribution inserted, yields Algorithm 2 for the maze exploration task (see **Mathematical Methods** for derivation). Immediately after a transition from the current state s to the next state s' , the new belief q_γ obtained by the SMiLe rule [Eq (6)] is a Dirichlet distribution $\vec{\alpha}_{new}(s)$ with components $\alpha_{new}(s, \check{s}) = \gamma(1 + [\check{s} = s']) + (1 - \gamma)\alpha_{old}(s, \check{s})$, that can be written as a *weighted average* of the parameters of the current belief π_n (i.e., $\alpha_{old}(s, \check{s})$) and those of the scaled likelihood $\hat{p}_X$ (i.e., $1 + [\check{s} = s']$). Here, $[\check{s} = s']$ indicates a number that is 1 if the condition in square brackets is satisfied, and 0 otherwise.

Similar to the Gaussian mean estimation task, surprise is initially high and slowly decreases as the agent learns the topology of the environment (Fig 5A). When the environment is switched, the sudden increase in the surprise signal (Fig 5A) causes the parameter γ to increase (Fig 5B). This is equivalent to discounting previously learned

Algorithm 2 Surprise-modulated belief update for the maze exploration task

- 1: $N \leftarrow$ number of data samples
- 2: $\alpha(s, \check{s}) = 1, \quad \forall s \in \{1, 2, \dots, 16\}, \check{s} \in \{1, 2, \dots, 16\} \setminus \{s\}$ (a uniform prior belief)
- 3: $m \leftarrow 0.1$ (subject-dependent)
- 4: Start in state s
- 5: **for** n : 1 to N **do**
 - # at this time step we only update the parameters that describe state transitions from the current state s to all possible next states $\check{s} \in \{1, 2, \dots, 16\} \setminus \{s\}$. The current belief, for the state s , is $\pi_{n-1} \sim \text{Dir}(\mathbf{a})$, $\mathbf{a} \in \mathbb{R}^{15}$, $\mathbf{a}(\check{s}) = \alpha(s, \check{s})$.
- 6: $X_n : s \rightarrow s'$ (a new transition is observed)
 - # the scaled likelihood is $\hat{p}_X \sim \text{Dir}(\mathbf{b})$, $\mathbf{b} \in \mathbb{R}^{15}$, $\mathbf{b}(\check{s}) = 1 + [\check{s} = s']$
- 7: (i) $S_{cc}(X_n; \pi_{n-1}) = D_{KL}[\text{Dir}(\mathbf{a}) || \text{Dir}(\mathbf{b})]$
- 8: (ii-a) $B_{max}(X_n) = D_{KL}[\text{Dir}(\mathbf{b}) || \text{Dir}(\mathbf{a})]$
- 9: (ii-b) $B(X_n) = \frac{m S_{cc}(X_n; \pi_{n-1})}{1 + m S_{cc}(X_n; \pi_{n-1})} B_{max}(X_n)$
- 10: (iii) find γ by solving $D_{KL}[\text{Dir}(\gamma \mathbf{b} + (1 - \gamma) \mathbf{a}) || \text{Dir}(\mathbf{a})] = B(X_n)$
- 11: (iv) $\alpha(s, \check{s}) \leftarrow (1 - \gamma) \alpha(s, \check{s}) + \gamma(1 + [\check{s} = s'])$
- 12: **Return** $\alpha(s, \check{s}), \forall s, \check{s}$;

Note 1: $D_{KL}[\text{Dir}(\mathbf{m}) || \text{Dir}(\mathbf{n})] = \ln \Gamma(\sum_{\check{s}} \mathbf{m}(\check{s})) - \ln \Gamma(\sum_{\check{s}} \mathbf{n}(\check{s})) - \sum_{\check{s}} \ln \Gamma(\mathbf{m}(\check{s})) + \sum_{\check{s}} \ln \Gamma(\mathbf{n}(\check{s})) + \sum_{\check{s}} (\mathbf{m}(\check{s}) - \mathbf{n}(\check{s})) (\Psi(\mathbf{m}(\check{s})) - \Psi(\sum_{\check{s}} \mathbf{m}(\check{s})))$.

Note 2: $\Gamma(\cdot)$ and $\Psi(\cdot)$ denote the *gamma* and *digamma* functions, respectively. $[\check{s} = s']$ denotes the Iverson bracket, a number that is 1 if the condition in square brackets is satisfied, and 0 otherwise.

information and results in a quick adaptation to the new environment. To quantify the adaptation to the new environment, we compare the state transition probabilities of the current model with the true transition probabilities of the two environments. We find that the estimation error of the state transition probabilities in the new environment is quickly reduced after the switch points (Fig 5C). Following a change point, the model uncertainty, measured as the entropy of the current belief about the state transition probabilities, increases indicating that the current model of the topology is inaccurate (Fig 5D). A few time steps later the uncertainty slowly decreases, indicating increased confidence in what is learned in the new environment.

If we look more closely at the model parameters, we find that the surprise-modulated belief update (Algorithm 2) enables the agent to adjust the estimated state transition probabilities. In Fig 6 we compare the estimated and the true transition probabilities 100 time steps after a switch. Given that the environment is characterized by 64 different transitions (in a space of $16 \times 15 = 240$ potential transitions), 100 time steps allow an agent to explore only a fraction of the potential transitions. Nevertheless, 100 time steps after a switch, the matrix of transition probabilities already resembles that of the present environment (Figs 6C and 6D).

The surprise-modulated belief update is a method of quick learning. How well does our SMiLe update rule perform relative to other existing models? We compared it with two well-known models. First, we compared to a naive Bayesian learner which tries to estimate the 240 state transition probabilities using Bayes rule. Note that, by construction, the naive Bayesian learner is not aware of the switches between the environments. Second, we compared to a hierarchical statistical model that reflects the architecture of

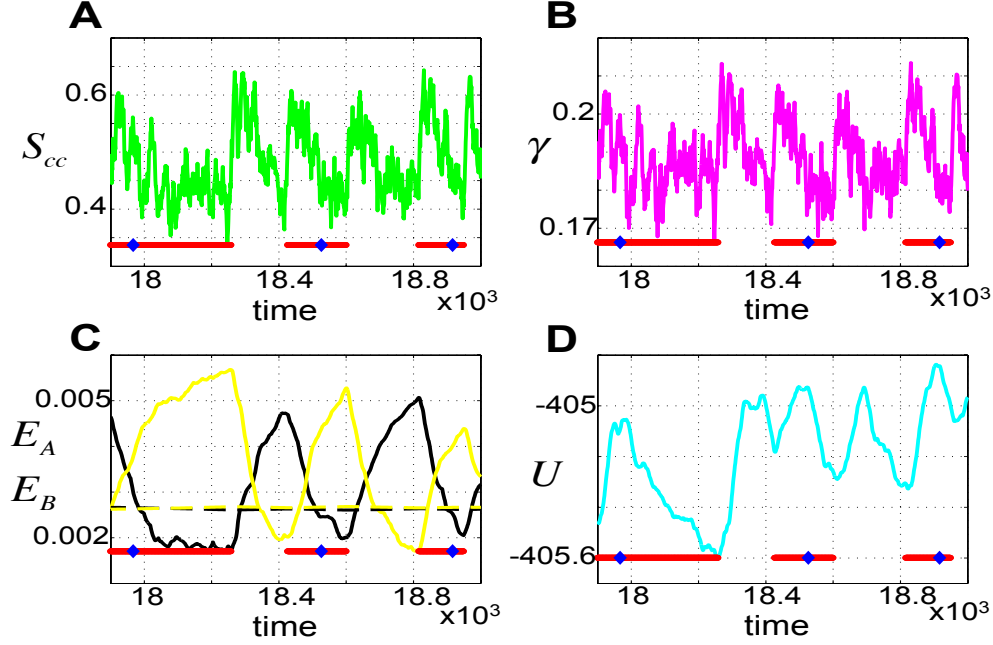


Figure 5: **Time-series of relevant signals in the surprise-modulated belief update (Algorithm 2) applied to the maze exploration task.** All the curves have been smoothed with an exponential moving average (EMA) with a decay constant 0.1. The plots are shown for 1100 time steps (horizontal axis) toward the end of a simulation with 20000 time steps. The agent visits environments $\mathcal{A}$ and $\mathcal{B}$ *equally often* and spends *on average* 200 time steps in each environment before a switch occurs. Red bars indicate the time that the agent explores environment $\mathcal{A}$. Blue diamonds indicate 100 time steps after a change point from $\mathcal{B}$ to $\mathcal{A}$. **A.** Confidence-corrected surprise S_{cc} [Eq (2)] (green) increases at switch points and decreases (with fluctuations) till the next change point. **B.** The parameter γ (magenta) increases with the surprise at the change points and causes the next data samples to be more effective on belief update than the samples before the change point. **C.** The estimation errors for the transition matrix $\hat{T}$, $E_{\mathcal{A}}[t] = \|\hat{T}[t] - T_{\mathcal{A}}\|_2 = 256^{-1} \sum_{s,s'} [\hat{T}[t](s, s') - T_{\mathcal{A}}(s, s')]^2$ (solid black) and $E_{\mathcal{B}}[t] = \|\hat{T}[t] - T_{\mathcal{B}}\|_2$ (solid yellow) while in environment $\mathcal{A}$ and $\mathcal{B}$, respectively, indicate a rapid adaptation to the new environment after the change points. The dashed black and yellow lines correspond to the estimation errors $E_{\mathcal{A}}$ and $E_{\mathcal{B}}$, respectively, when the naive Bayes rule (as a control experiment) is used for belief update. The naive Bayes rule converges to a stationary solution (no significant change in the estimation error after a switch of environment). **D.** The model uncertainty (light blue) increases for a few time steps following a change in the environment, an alert that the current model might be wrong. It then starts decreasing as the agent becomes more certain in the new environment.

the *true world* as in Fig 4. The task is to estimate the 2×240 state transitions in the two environments as well as transition probabilities between the environments $p_{\mathcal{A} \rightarrow \mathcal{B}}$

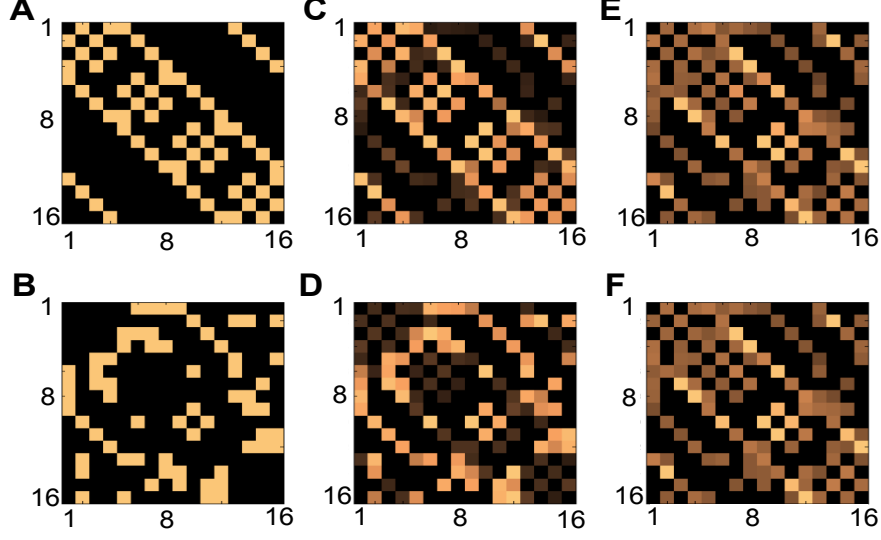


Figure 6: **True and estimated state transition probabilities in the maze exploration task.** The color intensity for each entry (s, s') represents the probability of transition from a current state s (row) to a next state s' (column). **A.** The *true* state transition probability matrix $T_{\mathcal{A}}(s, s')$ in environment $\mathcal{A}$. Each row $T_{\mathcal{A}}(s, :)$ has only four non-zero entries (small squares with the light brown color) whose position indicate the neighboring rooms of state s in environment $\mathcal{A}$. Note that $\sum_{\tilde{s}} T_{\mathcal{A}}(s, \tilde{s}) = 1, \forall s$. **B.** The true state transition probability matrix $T_{\mathcal{B}}(s, s')$ for the environment $\mathcal{B}$ which has a different topology compared to $\mathcal{A}$. **C.** The *estimated* state transition probability matrix $\hat{T}_{\mathcal{A}}$ when the surprise-modulated Algorithm 2 is used for belief update. $\hat{T}_{\mathcal{A}} = K^{-1} \sum_{k=1}^K \hat{T}[t_{\mathcal{B} \rightarrow \mathcal{A}}^k + 100]$ is calculated by averaging the estimated transition matrix $\hat{T}[t]$ at 100 time steps after each of K change points $t_{\mathcal{B} \rightarrow \mathcal{A}}^k$. Here, $t_{\mathcal{B} \rightarrow \mathcal{A}}^k$ denotes the k -th time that the environment is changed from $\mathcal{B}$ to $\mathcal{A}$ and *has remained unchanged* for at least the next 100 time steps (relevant time points are indicated by blue diamonds in Fig 5). The similarity between $\hat{T}_{\mathcal{A}}$ and $T_{\mathcal{A}}$ indicates that Algorithm 2 enables the agent to quickly adapt to environment $\mathcal{A}$ once a switch from $\mathcal{B}$ to $\mathcal{A}$ occurs. **D.** The estimated transition matrix $\hat{T}_{\mathcal{B}}$ (similarly defined as $\hat{T}_{\mathcal{A}}$ but for environment $\mathcal{B}$) when Algorithm 2 is used for belief update. Note its similarity to the true matrix $T_{\mathcal{B}}$. **E-F.** The estimated state transition probability matrices $\hat{T}_{\mathcal{A}}$ (top) and $\hat{T}_{\mathcal{B}}$ (bottom) when the naive Bayesian method (as a control experiment) is used for belief update. A Bayesian agent does not adapt well to the new environment after a switch occurs, because it learns a weighted average of true transition matrices $T_{\mathcal{A}}$ and $T_{\mathcal{B}}$, where the weight is proportional to the fraction of time spent in each environment. Since both environments are visited equally in this experiment, the estimated quantities approach $(T_{\mathcal{A}} + T_{\mathcal{B}})/2$.

and $p_{\mathcal{B} \rightarrow \mathcal{A}}$ by an online EM algorithm.

For the naive Bayesian learner, we find that its behavior indicates a steady increase in certainty, regardless of how surprising the samples are. In other words, it is incapable

of changing its belief after it has sufficiently explored the environments (Fig 5C). The state transition probabilities are estimated by averaging over the true parameters of both environments, where the weight of averaging is determined by the fraction of time spent in the corresponding environment (Figs 6E and 6F).

The comparison of our surprise-modulated belief update with the online EM algorithm (Mongillo and Deneve, 2008) for the hierarchical Bayesian model associated with the changing environments provides several insights (see Fig 7). First, already after less than 1000 time steps, the estimation error for environment $\mathcal{A}$ during short episodes in environment $\mathcal{A}$ drops below $E_{\mathcal{A}} = 0.002$. The online EM algorithm takes 10 times longer to achieve the same level of accuracy. While the solution of the SMiLe rule in the long run is not as good as that of the online EM algorithm, our algorithm benefits from a reduced computational complexity and simpler implementation.

To further investigate the ability of an agent to adapt to the new environment after a switch, we analyzed performance as a function of two free parameters that control the setting of the task: (i) the fraction of time spent in environment $\mathcal{A}$, and (ii) the average time spent in environment $\mathcal{A}$ before a switch to $\mathcal{B}$ occurs. To do so, we calculate the average estimation error in state transition probabilities 64 time steps after a switch occurs. We consider only those switches after which the agent stays in that environment for *at least* 64 time steps. Note that 64 is the minimum number of time steps that is required to ensure that all possible transitions from 16 room to their 4 neighbors *could* occur. A smaller estimation error for a given pair of free parameters indicates a faster adaptation to the new environment for that setting.

We found that the surprise-modulated belief enables an agent to quickly readjust its

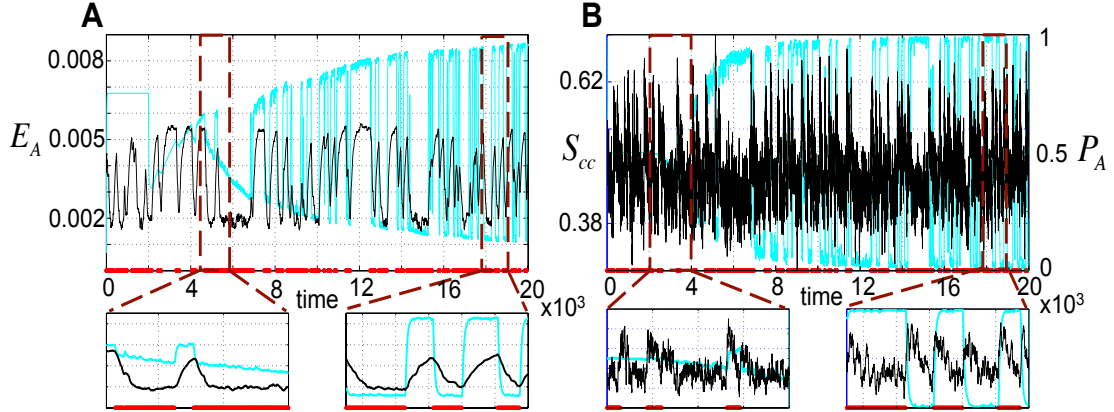


Figure 7: Comparison of surprise-modulated belief update with an online EM algorithm for the hierarchical Bayesian model. **A.** The estimation error E_A (vertical axis) of state transition probabilities within environment $\mathcal{A}$ versus time (horizontal axis), for surprise-modulated belief update (black) and online EM learner (blue). Bottom plots depict zooms during the early (left) and late (right) phases of a simulation of 20000 time steps. In the early phase of learning (bottom left), the surprise-modulated belief update enables the agent to quickly learn model parameters after a switch to environment $\mathcal{A}$ (indicated by red bars). In the late phase of learning (right), however, the online EM algorithm adapts to the new environment faster and more accurately than the surprise-modulated belief update. **B.** The inferred probability P_A of being in environment $\mathcal{A}$ (blue, right vertical axis) used in the online EM algorithm, and the confidence-corrected surprise S_{cc} (black, left vertical axis) used in the surprise-modulated belief update.

estimation of model parameters, even if the fraction of time spent in an environment is relatively short. In that sense, it behaves similarly to the approximate hierarchical Bayesian approach (online EM algorithm). This is not, however, the case for a naive Bayesian learner whose estimation error in each environment depends on the fraction of time spent in the corresponding environment (see Fig 8).

The naive Bayesian learner suffers from low accuracy in estimation and cannot adapt to environmental changes. A full hierarchical Bayesian model, however, requires prior information about the task and is computationally demanding. For example, the computational load of the hierarchical Bayesian model increases with the number N of environments between which switching occurs. The surprise-modulated belief update,

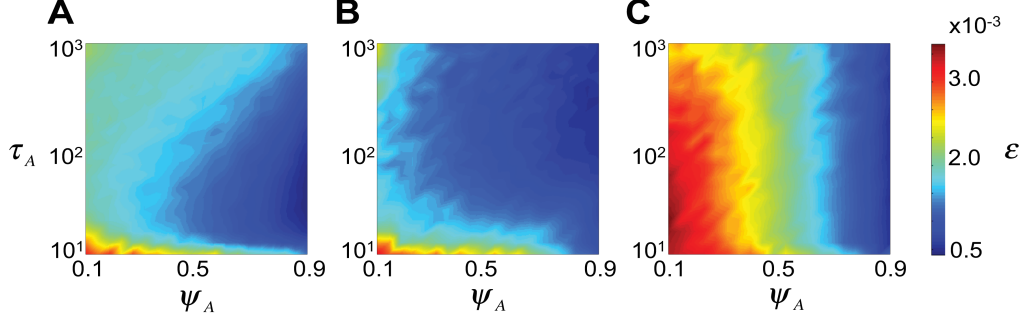


Figure 8: **The estimation error ϵ in the maze exploration task**, as a function of (1) the average time spent in environment $\mathcal{A}$ before a switch to environment $\mathcal{B}$ ($\tau_{\mathcal{A}} = \Delta t / p_{\mathcal{A} \rightarrow \mathcal{B}}$, vertical axis) and (2) the fraction of time spent in environment $\mathcal{A}$ ($\psi_{\mathcal{A}} = P_{\mathcal{B} \rightarrow \mathcal{A}} / (P_{\mathcal{B} \rightarrow \mathcal{A}} + P_{\mathcal{A} \rightarrow \mathcal{B}})$, horizontal axis). **A.** The average estimation error (of state transition probabilities), 64 time steps after a switch from $\mathcal{B}$ to $\mathcal{A}$, when surprise-modulated belief update (Algorithm 2) is used for learning. The spread of blue color (lower estimation error) illustrates that the surprise-modulated belief update enables an agent to quickly adapt to the environment visited after a switch. For each pair $(\tau_{\mathcal{A}}, \psi_{\mathcal{A}})$, the simulation is repeated for 20 episodes, each consisting of 20000 time steps. In each episode a different rearrangement of rooms for building environment $\mathcal{B}$ is used to make sure that the result is not biased by a specific choice of this environment. **B.** The average estimation error when the online EM algorithm is used for learning the hierarchical statistical model. **C.** The average estimation error when the naive Bayesian learner is used for belief update. The estimation error for this model is mainly determined by the fraction of time spent in environment $\mathcal{A}$ (i.e., $\psi_{\mathcal{A}}$). The estimation error decreases with the time spent in environment $\mathcal{A}$, regardless of the time scale of stability determined by $\tau_{\mathcal{A}}$.

however, balances accuracy and computational complexity: computational complexity remains, by construction, independent of the number of switched environments. In other words, since we accept from the beginning that our model of the world will be approximate and structurally incomplete, the model can perform reasonably well after having seen a small number of data samples.

3 Discussion

Surprise is a widely used concept describing a range of phenomena from unexpected events to behavioral responses. Existing approaches to quantifying surprise are ei-

ther data-centric (Shannon, 1948; Tribus, 1961; Palm, 2012) or model-centric (Baldi and Itti, 2010; Itti and Baldi, 2005), and may be objective in a known model of the world (Shannon, 1948; Tribus, 1961) or subject-dependent and rely on a learned model of the world (Palm, 2012; Baldi and Itti, 2010; Itti and Baldi, 2005), but are always linked to uncertainty. We emphasize that in order for surprise to be behaviorally meaningful, it has to be defined for a *single* data sample such that an organism can respond to a single event. In contrast, information theoretic quantities, such as data entropy and mutual information, are usually defined as average quantities.

Based on our definition of surprise, we proposed a new framework for surprise-driven learning. There are two components to this framework: (i) a confidence-adjusted surprise measure to capture environmental statistics as well as the commitment of the subject to his belief, and (ii) the surprise-minimization learning rule, or SMiLe-rule, which dynamically adjusts the balance between new and old information without prior assumptions about the temporal statistics in the environment. Within this framework, surprise is a single subject-specific variable that determines a subject’s propensity to modify existing beliefs. This algorithm is suitable for learning in complex environments that are either stable or undergo gradual or sudden changes using a world model that may not match the complexity of the world. Sudden changes are signalled by high surprise and result in placing more weight on new information. The significance of the proposed method is that it neither requires knowledge of the full Bayesian model of the environment nor any prior assumption about the temporal statistics in the environment. Moreover, it provides a simple framework that could potentially be implemented in a neurally plausible way using probabilistic population codes (Ma et al., 2006; Beck et al.,

2008).

3.1 Relation to Bayesian surprise

One of the existing approaches for measuring surprise is *Bayesian surprise* (Baldi and Itti, 2010; Itti and Baldi, 2009) which is generally defined as a distance or dissimilarity measure between prior and posterior beliefs where the updating is performed according to Bayes' rule. With this measure, a data sample X is more surprising than a data sample X' if it causes a larger change in the subject's belief. One of the shortcomings of the Bayesian surprise is that it can be evaluated only *after* the learning step (i.e., once we have changed our belief from prior to posterior). However, behavioral and neural responses indicate that surprise is nearly concurrent with the unexpected event, since physiological signals such as the P300 component of the EEG occur within less than 400 ms. Our working hypothesis is that the brain evaluates surprise even before recognition, inference or learning occurs. We thus need to evaluate surprise *before* we update our belief so that surprise may control learning rather than emerge from it. This property is fulfilled in the confidence-corrected surprise measure introduced in this paper.

Information content and Bayesian surprise are two distinct yet complementary approaches to measuring surprise. Information content is about *data* as it captures the inherent likelihood of a piece of data given a model. While its evaluation is rapid given a world model, we normally (outside an engineered lab environment) do not have access to the true underlying parameter θ^* . Bayesian surprise is about a *model*. Since it measures the change in belief (i.e., in the model parameters), it is subject-dependent

and does not require knowing θ^* . However, it is computed only after learning, whereas neural data suggests response to surprise within 400 ms. Our definition of confidence-corrected surprise combines these two measures to use their complementary benefits and overcome their shortcomings (see **Mathematical Methods**).

3.2 New versus old information

The proposed algorithm’s performance is primarily driven by two features: (i) the algorithm adaptively increases the influence of new data on the belief update as a function of how surprising the data was; and (ii) the algorithm increases model uncertainty in the face of surprising data thus increasing the influence of new data on current *and* future belief updates. The importance of the first point has been recognized and incorporated previously (Nassar et al., 2012; Pearce and Hall, 1980). The second point is particularly worth noting: a surprising sample not only signals a potential change, it also signals that our current model may be wrong, so that we should be *less* certain about its accuracy. This increase in model uncertainty implies discounting the influence of past information in current and future belief updates.

Both humans and animals adaptively adjust the relative contribution of old and newly acquired data on learning (Behrens et al., 2007; Nassar et al., 2012; Krugel et al., 2009; Pearce and Hall, 1980) and rapidly adapt to changing environments (Pearce and Hall, 1980; Wilson et al., 1992; Holland, 1997). Standard Bayesian and reinforcement learning models in humans (Tenenbaum and Griffiths, 2001) or animals (Dayan et al., 2000; Kakade and Dayan, 2002) assume a stable environment and are slow to adapt to sudden changes in the environment. To quickly learn in dynamic environments, models

need to include a way to detect and respond to sudden changes.

A full (hierarchical) Bayesian approach works only if the subject is aware of the correct model of the task, (e.g., the time scale of change in the environment or the number of environments between which switches occur). Calculating the probability of a change point in a Gaussian estimation task (Nassar et al., 2010), estimating the volatility of the environment in a reversal learning task (Behrens et al., 2007), and dynamically forgetting the past information with a controlled time constant (Rüter et al., 2012) are all examples of addressing learning in changing environments without explicit knowledge of the full Bayesian model.

In changing environments, hierarchical Bayesian models outperform the standard delta-rule with a fixed learning rate. However, hierarchical models either make assumptions about how fast the world is changing on average or about the underlying data generating process, in order to accurately detect a change in the environment. While our proposed surprise-based algorithm may not be theoretically optimal, it approximates the optimal (hierarchical) Bayesian solution without making any such assumption.

3.3 Model uncertainty

The ability of our proposed method to increase model uncertainty solves a common problem in standard Bayesian learning, namely, a model uncertainty or a learning rate approaching zero when the number of data samples increases. This is particularly prominent in Bayes' rule which is derived under the assumption of *stationarity* and which thus reduces uncertainty in each step no matter how surprising a sample is. The SMiLe rule [Eq (6)] guarantees that a small model uncertainty remains even after a long

stationary period. This remaining uncertainty ensures that an organism can still detect a change even after having spent an extensive amount of time in a given environment (see Fig 5C). One might argue, that reducing the learning rate to zero after extensive training is desirable under certain conditions as it corresponds to the well-documented phenomenon of overtraining whereby an organism no longer responds to changes in goal value. We would argue that this insensitivity is a consequence of behavioral control being handed over to the habitual system and thus to a different neural substrate (Balleine and O’Doherty, 2010; Balleine and Dickinson, 1998; Redgrave et al., 2010).

3.4 Potential applications

Surprise minimization is a more general approach to learning than learning by reward prediction error. Recent approaches in reward learning suggest using a scaled reward prediction error (Preuschoff and Bossaerts, 2007). A recurring problem in reward-based learning is the observation that subjects use different learning rates on a trial-by-trial basis even in stable environments. Researchers typically assume an average learning rate for fitting data. Note that in our approach, the learning rate varies naturally as a function of the last data point (as it should) while keeping the subject-specific parameter m constant.

Note that both confidence-corrected surprise and the SMiLe rule have wide-reaching implications outside the framework presented here. On the one hand, our surprise measure can not only *modulate* learning, but can be used as a *trigger* signal for an algorithm that needs to choose between several uncertain states or actions as is the case in change point detection (Nassar et al., 2010; Wilson et al., 2013; Rüter et al., 2012), memory and

cluster formation (Gershman and Niv, 2015), exploration/exploitation tradeoff (Cohen et al., 2007; Jepma and Nieuwenhuis, 2011), novelty detection (Knight et al., 1996; Bishop, 1994), and network reset (Bouret and Sara, 2005). On the other hand, the SMiLe-rule could add flexibility in learning and replace existing learning algorithms in scenarios where dynamically balancing old and new information is desired. This includes fitting γ to behavioral data without computing surprise or controlling γ by something other than surprise. Replacing the full Bayesian model of a learning task in changing environment with the SMiLe rule simplifies calculations, which makes the SMiLe-framework suitable for fitting relevant parameters to behavioral data.

3.5 Experimental predictions

There is ample evidence for a neural substrate of surprise. Existing measures of expectation violations such as absolute and variance-scaled reward prediction errors (Schultz, 2016, 2015), unexpected uncertainty (Yu and Dayan, 2005) and risk prediction errors (Preuschoff et al., 2008) have been linked to different neuromodulatory systems. Among those, the *noradrenergic system* has emerged as a prime candidate for signaling unexpected uncertainty and surprise: noradrenergic neurons respond to unexpected changes such as the presence of a novel stimulus, unexpected pairing of stimulus with a reinforcement during conditioning, and reversal of the contingencies (Sara and Segal, 1991; Sara et al., 1994; Vankov et al., 1995; Aston-Jones et al., 1997). The P300 component of the event-related potential (Pineda et al., 1997; Missonnier et al., 1999) which is associated with novelty (Donchin et al., 1978) and surprise (Jaskowski et al., 1994) is modulated by Noradrenaline. It also modulates pupil size (Costa and Rudebeck, 2016)

as a physiological response to surprise. The dynamics of the noradrenergic system are fast enough to quickly respond to unexpected events (Rajkowski et al., 1994; Clayton et al., 2004; Bouret and Sara, 2004), a functional requirement for surprise to control learning; see (Sara, 2009; Bouret and Sara, 2005; Aston-Jones and Cohen, 2005) for a review. We predict that in experiments with changing environments, the activity of Noradrenaline should exhibit a high correlation with the confidence-corrected surprise signal.

Note that Acetylcholine (ACh), on the other hand, is a candidate neuromodulator for encoding expected uncertainty (Yu and Dayan, 2005) and thus is linked to the model uncertainty (although it might also be linked to other forms of uncertainty such as environmental stochasticity).

A variety of experimental findings are consistent with and can be explained by our definition of confidence-corrected surprise and the SMiLe rule. It has been shown both theoretically (Yu and Dayan, 2005) and empirically (Gu, 2002) that Noradrenaline and ACh interact such that ACh sets a threshold for Noradrenaline to indicate fundamental changes in the environment (Yu and Dayan, 2005). This is consistent with our hypothesis that if an agent is uncertain about its current model of the world, unexpected events are perceived as less surprising than when the agent is almost certain about the model (which is the key idea behind the confidence-corrected surprise). The impairment of adaptation to contextual changes due to Noradrenaline depletion (Sara, 1998) can be explained by the incapability of subjects to respond to surprising events signaled by Noradrenaline. The absence/suppression of ACh (low model uncertainty) implies little or no variability of the environment so that even small prediction error signals are per-

ceived as surprising (Jones and Higgins, 1995), consistent with the excessive activation of noradrenergic system in such situations.

Moreover, there is empirical evidence that Noradrenaline and ACh both affect synaptic plasticity in the cortex and the hippocampus (Gu, 2002; Bear and Singer, 1986), suppress cortical processing (Kimura et al., 1999; Kobayashi et al., 2000), and facilitate information processing from thalamus to the cerebral cortex (Gil et al., 1997; Hasselmo et al., 1996; Hsieh et al., 2000). This is consistent with our theory that surprise balances the influence of newly acquired data (thalamocortical pathway) and old information (corticocortical pathway) during belief update.

In summary, we proposed a measure of surprise and a surprise-modulated belief update algorithm that can be used for modeling how humans and animals learn in changing environments. Our results suggest that the proposed method can approximate an optimal hierarchical Bayesian learner, with significantly reduced computational complexity, but at the cost of an imperfect model of the world. Our model provides a framework for future studies on learning with surprise. These include computational studies, such as how the proposed model can be neurally implemented, neurobiological studies, such as unraveling the interaction between different neural circuits that are functionally involved in learning under surprise, and behavioral studies with human subjects.

4 Mathematical Methods

In this section we provide mathematical explanations or proofs for statements made in the ‘Results’ Section.

4.1 The scaled likelihood is the posterior belief under a flat prior

Assume that all model parameters θ stay in some bounded convex interval of volume A . The volume A can be arbitrarily large. Given a data sample X , the posterior belief $p^{flat}(\theta|X)$ about the model parameters θ (derived by the Bayes rule) under the assumption of a flat prior $\hat{\pi}_0(\theta) = 1/A$ is:

$$p^{flat}(\theta|X) = \frac{p(X|\theta)\hat{\pi}_0(\theta)}{\int_{\theta} p(X|\theta)\hat{\pi}_0(\theta) d\theta} = \frac{p(X|\theta)}{\int_{\theta} p(X|\theta) d\theta} = \frac{p(X|\theta)}{||p_X||} = \hat{p}_X(\theta), \quad (11)$$

where $||p_X|| = \int_{\theta} p(X|\theta)d\theta$ is a data-dependent constant. Therefore, the scaled likelihood $\hat{p}_X(\theta)$ is the posterior under a flat prior. Note that the result is independent of the volume of A so that we take the limit of $A \rightarrow \infty$.

4.2 Confidence-corrected surprise increases with Shannon surprise and Bayesian surprise

The confidence-corrected surprise in Eq. (2) can be expressed as:

$$S_{cc}(X; \pi_n) = - \int_{\theta} \pi_n(\theta) \ln p(X|\theta) + \ln ||p_X|| - H(\pi_n), \quad (12)$$

where $||p_X||$ is a data-dependent constant defined above, and $H(\pi_n) = - \int_{\theta} \pi_n(\theta) \ln \pi_n(\theta) d\theta$ denotes the entropy of the current belief. Let us call the first term $- \int_{\theta} \pi_n(\theta) \ln p(X|\theta)$ in Eq. (12) the *raw* surprise $S_{raw}(X; \pi_n)$ of a data sample X :

$$S_{raw}(X; \pi_n) = - \int_{\theta} \pi_n(\theta) \ln p(X|\theta) d\theta, \quad (13)$$

We want to show that the raw surprise $S_{raw}(X; \pi_n)$ in Eq. (13) increases with the Shannon surprise and the Bayesian surprise.

The **Bayesian** surprise (Itti and Baldi, 2009; Baldi and Itti, 2010) measures a change in belief induced by the observation of a new data sample $X = X_{n+1}$. It is defined as a KL divergence $D_{KL}[\pi_n || \pi_{n+1}]$ between the prior belief π_n and the posterior belief $\pi_{n+1}(\theta)$ that is calculated from the naive Bayes rule

$$\pi_{n+1}(\theta) = \frac{p(X|\theta)\pi_n(\theta)}{\int_{\theta} p(X|\theta)\pi_n(\theta) d\theta}. \quad (14)$$

The **Shannon** surprise (Shannon, 1948; Tribus, 1961; Palm, 2012) is the the information content of data point $X = X_{n+1}$ calculated with the current world model of the subject. If the true model of the world (i.e., θ^*) is known, the *information content* $-\ln p(X|\theta^*)$ for a specific outcome $X \in \mathcal{X}$ is the negative log-likelihood of this data point (Tribus, 1961; Shannon, 1948; Palm, 2012). In other words, the occurrence of a rare (i.e., unlikely to occur) data sample X is surprising. As the information content relates to the *true* probabilities $p(X|\theta^*)$ of samples in the *real* world, it is an *objective*, model-independent, measure of unexpectedness. However, we work under the assumption that the true set of parameters θ^* , and thus the true probability $p(X|\theta^*)$, is not known to the observer, such that it is difficult to evaluate the exact information content of a data sample X . The Shannon surprise is defined as the negative-log-marginal-likelihood $-\ln Z(X)$, where $Z(X) = \int_{\theta} p(X|\theta)\pi_n(\theta)d\theta$ is the probability of data sample X after marginalizing out all the possible model parameters.

In the following, small numbers above an equality sign refer to equations in the

text. The raw surprise $S_{raw}(X; \pi_n)$ in Eq (13) is a linear combination of both Bayesian surprise and Shannon surprise, because

$$\begin{aligned}
S_{raw}(X; \pi_n) &\stackrel{(13)}{=} - \int_{\theta} \pi_n(\theta) \ln p(X|\theta) d\theta \\
&\stackrel{(14)}{=} - \int_{\theta} \pi_n(\theta) \ln \left[\frac{\pi_{n+1}(\theta) \left(\int_{\theta} p(X|\theta) \pi_n(\theta) d\theta \right)}{\pi_n(\theta)} \right] d\theta \\
&= D_{KL}[\pi_n || \pi_{n+1}] - \ln \left[\int_{\theta} p(X|\theta) \pi_n(\theta) d\theta \right], \tag{15}
\end{aligned}$$

where the first term $D_{KL}[\pi_n || \pi_{n+1}]$ stands for the Bayesian surprise, and the second term $-\ln \left[\int_{\theta} p(X|\theta) \pi_n(\theta) d\theta \right]$ stands for the Shannon surprise. Therefore, the raw surprise $S_{raw}(X; \pi_n)$ in Eq (15) combines both the data-driven approach of Shannon (information content) and the model-change driven approach for Itti and Baldi (Bayesian surprise).

4.3 Less likely data lead to a larger surprise S_{cc}

Our proposed confidence-corrected surprise measure $S_{cc}(X; \pi_n)$ in Eq (2) inherits the property of the raw surprise $S_{raw}(X; \pi_n)$ in Eq (15) which in turn is a linear combination of Bayesian surprise and Shannon surprise. Therefore it inherits the properties of the Shannon surprise. In particular, for a fixed opinion π_n , a less likely data point leads to a larger surprise.

4.4 Committed subjects are more surprised than uncommitted ones

The value of the confidence-corrected surprise Eq. (12) depends on a subject's commitment to her belief. The commitment to the current model of the world is repre-

sented by the negative *entropy* $-H(\pi_n) = \int_{\theta} \pi_n(\theta) \ln \pi_n(\theta) d\theta$. Eq. (12) shows that the confidence-corrected surprise decreases with entropy indicating an increases with commitment. Therefore, given the same likelihood of the data under two different world models, the subject with a stronger commitment (smaller entropy) is more surprised than the subject with a weaker commitment (higher entropy); cf. the example of Fig. 2A.

Intuitively, if we are uncertain about what to expect (because we have not yet learned the structure of the world), receiving a data sample that occurs with low probability under the present model is less surprising than a low-probability sample in a situation when we are almost certain about the world (see Fig 2A).

4.5 Calculation of surprise for the example of CEO election

If candidate 1 is selected, the surprise of colleague B, $S_{cc}(X = 1; \pi^B)$ is bigger by $0.75 \ln \frac{(1-\epsilon)}{\epsilon/3} > 0$ than the surprise of colleague A, $S_{cc}(X = 1; \pi^A)$. Both colleagues are equally committed to their believes, but the outcome “candidate 1” is less likely for colleague B than A. The evaluation of surprise yields

$$\begin{aligned}
S_{cc}(X = 1; \pi^B) - S_{cc}(X = 1; \pi^A) &= \sum_k \pi^B(\theta_k) \ln \frac{\pi^B(\theta_k)}{\hat{p}_{X=1}(\theta_k)} - \sum_k \pi^A(\theta_k) \ln \frac{\pi^A(\theta_k)}{\hat{p}_{X=1}(\theta_k)} \\
&= -H(\pi^B) + H(\pi^A) + \sum_k (\pi^A(\theta_k) - \pi^B(\theta_k)) \ln \hat{p}_{X=1}(\theta_k) \\
&= \sum_k (\pi^A(\theta_k) - \pi^B(\theta_k)) \ln \hat{p}_{X=1}(\theta_k) \\
&= 0.75 \ln \frac{(1-\epsilon)}{\epsilon/3} > 0.
\end{aligned} \tag{16}$$

Therefore B is more surprised than A.

For colleague A, surprise of the outcome “candidate 2”, $S_{cc}(X = 2; \pi^A)$, is bigger by $0.5 \ln \frac{1-\epsilon}{\epsilon/3} > 0$ than the surprise of outcome “candidate 1” (his favorite), $S_{cc}(X = 1; \pi^A)$ because the second candidate is less likely in his opinion; cf. point (ii) at the beginning of the subsection “Definition of Surprise”:

$$\begin{aligned}
S_{cc}(X = 2; \pi^A) - S_{cc}(X = 1; \pi^A) &= \sum_k \pi^A(\theta_k) \left(\ln \frac{\pi^A(\theta_k)}{\hat{p}_{X=2}(\theta_k)} - \ln \frac{\pi^A(\theta_k)}{\hat{p}_{X=1}(\theta_k)} \right) \\
&= \sum_k \pi^A(\theta_k) \ln \frac{\hat{p}_{X=1}(\theta_k)}{\hat{p}_{X=2}(\theta_k)} \\
&= 0.75 \ln \frac{1-\epsilon}{\epsilon/3} + 0.25 \ln \frac{\epsilon/3}{1-\epsilon} \\
&= 0.5 \ln \frac{1-\epsilon}{\epsilon/3} > 0.
\end{aligned} \tag{17}$$

More importantly, however, if the second candidate wins, the surprise of colleague A, $S_{cc}(X = 2; \pi^A)$, is bigger than that of colleague C, $S_{cc}(X = 2; \pi^C)$, even though both have assigned the same low likelihood to the second candidate. The evaluation of surprise yields

$$\begin{aligned}
S_{cc}(X = 2; \pi^A) - S_{cc}(X = 2; \pi^C) &= \sum_k \pi^A(\theta_k) \ln \frac{\pi^A(\theta_k)}{\hat{p}_{X=2}(\theta_k)} - \sum_k \pi^C(\theta_k) \ln \frac{\pi^C(\theta_k)}{\hat{p}_{X=2}(\theta_k)} \\
&= \sum_k (\pi^C(\theta_k) - \pi^A(\theta_k)) \ln \hat{p}_{X=2}(\theta_k) \\
&\quad - H(\pi^A) + H(\pi^C).
\end{aligned} \tag{18}$$

The terms with the $\ln$ in Eq. (18) add up to zero (i.e., $-0.5 \ln \epsilon/3 + 0 \ln(1-\epsilon) + 0.25 \ln \epsilon/3 + 0.25 \ln \epsilon/3 = 0$), so that we just need to evaluate the entropies to find

$$\begin{aligned}
S_{cc}(X = 2; \pi^A) - S_{cc}(X = 2; \pi^C) &= -H(\pi^A) + H(\pi^C) \\
&= 0.75 \ln 0.75 + 0.25 \ln 0.25 + \ln 4 \\
&= 0.75 \ln 3 > 0
\end{aligned} \tag{19}$$

In other words, since colleague A is more committed to his opinion than colleague C, i.e. $H(\pi^C) > H(\pi^A)$, he will be more surprised; cf. point (iii):

4.6 Derivation of the SMiLe rule

We note that the KL divergence $D_{KL}[a||b]$ is convex with respect to the first argument a . Therefore, both the objective function $S_{cc}(X; q)$ in Eq (2) and the constraint $D_{KL}[q||\pi_n] \leq B$ in the optimization problem in Eq (5) are convex with respect to q , which ensures the existence of the optimal solution.

We solve the constraint optimization by introducing a non-negative Lagrange multiplier $\lambda^{-1} \geq 0$ and a Lagrangian

$$\begin{aligned}
\mathbb{L}(q, \lambda) &= S_{cc}(X; q) - \frac{1}{\lambda}(B - D_{KL}[q||\pi_n]) \\
&\stackrel{(12)}{=} \left\langle -\ln p(X|\theta) + \ln q(\theta) + \frac{1}{\lambda} \ln \frac{q(\theta)}{\pi_n(\theta)} \right\rangle_q - \frac{B}{\lambda} + \ln ||p||, \tag{20}
\end{aligned}$$

where $\langle \cdot \rangle_q$ denotes the average with respect to q . Similar to the standard approach that is used in support vector machines (Schölkopf and Smola, 2002), the Lagrangian $\mathbb{L}$ defined in Eq (20) must be minimized with respect to the primal variable q and maximized

with respect to the dual variable λ (i.e., a saddle point must be found). Therefore the constraint problem in Eq (5) can be expressed as

$$\arg \min_q \max_{\lambda \geq 0} \mathbb{L}(q, \lambda). \quad (21)$$

By taking the derivative of $\mathbb{L}$ with respect to q and setting it equal to zero,

$$\frac{\partial \mathbb{L}}{\partial q} = -\ln p(X|\theta) + [1 + \ln q(\theta)] + \frac{1}{\lambda} [1 + \ln \frac{q(\theta)}{\pi_n(\theta)}] = 0, \quad (22)$$

we find that the Lagrangian in Eq (20) is minimized by the SMiLe rule [Eq (6)], i.e., $q(\theta) \propto p(X|\theta)^\gamma \pi_n(\theta)^{1-\gamma}$, where γ is determined by the Lagrange multiplier λ :

$$0 \leq \gamma = \frac{\lambda}{\lambda + 1} \leq 1, \quad (23)$$

Note that the constant $Z(X; \gamma)$ in Eq (6) follows from normalization of $q(\theta)$ to integral one.

4.7 A larger bound $B > B'$ on belief change implies a bigger $\gamma > \gamma'$ in the SMiLe rule

For $0 < B < B_{max}$ the solution of optimization problem in Eq (5) is the updated belief q_γ [Eq (6)] with $0 < \gamma < 1$ satisfying $D_{KL}[q_\gamma || \pi_n] = B$. In order to prove that $B > B'$ implies $\gamma > \gamma'$, we just need to show that $D_{KL}[q_\gamma || \pi_n]$ is an increasing function of γ and thus its first derivative with respect to γ is always non-negative.

For this purpose, we first need to evaluate the derivative of $q_\gamma(\theta)$, [Eq (6)], with

respect to γ :

$$\begin{aligned}
\frac{\partial}{\partial \gamma} q_\gamma(\theta) &= \frac{1}{Z(X; \gamma)} \frac{\partial}{\partial \gamma} [p(X|\theta)^\gamma \pi_n(\theta)^{1-\gamma}] + p(X|\theta)^\gamma \pi_n(\theta)^{1-\gamma} \frac{\partial}{\partial \gamma} \left[\frac{1}{Z(X; \gamma)} \right] \\
&= \frac{1}{Z(X; \gamma)} \left[p(X|\theta)^\gamma \pi_n(\theta)^{1-\gamma} \ln \frac{p(X|\theta)}{\pi_n(\theta)} \right] - \frac{p(X|\theta)^\gamma \pi_n(\theta)^{1-\gamma}}{Z(X; \gamma)^2} \frac{\partial}{\partial \gamma} [Z(X; \gamma)] \\
&= q_\gamma(\theta) \ln \frac{p(X|\theta)}{\pi_n(\theta)} - q_\gamma(\theta) \frac{1}{Z(X; \gamma)} \left[\int_\theta \ln \frac{p(X|\theta)}{\pi_n(\theta)} p(X|\theta)^\gamma \pi_n(\theta)^{1-\gamma} d\theta \right] \\
&= q_\gamma(\theta) \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} - \left\langle \ln \frac{p(X|\theta)}{\pi_n(\theta)} \right\rangle_{q_\gamma} \right). \tag{24}
\end{aligned}$$

Note also that

$$\int_\theta \frac{\partial}{\partial \gamma} q_\gamma(\theta) d\theta \stackrel{(24)}{=} \int_\theta q_\gamma(\theta) \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} - \left\langle \ln \frac{p(X|\theta)}{\pi_n(\theta)} \right\rangle_{q_\gamma} \right) d\theta = 0. \tag{25}$$

Then we calculate the derivative of $D_{KL}[q_\gamma || \pi_n]$ with respect to γ :

$$\begin{aligned}
\frac{\partial}{\partial \gamma} D_{KL}[q_\gamma || \pi_n] &= \int_{\theta} \frac{\partial}{\partial \gamma} \left[q_\gamma \ln \frac{q_\gamma(\theta)}{\pi_n(\theta)} \right] d\theta \\
&= \int_{\theta} \left(\ln \frac{q_\gamma(\theta)}{\pi_n(\theta)} \frac{\partial}{\partial \gamma} [q_\gamma(\theta)] + q_\gamma(\theta) \frac{\partial}{\partial \gamma} \left[\ln \frac{q_\gamma(\theta)}{\pi_n(\theta)} \right] \right) d\theta \\
&= \int_{\theta} \left(\ln \frac{q_\gamma(\theta)}{\pi_n(\theta)} + 1 \right) \frac{\partial}{\partial \gamma} [q_\gamma(\theta)] d\theta \\
&\stackrel{(6)}{=} \int_{\theta} \left(\gamma \ln \frac{p(X|\theta)}{\pi_n(\theta)} - \ln Z(X; \gamma) + 1 \right) \frac{\partial}{\partial \gamma} [q_\gamma(\theta)] d\theta \\
&\stackrel{(25)}{=} \gamma \int_{\theta} \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} \right) \frac{\partial}{\partial \gamma} [q_\gamma(\theta)] d\theta \\
&\stackrel{(24)}{=} \gamma \int_{\theta} \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} \right) \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} - \left\langle \ln \frac{p(X|\theta)}{\pi_n(\theta)} \right\rangle_{q_\gamma} \right) q_\gamma(\theta) d\theta \\
&= \gamma \int_{\theta} \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} \right)^2 q_\gamma(\theta) d\theta \\
&\quad - \gamma \left\langle \ln \frac{p(X|\theta)}{\pi_n(\theta)} \right\rangle_{q_\gamma} \int_{\theta} \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} \right) q_\gamma(\theta) d\theta \\
&= \gamma \left(\left\langle \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} \right)^2 \right\rangle_{q_\gamma} - \left(\left\langle \ln \frac{p(X|\theta)}{\pi_n(\theta)} \right\rangle_{q_\gamma} \right)^2 \right) \\
&= \gamma \text{var} \left[\ln \frac{p(X|\theta)}{\pi_n(\theta)} \right] \geq 0.
\end{aligned} \tag{26}$$

4.8 The impact of a data sample X on belief update increases with

γ in the SMiLe rule

To prove the statement above we need to show that the impact function $\Delta S_{cc}(X; L)$ in Eq (4), where the SMiLe rule Eq (6) is used for belief update (i.e., when $\pi_{n+1} = q_\gamma$), increases with the parameter γ . In the following we show that the first derivative of the impact function $\Delta S_{cc}(X; L(\gamma))$ with respect to γ is always non-negative.

$$\begin{aligned}
\frac{\partial}{\partial \gamma} \Delta S_{cc}(X; L(\gamma)) &= -\frac{\partial}{\partial \gamma} S_{cc}(X; q_\gamma) \stackrel{(2)}{=} \int_\theta \frac{\partial}{\partial \gamma} [q_\gamma \ln \frac{p(X|\theta)}{q_\gamma(\theta)}] d\theta \\
&= \int_\theta \left(\ln \frac{p(X|\theta)}{q_\gamma(\theta)} \frac{\partial}{\partial \gamma} [q_\gamma(\theta)] + q_\gamma(\theta) \frac{\partial}{\partial \gamma} \left[\ln \frac{p(X|\theta)}{q_\gamma(\theta)} \right] \right) d\theta \\
&= \int_\theta \left(\ln \frac{p(X|\theta)}{q_\gamma(\theta)} - 1 \right) \frac{\partial}{\partial \gamma} [q_\gamma(\theta)] d\theta \\
&\stackrel{(6)}{=} \int_\theta \left((1-\gamma) \ln \frac{p(X|\theta)}{\pi_n(\theta)} + \ln Z(X; \gamma) - 1 \right) \frac{\partial}{\partial \gamma} [q_\gamma(\theta)] d\theta \\
&\stackrel{(25)}{=} (1-\gamma) \int_\theta \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} \right) \frac{\partial}{\partial \gamma} [q_\gamma(\theta)] d\theta \\
&\stackrel{(24)}{=} (1-\gamma) \int_\theta \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} \right) \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} - \left\langle \ln \frac{p(X|\theta)}{\pi_n(\theta)} \right\rangle_{q_\gamma} \right) q_\gamma(\theta) d\theta \\
&= (1-\gamma) \int_\theta \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} \right)^2 q_\gamma(\theta) d\theta \\
&\quad - (1-\gamma) \left\langle \ln \frac{p(X|\theta)}{\pi_n(\theta)} \right\rangle_{q_\gamma} \int_\theta \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} \right) q_\gamma(\theta) d\theta \\
&= (1-\gamma) \left(\left\langle \left(\ln \frac{p(X|\theta)}{\pi_n(\theta)} \right)^2 \right\rangle_{q_\gamma} - \left(\left\langle \ln \frac{p(X|\theta)}{\pi_n(\theta)} \right\rangle_{q_\gamma} \right)^2 \right) \\
&= (1-\gamma) \text{var} \left[\ln \frac{p(X|\theta)}{\pi_n(\theta)} \right] \geq 0. \tag{27}
\end{aligned}$$

4.9 A larger reduction in the surprise implies a bigger change in belief

The minimal value of the Lagrangian $\mathbb{L}(q, \lambda)$ in Eq (20) that is achieved by the updated belief q_γ in Eq (6), obtained by the SMiLe rule, is equal to

$$\begin{aligned}
\mathbb{L}(q_\gamma, \lambda) &\stackrel{(20)}{=} \left\langle -\ln p(X|\theta) + \ln q_\gamma(\theta) + \frac{1}{\lambda} \ln \frac{q_\gamma(\theta)}{\pi_n(\theta)} \right\rangle_{q_\gamma} \overbrace{-\frac{B}{\lambda} + \ln \|p\|}^{=C} \\
&= \left\langle -\ln p(X|\theta) + \ln \frac{p(X|\theta)^\gamma \pi_n(\theta)^{1-\gamma}}{Z(X; \gamma)} + \frac{1}{\lambda} \ln \frac{p(X|\theta)^\gamma \pi_n(\theta)^{1-\gamma}}{Z(X; \gamma) \pi_n(\theta)} \right\rangle_{q_\gamma} + C \\
&= \left\langle \left(-1 + \gamma + \frac{\gamma}{\lambda}\right) \ln p(X|\theta) + \left(1 - \gamma - \frac{\gamma}{\lambda}\right) \ln \pi_n - \left(1 + \frac{1}{\lambda}\right) \ln Z(X; \gamma) \right\rangle_{q_\gamma} + C \\
&= \left\langle \left(-1 + \gamma(1 + \frac{1}{\lambda})\right) \ln \frac{p(X|\theta)}{\pi_n(\theta)} - \left(1 + \frac{1}{\lambda}\right) \ln Z(X; \gamma) \right\rangle_{q_\gamma} + C \\
&= -\frac{1}{\gamma} \ln Z(X; \gamma) + C. \tag{28}
\end{aligned}$$

Note that we used the equality $\frac{1}{\gamma} = 1 + \frac{1}{\lambda}$, from Eq (23), in the last line of Eq (28).

If the optimal solution q_γ is approximated by any other potential next belief q , then its corresponding functional value $\mathbb{L}(q, \lambda)$ differs from its minimal value $\mathbb{L}(q_\gamma, \lambda)$ in proportion to the KL divergence $D_{KL}[q||q_\gamma]$. This is because,

$$\begin{aligned}
\mathbb{L}(q, \lambda) - \mathbb{L}(q_\gamma, \lambda) &\stackrel{(20), (28)}{=} \left\langle -\ln p(X|\theta) + \ln q(\theta) + \frac{1}{\lambda} \ln \frac{q(\theta)}{\pi_n(\theta)} \right\rangle_q + \frac{1}{\gamma} \ln Z(X; \gamma) \\
&= \frac{1}{\gamma} \left\langle -\ln p(X|\theta)^\gamma + \ln q(\theta)^\gamma + \ln \left(\frac{q(\theta)}{\pi_n(\theta)} \right)^{\frac{\gamma}{\lambda}} + \ln Z(X; \gamma) \right\rangle_q \\
&= \frac{1}{\gamma} \left\langle \ln \frac{q(\theta)^{\gamma(1+\frac{1}{\lambda})} Z(X; \gamma)}{p(X|\theta)^\gamma \pi_n(\theta)^{\frac{\gamma}{\lambda}}} \right\rangle_q = \frac{1}{\gamma} \left\langle \ln \frac{q(\theta) Z(X; \gamma)}{p(X|\theta)^\gamma \pi_n(\theta)^{1-\gamma}} \right\rangle_q \\
&= \frac{1}{\gamma} D_{KL}[q||q_\gamma]. \tag{29}
\end{aligned}$$

Replacing q with π_n in Eq (29) follows the impact function $\Delta S_{cc}(X; L)$ in Eq (4) to

be,

$$\begin{aligned}
\Delta S_{cc}(X; L(\gamma)) &= S_{cc}(X; \pi_n) - S_{cc}(X; q_\gamma) \\
&\stackrel{(20)}{=} \mathbb{L}(\pi_n, \lambda) + \frac{1}{\lambda} B - \mathbb{L}(q_\gamma, \lambda) - \frac{1}{\lambda} (B - D_{KL}[q_\gamma || \pi_n]) \\
&= \mathbb{L}(\pi_n, \lambda) - \mathbb{L}(q_\gamma, \lambda) + \frac{1}{\lambda} D_{KL}[q_\gamma || \pi_n] \\
&\stackrel{(29)}{=} \frac{1}{\gamma} D_{KL}[\pi_n || q_\gamma] + \frac{1}{\lambda} D_{KL}[q_\gamma || \pi_n] \\
&\stackrel{(23)}{=} \frac{1}{\gamma} D_{KL}[\pi_n || q_\gamma] + \left(\frac{1}{\gamma} - 1 \right) D_{KL}[q_\gamma || \pi_n] \geq 0. \tag{30}
\end{aligned}$$

Note that q_γ is the updated belief under the SMiLe rule, i.e., $\pi_{n+1} = q_\gamma$. Therefore, the reduction in the surprise upon a second exposure to the same data sample is related to the belief changes $D_{KL}[\pi_n || \pi_{n+1}]$ and $D_{KL}[\pi_{n+1} || \pi_n]$ via Eq (30). Note that the equality in Eq (30) holds if and only if there is no change in the current belief, i.e., if $q_\gamma = \pi_{n+1} = \pi_n$. This happens only if $\gamma = 0$ which is equivalent to neglecting the new data point when updating the belief.

4.10 The SMiLe rule for beliefs described by Gaussian distribution

Suppose we have drawn $n - 1$ samples $X_1, \dots, X_{n-1}$ from a Gaussian distribution of known variance σ_x^2 , but unknown mean. The empirical mean after $n - 1$ samples is $\hat{\mu}_{n-1}$.

Assume that the current belief about the mean μ is a normal distribution, i.e., $\pi_{n-1}(\mu) \sim \mathcal{N}(\hat{\mu}_{n-1}, \sigma_{n-1}^2)$. Since the likelihood of receiving a new sample X_n is also normal, i.e., $p(X_n | \mu) \sim \mathcal{N}(\mu, \sigma_x^2)$, the updated belief obtained by the SMiLe rule [Eq (6)] is

$$\begin{aligned}
q_\gamma(\mu) &\propto \left(\exp\left(-\frac{(X_n - \mu)^2}{2\sigma_x^2}\right) \right)^\gamma \left(\exp\left(-\frac{(\mu - \hat{\mu}_{n-1})^2}{2\sigma_{n-1}^2}\right) \right)^{1-\gamma} \\
&\propto \exp\left(-\frac{(X_n - \mu)^2}{2(\sigma'_x)^2}\right) \exp\left(-\frac{(\mu - \hat{\mu}_{n-1})^2}{2(\sigma'_{n-1})^2}\right), \tag{31}
\end{aligned}$$

where $(\sigma'_x)^2 = \sigma_x^2/\gamma$ and $(\sigma'_{n-1})^2 = \sigma_{n-1}^2/(1 - \gamma)$. Because the product of two Gaussians is a Gaussian, we arrive at a distribution $q_\gamma \sim \mathcal{N}(\hat{\mu}_n, \sigma_n^2)$ with the mean $\hat{\mu}_n = w_n X_n + (1 - w_n)\hat{\mu}_{n-1}$ (with $w_n = \frac{(\sigma'_{n-1})^2}{(\sigma'_x)^2 + (\sigma'_{n-1})^2}$), and the variance $\sigma_n^2 = \left(\frac{1}{(\sigma'_x)^2} + \frac{1}{(\sigma'_{n-1})^2} \right)^{-1}$; see (MacKay, 2003) for the exact derivation. Assuming $\sigma_{n-1}^2 = \sigma_x^2$, then $w_n = \gamma$. Moreover, we can evaluate the confidence-corrected surprise to be

$$S_{cc}(X_n; \pi_{n-1}) = D_{KL}[\mathcal{N}(\hat{\mu}_{n-1}, \sigma_{n-1}^2) || \mathcal{N}(X_n, \sigma_x^2)] = \frac{(X_n - \hat{\mu}_{n-1})^2}{2\sigma_x^2}. \tag{32}$$

Note that in Eq (32), we used the following equality in Eq (33) (assuming $\sigma_x^2 = \sigma_{n-1}^2$),

$$D_{KL}[\mathcal{N}(a_1, b_1^2) || \mathcal{N}(a_2, b_2^2)] = \frac{(a_1 - a_2)^2}{2b_2^2} + \frac{1}{2} \left(\frac{b_1^2}{b_2^2} - 1 - \ln \frac{b_1^2}{b_2^2} \right). \tag{33}$$

4.11 The SMiLe rule for beliefs described by a Dirichlet distribution

Assume that the current belief about the probability of transition from state $s \in \{1, 2, \dots, D\}$ to all $D - 1$ possible next states $\check{s} \in \{1, 2, \dots, D\} \setminus s$ is described by a Dirichlet distribution

bution $\pi_n(\theta_s) \propto \prod_{\check{s}} \theta(s, \check{s})^{\alpha(s, \check{s})-1}$ parametrized by $\alpha_s = \alpha(s, :)$. Here, $\theta_s = \theta(s, :)$ denotes a *vector* of random variable $\theta(s, \check{s})$ that determines the probability of transition from s to $\check{s}$, i.e., $0 \leq \theta(s, \check{s}) \leq 1$ and $\sum_{\check{s}} \theta(s, \check{s}) = 1$. The likelihood function for an occurred transition $X : s \rightarrow s'$ is $p(X|\theta_s) = \theta(s, s') = \prod_{\check{s}} \theta(s, \check{s})^{[\check{s}=s']}$, where $[\cdot]$ denotes the Iverson bracket (that is equal to 1 if the condition inside the bracket is correct and 0 otherwise). Therefore, the updated belief $q_\gamma(\theta_s)$ obtained by the SMiLe rule [Eq (6)],

$$q_\gamma(\theta_s) \propto \left(\prod_{\check{s}} \theta(s, \check{s})^{[\check{s}=s']} \right)^\gamma \cdot \left(\prod_{\check{s}} \theta(s, \check{s})^{\alpha(s, \check{s})-1} \right)^{1-\gamma} \propto \prod_{\check{s}} \theta(s, \check{s})^{\beta(s, \check{s})-1}, \quad (34)$$

is again a Dirichlet distribution parametrized by $\beta(s, \check{s}) = (1 - \gamma)\alpha(s, \check{s}) + \gamma(1 + [\check{s} = s'])$.

The probability $\hat{T}[t](s, s')$ of transition from s to s' at time step t is estimated by $\hat{T}[t](s, s') = \frac{\alpha[t](s, s')-1+\epsilon}{\sum_{\check{s}} (\alpha[t](s, \check{s})-1+\epsilon)}$, where $\alpha[t](s, \check{s})$ denotes the updated model parameter at time step t . Here, $\epsilon > 0$ is a very small number which prevents the denominator from being zero.

4.12 The online EM algorithm for the maze-exploration task

The online EM algorithm, presented in (Mongillo and Deneve, 2008), is an estimation algorithm for the unknown parameters of a hidden Markov model (HMM). For the maze-exploration task we adapted the method presented in (Mongillo and Deneve, 2008) such that the transition probability to a new room also depends on the previously visited room (and not just the current environment). The HMM of the maze-exploration

task consists of two sets of unknown parameters: (i) a set $\mathbf{P} = [P_{ij}]_{2 \times 2}$ of (unknown) switch probabilities from environment i to j (where we use 1 for environment $\mathcal{A}$ and 2 for environment $\mathcal{B}$), and (ii) a set $\mathbf{T} = [T_{jss'}]_{2 \times 16 \times 16}$ of state transition probabilities, where $T_{jss'}$ denotes the probability of transition from state s to state s' within environment j . The set of all unknown parameters is denoted by $\theta \equiv (\mathbf{P}, \mathbf{T})$.

At each time step t , we estimate the probability $q_l^t = P(E_t = l | s_{0 \rightarrow t})$ of being in environment $E_t = l \in \{1, 2\}$, given all previous state transitions $s_{0 \rightarrow t} = \{s_0, s_1, \dots, s_t\}$. The probability q_l^t can be recursively calculated by

$$\hat{q}_l^t = \sum_m \hat{q}_m^{t-1} \gamma_{ml}^t, \quad (35)$$

where $\gamma_{ml}^t = \frac{P(s'=s_t | s=s_{t-1}, E_t=l) P(E_t=l | E_{t-1}=m)}{P(s'=s_t | s_{0 \rightarrow (t-1)})}$ belongs to a set of auxiliary variables $\Gamma = [\gamma_{lh}]_{2 \times 2}$ that are calculated by the last estimate $\hat{\theta}^{t-1}$ of the model parameters:

$$\gamma_{lh}^t = \frac{\hat{P}_{lh}^{t-1} \hat{T}_{hs_{t-1}s_t}^{t-1}}{\sum_{m,n} \hat{q}_m^{t-1} \hat{P}_{mn}^{t-1} \hat{T}_{ns_{t-1}s_t}^{t-1}}. \quad (36)$$

Then, using these auxiliary variables γ_{lh} , a set $\Phi = [\hat{\phi}_{i,j,s,s',h}]_{2 \times 2 \times 16 \times 16 \times 2}$ of parameters is recursively updated:

$$\hat{\phi}_{i,j,s,s',h}^t = \sum_l \gamma_{lh}^t \left[(1 - \eta) \hat{\phi}_{i,j,s,s',l}^{t-1} + \eta \hat{q}_l^{t-1} \Delta_{ijss'}^{l h s_{t-1} s_t} \right], \quad (37)$$

where $\Delta_{ijss'}^{l h s_{t-1} s_t} = \delta(i-l) \delta(j-h) \delta(s-s_{t-1}) \delta(s'-s_t)$, $\delta(\cdot)$ is the Kronecker delta (i.e., 1 when its argument is zero and 0 otherwise), and η is the learning rate.

Finally, the model parameters are updated by

$$\hat{P}_{ij}^t = \frac{\sum_{s,s',h} \hat{\phi}_{ijss'h}^t}{\sum_{j,s,s',h} \hat{\phi}_{ijss'h}^t}; \quad \hat{T}_{jss'}^t = \frac{\sum_{i,h} \hat{\phi}_{ijss'h}^t}{\sum_{i,s',h} \hat{\phi}_{ijss'h}^t}. \quad (38)$$

We emphasize that in order for the online EM algorithm to work properly, some technical considerations must be respected. For instance, in the beginning of learning, only online estimation of Φ must be updated (without updating the model parameters θ), so that the estimation error for the first 2000 time steps of our simulation (Fig 7A, blue) remains fixed. Moreover, we found that the online EM algorithm works well only if it is correctly initialized. To make our comparison fair, we assumed the agent “believes in” frequent transitions between environments by initializing the probabilities $\hat{P}_{ij}^0$ that describe the switch between environment $\mathcal{A}$ and $\mathcal{B}$ to be very close to true ones. Without such an assumption, the online EM takes even more time than what we reported here to learn the maze-exploration task. The actual initialization values were $\hat{P}_{12}^0 = \hat{P}_{21}^0 = 0.1$ while the true values were $P_{12} = P_{21} = 0.005$.

Acknowledgments

This project has been funded by the European Research Council under grant agreement No. 268689, and by the European Unions Horizon 2020 research and innovation program under grant agreement No. 720270.

References

- Adams, R. P. and MacKay, D. J. (2007). Bayesian online changepoint detection. *arXiv preprint arXiv:0710.3742*
- Aston-Jones, G. and Cohen, J. D. (2005). An integrative theory of locus coeruleus-norepinephrine function: adaptive gain and optimal performance. *Annu. Rev. Neurosci.* 28, 403–450
- Aston-Jones, G., Rajkowski, J., and Kubiak, P. (1997). Conditioned responses of monkey locus coeruleus neurons anticipate acquisition of discriminative behavior in a vigilance task. *Neuroscience* 80, 697–715
- Baldi, P. and Itti, L. (2010). Of bits and wows: a bayesian theory of surprise with applications to attention. *Neural Networks* 23, 649–666
- Balleine, B. W. and Dickinson, A. (1998). Goal-directed instrumental action: contingency and incentive learning and their cortical substrates. *Neuropharmacology* 37, 407–419
- Balleine, B. W. and O’Doherty, J. P. (2010). Human and rodent homologies in action control: corticostriatal determinants of goal-directed and habitual action. *Neuropsychopharmacology* 35, 48–69
- Bear, M. F. and Singer, W. (1986). Modulation of visual cortical plasticity by acetylcholine and noradrenaline. *Nature* 320, 172–176
- Beck, J. M., Ma, W. J., Kiani, R., Hanks, T., Churchland, A. K., Roitman, J., et al.

- (2008). Probabilistic population codes for bayesian decision making. *Neuron* 60, 1142–1152
- Behrens, T. E., Woolrich, M. W., Walton, M. E., and Rushworth, M. F. (2007). Learning the value of information in an uncertain world. *Nature neuroscience* 10, 1214–1221
- Bishop, C. M. (1994). Novelty detection and neural network validation. In *Vision, Image and Signal Processing, IEE Proceedings- (IET)*, vol. 141, 217–222
- Bouret, S. and Sara, S. J. (2004). Reward expectation, orientation of attention and locus coeruleus-medial frontal cortex interplay during learning. *European Journal of Neuroscience* 20, 791–802
- Bouret, S. and Sara, S. J. (2005). Network reset: a simplified overarching theory of locus coeruleus noradrenaline function. *Trends in neurosciences* 28, 574–582
- Brea, J., Senn, W., and Pfister, J.-P. (2013). Matching recall and storage in sequence learning with spiking neural networks. *The Journal of Neuroscience* 33, 9565–9575
- Clayton, E. C., Rajkowski, J., Cohen, J. D., and Aston-Jones, G. (2004). Phasic activation of monkey locus ceruleus neurons by simple decisions in a forced-choice task. *The Journal of neuroscience* 24, 9914–9920
- Cohen, J. D., McClure, S. M., and Angela, J. Y. (2007). Should i stay or should i go? how the human brain manages the trade-off between exploitation and exploration. *Philosophical Transactions of the Royal Society of London B: Biological Sciences* 362, 933–942

- Costa, V. D. and Rudebeck, P. H. (2016). More than meets the eye: the relationship between pupil size and locus coeruleus activity. *Neuron* 89, 8–10
- Dayan, P., Kakade, S., and Montague, P. R. (2000). Learning and selective attention. *nature neuroscience* 3, 1218–1223
- Donchin, E., Ritter, W., McCallum, W., et al. (1978). Cognitive psychophysiology: The endogenous components of the erp. *Event-related brain potentials in man* , 349–411
- Fairhall, A. L., Lewen, G. D., Bialek, W., and van Steveninck, R. R. d. R. (2001). Efficiency and ambiguity in an adaptive neural code. *Nature* 412, 787–792
- Frank, M., Leitner, J., Stollenga, M., Förster, A., and Schmidhuber, J. (2013). Curiosity driven reinforcement learning for motion planning on humanoids. *Frontiers in neurorobotics* 7
- Friston, K. (2010). The free-energy principle: a unified brain theory? *Nature Reviews Neuroscience* 11, 127–138
- Friston, K. and Kiebel, S. (2009). Predictive coding under the free-energy principle. *Philosophical Transactions of the Royal Society of London B: Biological Sciences* 364, 1211–1221
- Gershman, S. J. and Niv, Y. (2015). Novelty and inductive generalization in human reinforcement learning. *Topics in cognitive science* 7, 391–415
- Gil, Z., Connors, B. W., and Amitai, Y. (1997). Differential regulation of neocortical synapses by neuromodulators and activity. *Neuron* 19, 679–686

- Gillner, S. and Mallot, H. A. (1998). Navigation and acquisition of spatial knowledge in a virtual maze. *Journal of Cognitive Neuroscience* 10, 445–463
- Gu, Q. (2002). Neuromodulatory transmitter systems in the cortex and their role in cortical plasticity. *Neuroscience* 111, 815–835
- Hasselmo, M. E. (1999). Neuromodulation: acetylcholine and memory consolidation. *Trends in cognitive sciences* 3, 351–359
- Hasselmo, M. E., Wyble, B. P., and Wallenstein, G. V. (1996). Encoding and retrieval of episodic memories: role of cholinergic and gabaergic modulation in the hippocampus. *Hippocampus* 6, 693–708
- Hayden, B. Y., Heilbronner, S. R., Pearson, J. M., and Platt, M. L. (2011). Surprise signals in anterior cingulate cortex: neuronal encoding of unsigned reward prediction errors driving adjustment in behavior. *The Journal of Neuroscience* 31, 4178–4187
- Hess, E. H. and Polt, J. M. (1960). Pupil size as related to interest value of visual stimuli. *Science* 132, 349–350
- Holland, P. C. (1997). Brain mechanisms for changes in processing of conditioned stimuli in pavlovian conditioning: Implications for behavior theory. *Animal Learning & Behavior* 25, 373–399
- Hsieh, C. Y., Cruikshank, S. J., and Metharate, R. (2000). Differential modulation of auditory thalamocortical and intracortical synaptic transmission by cholinergic agonist. *Brain research* 880, 51–64

- Hurley, M. M., Dennett, D. C., and Adams, R. B. (2011). *Inside jokes: Using humor to reverse-engineer the mind* (MIT press)
- Itti, L. and Baldi, P. (2009). Bayesian surprise attracts human attention. *Vision research* 49, 1295–1306
- Itti, L. and Baldi, P. F. (2005). Bayesian surprise attracts human attention. In *Advances in neural information processing systems*. 547–554
- Jaskowski, P., Wauschkuhn, B., et al. (1994). Suspense and surprise: On the relationship between expectancies and p3. *Psychophysiology* 31, 359–369
- Jepma, M. and Nieuwenhuis, S. (2011). Pupil diameter predicts changes in the exploration–exploitation trade-off: evidence for the adaptive gain theory. *Journal of cognitive neuroscience* 23, 1587–1596
- Jones, D. and Higgins, G. (1995). Effect of scopolamine on visual attention in rats. *Psychopharmacology* 120, 142–149
- Kakade, S. and Dayan, P. (2002). Acquisition and extinction in autoshaping. *Psychological review* 109, 533
- Kalat, J. (2012). *Biological psychology* (Cengage Learning)
- Kimura, F., Fukuda, M., and Tsumoto, T. (1999). Acetylcholine suppresses the spread of excitation in the visual cortex revealed by optical recording: possible differential effect depending on the source of input. *European Journal of Neuroscience* 11, 3597–3609

- Knight, R. T. et al. (1996). Contribution of human hippocampal region to novelty detection. *Nature* 383, 256–259
- Kobayashi, M., Imamura, K., Sugai, T., Onoda, N., Yamamoto, M., Komai, S., et al. (2000). Selective suppression of horizontal propagation in rat visual cortex by norepinephrine. *European Journal of Neuroscience* 12, 264–272
- Kolossa, A., Kopp, B., and Fingscheidt, T. (2015). A computational analysis of the neural bases of bayesian inference. *NeuroImage* 106, 222–237
- Krugel, L. K., Biele, G., Mohr, P. N., Li, S.-C., and Heekeren, H. R. (2009). Genetic variation in dopaminergic neuromodulation influences the ability to rapidly and flexibly adapt decisions. *Proceedings of the National Academy of Sciences* 106, 17951–17956
- Little, D. Y. and Sommer, F. T. (2014). Learning and exploration in action-perception loops. *Closing the Loop Around Neural Systems* , 295
- Ma, W. J., Beck, J. M., Latham, P. E., and Pouget, A. (2006). Bayesian inference with probabilistic population codes. *Nature neuroscience* 9, 1432–1438
- MacKay, D. J. (2003). *Information theory, inference and learning algorithms* (Cambridge university press)
- Missonnier, P., Ragot, R., Derouesné, C., Guez, D., and Renault, B. (1999). Automatic attentional shifts induced by a noradrenergic drug in alzheimers disease: evidence from evoked potentials. *International journal of psychophysiology* 33, 243–251

- Mohamed, S. and Rezende, D. J. (2015). Variational information maximisation for intrinsically motivated reinforcement learning. In *Advances in neural information processing systems*. 2125–2133
- Mongillo, G. and Deneve, S. (2008). Online learning with hidden markov models. *Neural computation* 20, 1706–1716
- Morris, R. (1984). Developments of a water-maze procedure for studying spatial learning in the rat. *Journal of neuroscience methods* 11, 47–60
- Nassar, M. R., Rumsey, K. M., Wilson, R. C., Parikh, K., Heasly, B., and Gold, J. I. (2012). Rational regulation of learning dynamics by pupil-linked arousal systems. *Nature neuroscience* 15, 1040–1046
- Nassar, M. R., Wilson, R. C., Heasly, B., and Gold, J. I. (2010). An approximately bayesian delta-rule model explains the dynamics of belief updating in a changing environment. *The Journal of Neuroscience* 30, 12366–12378
- Nelson, A. L., Grant, E., Galeotti, J. M., and Rhody, S. (2004). Maze exploration behaviors using an integrated evolutionary robotics environment. *Robotics and Autonomous Systems* 46, 159–173
- Oudeyer, P.-Y., Kaplan, F., and Hafner, V. V. (2007). Intrinsic motivation systems for autonomous mental development. *IEEE transactions on evolutionary computation* 11, 265–286
- Palm, G. (2012). *Novelty, information and surprise* (Springer)

- Payzan-LeNestour, E. and Bossaerts, P. (2011). Risk, unexpected uncertainty, and estimation uncertainty: Bayesian learning in unstable settings. *PLoS computational biology* 7, e1001048
- Pearce, J. M. and Hall, G. (1980). A model for pavlovian learning: variations in the effectiveness of conditioned but not of unconditioned stimuli. *Psychological review* 87, 532
- Pineda, J., Westerfield, M., Kronenberg, B., and Kubrin, J. (1997). Human and monkey p3-like responses in a mixed modality paradigm: effects of context and context-dependent noradrenergic influences. *International Journal of Psychophysiology* 27, 223–240
- Preuschoff, K. and Bossaerts, P. (2007). Adding prediction risk to the theory of reward learning. *Annals of the New York Academy of Sciences* 1104, 135–146
- Preuschoff, K., Quartz, S. R., and Bossaerts, P. (2008). Human insula activation reflects risk prediction errors as well as risk. *The Journal of Neuroscience* 28, 2745–2752
- Preuschoff, K., Hart, B. M., and Einhäuser, W. (2011). Pupil dilation signals surprise: evidence for noradrenaline's role in decision making. *Front Neurosci* 5, 115
- Rajkowski, J., Kubiak, P., and Aston-Jones, G. (1994). Locus coeruleus activity in monkey: phasic and tonic changes are associated with altered vigilance. *Brain research bulletin* 35, 607–616
- Ranganath, C. and Rainer, G. (2003). Neural mechanisms for detecting and remembering novel events. *Nature Reviews Neuroscience* 4, 193–202

- Redgrave, P., Rodriguez, M., Smith, Y., Rodriguez-Oroz, M. C., Lehericy, S., Bergman, H., et al. (2010). Goal-directed and habitual control in the basal ganglia: implications for parkinson's disease. *Nature Reviews Neuroscience* 11, 760–772
- Rezende, D. J. and Gerstner, W. (2014). Stochastic variational learning in recurrent spiking networks. *Frontiers in Computational Neuroscience* 8. doi:10.3389/fncom.2014.00038
- Roesch, M. R., Esber, G. R., Li, J., Daw, N. D., and Schoenbaum, G. (2012). Surprise! neural correlates of pearce–hall and rescorla–wagner coexist within the brain. *European Journal of Neuroscience* 35, 1190–1200
- Rüter, J., Marcille, N., Sprekeler, H., Gerstner, W., and Herzog, M. H. (2012). Paradoxical evidence integration in rapid decision processes. *PLoS Comput Biol* 8, e1002382
- Sara, S. and Segal, M. (1991). Plasticity of sensory responses of locus coeruleus neurons in the behaving rat: implications for cognition. *Progress in brain research* 88, 571–585
- Sara, S. J. (1998). Learning by neurones: role of attention, reinforcement and behaviour. *Comptes Rendus de l'Académie des Sciences-Series III-Sciences de la Vie* 321, 193–198
- Sara, S. J. (2009). The locus coeruleus and noradrenergic modulation of cognition. *Nature reviews neuroscience* 10, 211–223
- Sara, S. J., Vankov, A., and Hervé, A. (1994). Locus coeruleus-evoked responses in

- behaving rats: a clue to the role of noradrenaline in memory. *Brain research bulletin* 35, 457–465
- Schmidhuber, J. (2010). Formal theory of creativity, fun, and intrinsic motivation (1990–2010). *IEEE Transactions on Autonomous Mental Development* 2, 230–247
- Schölkopf, B. and Smola, A. J. (2002). *Learning with kernels: Support vector machines, regularization, optimization, and beyond* (MIT press)
- Schultz, W. (2015). Neuronal reward and decision signals: from theories to data. *Physiological reviews* 95, 853–951
- Schultz, W. (2016). Dopamine reward prediction-error signalling: a two-component response. *Nature Reviews Neuroscience*
- Shannon, C. E. (1948). A mathematical theory of communication. *Bell System Technical Journal* 27, 379–423. doi:10.1002/j.1538-7305.1948.tb01338.x
- Silver, D., van Hasselt, H., Hessel, M., Schaul, T., Guez, A., Harley, T., et al. (2016). The predictron: End-to-end learning and planning. *arXiv preprint arXiv:1612.08810*
- Singh, S. P., Barto, A. G., and Chentanez, N. (2004). Intrinsically motivated reinforcement learning. In *NIPS*. vol. 17, 1281–1288
- Sun, Y., Gomez, F., and Schmidhuber, J. (2011). Planning to be surprised: Optimal bayesian exploration in dynamic environments. In *Artificial General Intelligence* (Springer). 41–51
- Sutton, R. S., Modayil, J., Delp, M., Degris, T., Pilarski, P. M., White, A., et al.

- (2011). Horde: A scalable real-time architecture for learning knowledge from unsupervised sensorimotor interaction. In *The 10th International Conference on Autonomous Agents and Multiagent Systems-Volume 2* (International Foundation for Autonomous Agents and Multiagent Systems), 761–768
- Tenenbaum, J. B. and Griffiths, T. L. (2001). Structure learning in human causal induction. *Advances in neural information processing systems* , 59–65
- Tishby, N., Pereira, F. C., and Bialek, W. (2000). The information bottleneck method. *arXiv preprint physics/0004057*
- Tribus, M. (1961). Information theory as the basis for thermostatics and thermodynamics. *Journal of Applied Mechanics* 28, 1–8
- Vankov, A., Hervé-Minvielle, A., and Sara, S. J. (1995). Response to novelty and its rapid habituation in locus coeruleus neurons of the freely exploring rat. *European Journal of Neuroscience* 7, 1180–1187
- Wallenstein, G. V., Hasselmo, M. E., and Eichenbaum, H. (1998). The hippocampus as an associator of discontiguous events. *Trends in neurosciences* 21, 317–323
- Wilson, P. N., Boumphrey, P., and Pearce, J. M. (1992). Restoration of the orienting response to a light by a change in its predictive accuracy. *Quarterly Journal of Experimental Psychology: Section B* 44, 17–36
- Wilson, R. C., Nassar, M. R., and Gold, J. I. (2013). A mixture of delta-rules approximation to bayesian inference in change-point problems. *PLoS computational biology* 9, e1003150

Yu, A. J. and Dayan, P. (2005). Uncertainty, neuromodulation, and attention. *Neuron* 46, 681–692