

Optimal Hashing-based Time–Space Trade-offs for Approximate Near Neighbors*

Alexandr Andoni
Columbia

Thijs Laarhoven
IBM Research Zürich

Ilya Razenshteyn
MIT CSAIL

Erik Waingarten
Columbia

January 18, 2024

Abstract

We show tight upper and lower bounds for time–space trade-offs for the c -Approximate Near Neighbor Search problem. For the d -dimensional Euclidean space and n -point datasets, we develop a data structure with space $n^{1+\rho_u+o(1)} + O(dn)$ and query time $n^{\rho_q+o(1)} + dn^{o(1)}$ for every $\rho_u, \rho_q \geq 0$ such that:

$$c^2 \sqrt{\rho_q} + (c^2 - 1) \sqrt{\rho_u} = \sqrt{2c^2 - 1}. \quad (1)$$

To illustrate these results, for the approximation $c = 2$ we get:

- Space $n^{1.77\dots}$ and query time $n^{o(1)}$, significantly improving upon known data structures that support very fast queries [IM98, KOR00];
- Space $n^{1.14\dots}$ and query time $n^{0.14\dots}$, which matches optimal data-dependent Locality-Sensitive Hashing (LSH) from [AR15];
- Space $n^{1+o(1)}$ and query time $n^{0.43\dots}$, making significant progress in the regime of near-linear space, which is arguably of the most interest for practice [LJW⁺07].

This is the first data structure that achieves sublinear query time and near-linear space for *every* approximation factor $c > 1$, improving upon [Kap15]. The data structure is a culmination of a long line of work on the problem for all space regimes; it builds on Spherical Locality-Sensitive Filtering [BDGL16] and data-dependent hashing [AINR14, AR15].

Our matching lower bounds are of two types: conditional and unconditional. First, we prove tightness of the *whole* trade-off (1) in a restricted model of computation, which captures all known hashing-based approaches. We then show *unconditional* cell-probe lower bounds for one and two probes that match (1) for $\rho_q = 0$, improving upon the best known lower bounds from [PTW10]. In particular, this is the first space lower bound (for *any* static data structure) for two probes which is not polynomially smaller than the one-probe bound. To show the result for two probes, we establish and exploit a connection to *locally-decodable codes*.

*This paper merges two arXiv preprints: [Laa15c] (appeared online on November 24, 2015) and [ALRW16] (appeared online on May 9, 2016), and subsumes both of these articles.

Contents

1	Introduction	1
1.1	Approximate Near Neighbor problem (ANN)	1
1.2	Locality-Sensitive Hashing (LSH) and beyond	1
1.3	Time-space trade-offs	2
1.4	Lower bounds	2
1.5	Our results: upper bounds	3
1.5.1	Techniques	4
1.6	Our results: lower bounds	6
1.6.1	One cell probe	6
1.6.2	Two cell probes	7
1.6.3	The general time-space trade-off	8
1.7	Related work: past and concurrent	9
1.8	Open problems	9
2	Random instances	10
3	Upper bounds: data-independent partitions	11
3.1	Setup	11
3.2	Results	12
3.3	Data structure	13
3.3.1	Description	13
3.3.2	Analysis	14
3.3.3	Setting parameters	15
3.4	An algorithm based on Locality-Sensitive Filtering (LSF)	17
4	Upper bounds: data-dependent partitions	18
4.1	Overview	20
4.2	Description	21
4.3	Setting parameters	24
4.4	Analysis	25
5	Lower bounds: preliminaries	30
5.1	Graphical Neighbor Search and robust expansion	30
5.2	Locally-decodable codes (LDC)	31
6	Lower bounds: one-probe data structures	31
6.1	Robust expansion of the Hamming space	31
6.2	Lower bounds for one-probe data structures	34
7	Lower bounds: list-of-points data structures	35
8	Lower bounds: two-probe data structures	38
8.1	Deterministic data structures	40
8.2	Making low-contention data structures	41
8.3	Datasets which shatter	42
8.4	Corrupting some cell contents of shattered points	44
8.5	Decreasing the word size	46
8.6	Connection to locally-decodable codes	47
8.6.1	Crash course in quantum computing	47
8.6.2	Weak quantum random access codes from GNS algorithms	48
8.6.3	On adaptivity	52
9	Acknowledgments	53

1 Introduction

1.1 Approximate Near Neighbor problem (ANN)

The Near Neighbor Search problem (NNS) is a basic and fundamental problem in computational geometry, defined as follows. We are given a dataset P of n points from a metric space (X, d_X) and a distance threshold $r > 0$. The goal is to preprocess P in order to answer *near neighbor queries*: given a query point $q \in X$, return a dataset point $p \in P$ with $d_X(q, p) \leq r$, or report that there is no such point. The d -dimensional Euclidean (\mathbb{R}^d, ℓ_2) and Manhattan/Hamming (\mathbb{R}^d, ℓ_1) metric spaces have received the most attention. Besides classical applications to similarity search over many types of data (text, audio, images, etc; see [SDI06] for an overview), NNS has been also recently used for cryptanalysis [MO15, Laa15a, Laa15b, BDGL16] and optimization [DRT11, HLM15, ZYS16].

The performance of an NNS data structure is primarily characterized by two key metrics:

- space: the amount of memory a data structure occupies, and
- query time: the time it takes to answer a query.

All known time-efficient data structures for NNS (e.g., [Cla88, Mei93]) require space exponential in the dimension d , which is prohibitively expensive unless d is very small. To overcome this so-called *curse of dimensionality*, researchers proposed the (c, r) -Approximate Near Neighbor Search problem, or (c, r) -ANN. In this relaxed version, we are given a dataset P and a distance threshold $r > 0$, as well as an approximation factor $c > 1$. Given a query point q with the promise that there is at least one data point in P within distance at most r from q , the goal is to return a data point $p \in P$ within a distance at most cr from q .

This approximate version of NNS allows efficient data structures with a query time sublinear in n , and only polynomial dependence in d in all parameters [IM98, GIM99, KOR00, Ind01a, Ind01b, Cha02, CR04, DIIM04, Pan06, AI06, TT07, AC09, AINR14, Kap15, AR15, Pag16, BDGL16]. In practice, ANN algorithms are often successful even when one is interested in *exact* nearest neighbors [ADI⁺06, AIL⁺15]. We refer the reader to [HIM12, AI08, And09] for a survey of the theory of ANN, and [WSSJ14, WLKC15] for a more practical perspective.

In this paper, we obtain tight time-space trade-offs for ANN. Our upper bounds are stated in Section 1.5, and the lower bounds are stated in Section 1.6. We provide more background on the problem next.

1.2 Locality-Sensitive Hashing (LSH) and beyond

A classic technique for ANN is *Locality-Sensitive Hashing* (LSH), introduced in 1998 by Indyk and Motwani [IM98, HIM12]. The main idea is to use *random space partitions*, for which a pair of close points (at distance at most r) is more likely to belong to the same part than a pair of far points (at distance more than cr). Given such a partition, the data structure splits the dataset P according to the partition, and, given a query, retrieves all the data points which belong to the same part as the

query. To get a high probability of success, one needs to maintain several partitions and check all of them during the query stage. LSH yields data structures with space $O(n^{1+\rho} + dn)$ and query time $O(dn^\rho)$. For a particular metric space and approximation c , the key quantity ρ measures the quality of the random space partition. Usually, $\rho = 1$ for $c = 1$ and $\rho \rightarrow 0$ as $c \rightarrow \infty$.

Since the introduction of LSH in [IM98], subsequent research established optimal values of the LSH exponent ρ for several metrics of interest, including ℓ_1 and ℓ_2 . For the Hamming distance (ℓ_1), the optimal value is $\rho = \frac{1}{c} \pm o(1)$ [IM98, MNP07, OWZ14]. For the Euclidean metric (ℓ_2), it is $\rho = \frac{1}{c^2} \pm o(1)$ [IM98, DIIM04, AI06, MNP07, OWZ14].

More recently, it has been shown that better bounds on ρ are possible if the space partitions are *allowed to depend on the dataset*¹. That is, the algorithm is based on an observation that every dataset has some structure to exploit. This more general framework of *data-dependent LSH* yields $\rho = \frac{1}{2c-1} + o(1)$ for the ℓ_1 distance, and $\rho = \frac{1}{2c^2-1} + o(1)$ for ℓ_2 [AINR14, Raz14, AR15]. Moreover, these bounds are known to be tight for data-dependent LSH [AR16].

1.3 Time–space trade-offs

Since the early results on LSH, a natural question has been whether one can obtain other time vs. space trade-offs than that of LSH, which achieves space around $n^{1+\rho}$ and query time around n^ρ . Indeed, simultaneous with the introduction of LSH, data structures obtaining *polynomial* space with *poly-logarithmic* query time were introduced [IM98, KOR00].

However, in practice, the most important regime is that of *near-linear* space, since space is usually a harder constraint than time: see, e.g., [LJW⁺07]. In particular, the main question became whether it is possible to obtain space which is near-linear while maintaining sublinear query time. This regime has been studied since [Ind01a], with subsequent improvements in [Pan06, AI06, LJW⁺07, Kap15, AIL⁺15]. In particular, [LJW⁺07, AIL⁺15] introduce practical versions of the above theoretical results.

Despite significant progress in the near-linear space regime, none of the algorithms so far have been able to simultaneously obtain near-linear space and a sublinear query time, for *all* approximations $c > 1$. For example, the best currently known algorithm of [Kap15] obtained query time of roughly $n^{4/(c^2+1)}$, which becomes trivial for $c < \sqrt{3}$.

1.4 Lower bounds

Lower bounds for NNS and ANN have also received considerable attention. Such lower bounds are ideally obtained in the *cell-probe* model [MNSW98, Mil99]. In the cell-probe model one measures the *number of memory cells* the query algorithm accesses. Despite a number of success stories, high cell-probe lower bounds are notoriously hard to prove. In fact, there are few techniques for proving high cell-probe lower bounds, for any (static) data structure problem. For ANN in particular, we

¹Let us note that the idea of data-dependent random space partitions is ubiquitous in practice, see, e.g., [WSSJ14, WLKC15] for a survey. But the perspective in practice is that the given datasets are not “worst case” and hence it is possible to adapt to the additional “nice” structure.

have no viable techniques to prove $\omega(\log n)$ query time lower bounds. Due to this state of affairs, one may rely on *restricted* models of computation, which nevertheless capture existing upper bounds.

Early lower bounds for NNS were obtained for data structures in *exact* or *deterministic* settings [BOR99, CCGL99, BR02, Liu04, JKKR04, CR04, PT06, Yin16]. In [CR04, LPY16] an almost tight cell-probe lower bound was obtained for the randomized Approximate Nearest Neighbor Search under the ℓ_1 distance. In the latter problem, there is no distance threshold r , and instead the goal is to find a data point that is not much further than the *closest* data point. This twist is the main source of hardness, and the result is not applicable to the ANN problem as introduced above.

There are few results that show lower bounds for *randomized* data structures for the *approximate* near neighbor problem (the setting studied in the present paper). The first such result [AIP06] shows that any data structure that solves $(1 + \varepsilon, r)$ -ANN for ℓ_1 or ℓ_2 using t cell probes requires space $n^{\Omega(1/t\varepsilon^2)}$.² This result shows that the algorithms of [IM98, KOR00] are tight up to constants in the exponent for $t = O(1)$.

In [PTW10] (following up on [PTW08]), the authors introduce a general framework for proving lower bounds for ANN under any metric. They show that lower bounds for ANN are implied by the *robust expansion* of the underlying metric space. Using this framework, [PTW10] show that (c, r) -ANN using t cell probes requires space $n^{1+\Omega(1/tc)}$ for the Hamming distance and $n^{1+\Omega(1/tc^2)}$ for the Euclidean distance (for every $c > 1$).

Lower bounds have also been obtained for other metrics. For the ℓ_∞ distance, [ACP08] show a lower bound for deterministic ANN data structures. This lower bound was later generalized to randomized data structures [PTW10, KP12]. A recent result [AV15] adapts the framework of [PTW10] to Bregman divergences.

To prove higher lower bounds, researchers resorted to lower bounds for restricted models. These examples include: decision trees [ACP08] (the corresponding upper bound [Ind01b] is in the same model), LSH [MNP07, OWZ14, AIL⁺15] and data-dependent LSH [AR16].

1.5 Our results: upper bounds

We give an algorithm obtaining the entire range of time–space tradeoffs, obtaining sublinear query time for all $c > 1$, for the entire space \mathbb{R}^d . Our main theorem is the following:

Theorem 1.1 (see Sections 3 and 4). *For every $c > 1$, $r > 0$, $\rho_q \geq 0$ and $\rho_u \geq 0$ such that*

$$c^2 \sqrt{\rho_q} + (c^2 - 1) \sqrt{\rho_u} \geq \sqrt{2c^2 - 1}, \quad (2)$$

there exists a data structure for (c, r) -ANN for the Euclidean space \mathbb{R}^d , with space $n^{1+\rho_u+o(1)} + O(dn)$ and query time $n^{\rho_q+o(1)} + dn^{o(1)}$.

This algorithm has optimal exponents for all hashing-based algorithms, as well as one- and two-probe data structures, as we prove in later sections. In particular, Theorem 1.1 recovers or

²The correct dependence on $1/\varepsilon$ requires a stronger LSD lower bound from [Pät11].

improves upon all earlier results on ANN in the entire time-space trade-off. Indeed, setting $\rho_u = 0$, we obtain space $n^{1+o(1)}$ with query time $n^{\frac{2c^2-1}{c^4}+o(1)}$, which is sublinear for every $c > 1$. For $\rho_q = \rho_u$, we recover the best data-dependent LSH bound from [AR15], with space $n^{1+\frac{1}{2c^2-1}+o(1)}$ and query time $n^{\frac{1}{2c^2-1}+o(1)}$. Finally, setting $\rho_q = 0$, we obtain query time $n^{o(1)}$ and space $n^{\left(\frac{c^2}{c^2-1}\right)^2+o(1)}$, which, for $c = 1 + \varepsilon$ with $\varepsilon \rightarrow 0$, becomes $n^{1/(4\varepsilon^2)+\dots}$.

Using a reduction from [Ngu14], we obtain a similar trade-off for the ℓ_p spaces for $1 \leq p < 2$ with c^2 replaced with c^p . In particular, for the Hamming space we get:

$$c\sqrt{\rho_q} + (c-1)\sqrt{\rho_u} \geq \sqrt{2c-1}.$$

Let us remark that our algorithms can be made to support insertions/deletions with only logarithmic loss in space/query time, using the *dynamization* technique for decomposable search problems from [OvL81], achieving update time of $d \cdot n^{\rho_u+o(1)}$. To apply this technique, one needs to ensure that we can get preprocessing time near-linear in the space used, which is the case for our data structure.

1.5.1 Techniques

We now describe at a high level the algorithm behind Theorem 1.1. It consists of two major stages. In the first stage, we show how to obtain Theorem 1.1 for *random* Euclidean instances (introduced formally in Section 2): in short, we generate a dataset uniformly at random on a unit sphere $S^{d-1} \subset \mathbb{R}^d$ and plant a query at random within distance $\sqrt{2}/c$ from a randomly chosen data point. In the second stage, we show the claimed result for the *worst-case* instances by combining ideas from the first stage with data-dependent LSH from [AINR14, AR15].

Data-independent partitions. Theorem 1.1 for random instances can be obtained using a certain *data-independent* random process, which we briefly introduce below. It can be seen as a modification of Spherical Locality-Sensitive Filtering from [BDGL16], and is related to a cell-probe *upper bound* from [PTW10]. While this data-independent approach can be extended to *worst case* instances, it gives a significantly worse bound than (2).

Suppose that we want to solve an instance of ANN on a *Euclidean unit sphere* $S^{d-1} \subset \mathbb{R}^d$. For this we build a random decision tree using the following random procedure. We take our initial dataset $P \subset S^{d-1}$, sample several i.i.d. standard Gaussian vectors z_1, z_2, \dots, z_T , and then form T (not necessarily disjoint) sets $P_i \subseteq P$ as follows:

$$P_i = \{p \in P \mid \langle z_i, p \rangle \geq \eta_u\}.$$

For each child with non-empty P_i , we recurse by repeating the above procedure on P_i . We stop the recursion once we reach K -th level in our tree. To process a query point $q \in S^{d-1}$, we start at the root and descend into (potentially a few children) P_i for which $\langle z_i, q \rangle \geq \eta_q$, for which we then do

the same. When we eventually reach the K -th level, we try all the points from the corresponding subsets of the dataset.

The choice of the parameters T , K , η_u and η_q depends on the distance threshold r , approximation factor c , as well as the desired space and query time exponents ρ_u and ρ_q . In particular, $\eta_u = \eta_q$ corresponds to the “LSH regime” $\rho_u = \rho_q$; $\eta_u < \eta_q$ corresponds to the “fast queries” regime $\rho_q < \rho_u$ (the query procedure is more selective about where to go); and $\eta_u > \eta_q$ corresponds to the “low memory” regime $\rho_u < \rho_q$. The analysis of this algorithm relies on bounds on the Gaussian area of certain two-dimensional sets [AIL⁺15], which are routinely needed for understanding “Gaussian-induced” partitions.

This algorithm has two important consequences. First, we obtain the desired trade-off (2) for random instances by setting $r = \frac{\sqrt{2}}{c}$. Second, we obtain an inferior trade-off for *worst-case* instances of (c, r) -ANN over a unit sphere S^{d-1} . Namely, for the worst-case dataset on \mathbb{R}^d , we can get:

$$(c^2 + 1)\sqrt{\rho_q} + (c^2 - 1)\sqrt{\rho_u} \geq 2c. \quad (3)$$

Even though it is inferior to the desired bound from (2)³, it is still quite non-trivial. In particular, (3) is better than *all the prior work* on time–space trade-offs for ANN, including the most recent [Kap15]. Moreover, we can use a reduction from [Val15], and achieve the bound (3) for the whole \mathbb{R}^d as opposed to just a unit sphere. Let us formally record it below:

Theorem 1.2. *For every $c > 1$, $r > 0$, $\rho_q \geq 0$ and $\rho_u \geq 0$ such that Eqn. (3) holds, there exists a data structure for (c, r) -ANN for the whole \mathbb{R}^d with space $n^{1+\rho_u+o(1)} + O(dn)$ and query time $n^{\rho_q+o(1)} + dn^{o(1)}$.*

Data-dependent partitions. We then improve Theorem 1.2 for worst-case instances and obtain the final result, Theorem 1.1. We build on the ideas of data-dependent LSH from [AINR14, AR15]. As before, using the reduction from [Val15], we can assume that the dataset and queries lie on a unit sphere S^{d-1} .

If it were the case that pairwise distances between data points are distributed roughly like in the random instance, we could have just used the above data-independent procedure. In absence of such a guarantee, the key idea is to manipulate the dataset to reduce it to the case where it does happen. Namely, we are looking for low-diameter clusters that contain lots of data points. We extract these clusters, and for each of them we enclose it in a ball of radius non-trivially smaller than 1 and recurse. For the remainder we perform one step of the above data-independent algorithm: we sample T Gaussian vectors, form T subsets of the dataset, and recurse on them. Overall, we make progress in two ways: for the clusters, we make them a bit more isotropic after re-centering, which, after several re-centerings, makes the instance amenable to the data-independent algorithm, and for the remainder, we can show that the absence of dense clusters makes the data-independent algorithm work at least for a single level of the tree (indeed, when recursing into P_i ’s, clusters can re-appear, in which case we need to extract them, and so forth).

³See Figure 2 for comparison for the case $c = 2$.

While the above intuition is very simple and, in hindsight, natural, the actual execution requires a good amount of work. For example, we need to formalize “low-diameter”, “lots of points”, “more isotropic”, etc. Nevertheless, compared to [AR15], we manage to simplify certain parts. For example, we do not rely on the behavior of Gaussian partitions on *triples* of points (which was necessary in [AR15]), which makes the overall argument much cleaner. There are still lots of moving parts, and we hope that this algorithm will be simplified further down the road.

Let us remark that it was suggested in the previous work that using data-dependent partitions for time–space trade-off might be possible. To quote [Kap15]: “It would be very interesting to see if similar [...] analysis can be used to improve our tradeoffs”.

1.6 Our results: lower bounds

We also show both new cell-probe and restricted lower bounds for (c, r) -ANN, which match our upper bounds. All our lower bounds rely on a certain canonical hard distribution for the Hamming space (defined later in Section 2). Via a standard reduction [LLR94], we obtain similar hardness results for ℓ_p with $1 < p \leq 2$ (with c being replaced by c^p).

1.6.1 One cell probe

First, we show a tight lower bound on the space needed to solve ANN for a random instance, for query algorithms that use a *single* cell probe. More formally, we prove the following theorem:

Theorem 1.3 (see Section 6.2). *Any data structure that:*

- *solves (c, r) -ANN for the Hamming random instance (as defined in Section 2) with probability at least $2/3$,*
- *operates on memory cells of size $n^{o(1)}$,*
- *for each query, looks up a single cell,*

must use at least $n^{(\frac{c}{c-1})^2 - o(1)}$ words of memory.

The space lower bound matches:

- Our upper bound for *random instances* that can be made single-probe;
- Our upper bound for worst-case instances with query time $n^{o(1)}$.

The previous best lower bound from [PTW10] for a single probe was weaker by a polynomial factor.

We prove Theorem 1.3 by computing tight bounds on the robust expansion of a hypercube $\{-1, 1\}^d$ as defined in [PTW10]. Then, we invoke a result from [PTW10], which yields the desired cell probe lower bound. We obtain estimates on the robust expansion via a combination of the hypercontractivity inequality and Hölder’s inequality [O’D14]. Equivalently, one could obtain the same bounds by an application of the Generalized Small-Set Expansion Theorem for $\{-1, 1\}^d$ of [O’D14].

1.6.2 Two cell probes

To state our results for two cell probes, we first define the *decision* version of ANN (first introduced in [PTW10]). Suppose that with every data point $p \in P$ we associate a bit $x_p \in \{0, 1\}$. A new goal is: given a query $q \in \{-1, 1\}^d$ which is within distance at most r from a data point $p \in P$, and assuming that $P \setminus \{p\}$ is at distance more than cr from q , return correct x_p with probability at least $2/3$. It is easy to see that any algorithm for (c, r) -ANN would solve this decision version.

We prove the following lower bound for data structures making only two cell probes per query.

Theorem 1.4 (see Section 8). *Any data structure that:*

- *solves the decision ANN for the random instance (Section 2) with probability $2/3$,*
- *operates on memory cells of size $o(\log n)$,*
- *accesses at most two cells for each query,*

must use at least $n^{(\frac{c}{c-1})^2 - o(1)}$ words of memory.

Informally speaking, we show that the second cell probe cannot improve the space bound by more than a subpolynomial factor. To the best of our knowledge, this is the first lower bound on the space of *any* static data structure problem without a polynomial gap between $t = 1$ and $t \geq 2$ cell-probes. Previously, the highest ANN lower bound for two queries was weaker by a polynomial factor [PTW10]. (This remains the case even if we plug the tight bound on the robust expansion of a hypercube into the framework of [PTW10].) Thus, in order to obtain a higher lower bound for $t = 2$, we need to depart from the framework of [PTW10].

Our proof establishes a connection between two-query data structures (for the decision version of ANN), and two-query locally-decodable codes (LDC) [Yek12]. A possibility of such a connection was suggested in [PTW10]. In particular, we show that any data structure violating the lower bound from Theorem 1.4 would imply a too-good-to-be-true two-query LDC, which contradicts known LDC lower bounds from [KdW04, BRdW08].

The first lower bound for unrestricted two-query LDCs was proved in [KdW04] via a *quantum* argument. Later, the argument was simplified and made *classical* in [BRdW08]. It turns out that, for our lower bound, we need to resort to the original quantum argument of [KdW04] since it has a better dependence on the noise rate a code is able to tolerate. During the course of our proof, we do not obtain a full-fledged LDC, but rather an object which can be called an *LDC on average*. For this reason, we are unable to use [KdW04] as a black box but rather adapt their proof to the average case.

Finally, we point out an important difference with Theorem 1.3: in Theorem 1.4 we allow words to be merely of size $o(\log n)$ (as opposed to $n^{o(1)}$). Nevertheless, for the *decision version* of ANN for random instances our upper bounds hold even for such “tiny” words. In fact, our techniques do not allow us to handle words of size $\Omega(\log n)$ due to the weakness of known lower bounds for two-query LDC for *large alphabets*. In particular, our argument can not be pushed beyond word

size $2^{\tilde{\Theta}(\sqrt{\log n})}$ in principle, since this would contradict known constructions of two-query LDCs over large alphabets [DG15]!

1.6.3 The general time–space trade-off

Finally, we prove conditional lower bound on the entire time–space trade-off that is tight (up to $n^{o(1)}$ factors), matching our upper bounds. Note that—since we show polynomial query time lower bounds—proving similar lower bounds *unconditionally* is far beyond the current reach of techniques, modulo major breakthrough in cell probe lower bounds.

Our lower bounds are proved in the following model, which can be loosely thought of comprising all hashing-based frameworks we are aware of:

Definition 1.5. A list-of-points data structure for the ANN problem is defined as follows:

- We fix (possibly randomly) sets $A_i \subseteq \{0, 1\}^d$, for $i = 1 \dots m$; also, with each possible query point $q \in \{0, 1\}^d$, we associate a (random) set of indices $I(q) \subseteq [m]$;
- For a given dataset P , the data structure maintains m lists of points L_1, L_2, \dots, L_m , where $L_i = P \cap A_i$;
- On query q , we scan through each list L_i for $i \in I(q)$ and check whether there exists some $p \in L_i$ with $\|p - q\|_1 \leq cr$. If it exists, return p .

The total space is defined as $s = m + \sum_{i=1}^m |L_i|$ and the query time is $t = |I(q)| + \sum_{i \in I(q)} |L_i|$.

For this model, we prove the following theorem.

Theorem 1.6 (see Section 7). Consider any list-of-points data structure for (c, r) -ANN for random instances of n points in the d -dimensional Hamming space with $d = \omega(\log n)$, which achieves a total space of $n^{1+\rho_u}$, and has query time $n^{\rho_q - o(1)}$, for $2/3$ success probability. Then it must hold that:

$$c\sqrt{\rho_q} + (c - 1)\sqrt{\rho_u} \geq \sqrt{2c - 1}. \quad (4)$$

We note that our model captures the basic hashing-based algorithms, in particular most of the known algorithms for the high-dimensional ANN problem [KOR00, IM98, Ind01b, Ind01a, GIM99, Cha02, DIIM04, Pan06, AC09, AI06, Pag16, Kap15], including the recently proposed Locality-Sensitive Filters scheme from [BDGL16]. The only data structures not captured are the data-dependent schemes from [AINR14, Raz14, AR15]; we conjecture that the natural extension of the list-of-point model to data-dependent setting would yield the same lower bound. In particular, Theorem 1.6 uses the random instance as a hard distribution, for which being data-dependent seems to offer no advantage. Indeed, a data-dependent lower bound in the standard LSH regime (where $\rho_q = \rho_u$) has been recently shown in [AR16], and matches (4) for $\rho_q = \rho_u$.

1.7 Related work: past and concurrent

There has been a lot of recent algorithmic advances on high-dimensional similarity search. One of them is better algorithms for the closest pair problem, which can be seen as the off-line version of NNS/ANN [Val15, AW15, KKK16, KKKÓ16, ACW16]. Note that ANN solutions with $n^{1+\rho_u}$ space (and preprocessing), and n^{ρ_q} query time imply closest pair problem with $O(n^{1+\rho_u} + n^{1+\rho_q})$ time (implying that the balanced, LSH regime is most relevant). Other work includes locality-sensitive filters [BDGL16], LSH without false negatives [GPY94, Ind00, AGK06, Pag16, PP16], to name just a few. See also the surveys [HIM12, AI08, And09].

Relation to the manuscript [Chr16]. We also comment in detail on the recent manuscript of [Chr16], which has non-trivial intersection with this paper, and its relation to the arXiv preprints [Laa15c, ALRW16] that are now subsumed by this paper. In November 2015, [Laa15c] announced the optimal trade-off (i.e., Theorem 1.1) for random instances. As mentioned earlier, it is possible to extend this result to the entire Euclidean space, albeit with an inferior trade-off, from Theorem 1.2; for this, one can use a standard reduction à la [Val15] (this extension was not discussed in [Laa15c]). On May 9, 2016, both [Chr16] and [ALRW16] have been announced on arXiv. In [Chr16], the author also obtains an upper bound similar to Theorem 1.2 (trade-offs for the entire \mathbb{R}^d , but which are suboptimal), using a different (data-independent) reduction from the worst-case to the spherical case. Besides the upper bound, the author of [Chr16] also proved a conditional lower bound, similar to our lower bound from Theorem 1.6. This lower bound of [Chr16] is independent of our work in [ALRW16] (which is now a part of the current paper).

1.8 Open problems

We compile a list of (exciting, in our opinion) open problems which hint directions for future work:

- While our upper bounds are optimal (at least, in the hashing framework), the most general algorithms are, unfortunately, impractical. Our trade-offs for random instances on the sphere may well be practical (see also [BDGL16, Laa15a] for an experimental comparison with e.g. [Cha02, AIL⁺15] for $\rho_q = \rho_u$), but a specific bottleneck for the extension to worst-case instances in \mathbb{R}^d is the clustering step inherited from [AR15]. Can one obtain simple and practical algorithms that achieve the optimal time-space trade-off for these instances as well?
- Our new upper bound for the Euclidean case comes tantalizingly close to the best known data structure for the ℓ_∞ distance [Ind01b]. Can we unify them and extend in a smooth way to the ℓ_p spaces for $2 < p < \infty$?
- Can we improve the dependence on the word size in the reduction from ANN data structures to LDCs used in the two-probe lower bound? As discussed above, the word size can not be pushed beyond $2^{\tilde{\Theta}(\sqrt{\log n})}$ due to known constructions [DG15].

- A more optimistic view is that LDCs may provide a way to avoid the barrier posed by hashing-based approaches. We have shown that ANN data structures can be used to build weak forms of LDCs, and an intriguing open question is whether known LDC constructions can help with designing good ANN data structures.

2 Random instances

In this section we introduce the central *random* instances of ANN for the Hamming and Euclidean spaces. These instances play a crucial role for both upper bounds (algorithms) and the lower bounds in all the subsequent sections (as well as some prior work). On the one hand, the optimal data-dependent LSH data structure from [AR15] essentially reduces any dataset to such instances, for which one then designs the best data-*independent* LSH. On the other hand, the instances introduced below will be precisely the hard distribution against which we prove hardness.

We note that, for upper bounds, the most relevant distribution is that for Euclidean space, since this also yields the algorithms for the Hamming space using standard reductions. For the lower bounds, the most relevant distribution is that for the Hamming space, as this also yields lower bounds for the Euclidean space, again, using standard reductions.

Hamming distance. The distribution here is the classic distribution introduced for the *light bulb problem* in literature [Val88], which can be seen as the *off-line* setting of ANN.

- The dataset P consists of n independent uniformly random points from $\{-1, 1\}^d$, where $d = \omega(\log n)$;
- A query q is generated by choosing a uniformly random data point $p \in P$, and flipping each coordinate of p with probability $\frac{1}{2c}$ independently;
- The goal for a data structure is to recover the data point p from the query point q .

This hard distribution has also been used for many of the lower bounds on ANN mentioned in Section 1.4.

Euclidean distance. Now we introduce a similar random instance for ℓ_2 . It is exactly a data structure for such instances that lies at the core of the optimal data-dependent LSH for the Euclidean distance from [AR15].

- All points and queries lie on a unit sphere $S^{d-1} \subset \mathbb{R}^d$.
- The dataset P is generated by sampling n unit vectors from S^{d-1} independently and uniformly at random. We assume that $d = \omega(\log n)$ so that pairwise distances are sufficiently concentrated around $\sqrt{2}$.

- A query q is generated by first choosing a dataset point $p \in P$ uniformly at random, and then choosing q uniformly at random from all points in S^{d-1} within distance $\frac{\sqrt{2}}{c}$ from p .
- The goal of the data structure is to preprocess P so that, given a query q generated as above, it can recover the corresponding data point p .

This instance must be handled by any data structure for $(c + o(1), \frac{\sqrt{2}}{c})$ -ANN over ℓ_2 . At the same time, [AR15] show how to reduce *any* (c, r) -ANN instance to several *pseudo*-random instances without increasing query time and space too much. The resulting instances are not exactly the random instances described above, but do have roughly the same distribution of distances.

3 Upper bounds: data-independent partitions

3.1 Setup

For $0 < s < 2$, we define $\alpha(s) = 1 - \frac{s^2}{2}$ to be the cosine of the angle between two points on a unit Euclidean sphere S^{d-1} with distance s between them, and $\beta(s) = \sqrt{1 - \alpha^2(s)}$ to be the sine of the same angle.

We introduce two functions that will be useful later. First, for $\rho > 0$, let

$$F(\rho) = \Pr_{z \sim N(0,1)^d} [\langle z, u \rangle \geq \rho],$$

where $u \in S^{d-1}$ is an arbitrary point on the unit sphere. Note that $F(\rho)$ does not depend on the specific choice of u due to the spherical symmetry of Gaussians. Second, for $0 < s < 2$ and $\rho, \sigma > 0$, let

$$G(s, \rho, \sigma) = \Pr_{z \sim N(0,1)^d} [\langle z, u \rangle \geq \rho \text{ and } \langle z, v \rangle \geq \sigma],$$

where $u, v \in S^{d-1}$ are arbitrary points from the unit sphere with $\|u - v\|_2 = s$. As is the case with F , the value of $G(s, \rho, \sigma)$ does not depend on the specific points u and v , just on the distance between them. Clearly $G(s, \rho, \sigma)$ is non-increasing in s , for fixed ρ and σ .

We state two useful bounds on $F(\cdot)$ and $G(\cdot, \cdot, \cdot)$. The first is a standard tail bound for $N(0, 1)$.

Lemma 3.1. *For $\rho \rightarrow \infty$,*

$$F(\rho) = e^{-(1+o(1)) \cdot \frac{\rho^2}{2}}.$$

The second is a by now standard computation: see, e.g., the appendix of [AIL⁺15].

Lemma 3.2. *If $\rho, \sigma \rightarrow \infty$, then, for every s one has:*

$$G(s, \rho, \sigma) = e^{-(1+o(1)) \cdot \frac{\rho^2 + \sigma^2 - 2\alpha(s)\rho\sigma}{2\beta^2(s)}}.$$

Finally, by using the Johnson–Lindenstrauss lemma [JL84, DG99] we can assume that $d = \Theta(\log n \cdot \log \log n)$ incurring distortion at most $1 + o(1)$.

3.2 Results

Now we formulate the main result of Section 3, which we later significantly improve in Section 4.

Theorem 3.3. *For every $c > 1$, $r > 0$, $\rho_q \geq 0$ and $\rho_u \geq 0$ such that $cr < 2$ and*

$$(1 - \alpha(r)\alpha(cr))\sqrt{\rho_q} + (\alpha(r) - \alpha(cr))\sqrt{\rho_u} \geq \beta(r)\beta(cr), \quad (5)$$

there exists a data structure for (c, r) -ANN on a unit sphere $S^{d-1} \subset \mathbb{R}^d$ with space $n^{1+\rho_u+o(1)}$ and query time $n^{\rho_q+o(1)}$.

Let us instantiate Theorem 3.3 for two important cases. First, we can get a single trade-off between ρ_q and ρ_u for all $r > 0$ at the same time. This can be done by observing that (5) is the worst when $r \rightarrow 0$. Thus, we can get a (pessimistic, unless r is small) bound on ρ_q and ρ_u that depends on the approximation c only, which then can easily be translated to a result for the whole \mathbb{R}^d (using the reduction from [Val15]).

Corollary 3.4. *For every $c > 1$, $r > 0$, $\rho_q \geq 0$ and $\rho_u \geq 0$ such that*

$$(c^2 + 1)\sqrt{\rho_q} + (c^2 - 1)\sqrt{\rho_u} \geq 2c, \quad (6)$$

there exists a data structure for (c, r) -ANN for the whole \mathbb{R}^d with space $n^{1+\rho_u+o(1)}$ and query time $n^{\rho_q+o(1)}$.

Proof. It is not hard to check that (5) degrades into (6) when $r \rightarrow 0$, and it is the worst case over all possible $r > 0$. To get a data structure for the whole \mathbb{R}^d , one needs, informally speaking, to look at the dataset from “far away”. Before that, we partition \mathbb{R}^d using a randomly-shifted grid with side size $O_c(\sqrt{d}) = \tilde{O}_c(\sqrt{\log n})$. Then, it would be almost on the sphere, and this reduces the problem to the spherical case for a very small $r > 0$ (namely, of order $\tilde{\Omega}(1/\sqrt{\log n})$). \square

Second, we can see what Theorem 3.3 gives for *random* instances as defined in Section 2. This regime corresponds to setting $r = \frac{\sqrt{2}}{c}$. As it was noticed above, (5) is the worst when $r \rightarrow 0$. This means that for random instances we can obtain a trade-off between ρ_q and ρ_u which is significantly better than (6).

Corollary 3.5. *For every $c > 1$, $\rho_q \geq 0$ and $\rho_u \geq 0$ such that*

$$c^2\sqrt{\rho_q} + (c^2 - 1)\sqrt{\rho_u} \geq \sqrt{2c^2 - 1}, \quad (7)$$

there exists a data structure for $(c, \frac{\sqrt{2}}{c})$ -ANN on a unit sphere $S^{d-1} \subset \mathbb{R}^d$ with space $n^{1+\rho_u+o(1)}$ and query time $n^{\rho_q+o(1)}$. In particular, this data structure is able to handle random instances as defined in Section 2.

Proof. Follows from (5) and that $\alpha(\sqrt{2}) = 0$ and $\beta(\sqrt{2}) = 1$. \square

Let us see what (6) and (7) give for say $c = 2$. We plotted them as Figure 2. Note that (7) is much better than (6), especially for fast queries (for instance, for query time $n^{o(1)}$ (6) gives space $n^{2.77\dots}$, while (7) gives much better space $n^{1.77\dots}$). Later, in Section 4, we will get the best of both worlds: we obtain the trade-off (7) for *worst-case* instances. The remainder of the section is devoted to proving Theorem 3.3.

3.3 Data structure

3.3.1 Description

Our data structure is a *single* rooted tree where each node corresponds to a spherical cap. The tree consists of $K + 1$ levels of nodes where each node has out-degree at most T . We will index the levels by $0, 1, \dots, K$, where the 0-th level consists of the root denoted by r , and each node up to the $(K - 1)$ -th level has at most T children. Therefore, there are at most T^K nodes at the K -th level.

For every node v in the tree, let \mathcal{L}_v be the set of nodes on the path from v to the root u excluding the root (but including v). Each node v , except for the root, stores a random Gaussian vector $z_v \sim N(0, 1)^d$. So for each node v , we define the following subset of the dataset $P_v \subseteq P$ as

$$P_v = \{p \in P \mid \forall v' \in \mathcal{L}_v \ \langle z_{v'}, p \rangle \geq \eta_u\},$$

where $\eta_u > 0$ is a parameter to be chosen later.

For example, at the root node u , $P_u = P$, because $\mathcal{L}_u = \emptyset$ (remember that the path \mathcal{L}_u excludes the root). Intuitively, each set P_v corresponds to a subset of the dataset lying in the intersection of spherical caps centered around $z_{v'}$ for all $v' \in \mathcal{L}_v$. Every node v from the level K stores the subset P_v explicitly.

We build the tree recursively. For a given node v in levels $0, \dots, K - 1$, we first sample T i.i.d. Gaussian vectors $g_1, g_2, \dots, g_T \sim N(0, 1)^d$. Then, for every i such that $\{p \in P_v \mid \langle g_i, p \rangle \geq \eta_u\}$ is non-empty, we create a new child v' with $z_{v'} = g_i$ and recursively process v' . At the K -th level, each node v stores P_v as a list of points.

In order to process a query $q \in S^{d-1}$, we start from the root u and descend down the tree. We consider every child v of the root for which $\langle z_v, q \rangle \geq \eta_q$, where $\eta_q > 0$ is another parameter to be chosen later⁴. After identifying all the children, we proceed down the children recursively. If we end up in a leaf v at level K , we scan through all the points in P_v and their distance to the query q . If a point lies at a distance at most cr from the query, we return it.

We summarize the data structure in Figure 1. To build the data structure for some dataset P , one calls $\text{BUILD}(P, 0, \perp)$ and assigns the returned value corresponding to the root of the tree to a fresh variable u . To run the query algorithm for a query point q , one should call $\text{QUERY}(q, u)$.

⁴Note that η_u may not be equal to η_q , and it is exactly this discrepancy that will eventually govern the time-space trade-off.

```

function BUILD( $P', l, z$ )
  create a tree node  $v$ 
  store  $l$  as  $v.l$ 
  store  $z$  as  $v.z$ 
  if  $l = K$  then
    store  $P'$  as  $v.P$ 
  else
    for  $i \leftarrow 1 \dots T$  do
      sample a Gaussian vector  $z' \sim N(0, 1)^d$ 
       $P'' \leftarrow \{p \in P' \mid \langle z', p \rangle \geq \eta_u\}$ 
      if  $P'' \neq \emptyset$  then
        add BUILD( $P'', l + 1, z'$ ) as a child of  $v$ 
  return  $v$ 

function QUERY( $q, v$ )
  if  $v.l = K$  then
    for  $p \in v.P$  do
      if  $\|p - q\| \leq cr$  then
        return  $p$ 
  else
    for  $v' - \text{child of } v$  do
      if  $\langle v'.z, q \rangle \geq \eta_q$  then
         $p \leftarrow \text{QUERY}(q, v')$ 
        if  $p \neq \perp$  then
          return  $p$ 
  return  $\perp$ 

```

Figure 1: Pseudocode for data-independent partitions

3.3.2 Analysis

Probability of success We first analyze the probability of success of the data structure. This corresponds to computing the probability that $\text{QUERY}(q, u)$ returns some point p' with $\|q - p\|_2 \leq cr$.

Lemma 3.6. *If*

$$T \geq \frac{100}{G(r, \eta_u, \eta_q)},$$

then the probability of finding a point within distance cr from a given query it at least 0.9.

Proof. We prove the lemma by induction on the depth of the tree. Let $q \in S^{d-1}$ be a query point and $p \in P$ its near neighbor. Suppose we are within the recursive call $\text{QUERY}(q, v)$ for some node v in the tree. Suppose we have not already failed, so that $p \in P_v$. We would like to prove that—if the condition of the lemma is met—the probability that this call returns *some* point within distance cr is at least 0.9.

When v is a node in the last level K , the algorithm enumerates P_v and, since we assume $p' \in P_v$, some good point will be discovered. Therefore, this case is trivial. Now suppose that v is not from the K -th level. Using the inductive assumption, suppose that the statement of the lemma is true for all the children of v . Then,

$$\Pr[\text{failure}] \leq \prod_{v': \text{child of } v} \left(1 - \Pr_{z_{v'}} [\langle z_{v'}, p' \rangle \geq \eta_u \text{ and } \langle z_{v'}, q \rangle \geq \eta_q] \cdot 0.9 \right) \quad (8)$$

$$\leq (1 - G(r, \eta_u, \eta_q) \cdot 0.9)^T \leq 0.1, \quad (9)$$

where the first step follows from the inductive assumption and independence between children of v during the preprocessing phase. The second step follows by monotonicity of $G(s, \rho, \sigma)$ in s , and the third step is due to the assumption of the lemma. \square

Space We now analyze the space consumption of the data structure.

Lemma 3.7. *The expected space consumption of the data structure is at most*

$$n^{1+o(1)} \cdot K \cdot (T \cdot F(\eta_u))^K.$$

Proof. Let us compute the expected total size of the sets P_v for leaf nodes v from the K -th level. There are at most T^K such nodes, and for a fixed point $p \in P$ and a fixed node v the probability that $p \in P_v$ is equal to $F(\eta_u)^K$. Thus, the total size is at most $n \cdot (T \cdot F(\eta_u))^K$ in expectation. Thus, the desired bound follows, since for every stored point we have at most $K + 1$ tree nodes, and the term $n^{o(1)}$, which is an upper bound for d , comes from the fact that we need to store the points as well as the Gaussian vectors. \square

Query time Finally, we analyze the query time.

Lemma 3.8. *The expected query time is at most*

$$n^{o(1)} \cdot T \cdot (1 + T \cdot F(\eta_q))^K + n^{1+o(1)} \cdot (T \cdot G(cr, \eta_u, \eta_q))^K. \quad (10)$$

Proof. First, we compute the expected query time except the time it takes to enumerate P_v 's in the leaves we reach. The expected number of *nodes* the query procedure reaches is:

$$1 + T \cdot F(\eta_q) + (T \cdot F(\eta_q))^2 + \dots + (T \cdot F(\eta_q))^K = O(1) \cdot (1 + (T \cdot F(\eta_q))^K),$$

and in each of them we spend time $n^{o(1)} \cdot T$. The product of the two expressions gives the first term in the desired bound.

Let us now understand the expected time it takes to enumerate P_v 's. There are at most $n - 1$ *far* points (at distance more than cr from the query) and T^K leaves, for each far point p' and each leaf v the probability that both p' and q end up in P_v is at most $G(cr, \eta_u, \eta_q)^K$. And, for each such pair, we spend time at most $n^{o(1)}$ processing the corresponding p' . Overall, this gives the second term in the desired bound. \square

3.3.3 Setting parameters

Now we describe how to set parameters T , K , η_u and η_q to prove Theorem 3.3. Suppose we aim at query time $n^{\rho_q+o(1)}$ and space $n^{1+\rho_u+o(1)}$ for $\rho_q, \rho_u \geq 0$.

First, we set $K = \sqrt{\ln n}$. We want to satisfy the requirement of Lemma 3.6, so we set

$$T = \frac{100}{G(r, \eta_u, \eta_q)}. \quad (11)$$

Second, we want to (approximately) balance the terms in the query time (10). For this, we aim to have

$$F(\eta_q)^K = n \cdot G(cr, \eta_u, \eta_q)^K. \quad (12)$$

If we satisfy these two conditions, then we obtain space $n^{1+o(1)} \cdot (T \cdot F(\eta_u))^K$ and query time⁵ $n^{o(1)} \cdot (T \cdot F(\eta_q))^K$.

Let us denote $F(\eta_u)^K = n^{-\sigma}$ and $F(\eta_q)^K = n^{-\tau}$. We have, by Lemma 3.1, Lemma 3.2 and (12), up to $o(1)$ terms,

$$\tau = \frac{\sigma + \tau - 2\alpha(cr) \cdot \sqrt{\sigma\tau}}{\beta^2(cr)} - 1,$$

which can be rewritten as

$$|\sqrt{\sigma} - \alpha(cr)\sqrt{\tau}| = \beta(cr), \quad (13)$$

since $\alpha^2(cr) + \beta^2(cr) = 1$. We have, by Lemma 3.1, Lemma 3.2 and (11),

$$T^K = n^{\frac{\sigma + \tau - 2\alpha(r)\sqrt{\sigma\tau}}{\beta^2(r)} + o(1)}.$$

Thus, we get space

$$n^{1+o(1)} \cdot (T \cdot F(\eta_u))^K = n^{1 + \frac{\sigma + \tau - 2\alpha(r)\sqrt{\sigma\tau}}{\beta^2(r)} - \sigma + o(1)} = n^{1 + \frac{(\alpha(r)\sqrt{\sigma} - \sqrt{\tau})^2}{\beta^2(r)} + o(1)}$$

and query time

$$n^{o(1)} \cdot (T \cdot F(\eta_q))^K = n^{\frac{\sigma + \tau - 2\alpha(r)\sqrt{\sigma\tau}}{\beta^2(r)} - \tau + o(1)} = n^{\frac{(\sqrt{\sigma} - \alpha(r)\sqrt{\tau})^2}{\beta^2(r)} + o(1)}.$$

Thus, we have

$$\rho_q = \frac{(\sqrt{\sigma} - \alpha(r)\sqrt{\tau})^2}{\beta^2(r)},$$

and

$$\rho_u = \frac{(\alpha(r)\sqrt{\sigma} - \sqrt{\tau})^2}{\beta^2(r)}$$

provided (13). Combining these identities, we obtain (5).

Namely, we set $\sqrt{\sigma} = \alpha(cr)\sqrt{\tau} + \beta(cr)$ to satisfy (13). Then, we move $\sqrt{\tau}$ between:

$$\frac{\alpha(r)\beta(cr)}{1 - \alpha(r)\alpha(cr)},$$

which corresponds to $\rho_u = 0$ and

$$\frac{\beta(cr)}{\alpha(r) - \alpha(cr)},$$

which corresponds to $\rho_q = 0$.

This gives a relation:

$$\sqrt{\tau} = \frac{\beta(cr) - \beta(r)\sqrt{\rho_q}}{\alpha(r) - \alpha(cr)} = \frac{\alpha(r)\beta(cr) + \beta(r)\sqrt{\rho_u}}{1 - \alpha(r)\alpha(cr)},$$

⁵Other terms from the query time are absorbed into $n^{o(1)}$ due to our choice of K

which gives the required trade-off (5)

3.4 An algorithm based on Locality-Sensitive Filtering (LSF)

We will now briefly describe an alternative algorithm to the one above, which is based on the *Spherical Locality-Sensitive Filtering* introduced in [BDGL16].⁶ While it achieves the same bounds, it has a couple of potential advantages: 1) it may be more practical and 2) it naturally extends to the $d = O(\log n)$ case with somewhat better trade-offs between ρ_q, ρ_u than in (2) (such better exponents were already obtained in [BDGL16] for the “LSH regime” of $\rho_u = \rho_q$).

For spherical LSF, in the notation of the construction described above, partitions are formed by first dividing \mathbb{R}^d into K blocks ($\mathbb{R}^d = \mathbb{R}^{d/K} \times \dots \times \mathbb{R}^{d/K}$), and then generating a spherical code $C \subset S^{d/K-1} \subset \mathbb{R}^{d/K}$ of vectors sampled uniformly at random from the lower-dimensional unit sphere $S^{d/K-1}$. For any vector $p \in \mathbb{R}^d$, we write $p^{(1)}, \dots, p^{(K)}$ for the K blocks of d/K coordinates in the vector p . For simplicity, let us assume that d is a multiple of K .

Similar to the tree-based construction above, we then generate a tree of vectors and subsets as follows. The tree consists of K levels, and the $|C|$ children of a node v at level ℓ are defined by the vectors $(0, \dots, 0, z_i, 0, \dots, 0)$, where only the ℓ -th block of d/K entries is potentially non-zero and is formed by one of the $|C|$ code words. The subset P'' of a child then corresponds to the subset P' of the parent, intersected with the spherical cap corresponding to the child. In other words, at the lowest level K a leaf v typically contains a subset $P' \subset P$ satisfying

$$P' = \{p \in P : \langle z_{i_1}, p^{(1)} \rangle \geq \eta_u, \dots, \langle z_{i_K}, p^{(K)} \rangle \geq \eta_u\}, \quad (14)$$

where the (indices of the) code words z_{i_1}, \dots, z_{i_K} depend on the path to the root of the tree. It was then shown in [BDGL16] that this approach of intersecting spherical caps is asymptotically equivalent to the following, slightly different definition of the subsets associated to the leaves:

$$\hat{P}' = \{p \in P : \langle z_{i_1}, p^{(1)} \rangle + \dots + \langle z_{i_K}, p^{(K)} \rangle \geq K \cdot \eta_u\}. \quad (15)$$

In other words, decoding each of the K blocks separately with threshold η_u was shown to be asymptotically equivalent to decoding the entire vector with threshold $K \cdot \eta_u$, as long as K does not grow too fast as a function of d and n . The latter joint decoding method based on the sum of the partial inner products is then used as the actual decoding method.

Let us highlight the difference between the previous tree-based algorithm and the algorithm in this section. Besides the difference between using Gaussian vectors and spherical (unit) vectors (a difference which is asymptotically negligible), the method for partitioning the sphere and the efficient decoding algorithm are different for these two methods. In short, both methods would like to use uniformly random, small spherical caps for the partitioning of the sphere, but clearly the decoding costs for such a method would be too high. Both methods then make a different concession as follows:

⁶As a historical note, we remark that the algorithm from this section was the one to inspire the tree-based algorithm.

- The concession made in the Gaussian tree-based solution is to let leaves correspond to intersections of spherical caps, so that many of the leaves can be discarded as soon as a vector is not included in one of the spherical caps higher up the tree. This further guarantees that all z_i can still be chosen at random. However, one would prefer to use small *single* spherical caps instead of intersections of a few larger spherical caps.
- In the LSF-based solution, the leaves in the tree still correspond to single (small) spherical caps, but for decoding efficiently, additional structure is introduced in the vectors defining these spherical caps. These vectors are no longer all randomly sampled from a Gaussian or from the sphere, but can be seen as code words from a random product code [BDGL16, Section 5]. In this case, no concession is done in terms of the shape of the region, but a concession is made in terms of the randomness of the spherical-caps-defining vectors z_i .

Although both constructions achieve the same asymptotic performance, it was already argued in [BDGL16] that the combined decoding approach instead of decoding blocks separately (i.e. single small spherical caps vs. intersections of several larger spherical caps) seems to lead to much-improved results in practice.

4 Upper bounds: data-dependent partitions

In this section we prove the main upper bound theorem, Theorem 1.1, which we restate below:

Theorem 4.1. *For every $c > 1$, $r > 0$, $\rho_q \geq 0$ and $\rho_u \geq 0$ such that*

$$c^2 \sqrt{\rho_q} + (c^2 - 1) \sqrt{\rho_u} \geq \sqrt{2c^2 - 1}, \quad (16)$$

there exists a data structure for (c, r) -ANN for the whole \mathbb{R}^d with space $n^{1+\rho_u+o(1)} + O(dn)$ and query time $n^{\rho_q+o(1)} + dn^{o(1)}$.

One can think of this theorem as achieving “the best of both worlds” for Corollary 3.4 and Corollary 3.5. Like in Corollary 3.4, our data structure works for worst-case datasets. However, we improve upon the trade-off between time and space complexity from Corollary 3.4 to that of random instances in Corollary 3.5. See Figure 2 for a comparison of both trade-offs for $c = 2$. The key idea is to combine the result of Section 3 with the techniques from [AR15].

As in [AR15], the resulting data structure is a decision tree. However, there are several notable differences from [AR15]:

- The whole data structure is a *single* decision tree, while in [AR15] we consider a *collection* of $n^{\Theta(1)}$ trees.
- Instead of Spherical LSH used in [AR15], we use the partitioning procedure from Section 3.

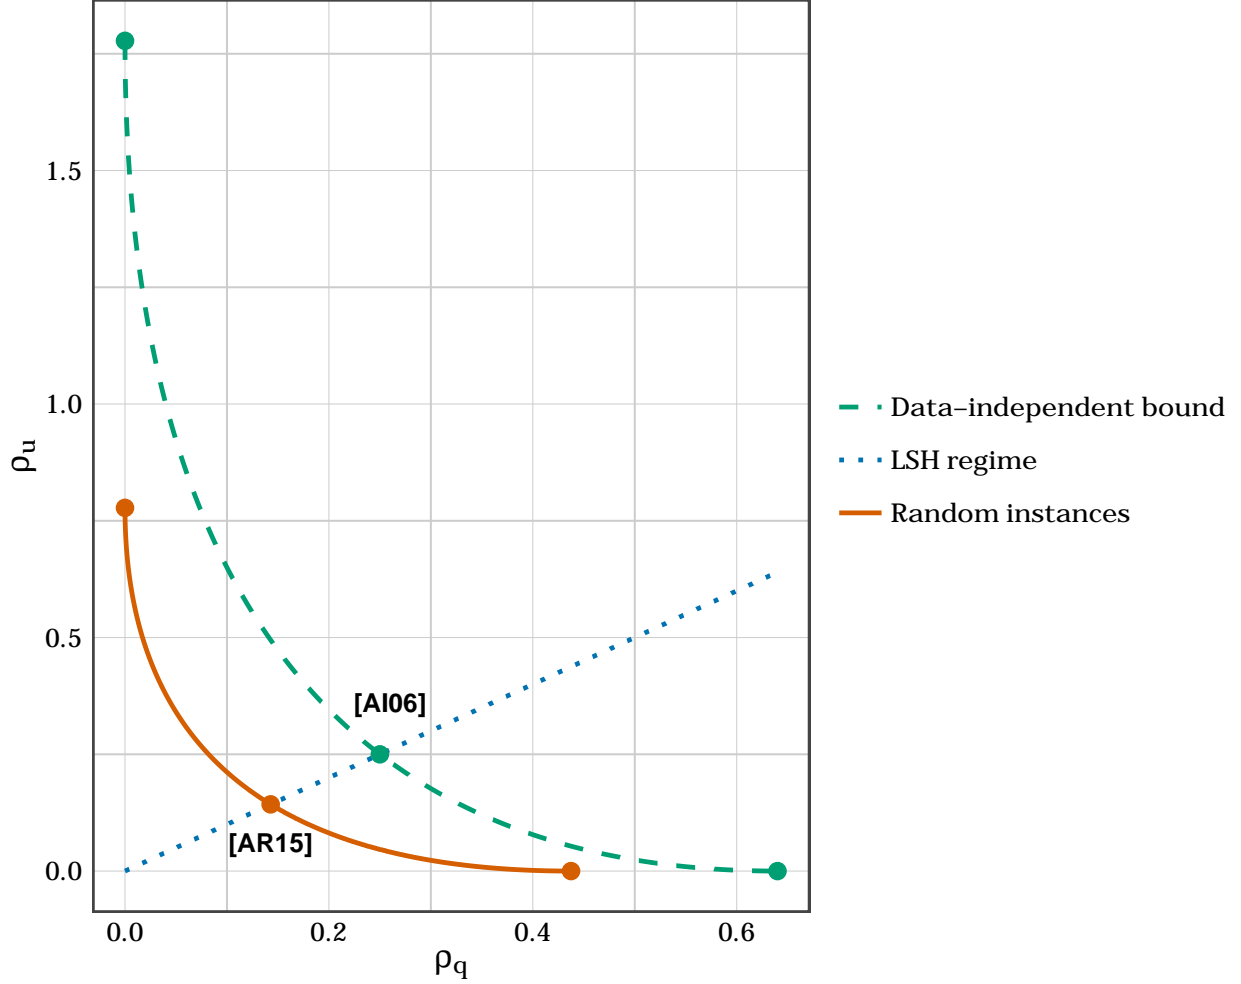


Figure 2: Trade-offs between query time $n^{\rho_q+o(1)}$ and space $n^{1+\rho_u+o(1)}$ for the Euclidean distance and approximation $c = 2$. The green dashed line corresponds to the simple data-independent bound for *worst-case* instances from Corollary 3.4. The red solid line corresponds to the bound for *random* instances from Corollary 3.5, which we later extend to *worst-case* instances in Section 4. The blue dotted line is $\rho_q = \rho_u$, which corresponds to the “LSH regime”. In particular, the intersection of the dotted and the dashed lines matches the best *data-independent* LSH from [AI06], while the intersection with the solid line matches the best *data-dependent* LSH from [AR15].

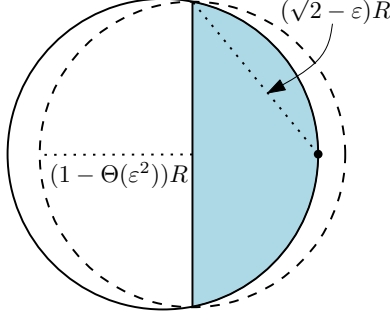


Figure 3: Covering a spherical cap of radius $(\sqrt{2} - \varepsilon)R$

- In [AR15], one proceeds with partitioning a dataset until all parts contain less than $n^{o(1)}$ points. We change the stopping criterion slightly to ensure the number of “non-cluster” nodes on any root-leaf branch is the same (around $\sqrt{\ln n}$).
- Unlike [AR15], we do not use a “three-point property” of a random space partition in the analysis. This is related to the fact that the probability success of a single tree is constant, unlike [AR15], where it is polynomially small.
- In [AR15] we reduce the general case to the “bounded ball” case using LSH from [DIIM04]. While the cost associated with this procedure is negligible in the LSH regime, the cost becomes too high in certain points on the time–space trade-off. Instead, we use a standard trick of imposing a randomly shifted grid, which reduces an arbitrary dataset to a dataset of diameter $\tilde{O}(\sqrt{\log n})$ [IM98]. Then, we invoke an upper bound from Section 3 together with a reduction from [Val15] which happens to be enough for this case.

4.1 Overview

We start with a high-level overview. Consider a dataset P_0 of n points. We may assume $r = 1$ by rescaling. We may further assume the dataset lies in the Euclidean space of dimension $d = \Theta(\log n \cdot \log \log n)$; one can always reduce the dimension to d by applying the Johnson–Lindenstrauss lemma [JL84, DG03] which reduces the dimension and distorts pairwise distances by at most $1 \pm 1/(\log \log n)^{\Omega(1)}$ with high probability. Using a reduction from [Val15], we may also assume the entire dataset P_0 and a query lie on a sphere $\partial B(0, R)$ of radius $R = \tilde{O}_c(\sqrt{\log n})$.

We partition P_0 into various components: s *dense* components, denoted by C_1, C_2, \dots, C_s , and one *pseudo-random* component, denoted by \tilde{P} . The partition is designed to satisfy the following properties. Each dense component C_i satisfies $|C_i| \geq \tau n$ and can be covered by a spherical cap of radius $(\sqrt{2} - \varepsilon)R$ (see Figure 3). Here $\tau, \varepsilon > 0$ are small quantities to be chosen later. One should think of C_i as clusters consisting of $n^{1-o(1)}$ points which are closer than random points would be. The pseudo-random component \tilde{P} consists of the remaining points without any dense clusters inside.

We proceed separately for each C_i and \tilde{P} . We enclose every dense component C_i in a slightly

smaller ball E_i of radius $(1 - \Theta(\varepsilon^2))R$ (see Figure 3). For simplicity, let us first ignore the fact that C_i does not necessarily lie on the boundary ∂E_i . Once we enclose each dense cluster with a smaller ball, we recurse on each resulting spherical instance of radius $(1 - \Theta(\varepsilon^2))R$. We treat the pseudo-random component \tilde{P} similarly to the random instance from Section 2 described in Section 3. Namely, we sample T Gaussian vectors $z_1, z_2, \dots, z_T \sim N(0, 1)^d$, and form T subsets of \tilde{P} :

$$\tilde{P}_i = \{p \in \tilde{P} \mid \langle z_i, p \rangle \geq \eta_u R\},$$

where $\eta_u > 0$ is a parameter to be chosen later (for each pseudo-random remainder separately). Then, we recurse on each \tilde{P}_i . Note that after we recurse, new dense clusters may appear in some \tilde{P}_i since it becomes easier to satisfy the minimum size constraint.

During the query procedure, we recursively query *each* C_i with the query point q . For the pseudo-random component \tilde{P} , we identify all i 's such that $\langle z_i, q \rangle \geq \eta_q R$, and query all corresponding children recursively. Here T , $\eta_u > 0$ and $\eta_q > 0$ are parameters that need to be chosen carefully (for each pseudo-random remainder separately).

Our algorithm makes progress in two ways. For dense clusters, we reduce the radius of the enclosing sphere by a factor of $(1 - \Theta(\varepsilon^2))$. Initially $R = \tilde{O}_c(\sqrt{\log n})$, so in $O_c(\log \log n / \varepsilon^2)$ iterations of removing dense clusters, we arrive at the case of $R \leq c/\sqrt{2}$, where Corollary 3.5 begins to be applicable. For the pseudo-random component \tilde{P} , most points will lie at a distance of at least $(\sqrt{2} - \varepsilon)R$ from each other. In particular, the ratio of R to a typical inter-point distance is approximately $1/\sqrt{2}$, exactly like in a random case. This is the reason we call \tilde{P} pseudo-random. In this setting, the data structure from Section 3 performs well.

We now address the issue deferred in the above high-level description: that a dense component C_i does not generally lie on ∂E_i , but rather can occupy the interior of E_i . In this case, we partition E_i into very thin annuli of carefully chosen width δ and treat each annulus as a sphere. This discretization of a ball adds to the complexity of the analysis, but is not fundamental from the conceptual point of view.

4.2 Description

We are now ready to describe the data structure formally. It depends on the (small positive) parameters τ , ε and δ , as well as an integer parameter $K \sim \sqrt{\ln n}$. We also need to choose parameters T , $\eta_u > 0$, $\eta_q > 0$ for each pseudo-random remainder separately. Figure 5 provides pseudocode for the algorithm.

Preprocessing. Our preprocessing algorithm consists of the following functions:

- **PROCESS(P)** does the initial preprocessing. In particular, it performs the rescaling so that we can assume that $r_1 = 1$ as well as the dimension reduction to $d = \Theta(\log n \log \log n)$ with the Johnson–Lindenstrauss lemma [JL84, DG03]. In addition, we perform the reduction

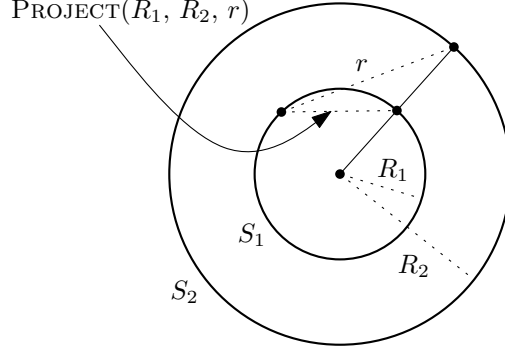


Figure 4: The definition of PROJECT

from [Val15]: we translate the points and think of them as lying on a sphere of radius $R = \tilde{O}_c(\sqrt{\log n})$. Then we call PROCESSSPHERE.

- PROCESSSPHERE(P, r_1, r_2, o, R, l) builds the data structure for a dataset P lying on a sphere $\partial B(o, R)$, assuming we need to solve ANN with distance thresholds r_1 and r_2 . Moreover, we are guaranteed that queries will lie on $\partial B(o, R)$. The parameter l counts the number of non-cluster nodes in the recursion stack we have encountered so far. Recall that we stop as soon as we encounter K of them.
- PROCESSBALL(P, r_1, r_2, o, R, l) builds the data structure for a dataset P lying inside the ball $B(o, R)$, assuming we need to solve ANN with distance thresholds r_1 and r_2 . Unlike PROCESSSPHERE, here queries can be arbitrary. The parameter l has the same meaning as in PROCESSSPHERE.
- PROJECT(R_1, R_2, r) is an auxiliary function allowing us to project points on a ball to very thin annuli. Suppose we have two spheres S_1 and S_2 with a common center and radii R_1 and R_2 . Suppose there are points $p_1 \in S_1$ and $p_2 \in S_2$ with $\|p_1 - p_2\| = r$. PROJECT(R_1, R_2, r) returns the distance between p_1 and the point \tilde{p}_2 that lies on S_1 and is the closest to p_2 (see Figure 4). This is implemented by a formula as in [AR15].

We now elaborate on the above descriptions of PROCESSSPHERE and PROCESSBALL, since these are the crucial components of our analysis.

ProcessSphere. We consider three base cases. If $l = K$, we stop and store P explicitly. If $r_2 \geq 2R$, then we may only store one point, since any point in P is a valid answer to any query made on a sphere of radius R containing P . If the algorithm from Section 3 can give the desired point on the time-space trade-off, then we choose $\eta_u, \eta_q > 0$ and T appropriately and build a single level of the tree from Section 3. We check for this last condition using (5).

Otherwise, we proceed by first removing the dense components and then handling the pseudo-random remainder. The dense components are clusters of at least $\tau|P|$ points lying in a ball of

radius $(\sqrt{2} - \varepsilon)R$ with its center on $\partial B(o, R)$. These balls can be enclosed by smaller balls of radius $\tilde{R} \leq (1 - \Omega(\varepsilon^2))R$. In each of these smaller balls, we invoke PROCESSBALL with the same l . Finally, we build a single level of the tree in Section 3 for the remaining pseudo-random points. We pick the appropriate $\eta_u, \eta_q > 0$ and T and recurse on each part with PROCESSSPHERE with l increased by 1.

ProcessBall. Similarly to PROCESSSPHERE, if $r_1 + 2R \leq r_2$, then any point from $B(o, R)$ is a valid answer to any query in $B(o, R + r_2)$.

If we are not in the trivial setting above, we reduce the ball to the spherical case via a discretization of the ball $B(o, R)$ into thin annuli of radius δ . First, we round all distances from points to o to a multiple of δ . This rounding can change the distance between any pair of points by at most 2δ by the triangle inequality. Then, for every possible *admissible* distances δi from o to a data point and δj from o to a query, we build a separate data structure via PROCESSSPHERE. By admissible distances δi and δj , we mean those distances where $|\delta(i - j)| \leq r_1 + 2\delta$ for integers i and j . Distances which are not admissible yield trivial instances.

We compute the new distance thresholds \tilde{r}_1 and \tilde{r}_2 for each new instance of PROCESSSPHERE as follows. After rounding, the new thresholds for the ball instance should be $r_1 + 2\delta$ and $r_2 - 2\delta$, since distances can change by at most 2δ . The new thresholds for the projected points are given by PROJECT.

Overall, the preprocessing creates a decision tree. The root corresponds to the procedure PROCESS, and subsequent nodes correspond to procedures PROCESSSPHERE and PROCESSBALL. We refer to the tree nodes correspondingly, using the labels in the description of the query algorithm from below.

Query algorithm. Consider a query point $q \in \mathbb{R}^d$. We run the query on the decision tree, starting with the root which executes PROCESS, and applying the following algorithms depending on the label of the nodes:

- In PROCESSSPHERE we first recursively query the data structures corresponding to the clusters. Then, we locate q in the spherical caps (with threshold η_q , like in Section 3), and query data structures we built for the corresponding subsets of P . When we encounter a node with points stored explicitly, we simply scan the list of points for a possible near neighbor. This happens when $l = K$.
- In PROCESSBALL, we first consider the base case, where we just return the stored point if it is close enough. In general, we check whether $\|q - o\|_2 \leq R + r_1$. If not, we return with no neighbor, since each dataset point lies within a ball of radius R from o , but the query point is at least $R + r_1$ away from o . If $\|q - o\|_2 \leq R + r_1$, we round q so the distance from o to q is a multiple of δ and enumerate all possible the distances from o to the potential near neighbor we are looking for. For each possible distance, we query the corresponding PROCESSSPHERE children after projecting q on the sphere with a tentative near neighbor using, PROJECT.

4.3 Setting parameters

We complete the description of the data structure by setting the remaining parameters. Recall that the dimension is $d = \Theta(\log n \cdot \log \log n)$. We set $\varepsilon, \delta, \tau$ as follows:

- $\varepsilon = \frac{1}{\log \log \log n}$;
- $\delta = \exp(-(\log \log \log n)^C)$;
- $\tau = \exp(-\log^{2/3} n)$,

where C is a sufficiently large positive constant.

Now we specify how to set $\eta_u, \eta_q > 0$ and T for each pseudo-random remainder. The idea will be to try to replicate the parameter settings of Section 3.3.3 corresponding to the random instance. The important parameter will be r^* , which acts as the “effective” r_2 . In the case that $r_2 \geq \sqrt{2}R$, then we have more flexibility than in the random setting, so we let $r^* = r_2$. In the case that $r_2 < \sqrt{2}R$, then we let $r^* = \sqrt{2}R$. In particular, we let

$$T = \frac{100}{G(r_1/R, \eta_u, \eta_q)}$$

in order to achieve a constant probability of success. Then we let η_u and η_q such that

- $F(\eta_u)/G(r_1/R, \eta_u, \eta_q) \leq n^{\rho_u/K+o(1)}$
- $F(\eta_q)/G(r_1/R, \eta_u, \eta_q) \leq n^{\rho_q/K+o(1)}$
- $G(r^*/R, \eta_u, \eta_q)/G(r_1/R, \eta_u, \eta_q) \leq n^{(\rho_q-1)/K+o(1)}$

which correspond to the parameter settings achieving the tradeoff of Section 3.3.3.

A crucial relation between the parameters is that τ should be much smaller than $n^{-1/K} = 2^{-\sqrt{\log n}}$. This implies that the “large distance” is effectively equal to $\sqrt{2}R$, at least for the sake of a single step of the random partition.

We collect some basic facts from the data structure which will be useful for the analysis. These facts follow trivially from the pseudocode in Figure 5.

- PROCESS is called once at the beginning and has one child corresponding to one call to PROCESSSPHERE. In the analysis, we will disregard this node. PROCESS does not take up any significant space or time. Thus, we refer to the root of the tree as the first call to PROCESSSPHERE.
- The children to PROCESSSPHERE may contain any number of calls to PROCESSBALL, corresponding to cluster nodes, and T calls to PROCESSSPHERE. The calls to PROCESSBALL do not replicate any points. The only points which may be replicated are in the pseudo-random remainder. These points can be replicated in the T calls to PROCESSSPHERE.

- PROCESSBALL has many children, all of which are PROCESSSPHERE which do not increment l . Each of these children corresponds to a call on a specific annulus of width δ around the center as well as possible distance for a query. For each annulus, there are $\frac{r_1}{\delta} + 2$ notable distances; after rounding by δ , a valid query can be at most $r_1 + 2\delta$ away from a particular annulus, thus, each point gets duplicated at most $\frac{r_1}{\delta} + 2$ many times.
- For each possible point $p \in P$, we may consider the subtree of nodes which process that particular point. We make the distinction between two kinds of calls to PROCESSSPHERE: calls where p lies in a dense cluster, and calls where p lies in a pseudo-random remainder. If p lies in a dense cluster, l will not be incremented; if p lies in the pseudo-random remainder, l will be incremented. The point p may be processed by various rounds of calls to PROCESSBALL and PROCESSSPHERE without incrementing l ; however, there will be a moment when p is not in a dense cluster and will be part of the pseudo-random remainder. In that setting, p will be processed by a call to PROCESSSPHERE which increments l .

4.4 Analysis

Lemma 4.2. *The following invariants hold.*

- At any moment one has $\frac{r_2}{r_1} \geq c - o_c(1)$ and $r_2 \leq c + o_c(1)$.
- At any moment the number of calls to PROCESSBALL in the recursion stack is at most $O_c((\varepsilon^{-1} \log \log n)^{O(1)})$.

Proof. The same as for Lemma 5.2 from [AR15]. □

Lemma 4.3. *During the algorithm we will always be able to choose η_u and η_q such that:*

- $F(\eta_u)/G(r_1/R, \eta_u, \eta_q) \leq n^{\rho_u/K+o(1)}$;
- $F(\eta_q)/G(r_1/R, \eta_u, \eta_q) \leq n^{\rho_q/K+o(1)}$;
- $G(r^*/R, \eta_u, \eta_q)/G(r_1/R, \eta_u, \eta_q) \leq n^{(\rho_q-1)/K+o(1)}$.

Proof. We will focus on the the part of PROCESSSPHERE where we find settings for η_u and η_q . There are two important cases:

- $r^* = r_2$. This happens when the third “if” statement evaluates to false. In other words, we have that

$$\left(1 - \alpha\left(\frac{r_1}{R}\right)\alpha\left(\frac{r_2}{R}\right)\right)\sqrt{\rho_q} + \left(\alpha\left(\frac{r_1}{R}\right) - \alpha\left(\frac{r_2}{R}\right)\right)\sqrt{\rho_u} \geq \beta\left(\frac{r_1}{R}\right)\beta\left(\frac{r_2}{R}\right). \quad (17)$$

Since in a call to PROCESSSPHERE, all points are on the surface of a sphere of radius R , the expression corresponds to the expression from Theorem 3.3. Thus, as described in Section 3.3.3, we can set η_u and η_q to satisfy the three conditions.

```

function PROCESSSPHERE( $P, r_1, r_2, o, R, l$ )
  if  $l = K$  then
    store  $P$  explicitly
    return
  if  $r_2 \geq 2R$  then
    store any point from  $P$ 
    return
   $r^* \leftarrow r_2$ 
  if  $\left(1 - \alpha\left(\frac{r_1}{R}\right)\alpha\left(\frac{r_2}{R}\right)\right)\sqrt{\rho_q} + \left(\alpha\left(\frac{r_1}{R}\right) - \alpha\left(\frac{r_2}{R}\right)\right)\sqrt{\rho_u} < \beta\left(\frac{r_1}{R}\right)\beta\left(\frac{r_2}{R}\right)$  then
     $m \leftarrow |P|$ 
     $\hat{R} \leftarrow (\sqrt{2} - \varepsilon)R$ 
    while  $\exists x \in \partial B(o, R) : |B(x, \hat{R}) \cap P| \geq \tau m$  do
       $B(\tilde{o}, \tilde{R}) \leftarrow$  the SEB for  $P \cap B(x, \hat{R})$ 
      PROCESSBALL( $P \cap B(x, \hat{R}), r_1, r_2, \tilde{o}, \tilde{R}, l$ )
       $P \leftarrow P \setminus B(x, \hat{R})$ 
     $r^* \leftarrow \sqrt{2}R$ 
  choose  $\eta_u$  and  $\eta_q$  such that:
  •  $F(\eta_u)/G(r_1/R, \eta_u, \eta_q) \leq n^{\rho_u/K+o(1)}$ ;
  •  $F(\eta_q)/G(r_1/R, \eta_u, \eta_q) \leq n^{\rho_q/K+o(1)}$ ;
  •  $G(r^*/R, \eta_u, \eta_q)/G(r_1/R, \eta_u, \eta_q) \leq n^{(\rho_q-1)/K+o(1)}$ .
   $T \leftarrow 100/G(r_1/R, \eta_u, \eta_q)$ 
  for  $i \leftarrow 1 \dots T$  do
    sample  $z \sim N(0, 1)^d$ 
     $P' \leftarrow \{p \in P \mid \langle z, p \rangle \geq \eta_u R\}$ 
    if  $P' \neq \emptyset$  then
      PROCESSSPHERE( $P', r_1, r_2, o, R, l+1$ )
function PROCESSBALL( $P, r_1, r_2, o, R, l$ )
  if  $r_1 + 2R \leq r_2$  then
    store any point from  $P$ 
    return
   $P \leftarrow \{o + \delta \lceil \frac{\|p-o\|}{\delta} \rceil \cdot \frac{p-o}{\|p-o\|} \mid p \in P\}$ 
  for  $i \leftarrow 0 \dots \lceil \frac{R}{\delta} \rceil$  do
     $\tilde{P} \leftarrow \{p \in P : \|p - o\| = \delta i\}$ 
    if  $\tilde{P} \neq \emptyset$  then
      for  $j \leftarrow 0 \dots \lceil \frac{R+r_1+2\delta}{\delta} \rceil$  do
        if  $\delta|i-j| \leq r_1 + 2\delta$  then
           $\tilde{r}_1 \leftarrow \text{PROJECT}(\delta i, \delta j, r_1 + 2\delta)$ 
           $\tilde{r}_2 \leftarrow \text{PROJECT}(\delta i, \delta j, r_2 - 2\delta)$ 
          PROCESSSPHERE( $\tilde{P}, \tilde{r}_1, \tilde{r}_2, o, \delta i, l$ )
function PROJECT( $R_1, R_2, r$ )
  return  $\sqrt{R_1(r^2 - (R_1 - R_2)^2)/R_2}$ 

```

Figure 5: Pseudocode of the data structure (SEB stands for *smallest enclosing ball*)

- $r^* = \sqrt{2}R$. This happens when the third “if” statement evaluates to true. We have by Lemma 4.2 $\frac{r_2}{r_1} \geq c - o_c(1)$. Thus, (17) does not hold, and thus $r_2 < \sqrt{2}R$. Hence, $r_1 \leq \frac{\sqrt{2}R}{c} - o(1)$. If this is the case, then from a parameter setting point of view, we are instantiating the data structure for the pseudo-random case, which we have already shown is possible.

□

Lemma 4.4. *The probability of success of the data structure is at least 0.9.*

Proof. In all the cases except for the handling of the pseudo-random remainder, the data structure is deterministic. Therefore, the proof follows in exactly the same way as Lemma 3.6. In this case, we also have at each step that $T = \frac{100}{G(r_1/R, \eta_u, \eta_q)}$, and the induction is over the number of times we handle the pseudo-random remainder. □

Lemma 4.5. *The total space the data structure occupies is at most $n^{1+\rho_u+o(1)}$ in expectation.*

Proof. We will prove that the total number of explicitly stored points (when $l = K$) is at most $n^{1+\rho_u+o(1)}$. We will count the contribution from each point separately, and use linearity of expectation to sum up the contributions. In particular, for a point $p \in P_0$, we want to count the number of lists where p appears in the data structure. Each root to leaf path of the tree has at most K calls to PROCESSSPHERE which increment l , and at most $O\left((\varepsilon^{-1} \log \log n)^{O(1)}\right)$ calls to PROCESSBALL, and thus $O\left((\varepsilon^{-1} \log \log n)^{O(1)}\right)$ calls to PROCESSSPHERE which do not increment l . Thus, once we count the number of lists, we may multiply by $K + O\left((\varepsilon^{-1} \log \log n)^{O(1)}\right) = n^{o(1)}$.

For each point, we will consider the subtree of the data structure where the point was processed. For example, if at some node, the data structure found a dense cluster containing p , we don’t need to consider the children of that node corresponding to the pseudo-random remainder; we may just consider the one child corresponding to the call to PROCESSBALL. On the other hand, if p does not appear in any dense cluster, we must consider all T children corresponding to the calls to PROCESSSPHERE on the pseudo-random remainder. Thus, we may consider the tree corresponding to calls to PROCESSSPHERE and PROCESSBALL which process p . As discussed briefly in Section 4.3, we distinguish between calls to PROCESSSPHERE which contain p in a dense cluster, and calls to PROCESSSPHERE which contain p in the pseudo-random remainder. We increment l only when p lies in the pseudo-random remainder.

Claim 4.6. *It suffices to consider the data structure where each node is a function call to PROCESSSPHERE which increments l , i.e. when p lies in the pseudo-random remainder.*

We will account for the duplication of points in PROCESSBALL and PROCESSSPHERE which does not increment l . Consider the first node v in a path from the root which does not increment l , this corresponds to a call to PROCESSSPHERE which had p in some dense cluster. Consider the subtree consisting of descendants of v where the leaves correspond to the first occurrence of PROCESSSPHERE which increments l . We claim that every internal node of the tree corresponds to alternating calls to PROCESSBALL and PROCESSSPHERE which do not increment l . In particular,

the calls to ProcessSphere which do not increment l never replicate p . The calls to PROCESSBALL replicate p in $b := O(\delta^{-1})$ many recursive calls. We may consider contracting the tree and at edge, multiplying by the number of times we encounter PROCESSBALL.

Note that p lies in a dense cluster if and only if it does not lie in the pseudo-random remainder. Thus, our contracted tree looks like a tree of K levels, each corresponding to a call to PROCESSSPHERE which contained p in the pseudo-random remainder.

The number of children of some nodes may be different; however, the number of times PROCESSBALL is called in each branch of computation is $U := O_c \left((\varepsilon^{-1} \log \log n)^{O(1)} \right)$, the total amount of duplication of points due to PROCESSBALL is at most $b^U = n^{o_c(1)}$. Via linearity of expectation, an equivalent view is that we copy every point $n^{o_c(1)}$ many times, and whenever we encounter a part of the tree which was contracted, we place a fresh copy of p . Now, the subtree of nodes processing p contains K levels with each T children, exactly like the data structure for Section 3.

Claim 4.7. *A node v corresponding to PROCESSSPHERE(P, r_1, r_2, o, R, l) has in expectation, p appearing in $n^{(K-l)\rho_u/K+o(1)}$ many lists in the subtree of v .*

The proof is an induction over the value of l in a particular node. For our base case, consider some node v corresponding to a function call of PROCESSSPHERE which is a leaf, so $l = K$, in this case, each point is only stored at most once, so the claim holds.

Suppose for the inductive assumption the claim holds for some l , then for a particular node at level $l - 1$, consider the point when p was part of the pseudo-random remainder. In this case, p is duplicated in

$$T \cdot F(\eta_u) = \frac{100 \cdot F(\eta_u)}{G(r_1/R, \eta_u, \eta_q)} \leq n^{\rho_u/K+o(1)}$$

many children, and in each child, the point appears $n^{(K-l)\rho_u/K+o(1)}$ many times. Therefore, in a node v , p appears in $n^{K-l+1\rho_u/K+o(1)}$ many list in its subtree. Letting $l = 0$ for the root gives the desired outcome. \square

Lemma 4.8. *The expected query time is at most $n^{\rho_q+o(1)}$.*

Proof. We need to bound the expected number of nodes we traverse as well as the number of points we enumerate for nodes with $l = K$.

We first bound the number of nodes we traverse. Let $A(u, l)$ be an upper bound on the expected number of visited nodes when we start in a PROCESSSPHERE node such that there are u PROCESSBALL nodes in the stack and l non-cluster nodes. By Lemma 4.2,

$$u \leq O_c \left((\varepsilon^{-1} \log \log n)^{O(1)} \right) =: U,$$

and from the description of the algorithm, we have $l \leq K$. We will prove $A(0, 0) \leq n^{\rho_q+o(1)}$, which corresponds to the expected number of nodes we touch starting from the root.

We claim

$$A(u, l) \leq \exp(\log^{2/3+o(1)} n) \cdot A(u+1, l) + n^{\rho_q/K+o(1)} \cdot A(u, l+1). \quad (18)$$

There are at most $1/\tau = \exp(\log^{2/3} n)$ cluster nodes, and in each node, we recurse on $\frac{r_1}{\delta} + 2 = \exp(\log^{o(1)} n)$ possible annuli with calls to PROCESSSPHERE nodes where u increased by 1 and l remains the same. On the other hand, there are

$$T \cdot F(\eta_q) = \frac{100 \cdot F(\eta_q)}{G(r_1/R, \eta_u, \eta_q)} \leq n^{\rho_q/K+o(1)}$$

caps, where the query falls, in expectation. Each calls PROCESSSPHERE where u remains the same and l increased by 1.

Solving (18):

$$A(0, 0) \leq \binom{U+K}{K} \exp(U \cdot \log^{2/3+o(1)} n) \cdot n^{\rho_q+o(1)} \leq n^{\rho_q+o(1)}.$$

We now give an upper bound on the number of points the query algorithm will test at level K . Let $B(u, l)$ be an upper bound on the expected fraction of the dataset in the current node that the query algorithm will eventually test at level K (where we count multiplicities). u and l have the same meaning as discussed above.

We claim

$$B(u, l) \leq \frac{1}{\tau} \cdot B(u+1, l) + n^{(\rho_q-1)/K+o(1)} \cdot B(u, l+1)$$

The first term comes from recursing down dense clusters. The second term is a bit more subtle. In particular, suppose $r_2 = r^*$, then the expected fraction of points is

$$T \cdot G(r_2/R, \eta_u, \eta_q) \cdot B(u, l+1) = \frac{100 \cdot G(r_2/R, \eta_u, \eta_q) \cdot B(u, l+1)}{G(r_1/R, \eta_u, \eta_q)} \quad (19)$$

$$\leq n^{(\rho_q-1)/K+o(1)} \cdot B(u, l+1) \quad (20)$$

by the setting of η_u and η_q . On the other hand, there is the other case when $r^* = \sqrt{2}R$, which occurs after having removed some clusters. In that case, consider a particular cap containing the points \tilde{P}_i . For points with distance to the query at most $(\sqrt{2} - \varepsilon)R$, there are at most a τn of them.

For the far points, \tilde{P}_i a $G(\sqrt{2} - \varepsilon, \eta_u, \eta_q)$ fraction of the points in expectation.

$$\begin{aligned}
T \cdot F(\eta_q) \cdot \left(\tau + G(\sqrt{2} - \varepsilon, \eta_u, \eta_q) \right) \cdot B(u, l + 1) &= \frac{100 \cdot F(\eta_q) \cdot \left(\tau + G(\sqrt{2} - \varepsilon, \eta_u, \eta_q) \right) \cdot B(u, l + 1)}{G(r_1/R, \eta_u, \eta_q)} \\
&\leq \frac{200 \cdot F(\eta_q) \cdot G(\sqrt{2}, \eta_u, \eta_q) \cdot n^{o(1)} \cdot B(u, l + 1)}{G(r_1/R, \eta_u, \eta_q)} \\
&\leq n^{(\rho_q - 1)/K + o(1)} \cdot B(u, l + 1)
\end{aligned}$$

Where we used that $\tau \ll G(\sqrt{2} - \varepsilon, \eta_u, \eta_q) \leq G(\sqrt{2}, \eta_u, \eta_q) \cdot n^{o(1)}$ (the latter step is due to $\varepsilon = o(1)$), and that $r^* = \sqrt{2}R$. Unraveling the recursion, we note that $u \leq U = O_c \left((\varepsilon^{-1} \log \log n)^{O(1)} \right)$ and $l \leq K = \sqrt{\ln n}$. Additionally, we have that $B(u, K) \leq 1$, since we do not store duplicates in the last level. Therefore,

$$B(0, 0) \leq 2^U 2^K \left(\frac{1}{\tau} \right)^U \cdot \left(n^{(\rho_q - 1)/K + o(1)} \right)^K = n^{\rho_q - 1 + o(1)}$$

□

5 Lower bounds: preliminaries

We introduce a few techniques and concepts to be used primarily for our lower bounds. We start by defining the approximate nearest neighbor search problem.

Definition 5.1. *The goal of the (c, r) -approximate nearest neighbor problem with failure probability δ is to construct a data structure over a set of points $P \subset \{0, 1\}^d$ supporting the following query: given any point q such that there exists some $p \in P$ with $\|q - p\|_1 \leq r$, report some $p' \in P$ where $\|q - p'\|_1 \leq cr$ with probability at least $1 - \delta$.*

5.1 Graphical Neighbor Search and robust expansion

We introduce a few definitions from [PTW10] to setup the nearest neighbor search problem for which we show lower bounds.

Definition 5.2 ([PTW10]). *In the Graphical Neighbor Search problem (GNS), we are given a bipartite graph $G = (U, V, E)$ where the dataset comes from U and the queries come from V . The dataset consists of pairs $P = \{(p_i, x_i) \mid p_i \in U, x_i \in \{0, 1\}, i \in [n]\}$. On query $q \in V$, if there exists a unique p_i with $(p_i, q) \in E$, then we want to return x_i .*

We will sometimes use the GNS problem to prove lower bounds on (c, r) -ANN as follows: we build a GNS graph G by taking $U = V = \{0, 1\}^d$, and connecting two points $u \in U, v \in V$ iff they are at a distance at most r (see details in [PTW10]). We will also need to make sure that in our instances q is not closer than cr to other points except the near neighbor.

The following is the fundamental property of a metric space that [PTW10] use to prove lower bounds.

Definition 5.3 (Robust Expansion [PTW10]). *For a GNS graph $G = (U, V, E)$, fix a distribution e on $E \subset U \times V$, and let μ be the marginal on U and η be the marginal on V . For $\delta, \gamma \in (0, 1]$, the robust expansion $\Phi_r(\delta, \gamma)$ is defined as follows:*

$$\Phi_r(\delta, \gamma) = \min_{A \subset V: \eta(A) \leq \delta} \min_{B \subset U: \frac{e(A \times B)}{e(A \times V)} \geq \gamma} \frac{\mu(B)}{\eta(A)}.$$

5.2 Locally-decodable codes (LDC)

Finally, our 2-probe lower bounds uses results on Locally-Decodable Codes (LDCs). We present the standard definitions and results on LDCs below, although we will need a weaker definition (and stronger statement) for our 2-query lower bound in Section 8.

Definition 5.4. *A (t, δ, ε) locally-decodable code (LDC) encodes n -bit strings $x \in \{0, 1\}^n$ into m -bit codewords $C(x) \in \{0, 1\}^m$ such that, for each $i \in [n]$, the bit x_i can be recovered with probability $\frac{1}{2} + \varepsilon$ while making only t queries into $C(x)$, even if the codeword is arbitrarily modified (corrupted) in δm bits.*

We will use the following lower bound on the size of the LDCs.

Theorem 5.5 (Theorem 4 from [KdW04]). *If $C : \{0, 1\}^n \rightarrow \{0, 1\}^m$ is a $(2, \delta, \varepsilon)$ -LDC, then*

$$m \geq 2^{\Omega(\delta \varepsilon^2 n)}. \quad (21)$$

6 Lower bounds: one-probe data structures

6.1 Robust expansion of the Hamming space

The goal of this section is to compute tight bounds for the robust expansion $\Phi_r(\delta, \gamma)$ in the Hamming space of dimension d , as defined in the preliminaries. We use these bounds for all of our lower bounds in the subsequent sections.

We use the following model for generating dataset points and queries corresponding to the random instance of Section 2.

Definition 6.1. *For any $x \in \{-1, 1\}^n$, $N_\sigma(x)$ is a probability distribution over $\{-1, 1\}^n$ representing the neighborhood of x . We sample $y \sim N_\sigma(x)$ by choosing $y_i \in \{-1, 1\}$ for each coordinate $i \in [d]$. With probability σ , $y_i = x_i$. With probability $1 - \sigma$, y_i is set uniformly at random.*

Given any Boolean function $f : \{-1, 1\}^n \rightarrow \mathbb{R}$, the function $T_\sigma f : \{-1, 1\}^n \rightarrow \mathbb{R}$ is

$$T_\sigma f(x) = \mathbb{E}_{y \sim N_\sigma(x)} [f(y)] \quad (22)$$

In the remainder of this section, will work solely on the Hamming space $V = \{-1, 1\}^d$. We let

$$\sigma = 1 - \frac{1}{c} \quad d = \omega(\log n)$$

and μ will refer to the uniform distribution over V .

The choice of σ allows us to make the following observations. A query is generated as follows: we sample a dataset point x uniformly at random and then generate the query y by sampling $y \sim N_\sigma(x)$. From the choice of σ , $d(x, y) \leq \frac{d}{2c}(1 + o(1))$ with high probability. In addition, for every other point in the dataset $x' \neq x$, the pair (x', y) is distributed as two uniformly random points (even though $y \sim N_\sigma(x)$, because x is randomly distributed). Therefore, by taking a union-bound over all dataset points, we can conclude that with high probability, $d(x', y) \geq \frac{d}{2}(1 - o(1))$ for each $x' \neq x$.

Given a query y generated as described above, we know there exists a dataset point x whose distance to the query is $d(x, y) \leq \frac{d}{2c}(1 + o(1))$. Every other dataset point lies at a distance $d(x', y) \geq \frac{d}{2}(1 - o(1))$. Therefore, the two distances are a factor of $c - o(1)$ away.

The following lemma is the main result of this section, and we will reference this lemma in subsequent sections.

Lemma 6.2 (Robust expansion). *In the Hamming space equipped with the Hamming norm, for any $p, q \in [1, \infty)$ where $(q - 1)(p - 1) = \sigma^2$, any $\gamma \in [0, 1]$ and $m \geq 1$,*

$$\Phi_r\left(\frac{1}{m}, \gamma\right) \geq \gamma^q m^{1 + \frac{q}{p} - q} \quad (23)$$

The robust expansion comes from a straight forward application from small-set expansion. In fact, one can easily prove tight bounds on robust expansion via the following lemma:

Theorem 6.3 (Generalized Small-Set Expansion Theorem, [O'D14]). *Let $0 \leq \sigma \leq 1$. Let $A, B \subset \{-1, 1\}^n$ have volumes $\exp(-\frac{a^2}{2})$ and $\exp(-\frac{b^2}{2})$ and assume $0 \leq \sigma a \leq b \leq a$. Then*

$$\Pr_{\substack{(x, y) \\ \sigma\text{-correlated}}} [x \in A, y \in B] \leq \exp\left(-\frac{1}{2} \frac{a^2 - 2\sigma ab + b^2}{1 - \sigma^2}\right)$$

However, we compute the robust expansion via an application of the Bonami-Beckner Inequality and Hölder's inequality. This computation gives us a bit more flexibility with respect to parameters which will become useful in subsequent sections. We now recall the necessary tools.

Theorem 6.4 (Bonami-Beckner Inequality [O'D14]). *Fix $1 \leq p \leq q$ and $0 \leq \sigma \leq \sqrt{(p - 1)/(q - 1)}$. Any Boolean function $f : \{-1, 1\}^n \rightarrow \mathbb{R}$ satisfies*

$$\|T_\sigma f\|_q \leq \|f\|_p \quad (24)$$

Theorem 6.5 (Hölder's Inequality). *Let $f : \{-1, 1\}^n \rightarrow \mathbb{R}$ and $g : \{-1, 1\}^n \rightarrow \mathbb{R}$ be arbitrary*

Boolean functions. Fix $s, t \in [1, \infty)$ where $\frac{1}{s} + \frac{1}{t} = 1$. Then

$$\langle f, g \rangle \leq \|f\|_s \|g\|_t \quad (25)$$

We will let f and g be indicator functions for two sets A and B and use a combination of the Bonami-Beckner Inequality and Hölder's Inequality to lower bound the robust expansion. The operator T_σ will applied to f will measure the neighborhood of set A . We will compute an upper bound on the correlation of the neighborhood of A and B (referred to as γ) with respect to the volumes of A and B , and the expression will give a lower bound on robust expansion.

We also need the following lemma.

Lemma 6.6. *Let $p, q \in [1, \infty)$, where $(p-1)(q-1) = \sigma^2$ and $f, g : \{-1, 1\}^d \rightarrow \mathbb{R}$ be two Boolean functions. Then*

$$\langle T_\sigma f, g \rangle \leq \|f\|_p \|g\|_q$$

Proof. We first apply Hölder's Inequality to split the inner-product into two parts. Then we apply the Bonami-Beckner Inequality to each part.

$$\langle T_\sigma f, f \rangle = \langle T_{\sqrt{\sigma}} f, T_{\sqrt{\sigma}} g \rangle \quad (26)$$

$$\leq \|T_{\sqrt{\sigma}} f\|_s \|T_{\sqrt{\sigma}} g\|_t \quad (27)$$

We pick the parameters $s = \frac{p-1}{\sigma} + 1$ and $t = \frac{s}{s-1}$, so $\frac{1}{s} + \frac{1}{t} = 1$. Note that $p \leq s$ because $\sigma < 1$ and $p \geq 1$ because $(p-1)(q-1) = \sigma^2 \leq \sigma$. We have

$$q \leq \frac{\sigma}{p-1} + 1 = t. \quad (28)$$

In addition,

$$\sqrt{\frac{p-1}{s-1}} = \sqrt{\sigma} \quad \sqrt{\frac{q-1}{t-1}} = \sqrt{(q-1)(s-1)} \quad (29)$$

$$= \sqrt{\frac{(q-1)(p-1)}{\sigma}} = \sqrt{\sigma}. \quad (30)$$

So we can apply the Bonami-Beckner Inequality to both norms. We obtain

$$\|T_{\sqrt{\sigma}} f\|_s \|T_{\sqrt{\sigma}} g\|_t \leq \|f\|_p \|g\|_q \quad (31)$$

□

We are now ready to prove Lemma 6.2.

Proof of Lemma 6.2. We use Lemma 6.6 and the definition of robust expansion. For any two sets $A, B \subset V$, let $a = \frac{1}{2^d}|A|$ and $b = \frac{1}{2^d}|B|$ be the measure of set A and B with respect to the uniform

distribution. We refer to $\mathbf{1}_A : \{-1, 1\}^d \rightarrow \{0, 1\}$ and $\mathbf{1}_B : \{-1, 1\}^d \rightarrow \{0, 1\}$ as the indicator functions for A and B .

$$\gamma = \Pr_{x \sim \mu, y \sim N_\sigma(x)}[x \in B \mid y \in A] \quad (32)$$

$$= \frac{1}{a} \langle T_\sigma \mathbf{1}_A, \mathbf{1}_B \rangle \quad (33)$$

$$\leq a^{\frac{1}{p}-1} b^{\frac{1}{q}} \quad (34)$$

Therefore, $\gamma^q a^{q-\frac{q}{p}} \leq b$. Let A and B be the minimizers of $\frac{b}{a}$ satisfying (32) and $a \leq \frac{1}{m}$.

$$\Phi_r\left(\frac{1}{m}, \gamma\right) = \frac{b}{a} \quad (35)$$

$$\geq \gamma^q a^{q-\frac{q}{p}-1} \quad (36)$$

$$\geq \gamma^q m^{1+\frac{q}{p}-q}. \quad (37)$$

□

6.2 Lower bounds for one-probe data structures

In this section, we prove Theorem 1.3. Our proof relies on the main result of [PTW10] for the GNS problem:

Theorem 6.7 (Theorem 1.5 [PTW10]). *There exists an absolute constant γ such that the following holds. Any randomized algorithm for a weakly independent instance of GNS which is correct with probability greater than $\frac{1}{2}$ must satisfy*

$$\frac{m^t w}{n} \geq \Phi_r\left(\frac{1}{m^t}, \frac{\gamma}{t}\right) \quad (38)$$

Proof of Theorem 1.3. The bound comes from a direct application of the computation of $\Phi_r(\frac{1}{m}, \gamma)$ in Lemma 6.2 to the bound in Theorem 6.7. Setting $t = 1$ in Theorem 6.7, we obtain

$$mw \geq n \cdot \Phi_r\left(\frac{1}{m}, \gamma\right) \quad (39)$$

$$\geq n \gamma^q m^{1+\frac{q}{p}-q} \quad (40)$$

for some $p, q \in [1, \infty)$ and $(p-1)(q-1) = \sigma^2$. Rearranging the inequality, we obtain

$$m \geq \frac{\gamma^{\frac{p}{p-1}} n^{\frac{p}{pq-q}}}{w^{\frac{p}{pq-q}}} \quad (41)$$

Let $p = 1 + \frac{\log \log n}{\log n}$, and $q = 1 + \sigma^2 \frac{\log n}{\log \log n}$. Then

$$m \geq n^{\frac{1}{\sigma^2} - o(1)}. \quad (42)$$

Since $\sigma = 1 - \frac{1}{c}$ and $w = n^{o(1)}$, we obtain the desired result. \square

Corollary 6.8. *Any 1 cell probe data structures with cell size $O(\log n)$ for c -approximate nearest neighbors on the sphere in ℓ_2 needs $n^{1 + \frac{2c^2-1}{(c^2-1)^2} - o(1)}$ many cells.*

Proof. Each point in the Hamming space $\{-1, 1\}^d$ (after scaling by $\frac{1}{\sqrt{d}}$) can be thought of as lying on the unit sphere. If two points are a distance r apart in the Hamming space, then they are $2\sqrt{r}$ apart on the sphere with ℓ_2 norm. Therefore a data structure for a c^2 -approximation on the sphere gives a data structure for a c -approximation in the Hamming space. \square

7 Lower bounds: list-of-points data structures

In this section we prove Theorem 1.6, i.e., a tight lower bound against data structure that fall inside the “list-of-points” model, as defined in Def. 1.5.

Recall that $A_i \subset V$ is the subset of dataset points which get placed in L_i . Let $B_i \subset V$ the subset of query points which query L_i , this is well defined, since $B_i = \{v \in V \mid i \in I(v)\}$. Suppose we sample a random dataset point $u \sim V$ and then a random query point v from the neighborhood of u . Let

$$\gamma_i = \Pr[v \in B_i \mid u \in A_i] \quad (43)$$

and let $s_i = \mu(A_i)$.

On instances where n dataset points $\{u_i\}_{i=1}^n$ are drawn randomly, and a query v is drawn from the neighborhood of a random dataset point, we can exactly characterize the query time.

$$T = \sum_{i=1}^m \mathbf{1}\{v \in B_i\} \left(1 + \sum_{j=1}^n \mathbf{1}\{u_j \in A_i\} \right) \quad (44)$$

$$\mathbb{E}[T] = \sum_{i=1}^m \mu(B_i) + \sum_{i=1}^m \gamma_i \mu(A_i) + (n-1) \sum_{i=1}^m \mu(B_i) \mu(A_i) \quad (45)$$

$$\geq \sum_{i=1}^m \Phi_r(s_i, \gamma_i) s_i + \sum_{i=1}^m s_i \gamma_i + (n-1) \sum_{i=1}^m \Phi_r(s_i, \gamma_i) s_i^2 \quad (46)$$

Since the data structure succeeds with probability γ , it must be the case that

$$\sum_{i=1}^m s_i \gamma_i \geq \gamma = \Pr_{j \sim [n], v \sim N(u_j)} [\exists i \in [m] : v \in B_i, u_j \in A_i] \quad (47)$$

And since we use at most space $O(s)$,

$$n \sum_{i=1}^m s_i \leq O(s) \quad (48)$$

From Lemma 6.2, for any $p, q \in [1, \infty)$ where $(p-1)(q-1) = \sigma^2$ where $\sigma = 1 - \frac{1}{c}$,

$$\mathbb{E}[T] \geq \sum_{i=1}^m s_i^{q-\frac{q}{p}} \gamma_i^q + (n-1) \sum_{i=1}^m s_i^{q-\frac{q}{p}+1} \gamma_i^q + \gamma \quad (49)$$

$$\gamma \leq \sum_{i=1}^m s_i \gamma_i \quad (50)$$

$$O\left(\frac{s}{n}\right) \geq \sum_{i=1}^m s_i \quad (51)$$

We set $S = \{i \in [m] : s_i \neq 0\}$ and for $i \in S$, $v_i = s_i \gamma_i$.

$$\mathbb{E}[T] \geq \sum_{i \in S} v_i^q \left(s_i^{-\frac{q}{p}} + (n-1) s_i^{-\frac{q}{p}+1} \right) \quad (52)$$

$$\geq \sum_{i \in S} \left(\frac{\gamma}{|S|} \right)^q \left(s_i^{-\frac{q}{p}} + (n-1) s_i^{-\frac{q}{p}+1} \right) \quad (53)$$

where we used the fact $q \geq 1$. Consider

$$F = \sum_{i \in S} \left(s_i^{-\frac{q}{p}} + (n-1) s_i^{-\frac{q}{p}+1} \right) \quad (54)$$

We analyze three cases separately:

- $0 < \rho_u \leq \frac{1}{2c-1}$
- $\frac{1}{2c-1} < \rho_u \leq \frac{2c-1}{(c-1)^2}$
- $\rho_u = 0$.

For the first two cases, we let

$$q = 1 - \sigma^2 + \sigma\beta \quad p = \frac{\beta}{\beta - \sigma} \quad \beta = \sqrt{\frac{1 - \sigma^2}{\rho_u}} \quad (55)$$

Since $0 < \rho_u \leq \frac{2c-1}{(c-1)^2}$, one can verify $\beta > \sigma$ and both p and q are at least 1.

Lemma 7.1. *When $\rho_u \leq \frac{1}{2c-1}$, and $s = n^{1+\rho_u}$,*

$$\mathbb{E}[T] \geq \Omega(n^{\rho_q})$$

where ρ_q and ρ_u satisfy Equation 4.

Proof. In this setting, p and q are constants, and $q \geq p$. Therefore, $\frac{q}{p} \geq 1$, so F is convex in all s_i 's in Equation 54. So we minimize the sum by taking $s_i = O(\frac{s}{n|S|})$ and substituting in (53),

$$\mathbb{E}[T] \geq \Omega \left(\frac{\gamma^q s^{-q/p+1} n^{q/p}}{|S|^{q-q/p}} \right) \quad (56)$$

$$\geq \Omega(\gamma^q s^{1-q} n^{q/p}) \quad (57)$$

since $q - q/p > 0$ and $|S| \leq s$. In addition, p , q and γ are constants, $\mathbb{E}[T] \geq \Omega(n^{\rho_q})$ where

$$\rho_q = (1 + \rho_u)(1 - q) + \frac{q}{p} \quad (58)$$

$$= (1 + \rho_u)(\sigma^2 - \sigma\beta) + \frac{(1 - \sigma^2 + \sigma\beta)(\beta - \sigma)}{\beta} \quad (59)$$

$$= \left(\sqrt{1 - \sigma^2} - \sqrt{\rho_u} \sigma \right)^2 \quad (60)$$

$$= \left(\frac{\sqrt{2c-1}}{c} - \sqrt{\rho_u} \cdot \frac{(c-1)}{c} \right)^2 \quad (61)$$

□

Lemma 7.2. When $\rho_u > \frac{1}{2c-1}$,

$$\mathbb{E}[T] \geq \Omega(n^{\rho_q})$$

where ρ_q and ρ_u satisfy Equation 4.

Proof. We follow a similar pattern to Lemma 7.1. However, we may no longer assert that F is convex in all s_i 's.

$$\frac{\partial F}{\partial s_i} = \left(-\frac{q}{p} \right) s_i^{-\frac{q}{p}-1} + \left(-\frac{q}{p} + 1 \right) (n-1) s_i^{-\frac{q}{p}} \quad (62)$$

The gradient is zero when each $s_i = \frac{q}{(p-q)(n-1)}$. Since $q < p$, this value is positive and $\sum_{i \in S} s_i \leq O(\frac{m}{n})$ for large enough n . F is continuous, so it is minimized exactly at that point. So $\mathbb{E}[T] \geq \left(\frac{\gamma}{|S|} \right)^q |S| \left(\frac{q}{(p-q)(n-1)} \right)^{-\frac{q}{p}}$. Again, we maximize $|S|$ to minimize this sum since $q \geq 1$. Therefore

$$\mathbb{E}[T] \geq \left(\frac{\gamma}{s} \right)^q s \left(\frac{q}{(p-q)(n-1)} \right)^{-\frac{q}{p}} \quad (63)$$

Since p , q and γ are constants, $\mathbb{E}[T] \geq \Omega(n^{\rho_q})$ where

$$\rho_q = (1 + \rho_u)(1 - q) + \frac{q}{p}$$

which is the same expression for ρ_q as in Lemma 7.1. □

Lemma 7.3. *When $\rho_u = 0$ (so $s = O(n)$),*

$$\mathbb{E}[T] \geq n^{\rho_q - o(1)}$$

where $\rho_q = \frac{2c-1}{c^2} = 1 - \sigma^2$.

Proof. In this case, although we cannot set p and q as in Equation 55, we let

$$q = 1 + \sigma^2 \cdot \frac{\log n}{\log \log n} \quad p = 1 + \frac{\log \log n}{\log n}.$$

Since $q > p$, we have

$$\mathbb{E}[T] = \Omega(\gamma^q s^{1-q} n^{\frac{q}{p}}) \tag{64}$$

$$= n^{1-\sigma^2-o(1)} \tag{65}$$

giving the desired expression. \square

8 Lower bounds: two-probe data structures

In this section we prove a cell probe lower bound for ANN for $t = 2$ cell probes as stated in Theorem 1.4.

As in [PTW10], we will prove lower bounds for GNS when $U = V$ with measure μ (see Def. 5.2). We assume there is an underlying graph G with vertex set V . For any particular point $p \in V$, its neighborhood $N(p)$ is the set of points with an edge to p in the graph G .

In the 2-query GNS problem, we have a dataset $P = \{p_i\}_{i=1}^n \subset V$ of n points as well as a bit-string $x \in \{0, 1\}^n$. We let D denote a data structure with m cells of w bits each. We can think of D as a map $[m] \rightarrow \{0, 1\}^w$ which holds w bits in each cell. D will depend on the dataset P as well as the bit-string x . The problem says that: given a query point $q \in V$, if there exists a unique neighbor $p_i \in N(q)$ in the dataset, we should return x_i with probability at least $\frac{2}{3}$ after making two cell-probes to D .

Theorem 8.1. *There exists a constant $\gamma > 0$ such that any non-adaptive GNS data structure holding a dataset of $n \geq 1$ points which succeeds with probability $\frac{2}{3}$ using two cell probes and m cells of w bits satisfies*

$$\frac{m \log m \cdot 2^{O(w)}}{n} \geq \Omega\left(\Phi_r\left(\frac{1}{m}, \gamma\right)\right).$$

Theorem 1.4 will follow from Theorem 8.1 together with the robust expansion bound from Lemma 6.2 for the special case when probes to the data structure are non-adaptive. For the rest of this section, we prove Theorem 8.1. We will later show how to reduce adaptive algorithms losing a sub-polynomial factor in the space for $w = o(\frac{\log n}{\log \log n})$ in Section 8.6.3.

At a high-level, we will show that with a “too-good-to-be-true” data structure with small space we can construct a weaker notion of 2-query locally-decodable code (LDC) with small noise rate

using the same amount of space⁷. Even though our notion of LDC is weaker than Def. 5.4, we can use most of the tools for showing 2-query LDC lower bounds from [KdW04]. These arguments use quantum information theory arguments, which are very robust and still work with the 2-query weak LDC we construct.

We note that [PTW10] was the first to suggest the connection between nearest neighbor search and locally-decodable codes. This work represents the first concrete connection which gives rise to better lower bounds.

Proof structure. The proof of Theorem 8.1 proceeds in six steps.

1. First we will use Yao's principle to reduce to the case of deterministic non-adaptive data structures for GNS with two cell-probes. We will give distributions over n -point datasets P , as well as bit-strings x and a query q . After defining these distributions, we will assume the existence of a deterministic data structure which makes two cell-probes non-adaptively and succeeds with probability at least $\frac{2}{3}$ when the inputs are sampled according to the three distributions.
2. We will modify the deterministic data structure in order to get "low-contention" data structures. These are data structures which do not rely on any single cell too much similar to Def. 6.1 in [PTW10]. This will be a simple argument where we increase the space bound by a constant factor to achieve this guarantee.
3. In the third step, we will take a closer look at how the low-contention data structure probes the cells. We will use ideas from [PTW10] to understand how queries neighboring particular dataset points probe various cells of the data structure. We will conclude with finding a fixed n -point dataset P . A constant fraction of the points in the dataset will satisfy the following condition: many queries in the neighborhood of these points probe disjoint pairs of cells. Intuitively, this means information about these dataset points must be spread out over various cells.
4. We will show that for the fixed dataset P , we could still recover a constant fraction bits with significant probability even if we corrupt the contents of some cells. This will be the crucial connection between nearest neighbor data structures and LDCs.
5. We will reduce to the case of 1-bit words in order to apply the LDC arguments from [KdW04]. We will increase the number of cells by a factor of 2^w and decrease the probability of success from $\frac{1}{2} + \eta$ to $\frac{1}{2} + \frac{\eta}{2^{2w}}$.
6. Finally, we will design an LDC with weaker guarantees and use the arguments in [KdW04] to prove lower bounds on the space of the weak LDC.

⁷A 2-query LDC corresponds to LDCs which make two probes to their memory contents. Even though there is a slight ambiguity with the data structure notion of query, we say "2-query LDCs" in order to be consistent with the LDC literature.

8.1 Deterministic data structures

Definition 8.2. A non-adaptive randomized algorithm R for the GNS problem with two cell-probes is an algorithm specified by the following three components. The data structure preprocesses a dataset $P = \{p_i\}_{i=1}^n$ consisting of n points, as well as a bit-string $x \in \{0, 1\}^n$, in order to produce a data structure $D : [m] \rightarrow \{0, 1\}^w$ which depends on P and x . On a query q , $R(q)$ chooses two indices $(i, j) \in [m]^2$, and specifies a function $f_q : \{0, 1\}^w \times \{0, 1\}^w \rightarrow \{0, 1\}$. The output is given as $f_q(D_j, D_k)$. We require that

$$\Pr_{R, D} [f_q(D_j, D_k) = x_i] \geq \frac{2}{3}$$

whenever $q \in N(p_i)$ and p_i is the unique such neighbor.

Note that the indices (i, j) which R generates to probe the data structure as well as the function f_q is independent of P and x .

Definition 8.3. We define the following distributions:

- Let \mathcal{P} be the distribution over n -point datasets given by sampling n times from our space V uniformly at random.
- Let \mathcal{X} be the uniform distribution over $\{0, 1\}^n$.
- Let $\mathcal{Q}(P)$ be the distribution over queries given by first picking a dataset point $p \in P$ uniformly at random and then picking $q \in N(p)$ uniformly at random.

Lemma 8.4. Assume R is a non-adaptive randomized algorithm for GNS using two cell-probes. Then there exists a non-adaptive deterministic algorithm A for GNS using two cell-probes which also produces a data structure $D : [m] \rightarrow \{0, 1\}^w$ and on query q chooses two indices $j, k \in [m]$ (again, independently of P and x) to probe in D as well as a function $f_q : \{0, 1\}^w \times \{0, 1\}^w \rightarrow \{0, 1\}$ where

$$\Pr_{P \sim \mathcal{P}, x \sim \mathcal{X}, q \sim \mathcal{Q}(P)} [f_q(D_j, D_k) = x_i] \geq \frac{2}{3}.$$

Proof. The following is a direct application of Yao's principle to the success probability of the algorithm. By assumption, there exists a distribution over algorithms which can achieve probability of success at least $\frac{2}{3}$ for any single query. Therefore, for the fixed distributions \mathcal{P}, \mathcal{X} , and \mathcal{Q} , there exists a deterministic algorithm achieving at least the same success probability. \square

In order to simplify notation, for any algorithm A , we let $A^D(q)$ denote output of the algorithm. When we write $A^D(q)$, we assume that $A(q)$ outputs a pair of indices (j, k) as well as the function $f_q : \{0, 1\}^w \times \{0, 1\}^w \rightarrow \{0, 1\}$, and the algorithm outputs $f_q(D_j, D_k)$. For any fixed dataset $P = \{p_i\}_{i=1}^n$ and bit-string $x \in \{0, 1\}^n$, we have

$$\Pr_{q \sim N(p_i)} [A^D(q) = x_i] = \Pr_{q \sim N(p_i)} [f_q(D_j, D_k) = x_i]$$

by definition. This allows us to succinctly state the probability of correctness when the query is a neighbor of p_i without caring about the specific cells the algorithm probes or the function f_q the algorithm uses to make its decision.

The important thing to note is that the contents of the data structure D may depend on the dataset P and the bit-string x . However, the algorithm A which produces D as well as the indexes for the probes to D for any query point is deterministic.

From now on, we will assume the existence of a non-adaptive deterministic algorithm A with success probability at least $\frac{2}{3}$ using m cells of width w . The success probability is taken over the random choice of the dataset $P \sim \mathcal{P}$, $x \sim \mathcal{X}$ and $q \sim \mathcal{Q}(P)$.

8.2 Making low-contention data structures

For any $t \in \{1, 2\}$ and $j \in [m]$, let $A_{t,j}$ be the set of queries which probe cell j at the t -th probe of algorithm A . These sets are well defined independently of the dataset P and the bit-string x . In particular, we could write

$$A_{t,j} = \{q \in V \mid A \text{ probes cell } j \text{ in probe } t \text{ when querying } q\}$$

by running the “probing” portion of the algorithm without the need to specify a dataset P or bit-string x . We could write down $A_{t,j}$ by simply trying every query point q and seeing which cells the algorithm probes.

In other words, since the algorithm is deterministic, the probing portion of algorithm A is completely specified by two collections $\mathcal{A}_1 = \{A_{1,j}\}_{j \in [m]}$ and $\mathcal{A}_2 = \{A_{2,j}\}_{j \in [m]}$ as well as the function f_q . \mathcal{A}_1 and \mathcal{A}_2 are two partitions of the query space V . On query q , if $q \in A_{t,j}$, we make the t -th probe to cell j . We output the value of f_q after observing the contents of the cells.

We now define the notion of low-contention data structures, which informally requires the data structure not rely on any one particular cell too much, namely no $A_{t,j}$ is too large.

Definition 8.5. *A deterministic non-adaptive algorithm A using m cells has low contention if every set $\mu(A_{t,j}) \leq \frac{1}{m}$ for $t \in \{1, 2\}$ and $j \in [m]$.*

We now use the following lemma to argue that up to a small increase in space, a data structure can be made low-contention.

Lemma 8.6. *Suppose A is a deterministic non-adaptive algorithm for GNS with two cell-probes using m cells, then there exists a deterministic non-adaptive algorithm A' for GNS with two cell-probes using $3m$ cells which succeeds with the same probability and has low contention.*

Proof. We first handle \mathcal{A}_1 and then \mathcal{A}_2 .

Suppose $\mu(A_{1,j}) \geq \frac{1}{m}$, then we partition $A_{1,j}$ into enough parts $\{A_{1,k}^{(j)}\}_k$ of size $\frac{1}{m}$. There will be at most one set with measure between 0 and $\frac{1}{m}$. For each of part $A_{1,k}^{(j)}$ of the partition, we make a new cell j_k with the same contents as cell j . When a query lies inside $A_{1,k}^{(j)}$ we probe the new cell j_k . From the data structure side, the cell contents are replicated for all additional cells.

The number of cells in this data structure is at most $2m$, since there can be at most m cells of size $\frac{1}{m}$ and for each original cell, we have only one cell with small measure. Also, keep in mind that we have not modified the sets in \mathcal{A}_2 , and thus there is at most m cells for which $\mu(A_{2,j}) \geq \frac{1}{m}$.

We do the same procedure for the second collection \mathcal{A}_2 . If some $\mu(A_{2,j}) \geq \frac{1}{m}$, we partition that cell into multiple cells of size exactly $\frac{1}{m}$, with one extra small cell. Again, the total number of cells will be m for dividing the heavy cells in the second probe, and at most m for the lighter cells in the second probe.

We have added m cells in having $\mu(A_{1,j}) \leq \frac{1}{m}$ for all $j \in [m]$, and added at most m cells in order to make $\mu(A_{2,j}) \leq \frac{1}{m}$ for all $j \in [m]$. Therefore, we have at most $3m$ cells. Additionally, the contents of the cells remain the same, so the algorithm succeeds with the same probability. \square

Given Lemma 8.6, we will assume that A is a deterministic non-adaptive algorithm for GNS with two cell-probes using m cells which has low contention. The extra factor of 3 in the number of cells will be pushed into the asymptotic notation.

8.3 Datasets which shatter

We fix some $\gamma > 0$ which can be thought of as a sufficiently small constant.

Definition 8.7 (Weak-shattering [PTW10]). *We say a partition A_1, \dots, A_m of V (K, γ) -weakly shatters a point p if*

$$\sum_{i \in [m]} \left(\mu(A_i \cap N(p)) - \frac{1}{K} \right)^+ \leq \gamma$$

where the operator $(\cdot)^+$ takes only the non-negative part.

For a fixed dataset point $p \in P$, we refer to γ as the “slack” in the shattering. The slack corresponds to the total measure which is leftover after we remove an arbitrary subset of $A_{t,j} \cap N(p)$ of measure at least $\frac{1}{K}$.

Lemma 8.8 (Shattering [PTW10]). *Let A_1, \dots, A_k collection of disjoint subsets of measure at most $\frac{1}{m}$. Then*

$$\Pr_{p \sim \mu} [p \text{ is } (K, \gamma)\text{-weakly shattered}] \geq 1 - \gamma$$

for $K = \Phi_r \left(\frac{1}{m}, \frac{\gamma^2}{4} \right) \cdot \frac{\gamma^3}{16}$.

For the remainder of the section, we let

$$K = \Phi_r \left(\frac{1}{m}, \frac{\gamma^2}{4} \right) \cdot \frac{\gamma^3}{16}.$$

We are interested in the shattering of dataset points with respect to the collections \mathcal{A}_1 and \mathcal{A}_2 . The dataset points which get shattered will probe many cells in the data structure. Intuitively, a bit x_i corresponding to a dataset point p_i which is weakly-shattered should be stored across various cells.

So for each point p which is (K, γ) weakly-shattered we define subsets $\beta_1, \beta_2 \subset N(p)$ which hold the "slack" of the shattering of p with respect to \mathcal{A}_1 and \mathcal{A}_2 .

Definition 8.9. Let $p \in V$ be a dataset point which is (K, γ) -weakly shattered by \mathcal{A}_1 and \mathcal{A}_2 . Let $\beta_1, \beta_2 \subset N(p)$ be arbitrary subsets where each $j \in [m]$ satisfies

$$\mu(A_{1,j} \cap N(p) \setminus \beta_1) \leq \frac{1}{K}$$

and

$$\mu(A_{2,j} \cap N(p) \setminus \beta_2) \leq \frac{1}{K}$$

Since p is (K, γ) -weakly shattered, we can pick β_1 and β_2 with measure at most γ each. We will refer to $\beta(p) = \beta_1 \cup \beta_2$.

For a given collection \mathcal{A} , let $S(\mathcal{A}, p)$ be the event that the collection \mathcal{A} (K, γ) -weakly shatters p . Note that Lemma 8.8 implies that $\Pr_{p \sim \mu}[S(\mathcal{A}, p)] \geq 1 - \gamma$.

Lemma 8.10. With high probability over the choice of n point dataset, at most $4\gamma n$ points do not satisfy $S(\mathcal{A}_1, p)$ and $S(\mathcal{A}_2, p)$.

Proof. This is a simple Chernoff bound. The expected number of points p which do not satisfy $S(\mathcal{A}_1, p)$ and $S(\mathcal{A}_2, p)$ is at most $2\gamma n$. Therefore, the probability that more than $4\gamma n$ points do not satisfy $S(\mathcal{A}_1, p)$ and $S(\mathcal{A}_2, p)$ is at most $\exp\left(-\frac{2\gamma n}{3}\right)$. \square

We call a dataset *good* if there are at most $4\gamma n$ dataset points which are not (K, γ) -weakly shattered by \mathcal{A}_1 and \mathcal{A}_2 .

Lemma 8.11. There exists a good dataset $P = \{p_i\}_{i=1}^n$ where

$$\Pr_{x \sim \mathcal{X}, q \sim Q(P)}[A^D(q) = x_i] \geq \frac{2}{3} - o(1)$$

Proof. This follows via a simple argument. For any fixed dataset $P = \{p_i\}_{i=1}^n$, let

$$\mathbf{P} = \Pr_{x \sim \mathcal{X}, q \sim Q(P)}[A^D(q) = x_i]$$

to simplify notation.

$$\frac{2}{3} \leq \mathbb{E}_{P \sim \mathcal{P}}[\mathbf{P}] \tag{66}$$

$$= (1 - o(1)) \cdot \mathbb{E}_{P \sim \mathcal{P}}[\mathbf{P} \mid P \text{ is good}] + o(1) \cdot \mathbb{E}_{P \sim \mathcal{P}}[\mathbf{P} \mid P \text{ is not good}] \tag{67}$$

$$\frac{2}{3} - o(1) \leq (1 - o(1)) \cdot \mathbb{E}_{P \sim \mathcal{P}}[\mathbf{P} \mid P \text{ is good}] \tag{68}$$

Therefore, there exists a dataset which is not shattered by at most $4\gamma n$ and $\Pr_{x \sim \mathcal{X}, q \sim Q(P)}[A^D(y) = x_i] \geq \frac{2}{3} - o(1)$. \square

8.4 Corrupting some cell contents of shattered points

In the rest of the proof, we fix the dataset $P = \{p_i\}_{i=1}^n$ satisfying the conditions of Lemma 8.11, i.e., such that

$$\Pr_{x \sim \mathcal{X}, q \sim \mathcal{Q}(P)}[A^D(q) = x_i] \geq \frac{2}{3} - o(1).$$

We now introduce the notion of corruption of the data structure cells D , which parallels the notion of noise in locally-decodable codes. Remember that, after fixing some bit-string x , the algorithm A produces some data structure $D : [m] \rightarrow \{0, 1\}^w$.

Definition 8.12. We call $D' : [m] \rightarrow \{0, 1\}^w$ a corrupted version of D at k cells if they differ on at most k cells, i.e., if $|\{i \in [m] : D(i) \neq D'(i)\}| \leq k$.

In this section, we will show there exist a dataset P of n points and a set $S \subset [n]$ of size $\Omega(n)$ with good recovery probability, even if the algorithm has access to a corrupted version of data structure.

Definition 8.13. For a fixed $x \in \{0, 1\}^n$, let

$$c_x(i) = \Pr_{q \sim N(p_i)}[A^D(q) = x_i].$$

Note that from the definitions of $\mathcal{Q}(P)$, $\mathbb{E}_{x \sim \mathcal{X}, i \in [n]}[c_x(i)] \geq \frac{2}{3} - o(1)$.

Lemma 8.14. Fix $\varepsilon > 0$, vector $x \in \{0, 1\}^n$, and let $D : [m] \rightarrow \{0, 1\}^w$ be the data structure the algorithm produces on dataset P with bit-string x . Let D' be a corruption of D at εK cells. For every $i \in [n]$ where events $S(\mathcal{A}_1, p_i)$ and $S(\mathcal{A}_2, p_i)$ occur, we have

$$\Pr_{q \sim N(p_i)}[A^{D'}(q) = x_i] \geq c_x(i) - 2\gamma - 2\varepsilon.$$

Proof. Note that $c_x(i)$ represents the probability mass of queries in the neighborhood of p_i for which the algorithm returns x_i . We want to understand how much of that probability mass we remove when we avoid probing the corrupted cells.

Since the dataset point p_i is (K, γ) -weakly shattered by \mathcal{A}_1 and \mathcal{A}_2 , at most 2γ probability mass of $c_i(x)$ will come from the slack of the shattering. In more detail, if $q \sim N(p_i)$, we have probability $c_i(x)$ that the algorithm returns x_i . If we query $q \sim N(p_i) \setminus \beta(p_i)$, in the worst case, every query $q \in \beta(p_i)$ returns x_i ; thus, after removing $\beta(p_i)$, we have removed at most 2γ probability mass over queries that the algorithm returns correctly.

The remaining probability mass is distributed across various cells, where each cell has at most $\frac{1}{K}$ mass for being probing in the first probe, and at most $\frac{1}{K}$ mass for being probe in the second probe. Therefore, if we remove εK cells, the first or second probe will probe those cells with probability at most 2ε . If we avoid the εK corrupted cells, the algorithm has the same output as it did with the uncorrupted data structure D . Therefore, the probability mass which returns x_i on query q in the corrupted data structure D' is at least $c_x(i) - 2\gamma - 2\varepsilon$. \square

Lemma 8.15. Fix $\gamma > 0$ to be a small enough constant. There exists a set $S \subset [n]$ of size $|S| = \Omega(n)$, such that whenever $i \in S$, we have that: events $S(\mathcal{A}_1, p_i)$ and $S(\mathcal{A}_2, p_i)$ occur, and

$$\mathbb{E}_{x \sim \mathcal{X}}[c_x(i)] \geq \frac{1}{2} + \nu,$$

where ν can be taken to be some small constant like $\frac{1}{10}$.

Proof. There is at most a 4γ -fraction of the dataset points which are not shattered. For simplifying the notation, let $\mathbf{P} = \Pr_{i \in [n]}[\mathbb{E}_{x \sim \mathcal{X}}[c_x(i)] \geq \frac{1}{2} + \nu, S(\mathcal{A}_1, p_i) \wedge S(\mathcal{A}_2, p_i)]$. We need to show that $\mathbf{P} = \Omega(1)$, since we will set $S \subset [n]$ as

$$S = \left\{ i \in [n] \mid \mathbb{E}_{x \sim \mathcal{X}}[c_x(i)] \geq \frac{1}{2} + \nu, S(\mathcal{A}_1, p_i) \wedge S(\mathcal{A}_2, p_i) \right\}.$$

The argument is a straight-forward averaging argument.

$$\frac{2}{3} - o(1) \leq \mathbb{E}_{x \sim \mathcal{X}, i \in [n]}[c_x(i)] \tag{69}$$

$$\leq 1 \cdot 4\gamma + 1 \cdot \mathbf{P} + \left(\frac{1}{2} + \nu\right) \cdot (1 - \mathbf{P}) \tag{70}$$

$$\frac{1}{6} - o(1) - 4\gamma - \nu \leq \mathbf{P} \cdot \left(\frac{1}{2} - \nu\right). \tag{71}$$

□

We combine Lemma 8.14 and Lemma 8.15 to obtain the following condition on the dataset.

Lemma 8.16. Fix small enough $\gamma > 0$ and $\varepsilon > 0$. There exists a set $S \subset [n]$ where $|S| = \Omega(n)$, such that whenever $i \in S$,

$$\mathbb{E}_{x \sim \mathcal{X}} \left[\Pr_{q \sim N(p_i)}[A^{D'}(q) = x_i] \right] \geq \frac{1}{2} + \eta$$

where $\eta = \nu - 2\gamma - 2\varepsilon$ and the algorithm probes a corrupted version of the data structure D .

Proof. Consider the set $S \subset [n]$ satisfying the conditions of Lemma 8.15. Whenever $i \in S$, p_i gets (K, γ) -weakly shattered and on average over x , A will recover x_i with probability $\frac{1}{2} + \nu$ when probing the data structure D on input $q \sim N(p_i)$, i.e

$$\mathbb{E}_{x \sim \mathcal{X}} \left[\Pr_{q \sim N(p_i)}[A^D(q) = x_i] \right] \geq \frac{1}{2} + \nu.$$

Therefore, from Lemma 8.14, if A probes D' which is a corruption of D in any εK cells, A will recover x_i with probability at least $\frac{1}{2} + \nu - 2\gamma - 2\varepsilon$ averaged over all $x \sim \mathcal{X}$ where $q \sim N(p_i)$. In other words,

$$\mathbb{E}_{x \sim \mathcal{X}} \left[\Pr_{q \sim N(p_i)}[A^{D'}(q) = x_i] \right] \geq \frac{1}{2} + \nu - 2\gamma - 2\varepsilon.$$

□

Theorem 8.17. *There exists an algorithm A and a subset $S \subseteq [n]$ of size $|S| = \Omega(n)$, where A makes only 2 cell probes to D . Furthermore, for any corruption of D at εK cells, A can recover x_i with probability at least $\frac{1}{2} + \eta$ over the random choice of $x \sim \mathcal{X}$.*

Proof. In order to extract x_i , we generate a random query $q \sim N(p_i)$ and we probe the data structure at the cells assuming the data structure is uncorrupted. From Lemma 8.16, there exists a set $S \subset [n]$ of size $\Omega(n)$ for which this algorithm recovers x_i with probability at least $\frac{1}{2} + \eta$, where the probability is taken on average over all possible $x \in \{0, 1\}^n$. \square

We fix the algorithm A and subset $S \subset [n]$ satisfying the conditions of Theorem 8.17. Since we fixed the dataset $P = \{p_i\}_{i=1}^n$ satisfying the conditions of Lemma 8.11, we say that $x \in \{0, 1\}^n$ is an input to algorithm A in order to initialize the data structure with dataset $P = \{p_i\}_{i=1}^n$ and x_i is the bit associated with p_i .

8.5 Decreasing the word size

We now reduce to the case when the word size is $w = 1$ bit.

Lemma 8.18. *There exists a deterministic non-adaptive algorithm A' which on input $x \in \{0, 1\}^n$ builds a data structure D' using $m2^w$ cells of width 1 bit. Any $i \in S$ as well as any corruption C to D' in at most εK positions satisfies*

$$\mathbb{E}_{x \in \{0,1\}^n} \left[\Pr_{q \sim N(p_i)} [A'^C(q) = x_i] \right] \geq \frac{1}{2} + \frac{\eta}{2^{2w}}$$

Proof. Given algorithm A which constructs the data structure $D : [m] \rightarrow \{0, 1\}^w$ on input $x \in \{0, 1\}^n$, construct the following data structure $D' : [m \cdot 2^w] \rightarrow \{0, 1\}$. For each cell $D_j \in \{0, 1\}^w$, make 2^w cells which contain all the parities of the w bits in D_j . This blows up the size of the data structure by 2^w .

Fix $i \in S$ and $q \in N(p_i)$ if algorithm A produces a function $f_q : \{0, 1\}^w \times \{0, 1\}^w \rightarrow \{0, 1\}$ which succeeds with probability at least $\frac{1}{2} + \zeta$ over $x \in \{0, 1\}^n$, then there exists a signed parity on some input bits which equals f_q in at least $\frac{1}{2} + \frac{\zeta}{2^{2w}}$ inputs $x \in \{0, 1\}^n$. Let S_j be the parity of the bits of cell j and S_k be the parity of the bits of cell k . Let $f'_q : \{0, 1\} \times \{0, 1\} \rightarrow \{0, 1\}$ denote the parity or the negation of the parity which equals f_q on $\frac{1}{2} + \frac{\zeta}{2^{2w}}$ possible input strings $x \in \{0, 1\}^n$.

Algorithm A' will evaluate f'_q at the cell containing the parity of the S_j bits in cell j and the parity of S_k bits in cell k . Let $I_{S_j}, I_{S_k} \in [m \cdot 2^w]$ be the indices of these cells. Since we can find such function for each fixed $q \in N(p_i)$, any two cell probes to $j, k \in [m]$, and any corrupted version of D , the algorithm A' satisfies

$$\mathbb{E}_{x \in \{0,1\}^n} \left[\Pr_{q \sim N(p_i)} [f'_q(C'_{I_{S_j}}, C'_{I_{S_k}}) = x_i] \right] \geq \frac{1}{2} + \frac{\eta}{2^{2w}}$$

whenever $i \in S$. \square

For the remainder of the section, we will prove a version of Theorem 8.1 for algorithms with 1-bit words. Given Lemma 8.18, we will modify the space to $m \cdot 2^w$ and the probability to $\frac{1}{2} + \frac{\eta}{2^{2w}}$ to obtain the answer. So for the remainder of the section, assume algorithm A has 1 bit words.

8.6 Connection to locally-decodable codes

To complete the proof of Theorem 8.1, it remains to prove the following lemma.

Lemma 8.19. *Let A be a non-adaptive deterministic algorithm which makes 2 cell probes to a data structure D of m cells of width 1 bit which can handle εK corruptions and recover x_i with probability $\frac{1}{2} + \eta$ on random input $x \in \{0, 1\}^n$ whenever $i \in S$ for some fixed S of size $\Omega(n)$. Then the following must hold*

$$\frac{m \log m}{n} \geq \Omega(\varepsilon K \eta^2).$$

The proof of the lemma uses [KdW04] and relies heavily on notions from quantum computing, in particular quantum information theory as applied to LDC lower bounds.

8.6.1 Crash course in quantum computing

We introduce a few concepts from quantum computing that are necessary in our subsequent arguments. The quantum state of a *qubit* is described by a unit-length vector in \mathbb{C}^2 . We write the quantum state as a linear combination of the basis states $\begin{pmatrix} 1 \\ 0 \end{pmatrix} = |0\rangle$ and $\begin{pmatrix} 0 \\ 1 \end{pmatrix} = |1\rangle$. The quantum state $\alpha = \begin{pmatrix} \alpha_1 \\ \alpha_2 \end{pmatrix}$ can be written

$$|\alpha\rangle = \alpha_1 |0\rangle + \alpha_2 |1\rangle$$

where we refer to α_1 and α_2 as *amplitudes* and $|\alpha_1|^2 + |\alpha_2|^2 = 1$. The quantum state of an m -qubit system is a unit vector in the tensor product $\mathbb{C}^2 \otimes \dots \otimes \mathbb{C}^2$ of dimension 2^m . The basis states correspond to all 2^m bit-strings of length m . For $j \in [2^m]$, we write $|j\rangle$ as the basis state $|j_1\rangle \otimes |j_2\rangle \otimes \dots \otimes |j_m\rangle$ where $j = j_1 j_2 \dots j_m$ is the binary representation of j . We will write the m -qubit quantum state $|\phi\rangle$ as unit-vector given by linear combination over all 2^m basis states. So $|\phi\rangle = \sum_{j \in [2^m]} \phi_j |j\rangle$. As a shorthand, $\langle\phi|$ corresponds to the conjugate transpose of a quantum state.

A *mixed state* $\{p_i, |\phi_i\rangle\}$ is a probability distribution over quantum states. In this case, we the quantum system is in state $|\phi_i\rangle$ with probability p_i . We represent mixed states by a density matrix $\sum p_i |\phi_i\rangle \langle\phi_i|$.

A measurement is given by a family of Hermitian positive semi-definite operators which sum to the identity operator. Given a quantum state $|\phi\rangle$ and a measurement corresponding to the family of operators $\{M_i^* M_i\}_i$, the measurement yields outcome i with probability $\|M_i |\phi\rangle\|^2$ and results in state $\frac{M_i |\phi\rangle}{\|M_i |\phi\rangle\|}$, where the norm $\|\cdot\|$ is the ℓ_2 norm. We say the measurement makes the *observation* M_i .

Finally, a quantum algorithm makes a query to some bit-string $y \in \{0, 1\}^m$ by starting with the state $|c\rangle |j\rangle$ and returning $(-1)^{c \cdot y_j} |c\rangle |j\rangle$. One can think of c as the control qubit taking values 0 or 1; if $c = 0$, the state remains unchanged by the query, and if $c = 1$ the state receives a $(-1)^{y_j}$ in its

amplitude. The queries may be made in superposition to a state, so the state $\sum_{c \in \{0,1\}, j \in [m]} \alpha_{cj} |c\rangle |j\rangle$ becomes $\sum_{c \in \{0,1\}, j \in [m]} (-1)^{c \cdot y_j} \alpha_{cj} |c\rangle |j\rangle$.

8.6.2 Weak quantum random access codes from GNS algorithms

Definition 8.20. $C : \{0,1\}^n \rightarrow \{0,1\}^m$ is a $(2, \delta, \eta)$ -LDC if there exists a randomized decoding algorithm making at most 2 queries to an m -bit string y non-adaptively, and for all $x \in \{0,1\}^n$, $i \in [n]$, and $y \in \{0,1\}^m$ where $d(y, C(x)) \leq \delta m$, the algorithm can recover x_i from the two queries to y with probability at least $\frac{1}{2} + \eta$.

In their paper, [KdW04] prove the following result about 2-query LDCs.

Theorem 8.21 (Theorem 4 in [KdW04]). *If $C : \{0,1\}^n \rightarrow \{0,1\}^m$ is a $(2, \delta, \eta)$ -LDC, then $m \geq 2^{\Omega(\delta \eta^2 n)}$.*

The proof of Theorem 8.21 proceeds as follows. They show how to construct a 1-query quantum-LDC from a classical 2-query LDC. From a 1-query quantum-LDC, [KdW04] constructs a quantum random access code which encodes n -bit strings in $O(\log m)$ qubits. Then they apply a quantum information theory lower bound due to Nayak [Nay99]:

Theorem 8.22 (Theorem 2 stated in [KdW04] from Nayak [Nay99]). *For any encoding $x \rightarrow \rho_x$ of n -bit strings into m -qubit states, such that a quantum algorithm, given query access to ρ_x , can decode any fixed x_i with probability at least $1/2 + \eta$, it must hold that $m \geq (1 - H(1/2 + \eta))n$.*

Our proof will follow a pattern similar to the proof of Theorem 8.21. We assume the existence of a GNS algorithm A which builds a data structure $D : [m] \rightarrow \{0,1\}$. We can think of D as a length m binary string encoding x ; in particular let $D_j \in \{0,1\}$ be the j th bit of D .

Our algorithm A from Theorem 8.17 does not satisfy the strong properties of an LDC, preventing us from applying 8.21 directly. However, it does have some LDC-ish guarantees. In particular, we can support εK corruptions to D . In the LDC language, this means that we can tolerate a noise rate of $\delta = \frac{\varepsilon K}{m}$. Additionally, we cannot necessarily recover *every* coordinate x_i , but we can recover x_i for $i \in S$, where $|S| = \Omega(n)$. Also, our success probability is $\frac{1}{2} + \eta$ over the random choice of $i \in S$ and the random choice of the bit-string $x \in \{0,1\}^n$. Our proof follows by adapting the arguments of [KdW04] to this weaker setting.

Lemma 8.23. *Let $r = \frac{2}{\delta a^2}$ where $\delta = \frac{\varepsilon K}{m}$ and $a \leq 1$ is a constant. Let D be the data structure from above (i.e., satisfying the hypothesis of Lemma 8.19). Then there exists a quantum algorithm that, starting from the $r(\log m + 1)$ -qubit state with r copies of $|U(x)\rangle$, where*

$$|U(x)\rangle = \frac{1}{\sqrt{2m}} \sum_{c \in \{0,1\}, j \in [m]} (-1)^{c \cdot D_j} |c\rangle |j\rangle$$

can recover x_i for any $i \in S$ with probability $\frac{1}{2} + \Omega(\eta)$ (over a random choice of x).

Assuming Lemma 8.23, we can complete the proof of Lemma 8.19.

Proof of Lemma 8.19. The proof is similar to the proof of Theorem 2 of [KdW04]. Let ρ_x represent the s -qubit system consisting of the r copies of the state $|U(x)\rangle$, where $s = r(\log m + 1)$; ρ_x is an encoding of x . Using Lemma 8.23, we can assume we have a quantum algorithm that, given ρ_x , can recover x_i for any $i \in S$ with probability $\alpha = \frac{1}{2} + \Omega(\eta)$ over the random choice of $x \in \{0, 1\}^n$.

We will let $H(A)$ be the Von Neumann entropy of A , and $H(A|B)$ be the conditional entropy and $H(A : B)$ the mutual information.

Let XM be the $(n + s)$ -qubit system

$$\frac{1}{2^n} \sum_{x \in \{0,1\}^n} |x\rangle \langle x| \otimes \rho_x.$$

The system corresponds to the uniform superposition of all 2^n strings concatenated with their encoding ρ_x . Let X be the first subsystem corresponding to the first n qubits and M be the second subsystem corresponding to the s qubits. We have

$$H(XM) = n + \frac{1}{2^n} \sum_{x \in \{0,1\}^n} H(\rho_x) \geq n = H(X) \quad (72)$$

$$H(M) \leq s, \quad (73)$$

since M has s qubits. Therefore, the mutual information $H(X : M) = H(X) + H(M) - H(XM) \leq s$. Note that $H(X|M) \leq \sum_{i=1}^n H(X_i|M)$. By Fano's inequality, if $i \in S$,

$$H(X_i|M) \leq H(\alpha)$$

where we are using the fact that Fano's inequality works even if we can recover x_i with probability α averaged over all x 's. Additionally, if $i \notin S$, $H(X_i|M) \leq 1$. Therefore,

$$s \geq H(X : M) = H(X) - H(X|M) \quad (74)$$

$$\geq H(X) - \sum_{i=1}^n H(X_i|M) \quad (75)$$

$$\geq n - |S|H(\alpha) - (n - |S|) \quad (76)$$

$$= |S|(1 - H(\alpha)). \quad (77)$$

Furthermore, $1 - H(\alpha) \geq \Omega(\eta^2)$ since, and $|S| = \Omega(n)$, we have

$$\frac{2m}{a^2 \varepsilon K} (\log m + 1) \geq \Omega(n\eta^2) \quad (78)$$

$$\frac{m \log m}{n} \geq \Omega(\varepsilon K \eta^2). \quad (79)$$

□

It remains to prove Lemma 8.23, which we proceed to do in the rest of the section. We first show that we can simulate our GNS algorithm with a 1-query quantum algorithm.

Lemma 8.24. *Fix an $x \in \{0, 1\}^n$ and $i \in [n]$. Let $D : [m] \rightarrow \{0, 1\}$ be the data structure produced by algorithm A on input x . Suppose $\Pr_{q \sim N(p_i)}[A^D(q) = x_i] = \frac{1}{2} + b$ for $b > 0$. Then there exists a quantum algorithm which makes one quantum query (to D) and succeeds with probability $\frac{1}{2} + \frac{4b}{7}$ to output x_i .*

Proof. We use the procedure in Lemma 1 of [KdW04] to determine the output algorithm A on input x at index i . The procedure simulates two classical queries with one quantum query. \square

All quantum algorithms which make 1-query to D can be specified in the following manner: there is a quantum state $|Q_i\rangle$, where

$$|Q_i\rangle = \sum_{c \in \{0,1\}, j \in [m]} \alpha_{cj} |c\rangle |j\rangle$$

which queries D . After querying D , the resulting quantum state is $|Q_i(x)\rangle$, where

$$|Q_i(x)\rangle = \sum_{c \in \{0,1\}, j \in [m]} (-1)^{c \cdot D_j} \alpha_{cj} |c\rangle |j\rangle.$$

There is also a quantum measurement $\{R, I - R\}$ such that, after the algorithm obtains the state $|Q_i(x)\rangle$, it performs the measurement $\{R, I - R\}$. If the algorithm observes R , it outputs 1 and if the algorithm observes $I - R$, it outputs 0.

From Lemma 8.24, we know there must exist a state $|Q_i\rangle$ and $\{R, I - R\}$ where if algorithm A succeeds with probability $\frac{1}{2} + \eta$ on random $x \sim \{0, 1\}^n$, then the quantum algorithm succeeds with probability $\frac{1}{2} + \frac{4\eta}{7}$ on random $x \sim \{0, 1\}^n$.

In order to simplify notation, we write $p(\phi)$ as the probability of making observation R from state $|\phi\rangle$. Since R is a positive semi-definite matrix, $R = M^*M$ and so $p(\phi) = \|M|\phi\rangle\|^2$.

In exactly the same way as [KdW04], we can remove parts of the quantum state $|Q_i(x)\rangle$ where $\alpha_{cj} > \frac{1}{\sqrt{\delta m}} = \frac{1}{\sqrt{\epsilon K}}$. If we let $L = \{(c, j) \mid \alpha_{cj} \leq \frac{1}{\sqrt{\epsilon K}}\}$, after keeping only the amplitudes in L , we obtain the quantum state $\frac{1}{a} |A_i(x)\rangle$, where

$$|A_i(x)\rangle = \sum_{(c,j) \in L} (-1)^{c \cdot D_j} \alpha_{cj} |c\rangle |j\rangle \quad a = \sqrt{\sum_{(c,j) \in L} \alpha_{cj}^2}$$

Lemma 8.25. *Fix $i \in S$. The quantum state $|A_i(x)\rangle$ satisfies*

$$\mathbb{E}_{x \in \{0,1\}^n} \left[p\left(\frac{1}{a} A_i(x)\right) \mid x_i = 1 \right] - \mathbb{E}_{x \in \{0,1\}^n} \left[p\left(\frac{1}{a} A_i(x)\right) \mid x_i = 0 \right] \geq \frac{8\eta}{7a^2}.$$

Proof. Note that since $|Q_i(x)\rangle$ and $\{R, I - R\}$ simulate A and succeed with probability at least

$\frac{1}{2} + \frac{4\eta}{7}$ on a random $x \in \{0, 1\}^n$, we have that

$$\frac{1}{2} \mathbb{E}_{x \in \{0,1\}^n} [p(Q_i(x)) \mid x_i = 1] + \frac{1}{2} \mathbb{E}_{x \in \{0,1\}^n} [1 - p(Q_i(x)) \mid x_i = 0] \geq \frac{1}{2} + \frac{4\eta}{7}, \quad (80)$$

which we can simplify to say

$$\mathbb{E}_{x \in \{0,1\}^n} [p(Q_i(x)) \mid x_i = 1] + \mathbb{E}_{x \in \{0,1\}^n} [p(Q_i(x)) \mid x_i = 0] \geq \frac{8\eta}{7}. \quad (81)$$

Since $|Q_i(x)\rangle = |A_i(x)\rangle + |B_i(x)\rangle$ and $|B_i(x)\rangle$ contains at most εK parts, if all probes to D in $|B_i(x)\rangle$ had corrupted values, the algorithm should still succeed with the same probability on random inputs x . Therefore, the following two inequalities hold:

$$\mathbb{E}_{x \in \{0,1\}^n} [p(A_i(x) + B(x)) \mid x_i = 1] + \mathbb{E}_{x \in \{0,1\}^n} [p(A_i(x) + B(x)) \mid x_i = 0] \geq \frac{8\eta}{7} \quad (82)$$

$$\mathbb{E}_{x \in \{0,1\}^n} [p(A_i(x) - B(x)) \mid x_i = 1] + \mathbb{E}_{x \in \{0,1\}^n} [p(A_i(x) - B(x)) \mid x_i = 0] \geq \frac{8\eta}{7} \quad (83)$$

Note that $p(\phi \pm \psi) = p(\phi) + p(\psi) \pm (\langle \phi | R | \psi \rangle + \langle \psi | D | \phi \rangle)$ and $p(\frac{1}{c}\phi) = \frac{p(\phi)}{c^2}$. One can verify by averaging the two inequalities (82) and (83) that we get the desired expression. \square

Lemma 8.26. *Fix $i \in S$. There exists a quantum algorithm that starting from the quantum state $\frac{1}{a} |A_i(x)\rangle$, can recover the value of x_i with probability $\frac{1}{2} + \frac{2\eta}{7a^2}$ over random $x \in \{0, 1\}^n$.*

Proof. The algorithm and argument are almost identical to Theorem 3 in [KdW04], we just check that it works under the weaker assumptions. Let

$$q_1 = \mathbb{E}_{x \in \{0,1\}^n} \left[p\left(\frac{1}{a} A_i(x)\right) \mid x_i = 1 \right] \quad q_0 = \mathbb{E}_{x \in \{0,1\}^n} \left[p\left(\frac{1}{a} A_i(x)\right) \mid x_i = 0 \right].$$

From Lemma 8.25, we know $q_1 - q_0 \geq \frac{8\eta}{7a^2}$. In order to simplify notation, let $b = \frac{4\eta}{7a^2}$. So we want a quantum algorithm which starting from state $\frac{1}{a} |A_i(x)\rangle$ can recover x_i with probability $\frac{1}{2} + \frac{b}{2}$ on random $x \in \{0, 1\}^n$. Assume $q_1 \geq \frac{1}{2} + b$, since otherwise $q_0 \leq \frac{1}{2} - b$ and the same argument will work for 0 and 1 flipped. Also, assume $q_1 + q_0 \geq 1$, since otherwise simply outputting 1 on observation R and 0 on observation $I - R$ will work.

The algorithm works in the following way: it outputs 0 with probability $1 - \frac{1}{q_1 + q_0}$ and otherwise makes the measurement $\{R, I - R\}$ on state $\frac{1}{a} |A_i(x)\rangle$. If the observation made is R , then the algorithm outputs 1, otherwise, it outputs 0. The probability of success over random input $x \in \{0, 1\}^n$ is

$$\begin{aligned} & \mathbb{E}_{x \in \{0,1\}^n} [\Pr[\text{returns correctly}]] \\ &= \frac{1}{2} \mathbb{E}_{x \in \{0,1\}^n} [\Pr[\text{returns 1} \mid x_i = 1]] + \frac{1}{2} \mathbb{E}_{x \in \{0,1\}^n} [\Pr[\text{returns 0} \mid x_i = 0]]. \end{aligned} \quad (84)$$

When $x_i = 1$, the probability the algorithm returns correctly is $(1 - q)p\left(\frac{1}{a}A_i(x)\right)$ and when $x_i = 0$, the probability the algorithm returns correctly is $q + (1 - q)(1 - p(\frac{1}{a}A_i(x)))$. So simplifying (84),

$$\mathbb{E}_{x \in \{0,1\}^n} [\Pr[\text{returns correctly}]] = \frac{1}{2}(1 - q)q_1 + \frac{1}{2}(q + (1 - q)(1 - q_0)) \quad (85)$$

$$\geq \frac{1}{2} + \frac{b}{2}. \quad (86)$$

□

Now we can finally complete the proof of Lemma 8.23.

Proof of Lemma 8.23. Again, the proof is exactly the same as the finishing arguments of Theorem 3 in [KdW04], and we simply check the weaker conditions give the desired outcome. On input $i \in [n]$ and access to r copies of the state $|U(x)\rangle$, the algorithm applies the measurement $\{M_i^* M_i, I - M_i^* M_i\}$ where

$$M_i = \sqrt{\varepsilon K} \sum_{(c,j) \in L} \alpha_{cj} |c, j\rangle \langle c, j|.$$

This measurement is designed in order to yield the state $\frac{1}{a} |A_i(x)\rangle$ on $|U(x)\rangle$ if the measurement makes the observation $M_i^* M_i$. The fact that the amplitudes of $|A_i(x)\rangle$ are not too large makes $\{M_i^* M_i, I - M_i^* M_i\}$ a valid measurement.

The probability of observing $M_i^* M_i$ is $\langle U(x) | M_i^* M_i | U(x) \rangle = \frac{\delta a^2}{2}$, where we used that $\delta = \frac{\varepsilon K}{m}$. So the algorithm repeatedly applies the measurement until observing outcome $M_i^* M_i$. If it never makes the observation, the algorithm outputs 0 or 1 uniformly at random. If the algorithm does observe $M_i^* M_i$, it runs the output of the algorithm of Lemma 8.26. The following simple calculation (done in [KdW04]) gives the desired probability of success on random input,

$$\mathbb{E}_{x \in \{0,1\}^n} [\Pr[\text{returns correctly}]] \geq \left(1 - (1 - \delta a^2/2)^r\right) \left(\frac{1}{2} + \frac{2\eta}{7a^2}\right) + (1 - \delta a^2/2)^r \cdot \frac{1}{2} \quad (87)$$

$$\geq \frac{1}{2} + \frac{\eta}{7a^2}. \quad (88)$$

□

8.6.3 On adaptivity

We can extend our lower bounds from the non-adaptive to the adaptive setting.

Lemma 8.27. *If there exists a deterministic data structure which makes two queries adaptively and succeeds with probability at least $\frac{1}{2} + \eta$, there exists a deterministic data structure which makes the two queries non-adaptively and succeeds with probability at least $\frac{1}{2} + \frac{\eta}{2^w}$.*

Proof. The algorithm guesses the outcome of the first cell probe and simulates the adaptive algorithm with the guess. After knowing which two probes to make, we probe the data structure non-adaptively. If the algorithm guessed the contents of the first cell-probe correctly, then we output the value of

the non-adaptive algorithm. Otherwise, we output a random value. This algorithm is non-adaptive and succeeds with probability at least $\left(1 - \frac{1}{2^w}\right) \cdot \frac{1}{2} + \frac{1}{2^w} \left(\frac{1}{2} + \eta\right) = \frac{1}{2} + \frac{\eta}{2^w}$. \square

Applying this theorem, from an adaptive algorithm succeeding with probability $\frac{2}{3}$, we obtain a non-adaptive algorithm which succeeds with probability $\frac{1}{2} + \Omega(2^{-w})$. This value is lower than the intended $\frac{2}{3}$, but the reduction to a weak LDC still goes through when let $\gamma = \Theta(2^{-w})$, $\varepsilon = \Theta(2^{-w})$. Another consequence is that $|S| = \Omega(2^{-w}n)$.

One can easily verify that for small enough $\gamma = \Omega(2^{-w})$,

$$\frac{m \log m \cdot 2^{\Theta(w)}}{n} \geq \Omega\left(\Phi_r\left(\frac{1}{m}, \gamma\right)\right)$$

Which yields tight lower bounds (up to sub-polynomial factors) for the Hamming space when $w = o(\log n)$.

In the case of the Hamming space, we can compute robust expansion in a similar fashion to Theorem 1.3. In particular, for any $p, q \in [1, \infty)$ where $(p-1)(q-1) = \sigma^2$, we have

$$\frac{m \log m \cdot 2^{O(w)}}{n} \geq \Omega(\gamma^q m^{1+q/p-q}) \quad (89)$$

$$m^{q-q/p+o(1)} \geq n^{1-o(1)} \gamma^q \quad (90)$$

$$m \geq n^{\frac{1-o(1)}{q-q/p+o(1)}} \gamma^{\frac{q}{q-q/p+o(1)}} \quad (91)$$

$$= n^{\frac{p}{pq-q}-o(1)} \gamma^{\frac{p}{p-1}-o(1)} \quad (92)$$

Let $p = 1 + \frac{wf(n)}{\log n}$ and $q = 1 + \sigma^2 \frac{\log n}{wf(n)}$ where we require that $wf(n) = o(\log n)$ and $f(n) \rightarrow \infty$ as $n \rightarrow \infty$.

$$m \geq n^{\frac{1}{\sigma^2}-o(1)} 2^{\frac{\log n}{\log \log n}} \quad (93)$$

$$\geq n^{\frac{1}{\sigma^2}-o(1)} \quad (94)$$

9 Acknowledgments

We would like to thank Jop Briët for helping us to navigate literature about LDCs. We also thank Omri Weinstein for useful discussions. Thanks to Adam Bouland for educating us on the topic of quantum computing. Thijs Laarhoven is supported by the SNSF ERC Transfer Grant CRETP2-166734 FELICITY.

References

- [AC09] Nir Ailon and Bernard Chazelle. The fast Johnson–Lindenstrauss transform and approximate nearest neighbors. *SIAM J. Comput.*, 39(1):302–322, 2009.

- [ACP08] Alexandr Andoni, Dorian Croitoru, and Mihai Pătraşcu. Hardness of nearest neighbor under L-infinity. In *Proceedings of the Symposium on Foundations of Computer Science (FOCS)*, pages 424–433, 2008.
- [ACW16] Josh Alman, Timothy M. Chan, and Ryan Williams. Polynomial representations of threshold functions with applications. In *FOCS*, 2016.
- [ADI⁺06] Alexandr Andoni, Mayur Datar, Nicole Immorlica, Piotr Indyk, and Vahab Mirrokni. Locality-sensitive hashing scheme based on p -stable distributions. *Nearest Neighbor Methods for Learning and Vision: Theory and Practice, Neural Processing Information Series, MIT Press*, 2006.
- [AGK06] Arvind Arasu, Venkatesh Ganti, and Raghav Kaushik. Efficient exact set-similarity joins. In *Proceedings of the 32nd international conference on Very large data bases*, pages 918–929. VLDB Endowment, 2006.
- [AI06] Alexandr Andoni and Piotr Indyk. Near-optimal hashing algorithms for approximate nearest neighbor in high dimensions. In *Proceedings of the Symposium on Foundations of Computer Science (FOCS)*, pages 459–468, 2006.
- [AI08] Alexandr Andoni and Piotr Indyk. Near-optimal hashing algorithms for approximate nearest neighbor in high dimensions. *Communications of the ACM*, 51(1):117–122, 2008.
- [AIL⁺15] Alexandr Andoni, Piotr Indyk, Thijs Laarhoven, Ilya Razenshteyn, and Ludwig Schmidt. Practical and optimal LSH for angular distance. In *NIPS*, 2015. Full version available at <http://arxiv.org/abs/1509.02897>.
- [AINR14] Alexandr Andoni, Piotr Indyk, Huy L. Nguyen, and Ilya Razenshteyn. Beyond locality-sensitive hashing. In *Proceedings of the ACM-SIAM Symposium on Discrete Algorithms (SODA)*, 2014. Full version at <http://arxiv.org/abs/1306.1547>.
- [AIP06] Alexandr Andoni, Piotr Indyk, and Mihai Pătraşcu. On the optimality of the dimensionality reduction method. In *Proceedings of the Symposium on Foundations of Computer Science (FOCS)*, pages 449–458, 2006.
- [ALRW16] Alexandr Andoni, Thijs Laarhoven, Ilya Razenshteyn, and Erik Waingarten. Lower bounds on time-space trade-offs for approximate near neighbors. *CoRR*, abs/1605.02701, 2016.
- [And09] Alexandr Andoni. *Nearest Neighbor Search: the Old, the New, and the Impossible*. PhD thesis, MIT, 2009. Available at <http://www.mit.edu/~andoni/thesis/main.pdf>.
- [AR15] Alexandr Andoni and Ilya Razenshteyn. Optimal data-dependent hashing for approximate near neighbors. In *Proceedings of the Symposium on Theory of Computing (STOC)*, 2015. Full version at <http://arxiv.org/abs/1501.01062>.
- [AR16] Alexandr Andoni and Ilya Razenshteyn. Tight lower bounds for data-dependent locality-sensitive hashing. In *Proceedings of the ACM Symposium on Computational Geometry (SoCG)*, 2016. Available at <http://arxiv.org/abs/1507.04299>.
- [AV15] Amirali Abdullah and Suresh Venkatasubramanian. A directed isoperimetric inequality with application to bregman near neighbor lower bounds. In *Proceedings of the Forty-Seventh Annual ACM on Symposium on Theory of Computing, STOC 2015, Portland, OR, USA, June 14-17, 2015*, pages 509–518, 2015.
- [AW15] Josh Alman and Ryan Williams. Probabilistic polynomials and hamming nearest neighbors. In *Proceedings of the Symposium on Foundations of Computer Science (FOCS)*, 2015.
- [BDGL16] Anja Becker, Léo Ducas, Nicolas Gama, and Thijs Laarhoven. New directions in nearest neighbor searching with applications to lattice sieving. In *Proceedings of the ACM-SIAM Symposium on Discrete Algorithms (SODA)*, 2016.

- [BOR99] Allan Borodin, Rafail Ostrovsky, and Yuval Rabani. Lower bounds for high dimensional nearest neighbor search and related problems. *Proceedings of the Symposium on Theory of Computing*, 1999.
- [BR02] Omer Barkol and Yuval Rabani. Tighter bounds for nearest neighbor search and related problems in the cell probe model. *J. Comput. Syst. Sci.*, 64(4):873–896, 2002. Previously appeared in STOC’00.
- [BRdW08] Avraham Ben-Aroya, Oded Regev, and Ronald de Wolf. A hypercontractive inequality for matrix-valued functions with applications to quantum computing and ldfs. In *49th Annual IEEE Symposium on Foundations of Computer Science, FOCS 2008, October 25-28, 2008, Philadelphia, PA, USA*, pages 477–486, 2008.
- [CCGL99] Amit Chakrabarti, Bernard Chazelle, Benjamin Gum, and Alexey Lvov. A lower bound on the complexity of approximate nearest-neighbor searching on the Hamming cube. *Proceedings of the Symposium on Theory of Computing (STOC)*, 1999.
- [Cha02] Moses Charikar. Similarity estimation techniques from rounding. In *Proceedings of the Symposium on Theory of Computing (STOC)*, pages 380–388, 2002.
- [Chr16] Tobias Christiani. A framework for similarity search with space-time tradeoffs using locality-sensitive filtering. *CoRR*, abs/1605.02687, 2016.
- [Cla88] Ken Clarkson. A randomized algorithm for closest-point queries. *SIAM Journal on Computing*, 17:830–847, 1988.
- [CR04] Amit Chakrabarti and Oded Regev. An optimal randomised cell probe lower bounds for approximate nearest neighbor searching. *Proceedings of the Symposium on Foundations of Computer Science (FOCS)*, 2004.
- [DG99] Sanjoy Dasgupta and Anupam Gupta. An elementary proof of the Johnson–Lindenstrauss lemma. *ICSI technical report TR-99-006*, Berkeley, CA, 1999.
- [DG03] Sanjoy Dasgupta and Anupam Gupta. An elementary proof of a theorem of Johnson and Lindenstrauss. *Random Structures Algorithms*, 22(1):60–65, 2003.
- [DG15] Zeev Dvir and Sivakanth Gopi. 2-server PIR with sub-polynomial communication. In *Proceedings of the Forty-Seventh Annual ACM on Symposium on Theory of Computing, STOC 2015, Portland, OR, USA, June 14-17, 2015*, pages 577–584, 2015.
- [DIIM04] Mayur Datar, Nicole Immorlica, Piotr Indyk, and Vahab Mirrokni. Locality-sensitive hashing scheme based on p-stable distributions. In *Proceedings of the ACM Symposium on Computational Geometry (SoCG)*, 2004.
- [DRT11] Inderjit S. Dhillon, Pradeep Ravikumar, and Ambuj Tewari. Nearest neighbor based greedy coordinate descent. In *Advances in Neural Information Processing Systems 24: 25th Annual Conference on Neural Information Processing Systems 2011. Proceedings of a meeting held 12-14 December 2011, Granada, Spain.*, pages 2160–2168, 2011.
- [GIM99] Aristides Gionis, Piotr Indyk, and Rajeev Motwani. Similarity search in high dimensions via hashing. *Proceedings of the 25th International Conference on Very Large Data Bases (VLDB)*, 1999.
- [GPY94] Daniel H. Greene, Michal Parnas, and F. Frances Yao. Multi-index hashing for information retrieval. In *Proceedings of the Symposium on Foundations of Computer Science (FOCS)*, pages 722–731, 1994.
- [HIM12] Sarel Har-Peled, Piotr Indyk, and Rajeev Motwani. Approximate nearest neighbor: Towards removing the curse of dimensionality. *Theory of Computing*, 1(8):321–350, 2012.
- [HLM15] Thomas Hofmann, Aurélien Lucchi, and Brian McWilliams. Neighborhood watch: Stochastic gradient descent with neighbors. *CoRR*, abs/1506.03662, 2015.

- [IM98] Piotr Indyk and Rajeev Motwani. Approximate nearest neighbor: towards removing the curse of dimensionality. *Proceedings of the Symposium on Theory of Computing (STOC)*, pages 604–613, 1998.
- [Ind00] Piotr Indyk. Dimensionality reduction techniques for proximity problems. *Proceedings of the Ninth ACM-SIAM Symposium on Discrete Algorithms*, 2000.
- [Ind01a] Piotr Indyk. *High-dimensional computational geometry*. Ph.D. Thesis. Department of Computer Science, Stanford University, 2001.
- [Ind01b] Piotr Indyk. On approximate nearest neighbors in ℓ_∞ norm. *J. Comput. Syst. Sci.*, 63(4):627–638, 2001. Preliminary version appeared in FOCS’98.
- [JKKR04] T. S. Jayram, Subhash Khot, Ravi Kumar, and Yuval Rabani. Cell-probe lower bounds for the partial match problem. *Journal of Computer and Systems Sciences*, 69(3):435–447, 2004. See also STOC’03.
- [JL84] William B. Johnson and Joram Lindenstrauss. Extensions of lipshitz mapping into hilbert space. *Contemporary Mathematics*, 26:189–206, 1984.
- [Kap15] Michael Kapralov. Smooth tradeoffs between insert and query complexity in nearest neighbor search. In *Proceedings of the ACM Symposium on Principles of Database Systems (PODS)*, pages 329–342, New York, NY, USA, 2015. ACM.
- [KdW04] Iordanis Kerenidis and Ronald de Wolf. Exponential lower bound for 2-query locally decodable codes via a quantum argument. *Journal of Computer and System Sciences*, 69(3):395–420, 2004.
- [KKK16] Matti Karppa, Petteri Kaski, and Jukka Kohonen. A faster subquadratic algorithm for finding outlier correlations. In *Proceedings of the ACM-SIAM Symposium on Discrete Algorithms (SODA)*, 2016. Available at <http://arxiv.org/abs/1510.03895>.
- [KKKÓ16] Matti Karppa, Petteri Kaski, Jukka Kohonen, and Pádraig Ó Catháin. Explicit correlation amplifiers for finding outlier correlations in deterministic subquadratic time. In *Proceedings of the 24th European Symposium Of Algorithms (ESA ’2016)*, 2016. To appear.
- [KOR00] Eyal Kushilevitz, Rafail Ostrovsky, and Yuval Rabani. Efficient search for approximate nearest neighbor in high dimensional spaces. *SIAM J. Comput.*, 30(2):457–474, 2000. Preliminary version appeared in STOC’98.
- [KP12] Michael Kapralov and Rina Panigrahy. NNS lower bounds via metric expansion for ℓ_∞ and EMD. In *Proceedings of International Colloquium on Automata, Languages and Programming (ICALP)*, pages 545–556, 2012.
- [Laa15a] Thijs Laarhoven. *Search problems in cryptography: From fingerprinting to lattice sieving*. PhD thesis, Eindhoven University of Technology, 2015.
- [Laa15b] Thijs Laarhoven. Sieving for shortest vectors in lattices using angular locality-sensitive hashing. In *Advances in Cryptology - CRYPTO 2015 - 35th Annual Cryptology Conference, Santa Barbara, CA, USA, August 16-20, 2015, Proceedings, Part I*, pages 3–22, 2015.
- [Laa15c] Thijs Laarhoven. Tradeoffs for nearest neighbors on the sphere. *CoRR*, abs/1511.07527, 2015.
- [Liu04] Ding Liu. A strong lower bound for approximate nearest neighbor searching in the cell probe model. *Information Processing Letters*, 92:23–29, 2004.
- [LJW⁺07] Qin Lv, William Josephson, Zhe Wang, Moses Charikar, and Kai Li. Multi-probe LSH: efficient indexing for high-dimensional similarity search. In *VLDB*, 2007.
- [LLR94] Nathan Linial, Eran London, and Yuri Rabinovich. The geometry of graphs and some of its algorithmic applications. In *Proceedings of the Symposium on Foundations of Computer Science (FOCS)*, pages 577–591, 1994.
- [LPY16] Mingmou Liu, Xiaoyin Pan, and Yitong Yin. Randomized approximate nearest neighbor search with limited adaptivity. *CoRR*, abs/1602.04421, 2016.

- [Mei93] Stefan Meiser. Point location in arrangements of hyperplanes. *Information and Computation*, 106:286–303, 1993.
- [Mil99] Peter Bro Miltersen. Cell probe complexity-a survey. *Proceedings of the 19th Conference on the Foundations of Software Technology and Theoretical Computer Science, Advances in Data Structures Workshop*, page 2, 1999.
- [MNP07] Rajeev Motwani, Assaf Naor, and Rina Panigrahy. Lower bounds on locality sensitive hashing. *SIAM Journal on Discrete Mathematics*, 21(4):930–935, 2007. Previously in SoCG’06.
- [MNSW98] Peter B. Miltersen, Noam Nisan, Shmuel Safra, and Avi Wigderson. Data structures and asymmetric communication complexity. *Journal of Computer and System Sciences*, 1998.
- [MO15] Alexander May and Ilya Ozerov. On computing nearest neighbors with applications to decoding of binary linear codes. In *EUROCRYPT*, 2015.
- [Nay99] Ashwin Nayak. Optimal lower bounds for quantum automata and random access codes. In *Foundations of Computer Science, 1999. 40th Annual Symposium on*, pages 369–376. IEEE, 1999.
- [Ngu14] Huy L. Nguyễn. *Algorithms for High Dimensional Data*. PhD thesis, Princeton University, 2014. Available at <http://arks.princeton.edu/ark:/88435/dsp01b8515q61f>.
- [O’D14] Ryan O’Donnell. *Analysis of boolean functions*. Cambridge University Press, 2014.
- [OvL81] Mark H. Overmars and Jan van Leeuwen. Some principles for dynamizing decomposable searching problems. *Information Processing Letters*, 12(1):49–53, 1981.
- [OWZ14] Ryan O’Donnell, Yi Wu, and Yuan Zhou. Optimal lower bounds for locality sensitive hashing (except when q is tiny). *Transactions on Computation Theory*, 6(1):5, 2014. Previously in ICS’11.
- [Pag16] Rasmus Pagh. Locality-sensitive hashing without false negatives. In *Proceedings of the ACM-SIAM Symposium on Discrete Algorithms (SODA)*, 2016. Available at <http://arxiv.org/abs/1507.03225>.
- [Pan06] Rina Panigrahy. Entropy-based nearest neighbor algorithm in high dimensions. In *Proceedings of the ACM-SIAM Symposium on Discrete Algorithms (SODA)*, 2006.
- [Păt11] Mihai Pătraşcu. Unifying the landscape of cell-probe lower bounds. *SIAM Journal on Computing*, 40(3):827–847, 2011. See also FOCS’08, arXiv:1010.3783.
- [PP16] Ninh Pham and Rasmus Pagh. Scalability and total recall with fast CoveringLSH. *CoRR*, abs/1602.02620, 2016.
- [PT06] Mihai Pătraşcu and Mikkel Thorup. Higher lower bounds for near-neighbor and further rich problems. *Proceedings of the Symposium on Foundations of Computer Science (FOCS)*, 2006.
- [PTW08] Rina Panigrahy, Kunal Talwar, and Udi Wieder. A geometric approach to lower bounds for approximate near-neighbor search and partial match. In *Proceedings of the Symposium on Foundations of Computer Science (FOCS)*, pages 414–423, 2008.
- [PTW10] Rina Panigrahy, Kunal Talwar, and Udi Wieder. Lower bounds on near neighbor search via metric expansion. In *Proceedings of the Symposium on Foundations of Computer Science (FOCS)*, pages 805–814, 2010.
- [Raz14] Ilya Razenshteyn. Beyond Locality-Sensitive Hashing. Master’s thesis, MIT, 2014.
- [SDI06] Gregory Shakhnarovich, Trevor Darrell, and Piotr Indyk, editors. *Nearest Neighbor Methods in Learning and Vision*. Neural Processing Information Series, MIT Press, 2006.
- [TT07] Tengen Terasawa and Yuzuru Tanaka. Spherical LSH for approximate nearest neighbor search on unit hypersphere. *Workshop on Algorithms and Data Structures*, 2007.
- [Val88] Leslie G Valiant. Functionality in neural nets. In *First Workshop on Computational Learning Theory*, pages 28–39, 1988.

- [Val15] Gregory Valiant. Finding correlations in subquadratic time, with applications to learning parities and the closest pair problem. *J. ACM*, 62(2):13, 2015. Previously in FOCS’12.
- [WLKC15] Jun Wang, Wei Liu, Sanjiv Kumar, and Shih-Fu Chang. Learning to hash for indexing big data — a survey. Available at <http://arxiv.org/abs/1509.05472>, 2015.
- [WSSJ14] Jingdong Wang, Heng Tao Shen, Jingkuan Song, and Jianqiu Ji. Hashing for similarity search: A survey. *CoRR*, abs/1408.2927, 2014.
- [Yek12] Sergey Yekhanin. Locally decodable codes. *Foundations and Trends in Theoretical Computer Science*, 6(3):139–255, 2012.
- [Yin16] Yitong Yin. Simple average-case lower bounds for approximate near-neighbor from isoperimetric inequalities. *CoRR*, abs/1602.05391, 2016.
- [ZYS16] Zeyuan Allen Zhu, Yang Yuan, and Karthik Sridharan. Exploiting the structure: Stochastic gradient methods using raw clusters. *CoRR*, abs/1602.02151, 2016.