

Simultaneous Credible Regions for Multiple Changepoint Locations

Tobias Siems*, Marc Hellmuth, Volkmar Liebscher
Department of Mathematics and Computer Science
University of Greifswald

March 2, 2022

Abstract

Within a Bayesian retrospective framework, we present a way of examining the distribution of changepoints through a novel set estimator. For a given level, α , we aim at smallest sets that cover all changepoints with a probability of at least $1 - \alpha$. These so-called smallest simultaneous credible regions, computed for certain values of α , provide parsimonious representations of the possible changepoint locations. In addition, combining them for a range of different α 's enables very informative yet condensed visualisations. Therewith we allow for the evaluation of model choices and the analysis of changepoint data to an unprecedented degree. This approach exhibits superior sensitivity, specificity and interpretability in comparison with highest density regions, marginal inclusion probabilities and confidence intervals inferred by `stepR`. Whilst their direct construction is usually intractable, asymptotically correct solutions can be derived from posterior samples. This leads to a novel NP-complete problem. Through reformulations into an Integer Linear Program we show empirically that a fast greedy heuristic computes virtually exact solutions.

Keywords: Highest density regions, Integer Linear Program, Model selection, NP-completeness, `stepR`, Spike and Slab

*The authors would like to thank the following persons for their useful hints and corrections: Lisa Koeppel, Paul Fearnhead, Nicolas Wieseke, Johann Jakob Preuß, Lawrence Bardwell, Areesh Mittal, Poppy Miller and Jamie-Leigh Chapman. The first author gratefully acknowledges support from the Landesgraduiertenförderung, Greifswald and the DAAD (ID 57266578).

1 Introduction

Detecting changepoints in time series is an important task. For example, while observing the gating behavior of ion channels (Doyle, 2004; Siekmann et al., 2014). There are many algorithms for, and scientific publications on, detecting multiple changepoints in time series, such as frequentist approaches (Friedrich et al., 2008; Frick et al., 2014) and Bayesian approaches (Fearnhead, 2006; Adams and MacKay, 2007; Fearnhead and Liu, 2007). A more exhaustive overview of existing methods can be found in Eckley et al. (2011).

Detecting changepoints in a time series usually comes down to deciding on a set of changepoint locations. Thus, Bayesian frameworks aim to infer a set valued random variable that gives a reasonable representation of this decision (Fearnhead, 2006; Adams and MacKay, 2007; Lai and Xing, 2011). The non-deterministic nature of these so-called *posterior random changepoints* expresses the uncertainty of their location.

Rigaill et al. (2012) illustrates this uncertainty by means of a Bayesian model with exactly two changepoints. They plot for all possible pairs of time points the posterior probability of being these changepoints. The results indicate both that posterior random changepoints are highly dependent and that generally more than one combination is likely. Unfortunately, this approach is not suitable to monitor the distribution of more than two changepoints. It is a crucial fact that the space of possible changepoint locations is very high-dimensional even for time series of moderate size. Thus, an extensive exploration is a nontrivial task.

In Bayesian research, summaries of changepoint locations, uncertainty measurements or model selection criteria are often provided by means of marginal inclusion probabilities. Rigaill et al. (2012) gives a general consideration of this approach, but it has always enjoyed great popularity in the changepoint community. See for example Perreault et al. (2000); Lavielle and Lebarbier (2001); Tourneret et al. (2003); Fearnhead (2006); Hannart and Naveau (2009); Fearnhead and Liu (2009); Lai and Xing (2011); Aston et al. (2012); Nam et al. (2012). Marginal inclusion probabilities, as shown in changepoint histograms, simply consist of the probabilities for a changepoint at each time point and thus, they are point wise statements. However, due to the uncertainty of their location, (even single) changepoints cannot be explored comprehensively by point wise statements. On these grounds, in this paper we present a novel approach, that incorporates all possible changepoint locations simultaneously.

Let $y = (y_1, \dots, y_n)$ be a time series and let $C \subseteq \{1, \dots, n\}$ be the posterior random changepoints. A region that contains all changepoints simultaneously with a probability of at least $1 - \alpha$ is an $A \subseteq \{1, \dots, n\}$ with $\mathbb{P}(C \subseteq A) \geq 1 - \alpha$. We call such an A a *simultaneous α level credible region* or simply *credible region* if there is no risk of confusion. It provides a sensitive assessment of the whole set of possible changepoint locations. However, in order to obtain specific assessments as well, we seek a smallest such region. This means we seek an element of

$$\mathfrak{R}(\alpha, C) := \underset{A \subseteq \{1, \dots, n\}}{\operatorname{argmin}} \left\{ \#A \mid \mathbb{P}(C \subseteq A) \geq 1 - \alpha \right\} \quad (1)$$

where $\#A$ is the cardinality of A .

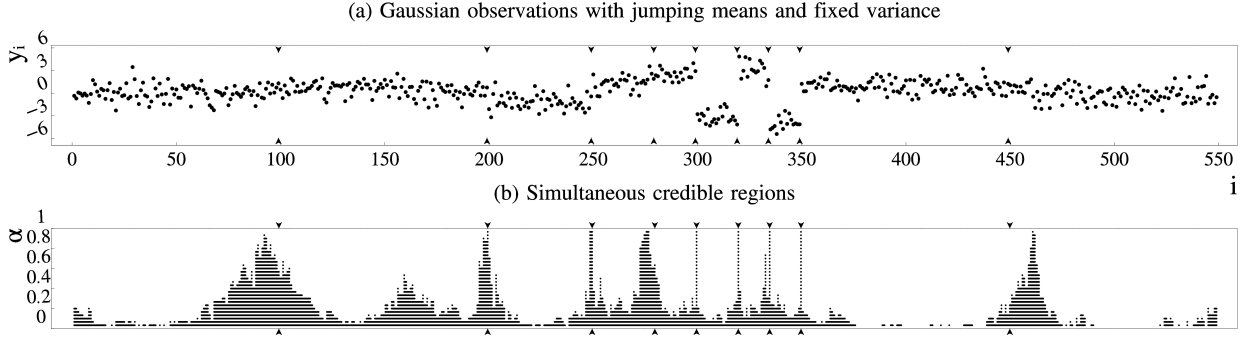


Figure 1: (a) A time series. (b) 29 approximated smallest simultaneous α level credible regions, each of them drawn as a broken horizontal line.

Figure 1 demonstrates smallest credible regions by means of an example. The data points in (a) where drawn independently from a Gaussian distribution having a constant variance of 1 and mean values that are subject to successive changes. The true changepoints are marked by small vertical arrows. To build an exemplary Bayesian model here, we choose a prior for the changepoint locations and mean values: The time from one changepoint to the next is geometrically distributed with success probability $\frac{3}{550}$ and the mean values are distributed according to $\mathcal{N}(0, 25)$.

Smallest credible regions are visualised in (b). For each $\alpha \in \left\{ \frac{1}{30}, \dots, \frac{29}{30} \right\}$ the plot shows one such (approximated) region as a collection of horizontal lines. The value of $\alpha \in [0, 1]$ controls the size of the regions and thus, governs the trade of between specificity and sensitivity.

The broadness of the credible regions around a true changepoint expresses the uncertainty of its locations. At the same time, a pointed shape reveals that the model is in favor of certain

change point locations. Existing visualisation techniques, like change point histograms, are unable to go beyond these two estimates. However, it is also crucial to get an impression of the sensitivity of the model towards a true change point. We can examine this by looking at the height of the peak that relates to the true change point. The higher the peak, the higher the model’s sensitivity. We refer to this height as the importance of the true change point. The importances of the true change points in Figure 1 are always larger than 0.9.

Of course, importance (as well as broadness and shape) can also be used for change point data without true change points. There, we look at the peaks that belong to the features of interest. Examples for features, that may occur in practice, are changes in mean, variance, slope or any other change in distribution. Furthermore, anomalies like outliers are of concern as well although they are usually supposed to be skipped by the model. Figure 1 shows a nuisance feature in form of a small irregularity at around 170 with an importance of around 0.4.

By means of importance we can conveniently evaluate if the model is sensitive towards the desired features but skips the nuisance ones. Conversely, we can also detect the relevant features in change point data on the basis of a given model. Most notably, this does not require any previous knowledge about the number of features or their positions. This novel concept is one of the main outcomes of the present paper. It allows for a much more detailed analysis of change point models and change point data than hitherto possible. Figure 1(b) demonstrates this. It shows that the change point model in use is sensitive towards the desired true change points and specific towards random distortions in the data.

The outline of this paper is as follows. In Section 2 we consider the above problem from a general statistical and algorithmic viewpoint. We examine alternative approaches in Section 3. Section 4 starts with an overview over sampling strategies in change point models and deals with importance in a broader and more formal way. Afterwards, we compare our results with the existing approaches. We examine Dow Jones returns and demonstrate how credible regions can be used in order to perform model selection in Section 5. Finally, we discuss our results in Section 6.

2 The Sample Based Problem

In this section we investigate the computational and mathematical foundations of our approach. We show how to approximate credible regions in an asymptotic manner, examine the complexity

and elaborate suitable algorithms.

We are given an arbitrary random set $C \subseteq \{1, \dots, n\}$. Let \mathcal{P} be the distribution of C , i.e. $\mathcal{P}(A) = \mathbb{P}(C = A)$ for all $A \subseteq \{1, \dots, n\}$. In this section, we are mainly concerned with the task of finding an element of $\mathfrak{R}(\alpha, C)$ (see Equation (1)), where α can take any value in $[0, 1]$.

Deriving $\mathbb{P}(C \subseteq A)$ is generally intractable since it arises from a summation of $2^{\#A}$ probabilities. Likewise, finding an element of $\mathfrak{R}(\alpha, C)$ requires a search over the 2^n subsets of $\{1, \dots, n\}$. Hence, we address this problem in an approximate manner by using relative frequencies instead of probabilities.

Definition 1. For $A \subseteq \{1, \dots, n\}$ and $s_1, \dots, s_m \subseteq \{1, \dots, n\}$, let

$$\mathfrak{r}(A, s_{1:m}) := \frac{1}{m} \sum_{i=1}^m \mathbb{1}\langle s_i \subseteq A \rangle$$

where $\mathbb{1}\langle \dots \rangle \in \{0, 1\}$ is the indicator function which is equal to 1 iff the bracketed condition is true. $\mathfrak{r}(A, s_{1:m})$ corresponds to the relative frequency with which the subsets are covered by A .

In the following theorem, we will show that having independent samples $s_1, \dots, s_m \subseteq \{1, \dots, n\}$ from \mathcal{P} , we can approximate an element of $\mathfrak{R}(\alpha, C)$ by finding an element of

$$\mathfrak{S}(\alpha, s_{1:m}) := \underset{A \subseteq \{1, \dots, n\}}{\operatorname{argmin}} \left\{ \#A \mid \mathfrak{r}(A, s_{1:m}) \geq 1 - \alpha \right\}$$

We denote this problem as the *Sample Based Problem (SBP)*.

Theorem 1. Let $S_1, S_2, \dots \subseteq \{1, \dots, n\}$ be independent random sets distributed according to \mathcal{P} and $\alpha \in [0, 1]$. If there exists an $\mathcal{A} \in \mathfrak{R}(\alpha, C)$ with $\mathbb{P}(C \subseteq \mathcal{A}) > 1 - \alpha$, then $\mathfrak{S}(\alpha, S_{1:m}) \subseteq \mathfrak{R}(\alpha, C)$ eventually almost surely.

Proof. Let $A \subseteq \{1, \dots, n\}$, since the $\mathbb{1}\langle S_i \subseteq A \rangle, i = 1, 2, \dots$ are i.i.d. with finite expectations, the strong law of large numbers states that $\lim_{m \rightarrow \infty} \mathfrak{r}(A, S_{1:m}) = \mathbb{P}(C \subseteq A)$ almost surely. Since $2^{\{1, \dots, n\}}$ is finite, $\mathfrak{r}(A, S_{1:m})$ even converges to $\mathbb{P}(C \subseteq A)$ for all $A \subseteq \{1, \dots, n\}$ almost surely.

Let $s_1, s_2, \dots \subseteq \{1, \dots, n\}$ be an arbitrary but fixed sequence with $\lim_{m \rightarrow \infty} \mathfrak{r}(A, s_{1:m}) = \mathbb{P}(C \subseteq A)$ for all $A \subseteq \{1, \dots, n\}$. For $A \subseteq \{1, \dots, n\}$ with $\mathbb{P}(C \subseteq A) < 1 - \alpha$ we can pick an $m_A \in \mathbb{N}$ such that $\mathfrak{r}(A, s_{1:m}) < 1 - \alpha$ for all $m > m_A$. Hence, $\mathfrak{S}(\alpha, s_{1:m}) \subseteq \{A \subseteq \{1, \dots, n\} \mid \mathbb{P}(C \subseteq A) \geq 1 - \alpha\}$ holds for all $m > m_1 := \max\{m_A \mid \mathbb{P}(C \subseteq A) < 1 - \alpha\}$. Furthermore, since $\mathbb{P}(C \subseteq \mathcal{A}) > 1 - \alpha$, we can pick an $m_0 \in \mathbb{N}$ with $\mathfrak{r}(\mathcal{A}, s_{1:m}) > 1 - \alpha$ for all $m > m_0$. Thus, by choosing $\ell = \max\{m_0, m_1\}$, we obtain $\mathfrak{S}(\alpha, s_{1:m}) \subseteq \mathfrak{R}(\alpha, C)$ for all $m > \ell$. \square

Since the exact value of α is usually irrelevant, the condition that there exists a certain solution can in most cases be neglected.

2.1 Reformulation of the Sample Based Problem and its complexity

In this section we consider the complexity of SBP, formulate it as an *Integer Linear Program* (ILP) and introduce a fast and fairly accurate approximation by a greedy method. The next theorem shows that there is no hope to find a polynomial time algorithm to solve SBP unless $P = NP$ (Garey and Johnson, 1979).

Theorem 2. *The (decision version of) SBP is NP-complete.*

The proof is provided in the supplementary material. To prove Theorem 2, we show that there is a one-to-one relationship between our subsets of $\{1, \dots, n\}$ and hypergraphs. In contrast to (the better-known) graphs, hypergraphs can contain edges with more than two vertices (Voloshin, 2009; Berge, 1984) and thus, serve as a natural generalization of graphs. In particular, we show in the supplement that there is a close relationship between a particular optimization problem for hypergraphs and SBP. Eventually, this allows us to prove the NP-hardness of SBP and to highlight the close connection between hypergraphs and random subsets of finite sets.

SBP is NP-hard and thus, there is no polynomial-time algorithm to optimally solve a given SBP-instance. Nevertheless, SBP can be formulated as an ILP and thus, SBP becomes accessible to highly efficient ILP solvers (Meindl and Templ, 2013). Such ILP solvers can be employed to optimally solve at least moderately-sized SBP-instances. The ILP formulation is as follows.

ILP. *Following the notion of Section 2, we are given a set of samples $s_1, \dots, s_m \subseteq \{1, \dots, n\}$ and an $\alpha \in [0, 1]$. We declare binary variables $U_i, F_j \in \{0, 1\}$ for all $i \in \{1, \dots, n\}$ and $j \in \{1, \dots, m\}$. For $i \in \{1, \dots, n\}$ let $\mathcal{D}(s_{1:m}, i) := \{j \mid i \in s_j\}$ denote the set of samples that contain i . Now define the following constraints*

$$\begin{aligned} \text{(I)} \quad & \sum_{j=1}^m F_j \geq m \cdot (1 - \alpha) \\ \text{(II)} \quad & \forall i \in \{1, \dots, n\} : \sum_{j \in \mathcal{D}(s_{1:m}, i)} (1 - F_j) \geq \#\mathcal{D}(s_{1:m}, i) \cdot (1 - U_i) \end{aligned}$$

under which the objective function $\sum_{i=1}^n U_i$ needs to be minimized.

Having computed an optimum, $A = \{i \mid U_i = 1\} \in \mathfrak{S}(\alpha, s_{1:m})$, i.e. this set is a solution of SBP.

The binary variable F_j represents the j -th sample. If $F_j = 1$ then $s_j \subseteq A$. Thus, the constraint (I) states that A covers at least $m \cdot (1 - \alpha)$ samples, which is equivalent to $\tau(A, s_{1:m}) \geq 1 - \alpha$ in the definition of $\mathfrak{S}(\alpha, s_{1:m})$. The constraint (II) states that time point i can only be dropped from A , if $i \in s_j$ implies that $F_j = 0$. From the perspective of SBP these constraints are obviously necessary and the proof of sufficiency is provided in the supplement.

A benchmark of several ILP solvers can be found in Meindl and Templ (2013). Following this advice, we use CPLEX V12.6.3 for Linux x86-64 IBM (2016) on a Lenovo Yoga 2 Pro (8GB Ram, 4 x 1.8GHZ Intel CPU) to solve our ILP instances.

2.2 A greedy heuristic

To provide an alternative way to address SBP, we now resort to a simple greedy heuristic. This approach starts with the whole set of time points and greedily removes all time points iteratively. The greedy rule used here chooses a time point that is contained in the smallest number of samples. In the subsequent steps, these samples will be ignored.

Greedy. Let $A_0 := \{1, \dots, n\}$. Compute $A_{\ell+1} = A_\ell \setminus \{k_{\ell+1}\}$ iteratively where $k_{\ell+1} \in \operatorname{argmax}_{i \in A_\ell} \{\tau(A_\ell \setminus \{i\}, s_{1:m})\}$ until $A_{\ell+1} = \emptyset$. Use A_ℓ as a solution proposal for SBP for any α with $\tau(A_{\ell+1}, s_{1:m}) < 1 - \alpha \leq \tau(A_\ell, s_{1:m})$.

Algorithm 1 Greedy-Algorithm for SBP

```

1: Input: List  $s[j]$  that represents the sample  $j$ ,  $1 \leq j \leq m$ 
2:       Sorted lists  $\mathcal{C}[i]$  that represents the samples that contain time point  $i$ ,  $1 \leq i \leq n$ 
3: Output:  $A_1, \dots, A_n$                                  $\triangleright A_{\ell+1} = A_\ell \setminus \{k_{\ell+1}\}$  with  $k_{\ell+1} \in \operatorname{argmax}_{i \in A_\ell} \{\tau(A_\ell \setminus \{i\}, s_{1:m})\}$ 
4:  $A_0 = \{1, \dots, n\}$ 
5: for  $\ell = 0, \dots, n-1$  do                                 $\triangleright$  Discard all time points iteratively
6:    $i = \operatorname{argmin} \{\mathcal{C}[k].\text{length} \mid k \in A_\ell\}$            $\triangleright$  Complexity  $\mathcal{O}(n)$ 
7:    $A_{\ell+1} = A_\ell \setminus \{i\}$ 
8:   for  $j = 1, \dots, \mathcal{C}[i].\text{length}$  and  $k = 1, \dots, s[j].\text{length}$  do     $\triangleright$  Remove all samples that contain  $i$  from  $\mathcal{C}$ 
9:      $\mathcal{C}[s[j][k]].\text{remove}(j)$                                  $\triangleright$  Removing has a complexity of  $\mathcal{O}(\log(m))$ 
10:  end for
11: end for

```

Algorithm 1 shows pseudocode of Greedy. The runtime of this algorithm is $\mathcal{O}(n^2 m \log(m))$. To see this, observe that the first for-loop runs n times and the assignment in Line 6 needs $\mathcal{O}(n)$

time. The second for-loop runs $\mathcal{O}(mn)$ times and the removal of an element in Line 9 can be done in $\mathcal{O}(\log(m))$ time. Thus, the overall time-complexity is $\mathcal{O}(n^2 + n^2m\log(m)) = \mathcal{O}(n^2m\log(m))$.

Although, the worst case runtime-complexity is more or less cubic, Algorithm 1 can be well applied in practice for the following reasons. Assume that every sample has exactly k elements uniformly distributed over $\{1, \dots, n\}$. In this case, the number of samples containing i is binomially distributed with parameters $\frac{k}{n}$ and m . Thus, their average number is $m \cdot \frac{k}{n}$. Finally, the average complexity reduces to $\mathcal{O}(k^2m)$ if we use a hash table to store elements of the $\mathcal{C}[i]$'s, a sorted list to store their lengths and assume that $n\log(n) < k^2m$. In general, where the elements of the samples are non-uniformly distributed and k only represents their maximal cardinality the runtime will be shortened even further.

Greedy provides credible regions for all α values at once. However, in contrast to solutions to the ILP, the resulting credible regions will be nested w.r.t. increasing α values.

3 Alternative approaches

In this section we explain two alternative Bayesian approaches which can be derived from C as well. In the first approach we join highest density regions in order to infer credible regions. Highest density regions can be considered as a straightforward simultaneous tool to explore distributions of interest (Held, 2004). The second approach, marginal inclusion probabilities, is a straightforward point wise tool in the context of changepoints.

Besides this, it should be noted that Guédon (2015) addresses uncertainty of changepoint locations through the entropy of C .

3.1 Highest density regions

A highest density region (HDR) is a certain subset of a probability space with elements having a higher density value than elements outside of it. Such a subset can be utilized to characterize and visualise the support of the corresponding probability distribution (Hyndman, 1996). In a Bayesian context, $(1 - \alpha)$ -HDR's are often used as simultaneous α level credible regions (Held, 2004). In this section, we examine HDR's in general and for the case of random subsets of $\{1, \dots, n\}$.

Let X be a random variable with a density p . For $\alpha \in [0, 1]$, let q_α be an α -quantile of $p(X)$,

i.e. $\mathbb{P}(p(X) \leq q_\alpha) \geq \alpha$ and $\mathbb{P}(p(X) \geq q_\alpha) \geq 1 - \alpha$.

Definition 2. *The set $\{x \mid p(x) \geq q_\alpha\}$ is referred to as the $(1 - \alpha)$ -HDR of X .*

The $(1 - \alpha)$ -HDR is a smallest subset of the state space with a probability of at least $1 - \alpha$ (Box and Tiao, 1973).

Now we consider $X = C$. Our credible regions are subsets of $\{1, \dots, n\}$, whereas the $(1 - \alpha)$ -HDR of C would be a subset of $2^{\{1, \dots, n\}}$. For the purpose of comparison, we join all successes in the HDR:

Definition 3. *Let $s_1, \dots, s_\ell \subseteq \{1, \dots, n\}$ be the $(1 - \alpha)$ -HDR of C . We refer to $\bigcup_{i=1}^\ell s_i$ as the joined $(1 - \alpha)$ -HDR of C .*

Let A be the joined $(1 - \alpha)$ -HDR and \mathcal{P} the distribution of C . Then

$$\mathbb{P}(C \subseteq A) = \mathcal{P}(2^A) \geq \sum_{i=1}^\ell \mathcal{P}(s_i) \geq 1 - \alpha$$

Even though, s_1, \dots, s_ℓ have high probabilities, $2^{\#A}$ may be much larger than ℓ . Likewise, $\mathbb{P}(C \subseteq A)$ might be considerably larger than $1 - \alpha$. Thus, A might be substantially larger than elements of $\mathfrak{R}(\alpha, C)$. In Section 4 we will see that this happens, especially for small α .

Unfortunately, in many cases we cannot compute HDR's directly and therefore, we use an approximation scheme (Held, 2004). Let now $s_1, \dots, s_m \subseteq \{1, \dots, n\}$ be independent samples from the distribution of C which are arranged in descending order according to their values under \mathcal{P} , i.e. $i > j \Rightarrow \mathcal{P}(s_i) \leq \mathcal{P}(s_j)$. We use $\bigcup_{i=1}^\ell s_i$ with $\ell := \lceil m \cdot (1 - \alpha) \rceil$ as an approximate joined $(1 - \alpha)$ -HDR.

3.2 Marginal inclusion probabilities

Here we consider probabilities of the form $\mathbb{P}(i \in C)$ for $i = 1, \dots, n$. They can be used to derive subsets of $\{1, \dots, n\}$ that are closely related to credible regions.

Lemma 1. *$\{i \mid \mathbb{P}(i \in C) > \alpha\}$ is a subset of all elements of $\mathfrak{R}(\alpha, C)$.*

Proof. Since $\mathbb{P}(i \in C) > \alpha$ implies $\mathbb{P}(C \subseteq \{1, \dots, n\} \setminus i) < 1 - \alpha$, i has to be part of any α level credible region. \square

The Bonferroni correction (Dunnett, 1955) can be applied to construct a credible region. Let $\mathfrak{B}(\alpha, C) := \left\{ i \mid \mathbb{P}(i \in C) > \frac{\alpha}{n} \right\}$.

Lemma 2. $\mathbb{P}(C \subseteq \mathfrak{B}(\alpha, C)) \geq 1 - \alpha$

Proof. Let $A := \mathfrak{B}(\alpha, C)^c$. We conclude that $1 - \mathbb{P}(C \subseteq A^c) = \mathbb{P}(C \cap A \neq \emptyset) \leq \sum_{i \in A} \mathbb{P}(i \in C) \leq \alpha$. Thus, $\mathbb{P}(C \subseteq A^c = \emptyset) \geq 1 - \alpha$ applies. \square

Point wise statements suffer from their inability to reflect dependencies. To see this, we assume that $\mathbb{P}(\#C = 1) = 1$ and $\mathbb{P}(i \in C) = \frac{1}{n}$ for all $i = 1, \dots, n$. Single time points are strongly dependent, e.g. $i \in C$ implies $j \notin C$ for all $j \neq i$. Clearly, $\mathfrak{B}(\alpha, C) = \{1, \dots, n\}$ for all $\alpha < 1$. Moreover, $\{i \mid \mathbb{P}(i \in C) > \alpha\} = \emptyset$ for $\alpha \geq \frac{1}{n}$. In contrast to this, elements of $\mathfrak{R}(\alpha, C)$ become smaller if α becomes larger. More precisely, $\#A = \lceil (1 - \alpha)n \rceil$ for $A \in \mathfrak{R}(\alpha, C)$. This is due to the fact that point wise statements ignore dependencies, whereas simultaneous statements incorporate them. Hence, in practice $\mathfrak{B}(\alpha, C)$ may be much broader than elements of $\mathfrak{R}(\alpha, C)$ and $\{i \mid \mathbb{P}(i \in C) > \alpha\}$ may be much smaller. In Section 4 we will give an example that underpins this claim.

4 Multiple changepoints and credible regions in more detail

In this section we discuss sampling strategies in changepoint models and we consider the concept of importance in a more formal way. Afterwards we reconsider the aforementioned example in order to compare existing approaches with the credible region approach. Finally, we investigate the performance of Greedy and the convergence speed of SBP empirically.

4.1 Existing sampling strategies

Generating exact posterior samples of Bayesian multiple changepoint models is a well studied task. Fearnhead (2006) describes how to infer samples from changepoint models that meet two conditions. Firstly, a changepoint must induce independence between the random variables before and after the changepoint. This applies to all the considered examples in this paper. An important counterexample where the independence assumption does not hold is a piecewise linear regression with attached lines. Secondly, a conjugacy assumption must be met. Generating one sample has a

complexity of $\mathcal{O}(n^2)$, which can be reduced by pruning. This sampling method was used in our changepoint models, except for the Well-Log example in the supplement.

The algorithm described in Fearnhead (2006) is also capable of sampling when changepoints induce independence, but the prior jump distribution is not conjugated and thus, closed form representations of the posterior distribution might not be available. This is done by using numerical integration, which may further impair the complexity. By resorting to this method, in the Well-Log example we sample with a runtime complexity of $\mathcal{O}(n^3)$.

Fearnhead and Liu (2009) explain how to sample from changepoint models that meet the conjugacy assumption but do not induce independence across changepoints. This is done by accepting inaccuracy arising through a pruning approach. Finally, if the distribution does not meet the independence nor the conjugacy assumption, one may pursue an MCMC or SMC approach (Green, 1995; Heard and Turcotte, 2017).

4.2 Importance revisited

Characterizing the features in the data which should or should not trigger a changepoint enables the formulation of changepoint problems in the first place. An intrinsic property of virtually every changepoint problem is that the location of the changepoint, placed as a consequence of a feature, is uncertain. Hence, a feature in the data is usually related to a set of locations instead of a single location. In order to deal with this fact, we require a simultaneous approach that considers all changepoint locations that belong to the same feature in a coherent fashion.

To this end, as intimated in Section 1, importance provides an estimate of the sensitivity of changepoint models towards features in changepoint data. However, it remains to substantiate this claim mathematically. We start with our definition of sensitivity. The sensitivity of a changepoint model towards a feature in the data is defined as the probability with which posterior random changepoints occur as a consequence of this feature. Thus, if $A \subseteq \{1, \dots, n\}$ represents the set of time points which are related to the feature, the sensitivity equates to $\mathbb{P}(C \not\subseteq A^c)$. In general, determining the set A is a fuzzy task. However, since changepoint data usually exhibits the relevant features only occasionally, in most cases we can easily specify these sets to a sufficient extent.

In the introduction the importance of a feature is roughly defined as the height of the peak that relates to this feature. This means we derive importance from a given range of credible regions.

Assume that we are given a whole range of credible regions $R_\alpha \in \mathfrak{R}(\alpha, C)$ for all $\alpha \in [0, 1]$. We now define the importance of a feature as $\hat{\alpha} = \inf\{\alpha \mid R_\alpha \subseteq A^c\}$, where A is again the set of locations that belongs to the feature. With this the following lemma applies.

Lemma 3. *The importance of a feature is an upper bound for the sensitivity of the changepoint model towards this feature.*

Proof. If there exists an $\varepsilon > 0$ with $R_\alpha \subseteq A^c$ for all $\alpha \in]\hat{\alpha}, \hat{\alpha} + \varepsilon[$, we conclude

$$\begin{aligned} 1 - \alpha &\leq \mathbb{P}(C \subseteq R_\alpha) \leq \mathbb{P}(C \subseteq A^c) \text{ for all } \alpha \in]\hat{\alpha}, \hat{\alpha} + \varepsilon[\\ \Leftrightarrow \quad 1 - \hat{\alpha} &\leq \mathbb{P}(C \subseteq A^c) \quad \Leftrightarrow \quad \hat{\alpha} \geq \mathbb{P}(C \not\subseteq A^c) \end{aligned}$$

In the case where $R_{\hat{\alpha}} \subseteq A^c$, we may apply the second part of the above equation directly. \square

Since the credible regions are not necessarily nested, in some rare cases, the importance read by means of the above definition may not correspond to a global peak in the credible regions. Furthermore, if credible regions are only drawn for an incomplete range of α 's, we may slightly underestimate the heights of the peaks. In exchange for these negligible inaccuracies, we obtain an intuitive, visual estimate that provides great insights into the distribution of changepoints and is thus of high practical value.

4.3 Exemplary comparison

Figure 2(a) displays the same dataset as Figure 1(a). There are 6 obvious true changepoints at 200, 250, 300, 320, 335 and 350 having a large jump height and two true changepoints at 280 and 450 with smaller jump heights of 1 and 0.8, respectively. Besides, there is a true changepoint at 100 with an even smaller jump from 0 to 0.5.

We now want to compare the credible regions approach with the highest density regions approach, marginal jump probabilities and confidence intervals inferred by the R package `stepR`. We use the same model as in the introduction. Figure 2(b) displays the credible regions with respect to $\alpha = \frac{1}{30}, \dots, \frac{29}{30}$ inferred by solving the ILP.

In the same fashion as before, Figure 2(c) displays several approximated joined HDR's derived from 10^7 samples. This confirms that joining the elements of an HDR leads to larger subsets of $\{1, \dots, n\}$ compared to elements of $\mathfrak{R}(\alpha, C)$. At an α level less than 0.4, the joined HDR already

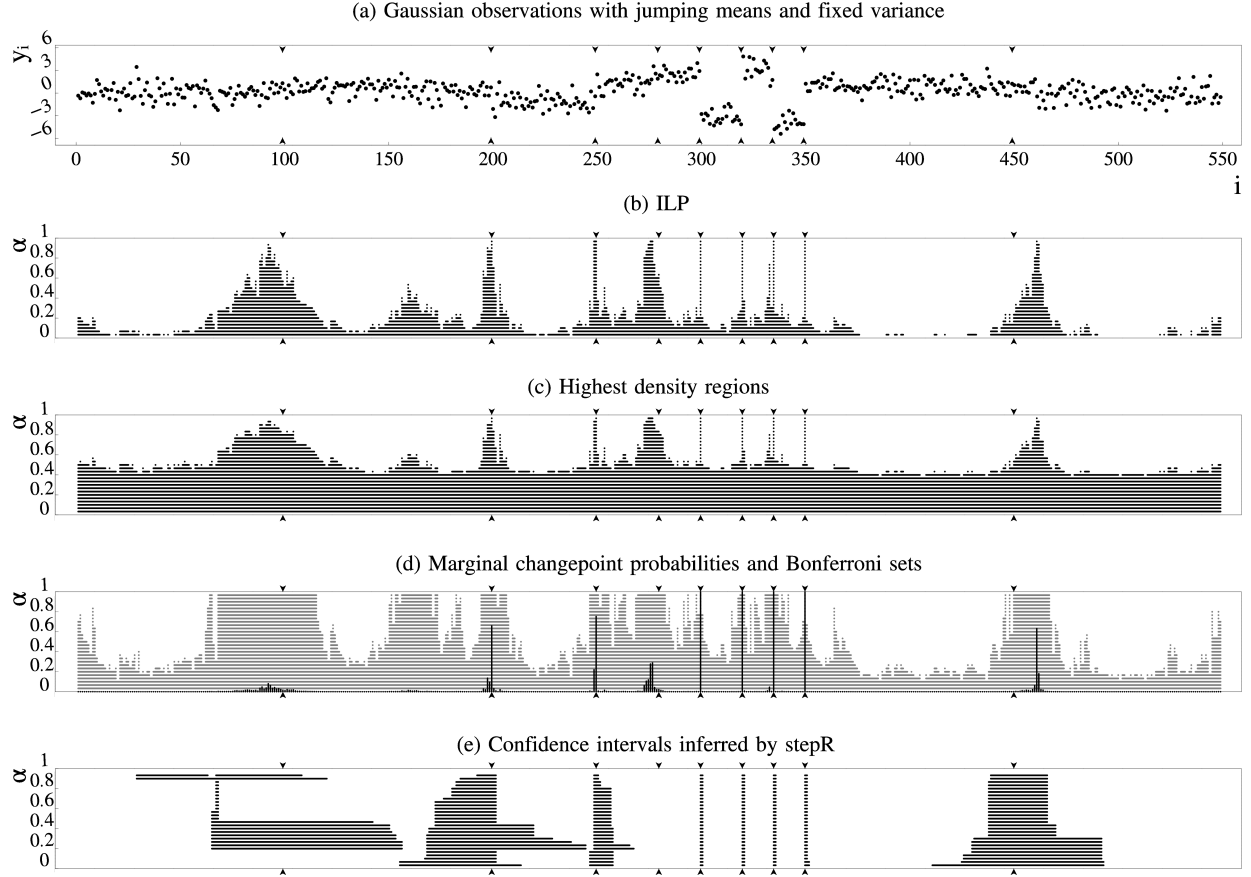


Figure 2: (a) Simulated independent Gaussian observations with variance 1 and successive changes in mean. The true changepoints are marked by vertical arrows. (b) Solutions derived by solving the ILP using 10^5 samples. (c) Joined $(1 - \alpha)$ -HDR's using 10^7 samples. (d) Marginal inclusion probabilities in black and $\mathfrak{B}(\alpha, C)$ in gray. (e) Joined confidence intervals inferred by stepR.

covers most of the time points and thus, holds no special information about the changepoint locations anymore.

Figure 2(d) displays the marginal inclusion probabilities, i.e. $\mathbb{P}(i \in C)$ highlighted in black. Unfortunately, they don't reflect the possible set of changepoints very well since they appear to be too sparse. Furthermore, due to a dispersal of the probabilities they are not able to express the sensitivity towards the true changepoints (see for example the changepoints at 100 and 280). This leads to the conclusion that this approach suffers from a lack of interpretability and is less sensitive than the credible regions approach.

Additionally, Figure 2(d) shows several credible regions corresponding to $\mathfrak{B}(\alpha, C)$. As

prognosticated in Section 3.2 these regions are very broad compared to smallest credible regions and thus, less specific.

Figure 2(e) displays several joined confidence intervals inferred by `stepR` (Hotz and Sieling, 2016). `stepR` first estimates the number of changepoints and produces one confidence interval for each changepoint. The plot shows the union of these confidence intervals. Although confidence sets and credible regions are different by definition, they intend to make similar statements.

Unfortunately, `stepR` does not forecast a confidence interval for the true changepoint at 280. Furthermore, the disappearance of certain changepoint locations at decreasing α values seems somewhat confusing and hard to make sense of. So, the shapes, broadnesses and importances read from the confidence sets are if at all only of little informative value. Therefore, the authors of this paper consider the confidence sets inferred by `stepR` as unsuitable for this purpose, because they suffer from a grave lack of interpretability.

The supplement contains a collection of pictures similar to Figure 2. There, the data was repeatedly generated using the same changepoint locations and mean values. It becomes apparent, that these kind of plots, produced with `stepR`, are almost consistently of poor quality.

In Section 4.2 we show that the importance of a feature in the data is an upper bound for the sensitivity of the model towards this feature. We can examine the differences between these two estimates empirically by means of the above example. Sensitivity and importance match for all the true changepoints except the first one. The importance of the first changepoint is approximately 0.94, whereas its sensitivity with regard to the interval from 0 to 130 is approximately 0.72. That's a deviation of around 0.2. The small irregularity at around 170 results in an even bigger deviation of around 0.3.

4.4 Empirical proof of convergence and the accuracy of Greedy

Figure 3 (left) demonstrates how solutions to SBP evolve with increasing sample size. For several sample sizes m it shows boxplots (using 1000 repetitions) over the size of elements of $\mathfrak{S}(0.3, s_{1:m})$. It can be observed that the sizes of the credible regions increase with an increasing sample size. This is due to the fact that we need a certain number of samples to cover the possible changepoint locations satisfactorily. However, at the same time, we observe an increasing preciseness which is a result of Theorem 1.

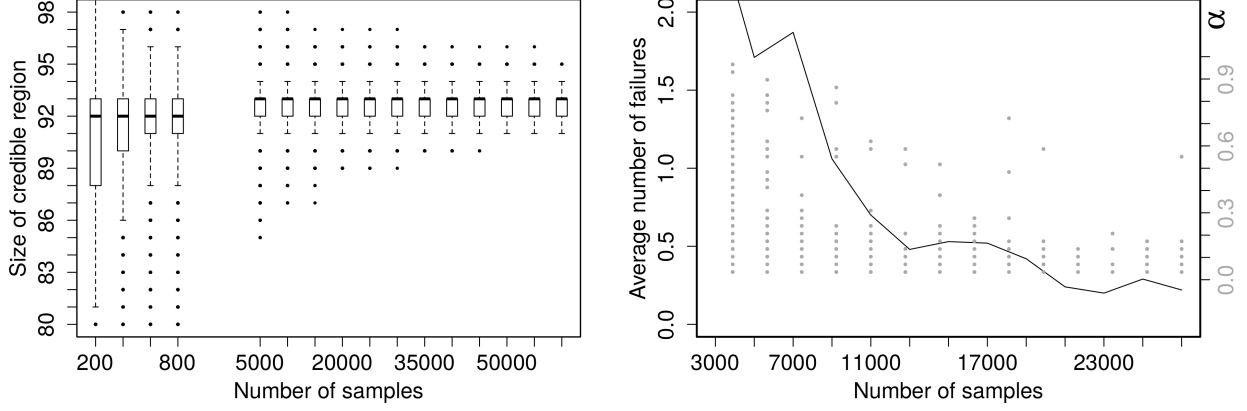


Figure 3: (left) An empirical convergence proof of SBP. Boxplots over the sizes of the elements of $\mathfrak{S}(0.3, s_{1:m})$ where m is varying according to the x-axis. (right) Illustration of the accuracy of solutions inferred by Greedy. The black graph illustrates the average number of failures within 29 different credible regions (left y-axis). The gray dots mark the α values (right y-axis) where failures occurred.

For different sample sizes we compared for each $\alpha \in \left\{ \frac{1}{30}, \dots, \frac{29}{30} \right\}$ the solutions provided by solving the ILP with those provided by Greedy. In Figure 3 (right), the black graph illustrates the average number of α 's (using 100 repetitions) where Greedy failed to provide an optimal solution. At higher sample counts, there are less than 0.3 of the 29 credible regions wrong. The gray points represent the α values (right axis) where the ILP was able to compute smaller regions than Greedy.

Hence, Greedy performs virtually exact on this changepoint problem. However, at smaller sample counts it gets more frequently outwitted by random. Fortunately, this shows that if Greedy does not compute an ideal region for a certain α , it will compute correct ones later again. This is due to the fact that credible regions for changepoint locations are roughly nested (like the solutions provided by Greedy). Only in some cases it is possible through solving the ILP to remove certain time points a little bit earlier than Greedy. Furthermore, because Greedy removes samples having a high number of changepoints fast, it works well together with changepoint models, since they prefer to explain the data through a small number of changepoints. Thus, we can conjecture that Greedy will perform just as well in most changepoint scenarios.

5 An example of use for model selection

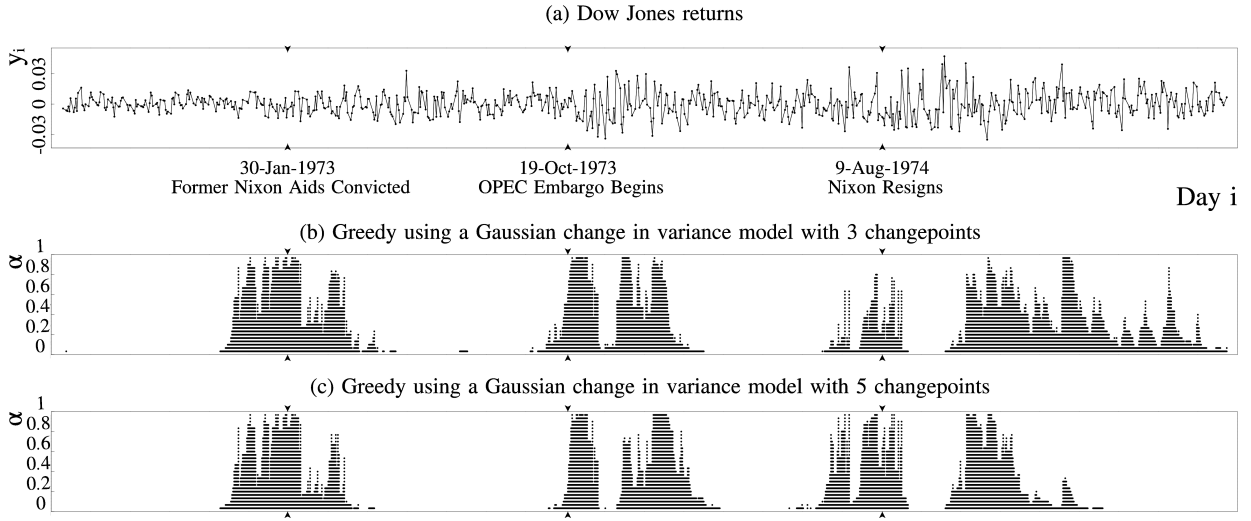


Figure 4: (a) Dow Jones returns. (b) and (c) Different regions provided by Greedy.

Now we examine Dow Jones returns observed between 1972 and 1975 (Adams and MacKay, 2007), see Figure 4(a). There are three documented events highlighted on January 1973, October 1973 and August 1974. The data is modeled as normally distributed with constant mean equal to 0 and jumping variances. The variances are distributed according to an inverse gamma distribution with parameters 1 and 10^{-4} (see also Adams and MacKay (2007)). Instead of allowing a random number of changepoints, this time we predetermine the number of changepoints to 3 respectively 5 and our aim is to compare these two model choices by means of credible regions.

As we can see in Figure 4(b), the regions become fairly broad especially in the last third of the picture, which gives rise to additional, nonsensical changepoint locations. The reason for this is that assuming only one changepoint after the second event, yields to a misjudgment of the third or fourth variance. Thus, the third changepoint becomes superfluous and its location highly uncertain.

In contrast, in the case of five changepoints in (c) the illustration turns out to be much more differentiated. The regions stay fairly narrow even for very small values of α . Just a quick look at the credible regions immediately reveals that fixing the number of changepoints may impair the inference dramatically. Thus, whenever possible, we should use a model that allows the number of changepoints to be determined at random.

6 Discussion

In this paper we develop a novel set estimator in the context of Bayesian changepoint analysis. It enables a new visualisation technique that provides very detailed insights into the distribution of changepoints. The resulting plots can be analysed manually just by considering the concepts of broadness to assess the uncertainty of the changepoint locations in regards to a feature, shape to explore the changepoint locations the model is in favor of to explain a feature, and importance to get an idea about the sensitivity of the model towards a feature. This greatly facilitates the evaluation and the adjustment of changepoint models on the basis of a given dataset. However, by means of these three concepts, we are also able to conveniently analyse changepoint datasets on the basis of a predetermined changepoint model.

We say that a credible region points to a feature in the data if the region contains at least one of the changepoint locations that are triggered by the model as a consequence of this feature. An α level credible region will point to all features having a sensitivity larger than α .

Against this backdrop, we may derive a single α level credible region from a given model in order to analyse the features in a dataset. Thus, we need to choose α in such a way that the corresponding credible region points to the features of interest, but skips the uninteresting ones. A good changepoint model will represent the degree of interest through its sensitivity. On that basis, we can choose α such that the requirements regarding accuracy and parsimony are met. Frick et al. (2014) recommend to choose $\alpha = 0.4$ for their method. This is a reasonable choice. However, it becomes apparent in Section 4.3 that the difference between sensitivity and importance can be around 0.3 in difficult cases. Thus, we recommend to choose $\alpha = 0.7$ instead.

An essential quality of the changepoint model is its willingness to jump since it highly affects the model's sensitivity towards features. In the supplement you can find several video files illustrating this through the success probability for the distribution of the sojourn time between successive changepoints. In this context, if changepoint samples are available but the necessary modifications of the model are not feasible anymore, a sloppy but perhaps effective way to obtain a representative credible region is to increase or decrease α until a reasonable coarseness comes about. However, systematic defects as in the model depicted in Figure 4(b) cannot be tackled in this way.

Credible regions provide valuable knowledge about groups of changepoint locations that

explain single features jointly. Besides, they reveal a little bit about combinations of changepoints with respect to more than one feature. The shapes of the credible regions shown in Figure 2(b) and 4(c) suggest that the data can be explained very well through combinations of 9 respectively 5 changepoints, which are limited to very few locations. On the other hand, the medium importance of the feature around 170 in Figure 2(b) shows that there is a notable alternate representation, which could be quite different to that of the true changepoints.

Our theory so far is built on random sets which represent the posterior random changepoints. However, since we can specify a bijective function between subsets of $\{1, \dots, n\}$ and binary sequences in $\{0, 1\}^n$, all the theory in this paper applies equally to sequences of binary random variables of equal length. Thus, we may apply credible regions to “Spike and Slab” regression (Mitchell and Beauchamp, 1988; George and McCulloch, 1993; Ishwaran and Rao, 2005) as well. There, each covariate is assigned to a binary variable which determines if the covariate is relevant for explaining the responses. However, covariates can generally not be described in terms of a time series and this could hinder a graphical analysis through credible regions.

Even though the construction of credible regions evoke acceptance regions from statistical testing, in this paper we do not intent to create a method in this direction. As we can see in the example in Section 4.3, credible regions can be fairly broad for say $\alpha = 0.05$. While this would interfere with statistical testing purposes, it provides valuable insights into changepoint models.

The ILP can be improved by introducing a constraint for each single changepoint in the samples, instead of having constraints for larger sets of samples that share the same changepoint location (Constraint II). This is because for an ILP solver, many small constraints are easier to handle than a big one, that involves many variables. However, due to high runtimes we do not recommend using the ILP. While we are able to compute solutions to the Gaussian change in mean example, it is not possible to compute all 29 solutions to the Dow Jones example within a week.

To conclude, the authors of this paper highly advice the use of Greedy’s credible regions to evaluate and justify changepoint models. To the same extent, we recommend to use them for the analysis of changepoint data. To this end, the R Package *SimCredRegR* provides a fast implementation of Greedy and plotting routines that can be applied to changepoint samples without further ado.

SUPPLEMENTARY MATERIAL

The R Package *SimCredRegR*, which comes with the supplementary material, provides all the datasets and sampling algorithms that were used throughout this paper. It further enables the computation of credible regions according to Greedy, joined highest density regions, marginal inclusion probabilities, Bonferroni sets and stepR’s joined confidence intervals. Besides you can find the R Package *SimCredRegILPR* to compute credible regions according to the ILP. Several video (“.mp4”) files which demonstrate how credible regions evolve at different parameter choices can be found. We further provide a proof of Theorem 2 and the correctness of the ILP. We examine two more examples: well-log data and coal mining disasters data. By means of different realisations of the data in Figure 2, we also provide a comparison of our credible regions and stepR’s confidence intervals. This can be found in the file “collection_of_different_data_simulations.pdf”. The supplement is available at: <https://github.com/siemst/simcredreg>.

References

- Adams, R. P. and D. J. MacKay (2007). Bayesian online changepoint detection. Cambridge, UK. arXiv:0710.3742.
- Aston, J. A., J.-Y. Peng, and D. E. Martin (2012). Implied distributions in multiple change point problems. *Statistics and Computing* 22(4), 981–993.
- Berge, C. (1984). *Hypergraphs: Combinatorics of Finite Sets*. North-Holland Mathematical Library. Elsevier Science.
- Box, G. and G. Tiao (1973). *Bayesian inference in statistical analysis*. Addison-Wesley series in behavioral science: quantitative methods. Addison-Wesley Pub. Co.
- Doyle, D. A. (2004). Structural changes during ion channel gating. *Trends in Neurosciences* 27(6), 298 – 302.
- Dunnett, C. W. (1955). A multiple comparison procedure for comparing several treatments with a control. *Journal of the American Statistical Association* 50(272), 1096–1121.
- Eckley, I. A., P. Fearnhead, and R. Killick (2011). Analysis of changepoint models. In D. Barber,

- A. T. Cemgil, and S. Chiappa (Eds.), *Bayesian Time Series Models*, pp. 205–224. Cambridge University Press, Cambridge.
- Fearnhead, P. (2006). Exact and efficient Bayesian inference for multiple changepoint problems. *Statistics and Computing* 16(2), 203–213.
- Fearnhead, P. and Z. Liu (2007). On-line inference for multiple changepoint problems. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 69(4), 589–605.
- Fearnhead, P. and Z. Liu (2009). Efficient Bayesian analysis of multiple changepoint models with dependence across segments. *Statistics and Computing* 21(2), 217–229.
- Frick, K., A. Munk, and H. Sieling (2014). Multiscale change point inference. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 76(3), 495–580.
- Friedrich, F., A. Kempe, V. Liebscher, and G. Winkler (2008). Complexity Penalized M-Estimation: Fast Computation. *Journal of Computational and Graphical Statistics* 17(1), 201–224.
- Garey, M. R. and D. S. Johnson (1979). *Computers and Intractability: A Guide to the Theory of NP-Completeness*. New York, NY, USA: W. H. Freeman & Co.
- George, E. I. and R. E. McCulloch (1993). Variable Selection via Gibbs Sampling. *Journal of the American Statistical Association* 88(423), 881–889.
- Green, P. J. (1995). Reversible jump Markov chain Monte Carlo computation and Bayesian model determination. *Biometrika* 82(4), 711–732.
- Guédon, Y. (2015). Segmentation uncertainty in multiple change-point models. *Statistics and Computing* 25(2), 303–320.
- Hannart, A. and P. Naveau (2009). Bayesian multiple change-points and segmentation: application to homogenization of climatic series homogenization of climatic series. In *EGU General Assembly Conference Abstracts*, Volume 11, pp. 10930.
- Heard, N. A. and M. J. M. Turcotte (2017). Adaptive sequential monte carlo for multiple changepoint analysis. *Journal of Computational and Graphical Statistics* 26(2), 414–423.

- Held, L. (2004). Simultaneous Posterior Probability Statements from Monte Carlo Output. *Journal of Computational and Graphical Statistics* 13(1), 20–35.
- Hotz, T. and H. Sieling (2016). *stepR: Fitting Step-Functions*. R package version 1.0-4.
- Hyndman, R. J. (1996). Computing and Graphing Highest Density Regions. *The American Statistician* 50(2), 120–126.
- IBM (2004–2016). IBM ILOG CPLEX C++ Optimizer. <http://www-01.ibm.com/software/integration/optimization/cplex-optimizer/>.
- Ishwaran, H. and J. S. Rao (2005, 04). Spike and slab variable selection: Frequentist and bayesian strategies. *Ann. Statist.* 33(2), 730–773.
- Lai, T. L. and H. Xing (2011). A simple bayesian approach to multiple change-points. *Statistica Sinica* 21, 539–569.
- Lavielle, M. and E. Lebarbier (2001). An application of mcmc methods for the multiple change-points problem. *Signal Processing* 81(1), 39–53.
- Meindl, B. and M. Templ (2013). Analysis of commercial and free and open source solvers for linear optimization problems. *Analysis*.
- Mitchell, T. J. and J. J. Beauchamp (1988). Bayesian Variable Selection in Linear Regression. *Journal of the American Statistical Association* 83(404), 1023–1032.
- Nam, C. F., J. A. Aston, and A. M. Johansen (2012). Quantifying the uncertainty in change points. *Journal of Time Series Analysis* 33(5), 807–823.
- Perreault, L., E. Parent, J. Bernier, B. Bobee, and M. Slivitzky (2000). Retrospective multivariate bayesian change-point analysis: a simultaneous single change in the mean of several hydrological sequences. *Stochastic Environmental Research and Risk Assessment* 14(4), 243–261.
- Rigaill, G., E. Lebarbier, and S. Robin (2012). Exact posterior distributions and model selection criteria for multiple change-point detection problems. *Statistics and Computing* 22(4), 917–929.

- Siekmann, I., J. Sneyd, and E. Crampin (2014). Statistical analysis of modal gating in ion channels. *Proceedings of the Royal Society of London A: Mathematical, Physical and Engineering Sciences* 470(2166), 1–19.
- Tourneret, J.-Y., M. Doisy, and M. Lavielle (2003). Bayesian off-line detection of multiple change-points corrupted by multiplicative noise: application to sar image edge detection. *Signal Processing* 83(9), 1871–1887.
- Voloshin, V. (2009). *Introduction to Graph and Hypergraph Theory*. Nova Science Publishers.