

Variational Bayes In Private Settings (VIPS)

Mijung Park

MIJUNGI.P@GMAIL.COM

Max Planck Institute for Intelligent Systems

Max-Planck-Ring 4, 72076 Tübingen, Germany

James Foulds

JFOULDS@UMBC.EDU

Department of Information Systems, University of Maryland, Baltimore County.

ITE 447, 1000 Hilltop Circle, Baltimore, MD 21250, USA

Kamalika Chaudhuri

KAMALIKA@CS.UCSD.EDU

Department of Computer Science, University of California, San Diego.

EBU3B 4110, University of California, San Diego, CA 92093, USA

Max Welling

M.WELLING@UVA.NL

QUVA lab, Informatics Institute, University of Amsterdam

Science Park 904, Amsterdam 1098 XH, The Netherlands

Abstract

Many applications of Bayesian data analysis involve sensitive information, motivating methods which ensure that privacy is protected. We introduce a general privacy-preserving framework for Variational Bayes (VB), a widely used optimization-based Bayesian inference method. Our framework respects differential privacy, the gold-standard privacy criterion, and encompasses a large class of probabilistic models, called the *Conjugate Exponential* (CE) family. We observe that we can straightforwardly privatise VB’s approximate posterior distributions for models in the CE family, by perturbing the expected sufficient statistics of the complete-data likelihood. For a broadly-used class of non-CE models, those with binomial likelihoods, we show how to bring such models into the CE family, such that inferences in the modified model resemble the private variational Bayes algorithm as closely as possible, using the Pólya-Gamma data augmentation scheme. The iterative nature of variational Bayes presents a further challenge since iterations increase the amount of noise needed. We overcome this by combining: (1) an improved composition method for differential privacy, called the *moments accountant*, which provides a tight bound on the privacy cost of multiple VB iterations and thus significantly decreases the amount of additive noise; and (2) the privacy amplification effect of subsampling mini-batches from large-scale data in stochastic learning. We empirically demonstrate the effectiveness of our method in CE and non-CE models including latent Dirichlet allocation, Bayesian logistic regression, and sigmoid belief networks, evaluated on real-world datasets.

Keywords: Variational Bayes, differential privacy, moments accountant, conjugate exponential family, Pólya-Gamma data augmentation.

1. Introduction

Bayesian inference, which reasons over the uncertainty in model parameters and latent variables given data and prior knowledge, has found widespread use in data science application domains in which privacy is essential, including text analysis (Blei et al., 2003), medical

informatics (Husmeier et al., 2006), and MOOCS (Piech et al., 2013). In these applications, the goals of the analysis must be carefully balanced against the privacy concerns of the individuals whose data are being studied (Daries et al., 2014). The recently proposed *Differential Privacy* (DP) formalism provides a means for analyzing and controlling this trade-off, by quantifying the privacy “cost” of data-driven algorithms (Dwork et al., 2006b). In this work, we address the challenge of performing Bayesian inference in private settings, by developing an extension of the widely used *Variational Bayes* (VB) algorithm that preserves differential privacy. We provide extensive experiments across a variety of probabilistic models which demonstrate that our algorithm is a practical, broadly applicable, and statistically efficient method for privacy-preserving Bayesian inference.

The algorithm that we build upon, variational Bayes, is an optimisation-based approach to Bayesian inference which has origins in the closely related *Expectation Maximisation* (EM) algorithm (Dempster et al., 1977), although there are important differences between these methods. Variational Bayes outputs an approximation to the full Bayesian posterior distribution, while expectation maximisation performs maximum likelihood and MAP estimation, and hence outputs a point estimate of the parameters. Thus, VB performs fully Bayesian inference, while EM does not. It will nevertheless be convenient to frame our discussion on VB in the context of EM, following Beal (2003). The EM algorithm seeks to learn the parameters of models with latent variables. Since directly optimising the log likelihood of observations under such models is intractable, EM introduces a lower bound on the log likelihood by rewriting it in terms of auxiliary probability distributions over the latent variables, and using a Jensen’s inequality argument. EM proceeds by iteratively alternating between improving the bound via updating the auxiliary distributions (the E-step), and optimising the lower bound with respect to the parameters (the M-step).

Alternatively, EM can instead be understood as an instance of the *variational method*, in which both the E- and M-steps are viewed as maximising the same joint objective function: a reinterpretation of the bound as a *variational* lower bound which is related to a quantity known as the *variational free energy* in statistical physics, and to the KL-divergence (Neal and Hinton, 1998). This interpretation opens the door to extensions in which simplifying assumptions are made on the optimization problem, thereby trading improved computational tractability against tightness of the bound. Such simplifications, for instance assuming that the auxiliary distributions are fully factorized, make feasible a fully Bayesian extension of EM, called *Variational Bayesian EM* (VBEM) (Beal, 2003). While VBEM has a somewhat similar algorithmic structure to EM, it aims to compute a fundamentally different object: an approximation to the entire posterior distribution, instead of a point estimate of the parameters. VBEM thereby provides an optimisation-based alternative to Markov Chain Monte Carlo (MCMC) simulation methods for Bayesian inference, and as such, frequently has faster convergence properties than corresponding MCMC methods. We collectively refer to VBEM and an intermediary method between it and EM, called *Variational EM* (VEM), as *variational Bayes*.¹

While the variational Bayes algorithm proves its usefulness by successfully solving many statistical problems, the standard form of the algorithm unfortunately cannot guarantee

1. Variational EM uses simplifying assumptions on the auxiliary distribution over latent variables, as in VBEM, but still aims to find a point estimate of the parameters, as in EM. See Sec. 2.5 for more details on variational Bayes, and Appendix D for more details on EM.

privacy for each individual in the dataset. Differential Privacy (DP) (Dwork et al., 2006b) is a formalism which can be used to establish such guarantees. An algorithm is said to preserve differential privacy if its output is sufficiently noisy or random to obscure the participation of any single individual in the data. By showing that an algorithm satisfies the differential privacy criterion, we are guaranteed that an adversary cannot draw new conclusions about an individual from the output of the algorithm, by virtue of his/her participation in the dataset. However, the injection of noise into an algorithm, in order to satisfy the DP definition, generally results in a loss of statistical efficiency, as measured by accuracy per sample in the dataset. To design practical differentially private machine learning algorithms, the central challenge is to design a noise injection mechanism such that there is a good trade-off between privacy and statistical efficiency.

Iterative algorithms such as variational Bayes pose a further challenge, when developing a differentially private algorithm: each iteration corresponds to a query to the database which must be privatised, and the number of iterations required to guarantee accurate posterior estimates causes high cumulative privacy loss. To compensate for the loss, one needs to add a significantly high level of noise to the quantity of interest. We overcome these challenges in the context of variational Bayes by using the following key ideas:

- **Perturbation of the expected sufficient statistics:** Our first observation is that when models are in the *Conjugate Exponential* (CE) family, we can privatise variational posterior distributions simply by perturbing the expected sufficient statistics of the complete-data likelihood. This allows us to make effective use of the *per iteration privacy budget* in each step of the algorithm.
- **Refined composition analysis:** In order to use the privacy budget more effectively *across many iterations*, we calculate the cumulative privacy cost by using an improved composition analysis, the *Moments Accountant* (MA) method of Abadi et al. (2016). This method maintains a bound on the log of the moment generating function of the privacy loss incurred by applying multiple mechanisms to the dataset, i.e. one mechanism for each iteration of a machine learning algorithm. This allows for a higher per-iteration budget than standard methods.
- **Privacy amplification effect from subsampling of large-scale data:** Processing the entire dataset in each iteration is extremely expensive in the big data setting, and is not possible in the case of streaming data, for which the size of the dataset is assumed to be infinite. Stochastic learning algorithms provide a scalable alternative by performing parameter updates based on subsampled mini-batches of data, and this has proved to be highly advantageous for large-scale applications of variational Bayes (Hoffman et al., 2013). This subsampling procedure, in fact, has a further benefit of *amplifying privacy*. Our results confirm that *subsampling works synergistically in concert with moments accountant composition* to make effective use of an overall privacy budget. While there are several prior works on differentially private algorithms in stochastic learning (e.g. Bassily et al. (2014); Song et al. (2013); Wang et al. (2015); Wang et al. (2016); Wu et al. (2016)), the use of privacy amplification due to subsampling, together with MA composition, has not been used in the context of variational Bayes before (Abadi et al. (2016) used this approach for privacy-preserving deep learning).

- **Data augmentation for the non-CE family models:** For widely used non-CE models with binomial likelihoods such as logistic regression, we exploit the *Pólya-Gamma* data augmentation scheme (Polson et al., 2013) to bring such models into the CE family, such that inferences in the modified model resemble our private variational Bayes algorithm as closely as possible. Unlike recent work which involves perturbing and clipping gradients for privacy (Jälkö et al., 2017), our method uses an improved composition method, and also maintains the closed-form updates for the variational posteriors and the posterior over hyper-parameters, and results in an algorithm which is more faithful to the standard CE variational Bayes method. Several papers have used the Pólya-Gamma data augmentation method in order to perform Bayesian inference, either exactly via Gibbs sampling (Polson et al., 2013), or approximately via variational Bayes (Gan et al., 2015). However, this augmentation technique has not previously been used in the context of differential privacy.

Taken together, these ideas result in an algorithm for privacy-preserving variational Bayesian inference that is both practical and very broadly applicable. Our private VB algorithm makes effective use of the privacy budget, both per iteration and across multiple iterations, and with further improvements in the stochastic variational inference setting. Our algorithm is also extremely general, and applies to the broad class of CE family models, as well as non-CE models with binomial likelihoods. We present extensive empirical results demonstrating that our algorithm can preserve differential privacy while maintaining a high degree of statistical efficiency, leading to practical private Bayesian inference on a range of probabilistic models.

We organise the remainder of this paper as follows. First, we review relevant background information on differential privacy, privacy-preserving Bayesian inference, and variational Bayes in Sec. 2. We then introduce our novel general framework of private variational Bayes in Sec. 3 and illustrate how to apply that general framework to the latent Dirichlet allocation model in Sec. 4. In Sec. 5, we introduce the Pólya-Gamma data augmentation scheme for non-CE family models, and we then illustrate how to apply our private variational Bayes algorithm to Bayesian logistic regression (Sec. 6) and sigmoid belief networks (Sec. 7). Lastly, we summarise our paper and provide future directions in Sec. 8.

2. Background

We begin with some background information on differential privacy, general techniques for designing differentially private algorithms and the composition techniques that we use. We then provide related work on privacy-preserving Bayesian inference, as well as the general formulation of the variational inference algorithm.

2.1 Differential privacy

Differential Privacy (DP) is a formal definition of the privacy properties of data analysis algorithms (Dwork and Roth, 2014; Dwork et al., 2006b).

Definition 1 (Differential Privacy) A randomized algorithm $\mathcal{M}(\mathbf{X})$ is said to be (ϵ, δ) -differentially private if

$$\Pr(\mathcal{M}(\mathbf{X}) \in \mathcal{S}) \leq \exp(\epsilon) \Pr(\mathcal{M}(\mathbf{X}') \in \mathcal{S}) + \delta \quad (1)$$

for all measurable subsets \mathcal{S} of the range of \mathcal{M} and for all datasets \mathbf{X}, \mathbf{X}' differing by a single entry (either by excluding that entry or replacing it with a new entry).

Here, an entry usually corresponds to a single individual’s private value. If $\delta = 0$, the algorithm is said to be ϵ -differentially private, and if $\delta > 0$, it is said to be *approximately* differentially private.

Intuitively, the definition states that the probability of any event does not change very much when a single individual’s data is modified, thereby limiting the amount of information that the algorithm reveals about any one individual. We observe that \mathcal{M} is a randomized algorithm, and randomization is achieved by either adding external noise, or by subsampling. In this paper, we use the “include/exclude” version of Def. 1, in which *differing by a single entry* refers to the inclusion or exclusion of that entry in the dataset.²

2.2 Designing differentially private algorithms

There are several standard approaches for designing differentially-private algorithms – see Dwork and Roth (2014) and Sarwate and Chaudhuri (2013) for surveys. The classical approach is output perturbation by Dwork et al. (2006b), where the idea is to add noise to the output of a function computed on sensitive data. The most common form of output perturbation is the *global sensitivity method* by Dwork et al. (2006b), where the idea is to calibrate the noise added to the global sensitivity of the function.

2.2.1 THE GLOBAL SENSITIVITY MECHANISM

The global sensitivity of a function F of a dataset \mathbf{X} is defined as the maximum amount (over all datasets \mathbf{X}) by which F changes when the private value of a single individual in \mathbf{X} changes. Specifically,

$$\Delta F = \max_{|\mathbf{X}-\mathbf{X}'|=1} |F(\mathbf{X}) - F(\mathbf{X}')|,$$

where \mathbf{X} is allowed to vary over the entire data domain, and $|\cdot|$ can correspond to either the L_1 norm or the L_2 norm, depending on the noise mechanism used.

In this paper, we consider a specific form of the global sensitivity method, called the *Gaussian mechanism* (Dwork et al., 2006a), where Gaussian noise calibrated to the global sensitivity in the L_2 norm is added. Specifically, for a function F with global sensitivity ΔF , we output:

$$F(\mathbf{X}) + Z, \quad \text{where } Z \sim N(0, \sigma^2), \quad \sigma^2 \geq 2 \log(1.25/\delta) (\Delta F)^2 / \epsilon^2,$$

and where ΔF is computed using the L_2 norm, and is referred to as the *L_2 sensitivity* of the function F . The privacy properties of this method are illustrated in (Dwork and Roth, 2014; Bun and Steinke, 2016; Dwork and Rothblum, 2016).

2. We use this version of differential privacy in order to make use of Abadi et al. (2016)’s analysis of the “privacy amplification” effect of subsampling in the specific case of MA using the Gaussian mechanism. Privacy amplification is also possible with the “replace-one” definition of DP, cf. Wang et al. (2016).

2.2.2 OTHER MECHANISMS

A variation of the global sensitivity method is the *smoothed sensitivity method* (Nissim et al., 2007), where the standard deviation of the added noise depends on the dataset itself, and is less when the dataset is *well-behaved*. Computing the smoothed sensitivity in a tractable manner is a major challenge, and efficient computational procedures are known only for a small number of relatively simple tasks.

A second, different approach is the *exponential mechanism* (McSherry and Talwar, 2007), a generic procedure for privately solving an optimisation problem where the objective depends on sensitive data. The exponential mechanism outputs a sample drawn from a density concentrated around the (non-private) optimal value; this method too is computationally inefficient for large domains. A third approach is *objective perturbation* (Chaudhuri et al., 2011), where an optimisation problem is perturbed by adding a (randomly drawn) term and its solution is output; while this method applies easily to convex optimisation problems such as those that arise in logistic regression and SVM, it is unclear how to apply it to more complex optimisation problems that arise in Bayesian inference.

A final approach for designing differentially private algorithms is sample-and-aggregate (Nissim et al., 2007), where the goal is to boost the amount of privacy offered by running private algorithms on subsamples, and then aggregating the result. In this paper, we use a combination of output perturbation along with sample-and-aggregate.

2.3 Composition

An important property of differential privacy which makes it conducive to real applications is *composition*, which means that the privacy guarantees decay gracefully as the same private dataset is used in multiple releases. This property allows us to easily design private versions of iterative algorithms by making each iteration private, and then accounting for the privacy loss incurred by a fixed number of iterations.

The first composition result was established by Dwork et al. (2006b) and Dwork et al. (2006a), who showed that differential privacy composes *linearly*; if we use differentially private algorithms A_1, \dots, A_k with privacy parameters $(\epsilon_1, \delta_1), \dots, (\epsilon_k, \delta_k)$ then the resulting process is $(\sum_k \epsilon_k, \sum_k \delta_k)$ -differentially private. This result was improved by Dwork et al. (2010) to provide a better rate for (ϵ, δ) -differential privacy. Kairouz et al. (2017) improves this even further, and provides a characterization of optimal composition for any differentially private algorithm. Bun and Steinke (2016) uses these ideas to provide simpler composition results for differentially mechanisms that obey certain properties.

2.3.1 THE MOMENTS ACCOUNTANT METHOD

In this paper, we use the *Moments Accountant* (MA) composition method due to Abadi et al. (2016) for accounting for privacy loss incurred by successive iterations of an iterative mechanism. We choose this method as it is tighter than Dwork et al. (2010), and applies more generally than zCDP composition (Bun and Steinke, 2016). Moreover, unlike the result in Kairouz et al. (2017), this method is tailored to specific algorithms, and has relatively simple forms, which makes calculations easy.

The moments accountant method is based on the concept of a *privacy loss random variable*, which allows us to consider the entire spectrum of likelihood ratios $\frac{\Pr(\mathcal{M}(\mathbf{X})=o)}{\Pr(\mathcal{M}(\mathbf{X}')=o)}$

induced by a privacy mechanism \mathcal{M} . Specifically, the privacy loss random variable corresponding to a mechanism \mathcal{M} , datasets \mathbf{X} and \mathbf{X}' , and an auxiliary parameter w is a random variable defined as follows:

$$L_{\mathcal{M}}(\mathbf{X}, \mathbf{X}', w) := \log \frac{\Pr(\mathcal{M}(\mathbf{X}, w) = o)}{\Pr(\mathcal{M}(\mathbf{X}', w) = o)}, \quad \text{with likelihood } \Pr(\mathcal{M}(\mathbf{X}, w) = o),$$

where o lies in the range of \mathcal{M} . Observe that if \mathcal{M} is $(\epsilon, 0)$ -differentially private, then the absolute value of $L_{\mathcal{M}}(\mathbf{X}, \mathbf{X}', w)$ is at most ϵ with probability 1.

The moments accountant method exploits properties of this privacy loss random variable to account for the privacy loss incurred by applying mechanisms $\mathcal{M}_1, \dots, \mathcal{M}_t$ successively to a dataset \mathbf{X} ; this is done by bounding properties of the log of the moment generating function of the privacy loss random variable. Specifically, the log moment function $\alpha_{\mathcal{M}_t}$ of a mechanism \mathcal{M}_t is defined as:

$$\alpha_{\mathcal{M}_t}(\lambda) = \sup_{\mathbf{X}, \mathbf{X}', w} \log \mathbb{E}[\exp(\lambda L_{\mathcal{M}_t}(\mathbf{X}, \mathbf{X}', w))], \quad (2)$$

where \mathbf{X} and \mathbf{X}' are datasets that differ in the private value of a single person.³ Abadi et al. (2016) shows that if \mathcal{M} is the combination of mechanisms $(\mathcal{M}_1, \dots, \mathcal{M}_k)$, then, its log moment generating function $\alpha_{\mathcal{M}}$ has the property that:

$$\alpha_{\mathcal{M}}(\lambda) \leq \sum_{t=1}^k \alpha_{\mathcal{M}_t}(\lambda) \quad (3)$$

Additionally, given a log moment function $\alpha_{\mathcal{M}}$, the corresponding mechanism \mathcal{M} satisfies a range of privacy parameters (ϵ, δ) connected by the following equation:

$$\delta = \min_{\lambda} \exp(\alpha_{\mathcal{M}}(\lambda) - \lambda\epsilon) \quad (4)$$

These properties immediately suggest a procedure for tracking privacy loss incurred by a combination of mechanisms $\mathcal{M}_1, \dots, \mathcal{M}_k$ on a dataset. For each mechanism \mathcal{M}_t , first compute the log moment function $\alpha_{\mathcal{M}_t}$; for simple mechanisms such as the Gaussian mechanism this can be done by simple algebra. Next, compute $\alpha_{\mathcal{M}}$ for the combination $\mathcal{M} = (\mathcal{M}_1, \dots, \mathcal{M}_k)$ from (3), and finally, recover the privacy parameters of \mathcal{M} using (4) by either finding the best ϵ for a target δ or the best δ for a target ϵ . In some special cases such as composition of k Gaussian mechanisms, the log moment functions can be calculated in closed form; the more common case is when closed forms are not available, and then a grid search may be performed over λ . We observe that any (ϵ, δ) obtained as a solution to (4) via grid search are still valid privacy parameters, although they may be suboptimal if the grid is too coarse.

3. In this paper, we will interchangeably denote expectations as $\mathbb{E}[\cdot]$ or $\langle \cdot \rangle$.

2.4 Privacy-preserving Bayesian inference

Privacy-preserving Bayesian inference is a new research area which is currently receiving a lot of attention. Dimitrakakis et al. (2014) showed that Bayesian posterior sampling is automatically differentially private, under a mild sensitivity condition on the log likelihood. This result was independently discovered by Wang et al. (2015), who also showed that the Stochastic Gradient Langevin Dynamics (SGLD) Bayesian inference algorithm (Welling and Teh, 2011) automatically satisfies approximate differential privacy, due to the use of Gaussian noise in the updates.

As an alternative to obtaining privacy “for free” from posterior sampling, Foulds et al. (2016) studied a Laplace mechanism approach for exponential family models, and proved that it is asymptotically efficient, unlike the former approach. Independently of this work, Zhang et al. (2016) proposed an equivalent Laplace mechanism method for private Bayesian inference in the special case of beta-Bernoulli systems, including graphical models constructed based on these systems. Foulds et al. (2016) further analyzed privacy-preserving MCMC algorithms, via both exponential and Laplace mechanism approaches.

In terms of approximate Bayesian inference, Jälkö et al. (2017) recently considered privacy-preserving variational Bayes via perturbing and clipping the gradients of the variational lower bound. However, this work focuses its experiments on logistic regression, a model that does not have latent variables. Given that most latent variable models consist of at least as many latent variables as the number of datapoints, the long vector of gradients (the concatenation of the gradients with respect to the latent variables; and with respect to the model parameters) in such cases is expected to typically require excessive amounts of additive noise. Furthermore, our approach, using the data augmentation scheme (see Sec. 5) and moment perturbation, yields closed-form posterior updates (posterior distributions both for latent variables and model parameters) that are closer to the spirit of the original variational Bayes method, for both CE and non-CE models, as well as an improved composition analysis using moments accountant.

In recent work, Barthe et al. (2016) designed a *probabilistic programming* language for designing privacy-preserving Bayesian machine learning algorithms, with privacy achieved via input or output perturbation, using standard mechanisms.

Lastly, although it is not a fully Bayesian method, it is worth noting the differentially private expectation maximisation algorithm developed by Park et al. (2017), which also involves perturbing the expected sufficient statistics for the complete-data likelihood. The major difference between our and their work is that EM is not (fully) Bayesian, i.e., EM outputs the *point estimates* of the model parameters; while VB outputs the posterior distributions (or those quantities that are necessary to do Bayesian predictions, e.g., expected natural parameters and expected sufficient statistics). Furthermore, Park et al. (2017) deals with only CE family models for obtaining the closed-form MAP estimates of the parameters; while our approach encompasses both CE and non-CE family models. Lastly, Park et al. (2017) demonstrated their method on small- to medium-sized datasets, which do not require stochastic learning; while our method takes into account the scenario of stochastic learning which is essential in the era of big data (Hoffman et al., 2013).

2.5 Variational Bayes

Variational inference is the class of techniques which solve inference problems in probabilistic models using variational methods (Jordan et al., 1999; Wainwright and Jordan, 2008). The general idea of variational methods is to cast a quantity of interest as an optimisation problem. By relaxing the problem in some way, we can replace the original intractable problem with one that we can solve efficiently.⁴

The application of variational inference to finding a Bayesian posterior distribution is called *Variational Bayes* (VB). Our discussion is focused on the Variational Bayesian EM (VBEM) algorithm variant. The goal of the algorithm is to compute an approximation q to the posterior distribution over latent variables and model parameters for models where exact posterior inference is intractable. This should be contrasted to VEM and EM, which aim to compute a point estimate of the parameters. VEM and EM can both be understood as special cases, in which the set of q distributions is constrained such that the approximate posterior is a Dirac delta function (Beal, 2003). We therefore include them within the definition of VB. See Blei et al. (2017) for a recent review on variational Bayes, Beal (2003) for more detailed derivations, and see Appendix D for more information on the relationship between EM and VBEM.

High-level derivation of VB Consider a generative model that produces a dataset $\mathcal{D} = \{\mathcal{D}_n\}_{n=1}^N$ consisting of N independent identically distributed (*i.i.d.*) items (\mathcal{D}_n is the n th input/output pair $\{\mathbf{x}_n, y_n\}$ for supervised learning, and \mathcal{D}_n is the n th vector output \mathbf{y}_n for unsupervised learning), generated using a set of latent variables $\mathbf{l} = \{\mathbf{l}_n\}_{n=1}^N$. The generative model provides $p(\mathcal{D}_n|\mathbf{l}_n, \mathbf{m})$, where \mathbf{m} are the model parameters. We also consider the prior distribution over the model parameters $p(\mathbf{m})$ and the prior distribution over the latent variables $p(\mathbf{l})$.

Variational Bayes recasts the task of approximating the posterior $p(\mathbf{l}, \mathbf{m}|\mathcal{D})$ as an optimisation problem: making the approximating distribution $q(\mathbf{l}, \mathbf{m})$, which is called the *variational distribution*, as similar as possible to the posterior, by minimising some distance (or divergence) between them. The terminology *VB* is often assumed to refer to the standard case, in which the divergence to minimise is the KL-divergence from $p(\mathbf{l}, \mathbf{m}|\mathcal{D})$ to $q(\mathbf{l}, \mathbf{m})$,

$$\begin{aligned} D_{KL}(q(\mathbf{l}, \mathbf{m})||p(\mathbf{l}, \mathbf{m}|\mathcal{D})) &= \mathbb{E}_q \left[\log \frac{q(\mathbf{l}, \mathbf{m})}{p(\mathbf{l}, \mathbf{m}|\mathcal{D})} \right] \\ &= \mathbb{E}_q[\log q(\mathbf{l}, \mathbf{m})] - \mathbb{E}_q[\log p(\mathbf{l}, \mathbf{m}|\mathcal{D})] \\ &= \mathbb{E}_q[\log q(\mathbf{l}, \mathbf{m})] - \mathbb{E}_q[\log p(\mathbf{l}, \mathbf{m}, \mathcal{D})] + \log p(\mathcal{D}) . \end{aligned} \quad (5)$$

The arg min of Eq. 5 with respect to $q(\mathbf{l}, \mathbf{m})$ does not depend on the constant $\log p(\mathcal{D})$. Minimising it is therefore equivalent to maximizing

$$\mathcal{L}(q) \triangleq \mathbb{E}_q[\log p(\mathbf{l}, \mathbf{m}, \mathcal{D})] - \mathbb{E}_q[\log q(\mathbf{l}, \mathbf{m})] = \mathbb{E}_q[\log p(\mathbf{l}, \mathbf{m}, \mathcal{D})] + H(q) , \quad (6)$$

4. Note that the “variational” terminology comes from the calculus of variations, which is concerned with finding optima of functionals. This pertains to probabilistic inference, since distributions are functions, and we aim to optimise over the space of possible distributions. However, it is typically not necessary to use the calculus of variations when deriving variational inference algorithms in practice.

where $H(q)$ is the entropy (or differential entropy) of $q(\mathbf{l}, \mathbf{m})$. The entropy of $q(\mathbf{l}, \mathbf{m})$ rewards simplicity, while $\mathbb{E}_q[\log p(\mathbf{l}, \mathbf{m}, \mathcal{D})]$, the expected value of the complete data log-likelihood under the variational distribution, rewards accurately fitting to the data. Since the KL-divergence is 0 if and only if the two distributions are the same, maximizing $\mathcal{L}(q)$ will result in $q(\mathbf{l}, \mathbf{m}) = p(\mathbf{l}, \mathbf{m}|\mathcal{D})$ when the optimisation problem is unconstrained. In practice, however, we restrict $q(\mathbf{l}, \mathbf{m})$ to a tractable subset of possible distributions. A common choice for the tractable subset is the set of fully factorized distributions $q(\mathbf{l}, \mathbf{m}) = q(\mathbf{m}) \prod_{n=1}^N q(\mathbf{l}_n)$, in which case the method is referred to as *mean-field variational Bayes*.

We can alternatively derive $\mathcal{L}(q)$ as a lower bound on the log of the marginal probability of the data $p(\mathcal{D})$ (the *evidence*),

$$\begin{aligned} \log p(\mathcal{D}) &= \log \left(\int d\mathbf{l} d\mathbf{m} p(\mathbf{l}, \mathbf{m}, \mathcal{D}) \right) = \log \left(\int d\mathbf{l} d\mathbf{m} p(\mathbf{l}, \mathbf{m}, \mathcal{D}) \frac{q(\mathbf{l}, \mathbf{m})}{q(\mathbf{l}, \mathbf{m})} \right) \\ &= \log \left(\mathbb{E}_q \left[\frac{p(\mathbf{l}, \mathbf{m}, \mathcal{D})}{q(\mathbf{l}, \mathbf{m})} \right] \right) \geq \mathbb{E}_q \left[\log p(\mathbf{l}, \mathbf{m}, \mathcal{D}) - \log q(\mathbf{l}, \mathbf{m}) \right] = \mathcal{L}(q), \end{aligned} \quad (7)$$

where we have made use of Jensen's inequality. Due to Eq. 7, $\mathcal{L}(q)$ is sometimes referred to as a variational lower bound, and in particular, the *Evidence Lower Bound* (ELBO), since it is a lower bound on the log of the model evidence $p(\mathcal{D})$. The VBEM algorithm maximises $\mathcal{L}(q)$ via coordinate ascent over parameters encoding $q(\mathbf{l}, \mathbf{m})$, called the variational parameters. The E-step optimises the variational parameters pertaining to the latent variables \mathbf{l} , and the M-step optimises the variational parameters pertaining to the model parameters \mathbf{m} . Under certain assumptions, these updates have a certain form, as we will describe below. These updates are iterated until convergence.

VB for CE models VB simplifies to a two-step procedure when the model falls into the Conjugate-Exponential (CE) class of models, which satisfy two conditions (Beal, 2003):

- (1) The complete-data likelihood is in the exponential family :

$$p(\mathcal{D}_n, \mathbf{l}_n | \mathbf{m}) = g(\mathbf{m}) f(\mathcal{D}_n, \mathbf{l}_n) \exp(\mathbf{n}(\mathbf{m})^\top \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n)), \quad (8)$$

- (2) The prior over \mathbf{m} is conjugate to the complete-data likelihood :

$$p(\mathbf{m} | \tau, \boldsymbol{\nu}) = h(\tau, \boldsymbol{\nu}) g(\mathbf{m})^\tau \exp(\boldsymbol{\nu}^\top \mathbf{n}(\mathbf{m})). \quad (9)$$

where natural parameters and sufficient statistics of the complete-data likelihood are denoted by $\mathbf{n}(\mathbf{m})$ and $\mathbf{s}(\mathcal{D}_n, \mathbf{l}_n)$, respectively. The hyperparameters are denoted by τ (a scalar) and $\boldsymbol{\nu}$ (a vector).

A large class of models fall in the CE family. Examples include linear dynamical systems and switching models; Gaussian mixtures; factor analysis and probabilistic PCA; Hidden Markov Models (HMM) and factorial HMMs; and discrete-variable belief networks. The models that are widely used but not in the CE family include: Markov Random Fields (MRFs) and Boltzmann machines; logistic regression; sigmoid belief networks; and Independent Component Analysis (ICA). We illustrate how best to bring such models into the CE family in a later section.

The VB algorithm for a CE family model optimises the lower bound on the model log marginal likelihood given by Eq. 7 (the ELBO),

$$\mathcal{L}(q(\mathbf{l})q(\mathbf{m})) = \int d\mathbf{m} d\mathbf{l} q(\mathbf{l})q(\mathbf{m}) \log \frac{p(\mathbf{l}, \mathcal{D}, \mathbf{m})}{q(\mathbf{l})q(\mathbf{m})}, \quad (10)$$

where we assume that the joint approximate posterior distribution over the latent variables and model parameters $q(\mathbf{l}, \mathbf{m})$ is factorised via the mean-field assumption as

$$q(\mathbf{l}, \mathbf{m}) = q(\mathbf{l})q(\mathbf{m}) = q(\mathbf{m}) \prod_{n=1}^N q(\mathbf{l}_n), \quad (11)$$

and that each of the variational distributions also has the form of an exponential family distribution. Computing the derivatives of the variational lower bound in Eq. 10 with respect to each of these variational distributions and setting them to zero yields the following two-step procedure.

- (1) First, given expected natural parameters $\bar{\mathbf{n}}$, the E-step computes:

$$q(\mathbf{l}) = \prod_{n=1}^N q(\mathbf{l}_n) \propto \prod_{n=1}^N f(\mathcal{D}_n, \mathbf{l}_n) \exp(\bar{\mathbf{n}}^\top \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n)) = \prod_{n=1}^N p(\mathbf{l}_n | \mathcal{D}_n, \bar{\mathbf{n}}). \quad (12)$$

Using $q(\mathbf{l})$, it outputs expected sufficient statistics, the expectation of $\mathbf{s}(\mathcal{D}_n, \mathbf{l}_n)$

with probability density $q(\mathbf{l}_n) : \bar{\mathbf{s}}(\mathcal{D}) = \frac{1}{N} \sum_{n=1}^N \langle \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n) \rangle_{q(\mathbf{l}_n)}$.

- (2) Second, given expected sufficient statistics $\bar{\mathbf{s}}(\mathcal{D})$, the M-step computes:

$$q(\mathbf{m}) = h(\tilde{\tau}, \tilde{\boldsymbol{\nu}}) g(\mathbf{m})^{\tilde{\tau}} \exp(\tilde{\boldsymbol{\nu}}^\top \mathbf{n}(\mathbf{m})), \text{ where } \tilde{\tau} = \tau + N, \tilde{\boldsymbol{\nu}} = \boldsymbol{\nu} + N\bar{\mathbf{s}}(\mathcal{D}). \quad (13)$$

Using $q(\mathbf{m})$, it outputs expected natural parameters $\bar{\mathbf{n}} = \langle \mathbf{n}(\mathbf{m}) \rangle_{q(\mathbf{m})}$.

Stochastic VB for CE models The VB update introduced in Eq. 12 is inefficient for large data sets because we should optimise the variational posterior over the latent variables corresponding to each data point before re-estimating the variational posterior over the parameters. For more efficient learning, we adopt stochastic variational inference, which uses stochastic optimisation to fit the variational distribution over the parameters. We repeatedly subsample the data to form noisy estimates of the natural gradient of the variational lower bound, and we follow these estimates with a decreasing step-size ρ_t , as in Hoffman et al. (2013).⁵ The stochastic variational Bayes algorithm is summarised in Algorithm 1.

3. Variational Bayes In Private Settings (VIPS) for the CE family

To create an extension of variational Bayes which preserves differential privacy, we need to inject noise into the algorithm. The design choices for the noise injection procedure must be carefully made, as they can strongly affect the statistical efficiency of the algorithm, in terms of its accuracy versus the number of samples in the dataset. We start by introducing our problem setup.

5. When optimising over a probability distribution, the Euclidean distance between two parameter vectors is often a poor measure of the dissimilarity of the distributions. The natural gradient of a function accounts for the information geometry of its parameter space, using a Riemannian metric to adjust the direction of the traditional gradient, which results in a faster convergence than the traditional gradient (Hoffman et al., 2013).

Algorithm 1 (Stochastic) Variational Bayes for CE family distributions

Input: Data \mathcal{D} . Define $\rho_t = (\tau_0 + t)^{-\kappa}$ and mini-batch size S .

Output: Expected natural parameters $\bar{\mathbf{n}}$ and expected sufficient statistics $\bar{\mathbf{s}}$.

for $t = 1, \dots, J$ **do**

(1) **E-step:** Given the expected natural parameters $\bar{\mathbf{n}}$, compute $q(\mathbf{l}_n)$ for $n = 1, \dots, S$.

Output the expected sufficient statistics $\bar{\mathbf{s}} = \frac{1}{S} \sum_{n=1}^S \langle \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n) \rangle_{q(\mathbf{l}_n)}$.

(2) **M-step:** Given $\bar{\mathbf{s}}$, compute $q(\mathbf{m})$ by $\tilde{\boldsymbol{\nu}}^{(t)} = \boldsymbol{\nu} + N\bar{\mathbf{s}}$. Set $\tilde{\boldsymbol{\nu}}^{(t)} \leftarrow (1 - \rho_t)\tilde{\boldsymbol{\nu}}^{(t-1)} + \rho_t\tilde{\boldsymbol{\nu}}^{(t)}$.

Output the expected natural parameters $\bar{\mathbf{n}} = \langle \mathbf{m} \rangle_{q(\mathbf{m})}$.

end for

3.1 Problem setup

A naive way to privatise the VB algorithm is by perturbing both $q(\mathbf{l})$ and $q(\mathbf{m})$. Unfortunately, this is impractical, due to the excessive amounts of additive noise (recall: we have as many latent variables as the number of datapoints). We propose to perturb the expected sufficient statistics *only*. What follows next explains why this makes sense.

While the VB algorithm is being run, the places where the algorithm needs to look at the data are (1) when computing the variational posterior over the latent variables $q(\mathbf{l})$; and (2) when computing the expected sufficient statistics $\bar{\mathbf{s}}(\mathcal{D})$ given $q(\mathbf{l})$ in the E-step. In our proposed approach, we compute $q(\mathbf{l})$ behind the *privacy wall* (see below), and compute the expected sufficient statistics using $q(\mathbf{l})$, as shown in Fig. 1. Before outputting the expected sufficient statistics, we perturb each coordinate of the expected sufficient statistics to compensate the maximum difference in $\langle \mathbf{s}_l(\mathcal{D}_j, \mathbf{l}_j) \rangle_{q(\mathbf{l}_j)}$ caused by both \mathcal{D}_j and $q(\mathbf{l}_j)$. The perturbed expected sufficient statistics then dictate the expected natural parameters in the M-step. Hence we do not need an additional step to add noise to $q(\mathbf{m})$.

The reason we neither perturb nor output $q(\mathbf{l})$ for training data is that we do not need $q(\mathbf{l})$ itself most of the time. For instance, when computing the predictive probability for test datapoints \mathcal{D}_{tst} , we need to perform the E-step to obtain the variational posterior for the test data $q(\mathbf{l}_{tst})$, which is a function of the test data and the expected natural parameters $\bar{\mathbf{n}}$, given as

$$p(\mathcal{D}_{tst}|\mathcal{D}) = \int d\mathbf{m} d\mathbf{l}_{tst} p(\mathcal{D}_{tst}|\mathbf{l}_{tst}, \mathbf{m}) q(\mathbf{l}_{tst}; \mathcal{D}_{tst}, \bar{\mathbf{n}}) q(\mathbf{m}; \tilde{\boldsymbol{\nu}}), \quad (14)$$

where the dependence on the training data \mathcal{D} is implicit in the approximate posteriors $q(\mathbf{m})$ through $\tilde{\boldsymbol{\nu}}$; and the expected natural parameters $\bar{\mathbf{n}}$. Hence, outputting the perturbed sufficient statistics and the expected natural parameters suffice for protecting the privacy of individuals in the training data. Furthermore, the M-step can be performed based on the (privatised) output of the E-step, without querying the data again, so we do not need to add any further noise to the M-step to ensure privacy, due to the fact that differential privacy is immune to data-independent post-processing. To sum up, we provide our problem setup as below.

1. Privacy wall: We assume that the sensitive training dataset is only accessible through a sanitising interface which we call a *privacy wall*. The training data stay behind the privacy wall, and adversaries have access to the outputs of our algorithm only, i.e., no

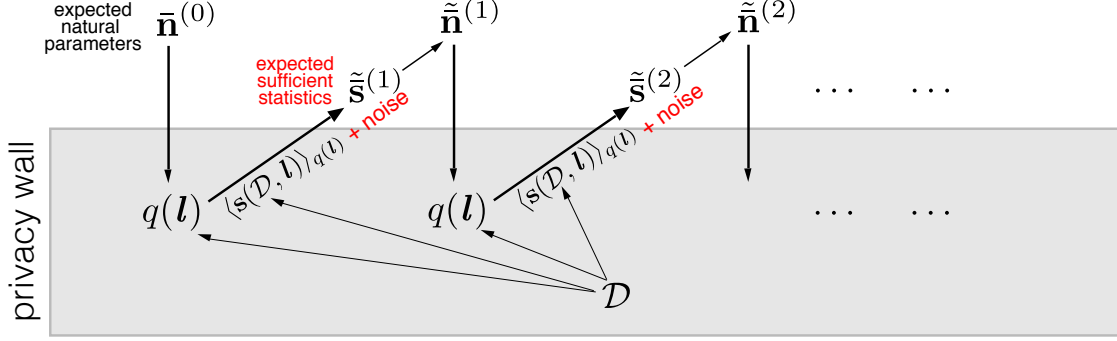


Figure 1: Schematic of VIPS. Given the initial expected natural parameters $\bar{\mathbf{n}}^{(0)}$, we compute the variational posterior over the latent variables $q(\mathbf{l})$. Since $q(\mathbf{l})$ is a function of not only the expected natural parameters but also the data \mathcal{D} , we compute $q(\mathbf{l})$ behind the privacy wall. Using $q(\mathbf{l})$, we then compute the expected sufficient statistics. Note that we neither perturb nor output $q(\mathbf{l})$ itself. Instead, when we noise up the expected sufficient statistics before outputting, we add noise to each coordinate of the expected sufficient statistics in order to compensate the maximum difference in $\langle \mathbf{s}_l(\mathcal{D}_j, \mathbf{l}_j) \rangle_{q(\mathbf{l}_j)}$ caused by both \mathcal{D}_j and $q(\mathbf{l}_j)$. In the M-step, we compute the variational posterior over the parameters $q(\mathbf{m})$ using the perturbed expected sufficient statistics $\tilde{\mathbf{s}}^{(1)}$. Using $q(\mathbf{m})$, we compute the expected natural parameters $\tilde{\mathbf{n}}^{(1)}$, which is already perturbed since it is a function of $\tilde{\mathbf{s}}^{(1)}$. We continue performing these two steps until convergence.

direct access to the training data, although they may have further prior knowledge on some of the individuals that are included in the training data.

2. Training phase: Our differentially private VB algorithm releases the perturbed expected natural parameters and perturbed expected sufficient statistics in every iteration. Every release of a perturbed parameter based on the training data triggers an update in the log moment functions (see Sec 3.2 on how these are updated). At the end of the training phase, the final privacy parameters are calculated based on (4).
3. Test phase: Test data are public (or belong to users), i.e., outside the privacy wall. Bayesian prediction on the test data is possible using the released expected natural parameters and expected sufficient statistics (given as Eq. 14). Note that we do not consider protecting the privacy of the individuals in the test data.

3.2 How to compute the log moment functions?

Recall that to use the moments accountant method, we need to compute the log moment functions $\alpha_{\mathcal{M}_t}$ for each individual iteration t . An iteration t of VIPS randomly subsamples a ν fraction of the dataset and uses it to compute a gradient which is then perturbed via the Gaussian mechanism with variance $\sigma^2 \mathbf{I}$. How the log moment function is computed depends on the sensitivity of the gradient as well as the underlying mechanism; we next discuss how each of these aspects.

Sensitivity analysis Suppose there are two neighbouring datasets \mathcal{D} and \mathcal{D}' , where \mathcal{D}' has one entry difference compared to \mathcal{D} (i.e., by replacing one entry from \mathcal{D}).

We denote the vector of expected sufficient statistics by $\bar{\mathbf{s}}(\mathcal{D}) = \frac{1}{N} \sum_{n=1}^N \bar{\mathbf{s}}(\mathcal{D}_n) = [M_1, \dots, M_L]$, where each expected sufficient statistic M_l is given by

$$M_l = \frac{1}{N} \sum_{i=1}^N \langle \mathbf{s}_l(\mathcal{D}_i, \mathbf{l}_i) \rangle_{q(\mathbf{l}_i)}. \quad (15)$$

When computing the sensitivity of the expected sufficient statistics, we assume, without loss of generality, the last entry removed from \mathcal{D} maximises the difference in the expected sufficient statistics run on the two datasets \mathcal{D} and \mathcal{D}' . Under this assumption and the *i.i.d.* assumption on the likelihood, given the current expected natural parameters $\bar{\mathbf{n}}$, all $q(\mathbf{l}_i)$ and $\mathbf{s}_l(\mathcal{D}_i, \mathbf{l}_i)$ for $i \in \{1, \dots, N-1\}$ evaluated on the dataset \mathcal{D} are the same as $q(\mathbf{l}'_i)$ and $\mathbf{s}_l(\mathcal{D}'_i, \mathbf{l}'_i)$ evaluated on the dataset \mathcal{D}' . Hence, the sensitivity is given by

$$\begin{aligned} \Delta M_l &= \max_{|\mathcal{D} \setminus \mathcal{D}'|_1=1} |M_l(\mathcal{D}) - M_l(\mathcal{D}')|, \\ &= \max_{|\mathcal{D} \setminus \mathcal{D}'|_1=1} \left| \frac{1}{N} \sum_{i=1}^N \mathbb{E}_{q(\mathbf{l}_i)} \mathbf{s}_l(\mathcal{D}_i, \mathbf{l}_i) - \frac{1}{N-1} \sum_{i=1}^{N-1} \mathbb{E}_{q(\mathbf{l}'_i)} \mathbf{s}_l(\mathcal{D}'_i, \mathbf{l}'_i) \right|, \\ &= \max_{|\mathcal{D} \setminus \mathcal{D}'|_1=1} \left| \frac{1}{N} \sum_{i=1}^N \mathbb{E}_{q(\mathbf{l}_i)} \mathbf{s}_l(\mathcal{D}_i, \mathbf{l}_i) - \frac{1}{N-1} \sum_{i=1}^{N-1} \mathbb{E}_{q(\mathbf{l}_i)} \mathbf{s}_l(\mathcal{D}_i, \mathbf{l}_i) \right|, \\ &\quad \text{since } \mathbb{E}_{q(\mathbf{l}_i)} \mathbf{s}_l(\mathcal{D}_i, \mathbf{l}_i) = \mathbb{E}_{q(\mathbf{l}'_i)} \mathbf{s}_l(\mathcal{D}'_i, \mathbf{l}'_i) \text{ for } i = \{1, \dots, N-1\}, \\ &\leq \max_{|\mathcal{D} \setminus \mathcal{D}'|_1=1} \left| \frac{N-1}{N} \frac{1}{N-1} \sum_{i=1}^{N-1} \mathbb{E}_{q(\mathbf{l}_i)} \mathbf{s}_l(\mathcal{D}_i, \mathbf{l}_i) - \frac{1}{N-1} \sum_{i=1}^{N-1} \mathbb{E}_{q(\mathbf{l}_i)} \mathbf{s}_l(\mathcal{D}_i, \mathbf{l}_i) \right| \\ &\quad + \frac{1}{N} |\mathbb{E}_{q(\mathbf{l}_N)} \mathbf{s}_l(\mathcal{D}_N, \mathbf{l}_N)|, \text{ due to the triangle inequality,} \\ &\leq \max_{|\mathcal{D} \setminus \mathcal{D}'|_1=1} \frac{1}{N} \left| \frac{1}{N-1} \sum_{i=1}^{N-1} \mathbb{E}_{q(\mathbf{l}_i)} \mathbf{s}_l(\mathcal{D}_i, \mathbf{l}_i) \right| + \frac{1}{N} |\mathbb{E}_{q(\mathbf{l}_N)} \mathbf{s}_l(\mathcal{D}_N, \mathbf{l}_N)|, \\ &\leq \max_{\mathcal{D}_N, q(\mathbf{l}_N)} \frac{2}{N} |\mathbb{E}_{q(\mathbf{l}_N)} \mathbf{s}_l(\mathcal{D}_N, \mathbf{l}_N)|, \end{aligned} \quad (16)$$

where the last line is because the average (over the $N-1$ terms) expected sufficient statistics is less than equal to the maximum expected sufficient statistics (recall: we assumed that the last entry maximises the difference in the expected sufficient statistics), i.e.,

$$\left| \frac{1}{N-1} \sum_{i=1}^{N-1} \mathbb{E}_{q(\mathbf{l}_i)} \mathbf{s}_l(\mathcal{D}_i, \mathbf{l}_i) \right| \leq \frac{1}{N-1} \sum_{i=1}^{N-1} |\mathbb{E}_{q(\mathbf{l}_i)} \mathbf{s}_l(\mathcal{D}_i, \mathbf{l}_i)| \leq |\mathbb{E}_{q(\mathbf{l}_N)} \mathbf{s}_l(\mathcal{D}_N, \mathbf{l}_N)|. \quad (17)$$

As in many existing works (e.g., (Chaudhuri et al., 2011; Kifer et al., 2012), among many others), we also assume that the dataset is pre-processed such that the L_2 norm of any \mathcal{D}_i is less than 1. Furthermore, we choose $q(\mathbf{l}_i)$ such that its support is bounded. Under these conditions, each coordinate of the expected sufficient statistics $\langle \mathbf{s}_l(\mathcal{D}_i, \mathbf{l}_i) \rangle_{q(\mathbf{l}_i)}$ has limited sensitivity. We will add noise to each coordinate of the expected sufficient statistics to compensate this bounded maximum change in the E-step.

Log Moment Function of the Subsampled Gaussian Mechanism Observe that iteration t of our algorithm subsamples a ν fraction of the dataset, computes a gradient based on this subsample, and perturbs it using the Gaussian mechanism with variance $\sigma^2 I_d$. To simplify the privacy calculations, we assume that each example in the dataset is included in a minibatch according to an independent coin flip with probability ν . This differs slightly from the standard approach for stochastic gradient methods, in which a fixed minibatch size S is typically used in each iteration. However, following Abadi et al. (2016), for simplicity of analysis, we will also assume that the instances are included independently with probability $\nu = \frac{S}{N}$; and for ease of implementation, we will use minibatches with fixed size S in our experiments.

From Proposition 1.6 in Bun and Steinke (2016) along with simple algebra, the log moment function of the Gaussian Mechanism \mathcal{M} applied to a query with L_2 -sensitivity Δ is $\alpha_{\mathcal{M}}(\lambda) = \frac{\lambda(\lambda+1)\Delta^2}{2\sigma^2}$. To compute the log moment function for the subsampled Gaussian Mechanism, we follow Abadi et al. (2016). Let β_0 and β_1 be the densities $\mathcal{N}(0, (\sigma/\Delta)^2)$ and $\mathcal{N}(1, (\sigma/\Delta)^2)$, and let $\beta = (1 - \nu)\beta_0 + \nu\beta_1$ be the mixture density; then, the log moment function at λ is $\max \log(E_1, E_2)$ where $E_1 = \mathbb{E}_{z \sim \beta_0}[(\beta_0(z)/\beta(z))^\lambda]$ and $E_2 = \mathbb{E}_{z \sim \beta}[(\beta(z)/\beta_0(z))^\lambda]$. E_1 and E_2 can be numerically calculated for any λ , and we maintain the log moments over a grid of λ values.

Finally, note that our algorithms are run for a prespecified number of iterations, and with a prespecified σ ; this ensures that the moments accountant analysis is correct, and we do not need an a data-dependent adaptive analysis such as in Rogers et al. (2016).

Algorithm 2 summarizes our VIPS algorithm that performs differentially private stochastic variational Bayes for CE family models.

Algorithm 2 Private VIPS for CE family distributions

Input: Data \mathcal{D} . Define $\rho_t = (\tau_0 + t)^{-\kappa}$, noise variance σ^2 , mini-batch size S , and maximum iterations J .

Output: Perturb expected natural parameters $\tilde{\mathbf{n}}$ and expected sufficient statistics $\tilde{\mathbf{s}}$.

Compute the L_2 -sensitivity Δ of the expected sufficient statistics.

for $t = 1, \dots, J$ **do**

(1) **E-step:** Given the expected natural parameters $\bar{\mathbf{n}}$, compute $q(\mathbf{l}_n)$ for $n = 1, \dots, S$. Perturb each coordinate of $\bar{\mathbf{s}} = \frac{1}{S} \sum_{n=1}^S \langle \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n) \rangle_{q(\mathbf{l}_n)}$ by adding $\mathcal{N}(0, \sigma^2 \Delta^2 I)$ noise, and output $\tilde{\mathbf{s}}$. Update the log moment functions.

(2) **M-step:** Given $\tilde{\mathbf{s}}$, compute $q(\mathbf{m})$ by $\tilde{\boldsymbol{\nu}}^{(t)} = \boldsymbol{\nu} + N\tilde{\mathbf{s}}$. Set $\tilde{\boldsymbol{\nu}}^{(t)} \leftarrow (1 - \rho_t)\tilde{\boldsymbol{\nu}}^{(t-1)} + \rho_t\tilde{\boldsymbol{\nu}}^{(t)}$.

Output the expected natural parameters $\tilde{\mathbf{n}} = \langle \mathbf{m} \rangle_{q(\mathbf{m})}$.

end for

4. VIPS for latent Dirichlet allocation

Here, we illustrate how to use the general framework of VIPS for CE family in the example of Latent Dirichlet Allocation (LDA).

4.1 Model specifics in LDA

The most widely used topic model is Latent Dirichlet Allocation (LDA) (Blei et al., 2003). Its generative process is given by

- Draw topics $\beta_k \sim \text{Dirichlet}(\eta \mathbf{1}_V)$, for $k = \{1, \dots, K\}$, where η is a scalar hyperparameter.
- For each document $d \in \{1, \dots, D\}$
 - Draw topic proportions $\theta_d \sim \text{Dirichlet}(\alpha \mathbf{1}_K)$, where α is a scalar hyperparameter.
 - For each word $n \in \{1, \dots, N\}$
 - * Draw topic assignments $\mathbf{z}_{dn} \sim \text{Discrete}(\theta_d)$
 - * Draw word $\mathbf{w}_{dn} \sim \text{Discrete}(\beta_{\mathbf{z}_{dn}})$

where each observed word is represented by an indicator vector \mathbf{w}_{dn} (n th word in the d th document) of length V , and where V is the number of terms in a fixed vocabulary set. The topic assignment latent variable \mathbf{z}_{dn} is also an indicator vector of length K , where K is the number of topics.

The LDA model falls in the CE family, viewing $\mathbf{z}_{d,1:N}$ and θ_d as two types of latent variables: $\mathbf{l}_d = \{\mathbf{z}_{d,1:N}, \theta_d\}$, and β as model parameters $\mathbf{m} = \beta$. The conditions for CE are satisfied: (1) the complete-data likelihood per document is in exponential family:

$$p(\mathbf{w}_{d,1:N}, \mathbf{z}_{d,1:N}, \theta_d | \beta) \propto f(\mathcal{D}_d, \mathbf{z}_{d,1:N}, \theta_d) \exp\left(\sum_n \sum_k [\log \beta_k]^\top [\mathbf{z}_{dn}^k \mathbf{w}_{dn}]\right), \quad (18)$$

where $f(\mathcal{D}_d, \mathbf{z}_{d,1:N}, \theta_d) \propto \exp([\alpha \mathbf{1}_K]^\top [\log \theta_d] + \sum_n \sum_k \mathbf{z}_{dn}^k \log \theta_d^k)$; and (2) we have a conjugate prior over β_k :

$$p(\beta_k | \eta \mathbf{1}_V) \propto \exp([\eta \mathbf{1}_V]^\top [\log \beta_k]), \quad (19)$$

for $k = \{1, \dots, K\}$. For simplicity, we assume hyperparameters α and η are set manually.

Under the LDA model, we assume the variational posteriors are given by

- Discrete : $q(\mathbf{z}_{dn}^k | \phi_{dn}^k) \propto \exp(\mathbf{z}_{dn}^k \log \phi_{dn}^k)$, with variational parameters for capturing the posterior topic assignment,

$$\phi_{dn}^k \propto \exp(\langle \log \beta_k \rangle_{q(\beta_k)}^\top \mathbf{w}_{dn} + \langle \log \theta_d^k \rangle_{q(\theta_d)}). \quad (20)$$

- Dirichlet : $q(\theta_d | \gamma_d) \propto \exp(\gamma_d^\top \log \theta_d)$, where $\gamma_d = \alpha \mathbf{1}_K + \sum_{n=1}^N \langle \mathbf{z}_{dn} \rangle_{q(\mathbf{z}_{dn})}$,

where these two distributions are computed in the E-step behind the privacy wall. The expected sufficient statistics are $\bar{\mathbf{s}}_k = \frac{1}{D} \sum_d \sum_n \langle \mathbf{z}_{dn}^k \rangle_{q(\mathbf{z}_{dn})} \mathbf{w}_{dn} = \frac{1}{D} \sum_d \sum_n \phi_{dn}^k \mathbf{w}_{dn}$ due to Eq. 20. Then, in the M-step, we compute the posterior

- Dirichlet : $q(\beta_k | \lambda_k) \propto \exp(\lambda_k^\top \log \beta_k)$, where $\lambda_k = \eta \mathbf{1}_V + \sum_d \sum_n \langle \mathbf{z}_{dn}^k \rangle_{q(\mathbf{z}_{dn})} \mathbf{w}_{dn}$.

4.2 VIPS for LDA

Following the general framework of VIPS, we perturb the expected sufficient statistics for differentially private LDA. While each document has a different document length N_d , we limit the maximum length of any document to N by randomly selecting N words in a document if the number of words in the document is longer than N . We add Gaussian noise to each coordinate, then map to 0 if the perturbed coordinate becomes negative:

$$\tilde{\mathbf{s}}_k^v = \bar{\mathbf{s}}_k^v + Y_k^v, \text{ where } Y_k^v \sim \mathcal{N}(0, \sigma^2(\Delta \bar{\mathbf{s}})^2), \quad (21)$$

where \mathbf{s}_k^v is the v th coordinate of a vector of length V : $\bar{\mathbf{s}}_k^v = \frac{1}{D} \sum_d \sum_n \phi_{dn}^k \mathbf{w}_{dn}^v$, and $\Delta \bar{\mathbf{s}}$ is the sensitivity given by

$$\begin{aligned} \Delta \bar{\mathbf{s}} &= \max_{|\mathcal{D} \setminus \mathcal{D}'|=1} \sqrt{\sum_k \sum_v (\bar{\mathbf{s}}_k^v(\mathcal{D}) - \bar{\mathbf{s}}_k^v(\mathcal{D}'))^2}, \\ &= \max_{|\mathcal{D} \setminus \mathcal{D}'|=1} \sqrt{\sum_k \sum_v \left(\frac{1}{D} \sum_n \sum_d \phi_{dn}^k \mathbf{w}_{dn}^v - \frac{1}{D-1} \sum_n \sum_d \phi_{d'n}^k \mathbf{w}_{d'n}^v \right)^2}, \\ &\leq \max_d \frac{2}{D} \sum_k \sum_v \left| \sum_n \phi_{dn}^k \mathbf{w}_{dn}^v \right|, \text{ due to Eq. 16} \\ &\leq \max_d \frac{2}{D} \sum_n \left(\sum_k \phi_{dn}^k \right) \left(\sum_v \mathbf{w}_{dn}^v \right) \leq \frac{2N}{D}, \end{aligned} \quad (22)$$

since $0 \leq \phi_{dn}^k \leq 1$, $\sum_k \phi_{dn}^k = 1$, $\sum_v \mathbf{w}_{dn}^v = 1$, and $\mathbf{w}_{dn}^v \in \{0, 1\}$. The resulting algorithm is summarised in Algorithm 3.

4.3 Experiments using Wikipedia data

We downloaded a random $D = 400,000$ documents from Wikipedia. We then tested our VIPS algorithm on the Wikipedia dataset with three different values of total privacy budget $\epsilon = \{1.2, 2.3, 4.6\}$ by varying values of σ , using different mini-batch sizes $S = \{10, 100, 200\}$, until the algorithm sees up to 160,000 documents. We assumed there are 100 topics, and we used a vocabulary set of approximately 8000 terms.

To compare our method with moments accountant, we used a baseline method using the *strong composition* (Theorem 3.20 of Dwork and Roth (2014)), resulting from the max divergence of the privacy loss random variable being bounded by a total budget including a slack variable δ , yields $(J\epsilon'(e^{\epsilon'} - 1) + \sqrt{2J \log(1/\delta'')}\epsilon', \delta'' + J\delta')$ -DP.

As our evaluation metric, we compute an upper bound on the perplexity on held-out documents. Perplexity is an information-theoretic measure of the predictive performance of probabilistic models which is commonly used in the context of language modeling (?). The perplexity of a probabilistic model $p_{model}(x)$ on a test set of N data points x_i (e.g. words in a corpus) is defined as

$$b^{-\frac{1}{N} \sum_{i=1}^N \log_b p_{model}(x_i)}, \quad (23)$$

where b is generally either 2 or e , corresponding to a measurement based on either bits or nats, respectively. We can interpret $-\frac{1}{N} \sum_{i=1}^N \log_b p_{model}(x_i)$ as the cross-entropy between

Algorithm 3 VIPS for LDA

Input: Data \mathcal{D} . Define D (documents), V (vocabulary), K (number of topics).
 Define $\rho_t = (\tau_0 + t)^{-\kappa}$, mini-batch size S , hyperparameters α, η , and σ^2

Output: Privatised expected natural parameters $\langle \log \beta_k \rangle_{q(\beta_k)}$ and sufficient statistics $\tilde{\mathbf{s}}$.
 Compute the sensitivity of the expected sufficient statistics given in Eq. 22.

for $t = 1, \dots, J$ **do**

(1) E-step: Given expected natural parameters $\langle \log \beta_k \rangle_{q(\beta_k)}$

for $d = 1, \dots, S$ **do**

 Compute $q(\mathbf{z}_{dn}^k)$ parameterised by $\phi_{dn}^k \propto \exp(\langle \log \beta_k \rangle_{q(\beta_k)}^\top \mathbf{w}_{dn} + \langle \log \theta_d^k \rangle_{q(\theta_d)})$.

 Compute $q(\theta_d)$ parameterised by $\gamma_d = \alpha \mathbf{1}_K + \sum_{n=1}^N \langle \mathbf{z}_{dn} \rangle_{q(\mathbf{z}_{dn})}$.

end for

 Output the perturbed expected sufficient statistics $\tilde{\mathbf{s}}_k^v = \frac{1}{S} \sum_d \sum_n \phi_{dn}^k \mathbf{w}_{dn}^v + Y_k^v$, where Y_k^v is Gaussian noise given in Eq. 21.

 Update the log-moment functions

(2) M-step: Given perturbed expected sufficient statistics $\tilde{\mathbf{s}}_k$,

 Compute $q(\beta_k)$ parameterised by $\lambda_k^{(t)} = \eta \mathbf{1}_V + D \tilde{\mathbf{s}}_k$.

 Set $\lambda^{(t)} \leftarrow (1 - \rho_t) \lambda^{(t-1)} + \rho_t \lambda^{(t)}$.

 Output expected natural parameters $\langle \log \beta_k \rangle_{q(\beta_k)}$.

end for

the model and the empirical distribution. This is the expected number of bits (nats) needed to encode a data point from the empirical data distribution (i.e. a word in our case), under an optimal code based on the model. Perplexity is b to the power of the cross entropy, which converts the number of bits (nats) in the encoding to the number of possible values in an encoding of that length (supposing the cross entropy were integer valued). Thus, perplexity measures the *effective vocabulary size when using the model to encode the data*, which is understood as a reflection of how confused (i.e. “perplexed”) the model is. In our case, p_{model} is the posterior predictive distribution under our variational approximation to the posterior, which is intractable to compute. Following Hoffman et al. (2010), we approximate perplexity based on the learned variational distribution, measured in nats, by plugging the ELBO into Equation 23, which results in an upper bound:

$$\text{perplexity}(\mathcal{D}^{\text{test}}, \lambda) \leq \exp \left[- \left(\sum_i \langle \log p(\mathbf{n}^{\text{test}}, \theta_i, \mathbf{z}_i | \lambda) \rangle_{q(\theta_i, \mathbf{z}_i)} - \langle \log q(\theta, \mathbf{z}) \rangle_{q(\theta, \mathbf{z})} \right) / \sum_{i,n} \mathbf{n}_{i,n}^{\text{test}} \right],$$

where $\mathbf{n}_i^{\text{test}}$ is a vector of word counts for the i th document, $\mathbf{n}^{\text{test}} = \{\mathbf{n}_i^{\text{test}}\}_{i=1}^I$. In the above, we use the λ that was calculated during training. We compute the posteriors over \mathbf{z} and θ by performing the first step in our algorithm using the test data and the perturbed sufficient statistics we obtain during training. We used the python implementation by the authors of (Hoffman et al., 2010) in our experiments. The per-word-perplexity is shown in Fig. 2.

In Table 1, we show the top 10 words in terms of assigned probabilities under a chosen topic in each method. We show 3 topics as examples. Non-private LDA results in the most coherent words among all the methods. For the private LDA models with a total privacy

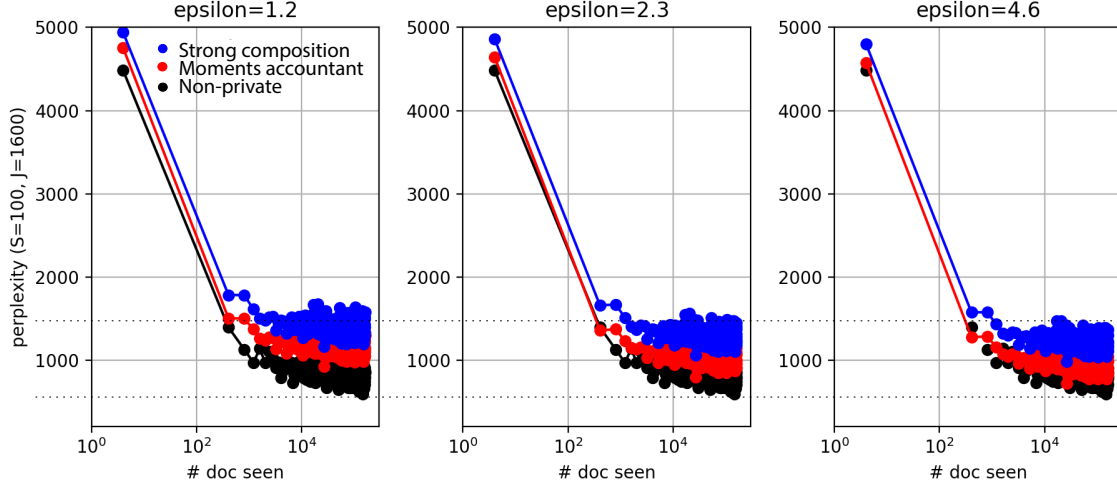


Figure 2: Per-word-perplexity as a function of the number of documents seen (up to 160,000). Data: $D = 400,000$ documents randomly selected from Wikipedia. We obtained the total privacy loss, $\epsilon_{tot} \in \{1.2, 2.3, 4.6\}$ by varying values of σ , given a mini-batch size $S = 100$ and the number of iterations $J = 1600$. Here, we fixed the total tolerance to $\delta_{tot} = 10^{-4}$. The non-private LDA (black trace) achieves the lowest perplexity. For the same level of total privacy loss, the moments accountant composition (red trace) performs better than the strong composition (blue trace). Regardless of which composition method to use, smaller ϵ yields a worse perplexity, due to a higher noise variance.

budget $\epsilon = 2.3$ ($S = 100, J = 1600$), as we move from moments accountant to strong composition, the amount of noise added gets larger, and therefore the topics become less coherent.

Using the same data, we then tested how perplexity changes as we change the mini-batch sizes. As shown in Fig. 3, it is more beneficial when the mini-batch size is small, since it effectively decreases the amount of noise to add. The moments composition results in a better accuracy than the strong composition.

5. VIPS for non-CE family

Under non-CE family models, the complete-data likelihood typically has the following form:

$$p(\mathcal{D}_n, \mathbf{l}_n | \mathbf{m}) \propto \exp(-h(\mathbf{m}, \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n))) , \quad (24)$$

which includes some function $h(\mathbf{m}, \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n))$ that cannot be split into two functions, where one is a function of only \mathbf{m} and the other is a function of only $\mathbf{s}(\mathcal{D}_n, \mathbf{l}_n)$. Hence, we cannot apply the general VIPS framework we described in the previous section to this case.

However, when the models we consider have binomial likelihoods, for instance, under negative binomial regression, nonlinear mixed-effects models, spatial models for count data, and logistic regression, we can bring the non-CE models to the CE family by adopting the Pólya-Gamma data augmentation strategy introduced by Polson et al. (2013).

Table 1: Posterior topics from private ($\epsilon = 2.3$) and non-private LDA

Non-private		Moments Acc		Strong Comp	
topic 74:		topic 74:		topic 74:	
character	0.1034	united	0.0452	united	0.0244
james	0.0835	states	0.0247	song	0.0204
thomas	0.0713	county	0.0203	name	0.0139
tom	0.0623	name	0.0171	new	0.0131
series	0.0615	new	0.0165	states	0.0130
name	0.0305	refer	0.0125	refer	0.0127
main	0.0191	american	0.0123	series	0.0124
city	0.0161	james	0.0122	county	0.0119
gordon	0.0131	thomas	0.0120	american	0.0102
people	0.0122	south	0.0110	george	0.0094
topic 75:		topic 75:		topic 75:	
state	0.0208	state	0.0246	priest	0.0002
history	0.0189	government	0.0123	knees	0.0002
government	0.0147	states	0.0121	sympathies	0.0002
states	0.0111	law	0.0100	egypt	0.0002
law	0.0085	international	0.0076	email	0.0002
political	0.0078	country	0.0071	supplies	0.0002
national	0.0075	united	0.0065	pilot	0.0002
university	0.0073	population	0.0064	serene	0.0002
population	0.0072	political	0.0063	rocky	0.0002
century	0.0071	people	0.0062	sex	0.0002
topic 76:		topic 76:		topic 76:	
roman	0.1119	title	0.0274	knight	0.0041
chinese	0.0511	order	0.0123	sir	0.0015
empire	0.0384	rank	0.0095	knights	0.0015
china	0.0372	officer	0.0067	grand	0.0008
emperor	0.0350	knight	0.0066	sire	0.0006
ancient	0.0301	titles	0.0065	commander	0.0006
rome	0.0241	sir	0.0062	honours	0.0005
julian	0.0220	grand	0.0061	maam	0.0004
imperial	0.0195	royal	0.0059	addressed	0.0003
han	0.0175	chief	0.0054	accompanying	0.0003

Pólya-Gamma data augmentation Pólya-Gamma data augmentation introduces an auxiliary variable that is Pólya-Gamma distributed per datapoint, such that the log-odds can be written as mixtures of Gaussians with respect to a Pólya-Gamma distribution, as

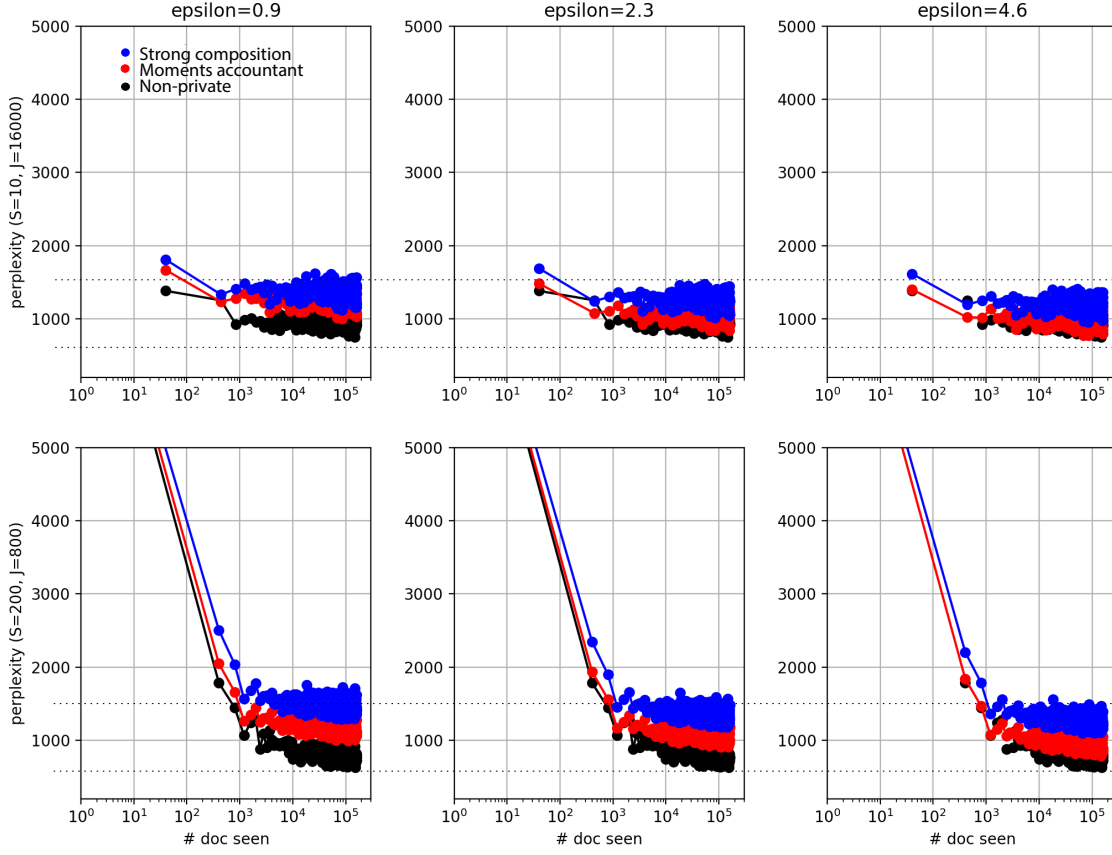


Figure 3: Per-word-perplexity with different mini-batch sizes $S \in \{10, 100, 200\}$. **Top:** mini-batch size $S = 10$ and total number of iterations $J = 16000$. **Bottom:** mini-batch size $S = 200$ and total number of iterations $J = 800$. In the private LDA, smaller mini-batch size achieves lower perplexity. Regardless of the mini-batch size, the moments accountant composition (red trace) achieves a lower perplexity than the strong composition (blue trace).

stated in Theorem 1 in (Polson et al., 2013):

$$\frac{\exp(\psi_n)^{y_n}}{(1 + \exp(\psi_n))^b} = 2^{-b} \exp((y_n - \frac{b}{2})\psi_n) \int_0^\infty \exp(-\frac{\xi_n \psi_n^2}{2}) p(\xi_n) d\xi_n \quad (25)$$

where ψ_n is a linear function in model parameters \mathbf{m} , y_n is the n th observation, and ξ_n is a Pólya-Gamma random variable, $\xi_n \sim \text{PG}(b, 0)$ where $b > 0$. For example, $\psi_n = \mathbf{m}^\top \mathbf{x}_n$ for models without latent variables and \mathbf{x}_n is the n th input vector, or $\psi_n = \mathbf{m}^\top \mathbf{l}_n$ for models with latent variables in unsupervised learning. Note that b is set depending on which binomial model one uses. For example, $b = 1$ in logistic regression. When $\psi_n = \mathbf{l}_n^\top \mathbf{m}$ and $b = 1$, we express the likelihood as:

$$p(\mathcal{D}_n | \mathbf{l}_n, \mathbf{m}) = 2^{-1} \exp((y_n - \frac{1}{2})\mathbf{l}_n^\top \mathbf{m}) \int_0^\infty \exp(-\frac{1}{2}\xi_n \mathbf{l}_n^\top \mathbf{m} \mathbf{m}^\top \mathbf{l}_n) p(\xi_n) d\xi_n. \quad (26)$$

By introducing a variational posterior over the auxiliary variables, we introduce a new objective function (See Appendix A for derivation)

$$\begin{aligned}
 \mathcal{L}_n(q(\mathbf{m}), q(\mathbf{l}_n), q(\xi_n)) &= \int q(\mathbf{m})q(\mathbf{l}_n)q(\xi_n) \log \frac{p(\mathcal{D}_n|\mathbf{l}_n, \xi_n, \mathbf{m})p(\mathbf{l}_n)p(\xi_n)p(\mathbf{m})}{q(\mathbf{m})q(\mathbf{l}_n)q(\xi_n)}, \\
 &= -\log 2 + (y_n - \frac{1}{2})\langle \mathbf{l}_n \rangle_{q(\mathbf{l}_n)}^\top \langle \mathbf{m} \rangle_{q(\mathbf{m})} - \frac{1}{2}\langle \xi_n \rangle_{q(\xi_n)} \langle \mathbf{l}_n^\top \mathbf{m} \mathbf{m}^\top \mathbf{l}_n \rangle_{q(\mathbf{l}_n)q(\mathbf{m})}, \\
 &\quad - \text{D}_{KL}(q(\xi_n)||p(\xi_n)) - \text{D}_{KL}(q(\mathbf{m})||p(\mathbf{m})) - \text{D}_{KL}(q(\mathbf{l}_n)||p(\mathbf{l}_n)).
 \end{aligned} \tag{27}$$

The first derivative of the lower lower bound with respect to $q(\xi_n)$ gives us a closed form update rule

$$\frac{\partial}{\partial q(\xi_n)} \mathcal{L}_n(q(\mathbf{m}), q(\mathbf{l}_n), q(\xi_n)) = 0, \quad \mapsto q(\xi_n) \propto \text{PG}(1, \sqrt{\langle \mathbf{l}_n^\top \mathbf{m} \mathbf{m}^\top \mathbf{l}_n \rangle_{q(\mathbf{l}_n)q(\mathbf{m})}}). \tag{28}$$

The rest updates for $q(\mathbf{l}_n)q(\mathbf{m})$ follow the standard updates under the conjugate exponential family distributions, since the lower bound to the conditional likelihood term includes only linear and quadratic terms both in \mathbf{l}_n and \mathbf{m} . By introducing the auxiliary variables, the complete-data likelihood conditioned on ξ_n (with some prior on \mathbf{l}_n) now has the form of

$$\begin{aligned}
 p(\mathcal{D}_n, \mathbf{l}_n|\mathbf{m}, \xi_n) &\propto p(\mathcal{D}_n|\mathbf{l}_n, \mathbf{m}, \xi_n) p(\mathbf{l}_n), \\
 &\propto \exp(\mathbf{n}(\mathbf{m})^\top \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n, \xi_n)) p(\mathbf{l}_n),
 \end{aligned} \tag{29}$$

which consists of natural parameters and sufficient statistics given by

$$\mathbf{n}(\mathbf{m}) = \begin{bmatrix} \mathbf{m} \\ \text{vec}(-\frac{1}{2}\mathbf{m}\mathbf{m}^\top) \end{bmatrix}, \quad \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n, \xi_n) = \begin{bmatrix} (y_n - \frac{1}{2})\mathbf{l}_n \\ \text{vec}(\xi_n \mathbf{l}_n \mathbf{l}_n^\top) \end{bmatrix}. \tag{30}$$

Note that now not only the latent and observed variables but also the new variables ξ_i form the complete-data sufficient statistics. The resulting variational Bayes algorithm for models with binomial likelihoods is given by

(a) Given the expected natural parameters $\bar{\mathbf{n}}$, the E-step yields:

$$\begin{aligned}
 q(\mathbf{l}, \xi) &= \prod_{n=1}^N q(\mathbf{l}_n)q(\xi_n) \propto p(\xi) \exp \left[\int d\mathbf{m} q(\mathbf{m}) \log p(\mathcal{D}, \mathbf{l}|\mathbf{m}, \xi) \right], \\
 &\propto p(\xi)p(\mathbf{l}) \prod_{n=1}^N \exp(\bar{\mathbf{n}}^\top \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n, \xi_n)),
 \end{aligned}$$

$$\text{where } q(\xi_n) = \text{PG}(1, \sqrt{\langle \mathbf{l}_i^\top \mathbf{m} \mathbf{m}^\top \mathbf{l}_n \rangle_{q(\mathbf{l}_n, \mathbf{m})}}), \text{ and } p(\xi_n) = \text{PG}(1, 0) \tag{31}$$

$$q(\mathbf{l}_n) \propto p(\mathbf{l}_n) \exp(\bar{\mathbf{n}}^\top \langle \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n, \xi_n) \rangle_{q(\xi_n)}). \tag{32}$$

Using $q(\mathbf{l})q(\xi)$, it outputs $\bar{\mathbf{s}}(\mathcal{D}) = \frac{1}{N} \sum_{n=1}^N \langle \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n, \xi_n) \rangle_{q(\mathbf{l}_n)q(\xi_n)}$.

(b) Given the expected sufficient statistics $\bar{\mathbf{s}}$, the M-step yields:

$$\begin{aligned}
 q(\mathbf{m}) &\propto p(\mathbf{m}) \exp \left[\int d\mathbf{l} d\xi q(\mathbf{l})q(\xi) \log p(\mathcal{D}, \mathbf{l}|\mathbf{m}, \xi) \right], \\
 &\propto \exp(\mathbf{n}(\mathbf{m})^\top \tilde{\boldsymbol{\nu}}), \text{ where } \tilde{\boldsymbol{\nu}} = \boldsymbol{\nu} + N\bar{\mathbf{s}}(\mathcal{D}).
 \end{aligned} \tag{33}$$

Using $q(\mathbf{m})$, it outputs the expected natural parameters $\bar{\mathbf{n}} := \langle \mathbf{n}(\mathbf{m}) \rangle_{q(\mathbf{m})}$.

Similar to the VIPS algorithm for the CE family, perturbing the expected sufficient statistics $\bar{\mathbf{s}}(\mathcal{D})$ in the E-step suffices for privatising all the outputs of the algorithm. Algorithm 4 summarizes private stochastic variational Bayes algorithm for non-CE family with binomial likelihoods.

Algorithm 4 $(\epsilon_{tot}, \delta_{tot})$ -DP VIPS for non-CE family with binomial likelihoods

Input: Data \mathcal{D} . Define $\rho_t = (\tau_0 + t)^{-\kappa}$, mini-batch size S , maximum iterations J , and σ .

Output: Perturb expected natural parameters $\tilde{\mathbf{n}}$ and expected sufficient stats $\tilde{\mathbf{s}}$.

Compute the L2-sensitivity Δ of the expected sufficient statistics.

for $t = 1, \dots, J$ **do**

(1) **E-step:** Given expected natural parameters $\bar{\mathbf{n}}$, compute $q(\mathbf{l}_n)q(\xi_n)$ for $n = 1, \dots, S$. Perturb each coordinate of $\bar{\mathbf{s}} = \frac{1}{S} \sum_{n=1}^S \langle \mathbf{s}(\mathcal{D}_n, \mathbf{l}_n) \rangle_{q(\mathbf{l}_n)q(\xi_n)}$ by adding noise drawn from $\mathcal{N}(0, \sigma^2 \Delta^2)$. Output $\tilde{\mathbf{s}}$.

Update the moments function.

(2) **M-step:** Given $\tilde{\mathbf{s}}$, compute $q(\mathbf{m})$ by $\tilde{\boldsymbol{\nu}}^{(t)} = \boldsymbol{\nu} + N\tilde{\mathbf{s}}$. Set $\tilde{\boldsymbol{\nu}}^{(t)} \leftarrow (1 - \rho_t)\tilde{\boldsymbol{\nu}}^{(t-1)} + \rho_t\tilde{\boldsymbol{\nu}}^{(t)}$.

Output the expected natural parameters $\tilde{\mathbf{n}} = \langle \mathbf{m} \rangle_{q(\mathbf{m})}$.

end for

As a side note, in order to use the variational lower bound as a stopping criterion, one needs to draw samples from the Pólya-Gamma posterior to numerically calculate the lower bound given in Eq. 27. This might be a problem if one does not have access to the Pólya-Gamma posterior, since our algorithm only outputs the perturbed expected sufficient statistics in the E-step (not the Pólya-Gamma posterior itself). However, one could use other stopping criteria, which do not require sampling from the Pólya-Gamma posterior, e.g., calculating the prediction accuracy in the classification case.

6. VIPS for Bayesian logistic regression

We present an example of non-CE family, Bayesian logistic regression, and illustrate how to employ the VIPS framework given in Algorithm 4 in such a case.

6.1 Model specifics

Under the logistic regression model with the Gaussian prior on the weights $\mathbf{m} \in \mathbb{R}^d$,

$$p(y_n = 1 | \mathbf{x}_n, \mathbf{m}) = \sigma(\mathbf{m}^\top \mathbf{x}_n), \quad p(\mathbf{m} | \alpha) = \mathcal{N}(\mathbf{m} | 0, \alpha^{-1} I), \quad p(\alpha) = \text{Gam}(a_0, b_0), \quad (34)$$

where $\sigma(\mathbf{m}^\top \mathbf{x}_n) = 1/(1 + \exp(-\mathbf{m}^\top \mathbf{x}_n))$, the n th input is $\mathbf{x}_n \in \mathbb{R}^d$, and the n th output is $y_n \in \{0, 1\}$. In logistic regression, there are no latent variables. Hence, the complete-data likelihood coincides the data likelihood,

$$p(y_n | \mathbf{x}_n, \mathbf{m}) = \frac{\exp(\psi_n)^{y_n}}{1 + \exp(\psi_n)}, \quad (35)$$

where $\psi_n = \mathbf{x}_n^\top \mathbf{m}$. Since the likelihood is not in the CE family. We use the Pólya-Gamma data augmentation trick to re-write it as

$$p(y_n | \mathbf{x}_n, \xi_n, \mathbf{m}) \propto \exp((y_n - \frac{1}{2})\mathbf{x}_n^\top \mathbf{m}) \exp(-\frac{1}{2}\xi_n \mathbf{x}_n^\top \mathbf{m} \mathbf{m}^\top \mathbf{x}_n), \quad (36)$$

Algorithm 5 VIPS for Bayesian logistic regression

Input: Data \mathcal{D} . Define $\rho_t = (\tau_0 + t)^{-\kappa}$, mini-batch size S , and maximum iterations J

Output: Privatised expected natural parameters $\tilde{\mathbf{n}}$ and expected sufficient statistics $\tilde{\mathbf{s}}$

Using the sensitivity of the expected sufficient statistics given in Eq. 48 and Eq. 50,

for $t = 1, \dots, J$ **do**

(1) **E-step:** Given expected natural parameters $\bar{\mathbf{n}}$, compute $q(\xi_n)$ for $n = 1, \dots, S$.

Perturb $\bar{\mathbf{s}} = \frac{1}{S} \sum_{n=1}^S \langle \mathbf{s}(\mathcal{D}_n, \xi_n) \rangle_{q(\xi_n)}$ by Eq. 47 and Eq. 49, and output $\tilde{\mathbf{s}}$.

Update the moments function.

(2) **M-step:** Given $\tilde{\mathbf{s}}$, compute $q(\mathbf{m})$ by $\tilde{\boldsymbol{\nu}}^{(t)} = \boldsymbol{\nu} + N\tilde{\mathbf{s}}$. Set $\tilde{\boldsymbol{\nu}}^{(t)} \leftarrow (1 - \rho_t)\tilde{\boldsymbol{\nu}}^{(t-1)} + \rho_t\tilde{\boldsymbol{\nu}}^{(t)}$.

Using $\tilde{\boldsymbol{\nu}}^{(t)}$, update $q(\alpha)$ by Eq. 44, and output $\tilde{\mathbf{n}} = \langle \mathbf{m} \rangle_{q(\mathbf{m})}$.

end for

and the data likelihood conditioned on ξ_n is

$$p(y_n | \mathbf{x}_n, \mathbf{m}, \xi_n) \propto \exp(\mathbf{n}(\mathbf{m})^\top \mathbf{s}(\mathcal{D}_n, \xi_n)), \quad (37)$$

where the natural parameters and sufficient statistics are given by

$$\mathbf{n}(\mathbf{m}) = \begin{bmatrix} \mathbf{m} \\ \text{vec}(-\frac{1}{2}\mathbf{m}\mathbf{m}^\top) \end{bmatrix}, \quad \mathbf{s}(\mathcal{D}_n, \xi_n) = \begin{bmatrix} (y_n - \frac{1}{2})\mathbf{x}_n \\ \text{vec}(\xi_n \mathbf{x}_n \mathbf{x}_n^\top) \end{bmatrix}. \quad (38)$$

Variational Bayes in Bayesian logistic regression Using the likelihood given in Eq. 29, we compute the posterior distribution over $\mathbf{m}, \alpha, \boldsymbol{\xi}$ by maximising the following variational lower bound due to Eq. 27

$$\begin{aligned} \mathcal{L}(q(\mathbf{m}), q(\boldsymbol{\xi}), q(\alpha)) &= \sum_{n=1}^N \left[-\log 2 + (y_n - \frac{1}{2})\mathbf{x}_n^\top \langle \mathbf{m} \rangle_{q(\mathbf{m})} - \frac{1}{2} \langle \xi_n \rangle_{q(\xi_n)} \mathbf{x}_n^\top \langle \mathbf{m}\mathbf{m}^\top \rangle_{q(\mathbf{m})} \mathbf{x}_n \right], \\ &\quad - \sum_{n=1}^N \text{D}_{KL}(q(\xi_n) || p(\xi_n)) - \text{D}_{KL}(q(\mathbf{m}) || p(\mathbf{m})) - \text{D}_{KL}(q(\alpha) || p(\alpha)). \end{aligned}$$

In the E-step, we update

$$q(\boldsymbol{\xi}) \propto p(\boldsymbol{\xi}) \prod_{n=1}^N \exp(\bar{\mathbf{n}}(\mathbf{m})^\top \mathbf{s}(\mathcal{D}_n, \xi_n)), \quad (39)$$

$$= \prod_{n=1}^N q(\xi_n), \text{ where } q(\xi_n) = \text{PG}(1, \sqrt{\mathbf{x}_n^\top \langle \mathbf{m}\mathbf{m}^\top \rangle_{q(\mathbf{m})} \mathbf{x}_n}). \quad (40)$$

Using $q(\boldsymbol{\xi})$, we compute the expected sufficient statistics

$$\bar{\mathbf{s}} = \frac{1}{N} \sum_{n=1}^N \bar{\mathbf{s}}(\mathcal{D}_n), \text{ where } \bar{\mathbf{s}}(\mathcal{D}_n) = \begin{bmatrix} \bar{\mathbf{s}}_1(\mathcal{D}_n) \\ \bar{\mathbf{s}}_2(\mathcal{D}_n) \end{bmatrix} = \begin{bmatrix} \frac{1}{N} (y_n - \frac{1}{2}) \mathbf{x}_n \\ \frac{1}{N} \text{vec}(\langle \xi_n \rangle_{q(\xi_n)} \mathbf{x}_n \mathbf{x}_n^\top) \end{bmatrix}. \quad (41)$$

In the M-step, we compute $q(\mathbf{m})$ and $q(\alpha)$ by

$$q(\mathbf{m}) \propto p(\mathcal{D} | \mathbf{m}, \langle \boldsymbol{\xi} \rangle) p(\mathbf{m} | \langle \alpha \rangle) \propto \exp(\mathbf{n}(\mathbf{m})^\top \tilde{\boldsymbol{\nu}}) = \mathcal{N}(\mathbf{m} | \boldsymbol{\mu}_m, \Sigma_m), \quad (42)$$

$$q(\alpha) \propto p(\mathbf{m} | \alpha) p(\alpha | a_0, b_0) = \text{Gamma}(a_N, b_N), \quad (43)$$

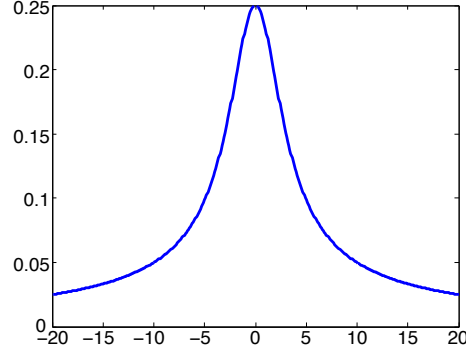


Figure 4: Posterior mean of each PG variable $\langle \xi_i \rangle$ as a function of $\sqrt{\mathbf{x}_i^\top \langle \mathbf{m} \mathbf{m}^\top \rangle \mathbf{x}_i}$. The maximum value of $\langle \xi_i \rangle$ is 0.25 when $\sqrt{\mathbf{x}_n^\top \langle \mathbf{m} \mathbf{m}^\top \rangle \mathbf{x}_n} = 0$,

where $\tilde{\boldsymbol{\nu}} = \boldsymbol{\nu} + N\bar{\mathbf{s}}$, $\boldsymbol{\nu} = [\mathbf{0}_d, \langle \alpha \rangle_{q(\alpha)} I_d]$, and

$$a_N = a_0 + \frac{d}{2}, \quad b_N = b_0 + \frac{1}{2}(\boldsymbol{\mu}_m^\top \boldsymbol{\mu}_m + \text{tr}(\Sigma_m)). \quad (44)$$

Mapping from $\tilde{\boldsymbol{\nu}}$ to $(\boldsymbol{\mu}_m, \Sigma_m)$ is deterministic, as below, where $\bar{\mathbf{s}}_1 = \sum_{n=1}^N \bar{\mathbf{s}}_1(\mathcal{D}_n)$ and $\bar{\mathbf{s}}_2 = \sum_{n=1}^N \bar{\mathbf{s}}_2(\mathcal{D}_n)$,

$$\tilde{\boldsymbol{\nu}} = \begin{bmatrix} N\bar{\mathbf{s}}_1 + \mathbf{0}_d \\ N\bar{\mathbf{s}}_2 + \langle \alpha \rangle_{q(\alpha)} I_d \end{bmatrix} = \begin{bmatrix} \Sigma_m^{-1} \boldsymbol{\mu}_m \\ \Sigma_m^{-1} \end{bmatrix}. \quad (45)$$

Using $q(\mathbf{m})$, we compute expected natural parameters

$$\langle \mathbf{n}(\mathbf{m}) \rangle_{q(\mathbf{m})} = \begin{bmatrix} \langle \mathbf{m} \rangle_{q(\mathbf{m})} \\ \text{vec}(-\frac{1}{2} \langle \mathbf{m} \mathbf{m}^\top \rangle_{q(\mathbf{m})}) \end{bmatrix} = \begin{bmatrix} \boldsymbol{\mu}_m \\ \text{vec}(-\frac{1}{2}(\Sigma_m + \boldsymbol{\mu}_m \boldsymbol{\mu}_m^\top)) \end{bmatrix}. \quad (46)$$

6.2 VIPS for Bayesian logistic regression

Following the general framework of VIPS, we perturb the expected sufficient statistics. For perturbing $\bar{\mathbf{s}}_1$, we add Gaussian noise to each coordinate,

$$\tilde{\bar{\mathbf{s}}}_1 = \bar{\mathbf{s}}_1 + Y_{1,\dots,d}, \text{ where } Y_i \sim i.i.d. \mathcal{N}(0, \sigma^2 \Delta \bar{\mathbf{s}}_1^2) \quad (47)$$

where the sensitivity $\Delta \bar{\mathbf{s}}_1$ is given by

$$\Delta \bar{\mathbf{s}}_1 = \max_{|\mathcal{D} \setminus \mathcal{D}'|=1} |\bar{\mathbf{s}}_1(\mathcal{D}) - \bar{\mathbf{s}}_1(\mathcal{D}')|_2 \leq \max_{\mathbf{x}_n, y_n} \frac{2}{N} |(y_n - \frac{1}{2})| |\mathbf{x}_n|_2 \leq \frac{2}{N}, \quad (48)$$

due to Eq. 16 and the assumption that the dataset is preprocessed such that any input has a maximum L2-norm of 1.

For perturbing $\bar{\mathbf{s}}_2$, we follow the *Analyze Gauss* (AG) algorithm (Dwork et al.). We first draw Gaussian random variables $\mathbf{z} \sim \mathcal{N}(0, \sigma^2(\Delta \bar{\mathbf{s}}_2)^2 I)$. Using \mathbf{z} , we construct a upper triangular matrix (including diagonal), then copy the upper part to the lower part so that

the resulting matrix Z becomes symmetric. Then, we add this noisy matrix to the covariance matrix

$$\tilde{\bar{\mathbf{s}}}_2 = \bar{\mathbf{s}}_2 + Z. \quad (49)$$

The perturbed covariance might not be positive definite. In such case, we project the negative eigenvalues to some value near zero to maintain positive definiteness of the covariance matrix. The sensitivity of $\bar{\mathbf{s}}_2$ in Frobenius norm is given by

$$\Delta \bar{\mathbf{s}}_2 = \max_{\mathbf{x}_n, q(\xi_n)} \frac{2}{N} |\langle \xi_n \rangle_{q(\xi_n)} \text{vec}(\mathbf{x}_n \mathbf{x}_n^\top)|_2 \leq \frac{1}{2N}, \quad (50)$$

due to Eq. 16 and the fact that the mean of a PG variable $\langle \xi_n \rangle$ is given by

$$\int_0^\infty \xi_n \text{PG}(\xi_n | 1, \sqrt{\mathbf{x}_n^\top \langle \mathbf{m} \mathbf{m}^\top \rangle \mathbf{x}_n}) d\xi_n = \frac{1}{2\sqrt{\mathbf{x}_n^\top \langle \mathbf{m} \mathbf{m}^\top \rangle \mathbf{x}_n}} \tanh\left(\frac{\sqrt{\mathbf{x}_n^\top \langle \mathbf{m} \mathbf{m}^\top \rangle \mathbf{x}_n}}{2}\right).$$

As shown in Fig. 4, the maximum value is 0.25.

Since there are two perturbations (one for $\bar{\mathbf{s}}_1$ and the other for $\bar{\mathbf{s}}_2$) in each iteration, we plug in $2J$ instead of the maximum iteration number J , when calculating the total privacy loss using the moments accountant. Our VIPS algorithm for Bayesian logistic regression is given in Algorithm 5.

6.3 Experiments with Stroke data

We used the stroke dataset, which was first introduced by Letham et al. (2014) for predicting the occurrence of a stroke within a year after an atrial fibrillation diagnosis.⁶ There are $N = 12,586$ patients in this dataset, and among these patients, 1,786 (14%) had a stroke within a year of the atrial fibrillation diagnosis.

Following Letham et al. (2014), we also considered all drugs and all medical conditions of these patients as candidate predictors. A binary predictor variable is used for indicating the presence or absence of each drug or condition in the longitudinal record prior to the atrial fibrillation diagnosis. In addition, a pair of binary variables is used for indicating age and gender. These totalled $d = 4,146$ unique features for medications and conditions. We randomly shuffled the data to make 5 pairs of training and test sets. For each set, we used 10,069 patients' records as training data and the rest as test data.

Using this dataset, we ran our VIPS algorithm in batch mode, i.e., using the entire training data in each iteration, as opposed to using a small subset of data. We also ran the private and non-private Empirical Risk Minimisation (ERM) algorithms (Chaudhuri et al., 2011), in which we performed 5-fold cross-validation to set the regularisation constant given each training/test pair. As a performance measure, we calculated the *Area Under the Curve* (AUC) on each test data, given the posteriors over the latent and parameters in case of BLR and the parameter estimate in case of ERM. In Fig. 5, we show the mean and 1-standard deviation of the AUCs obtained by each method.

6. The authors extracted every patient in the MarketScan Medicaid Multi-State Database (MDCD) with a diagnosis of atrial fibrillation, one year of observation time prior to the diagnosis, and one year of observation time following the diagnosis.

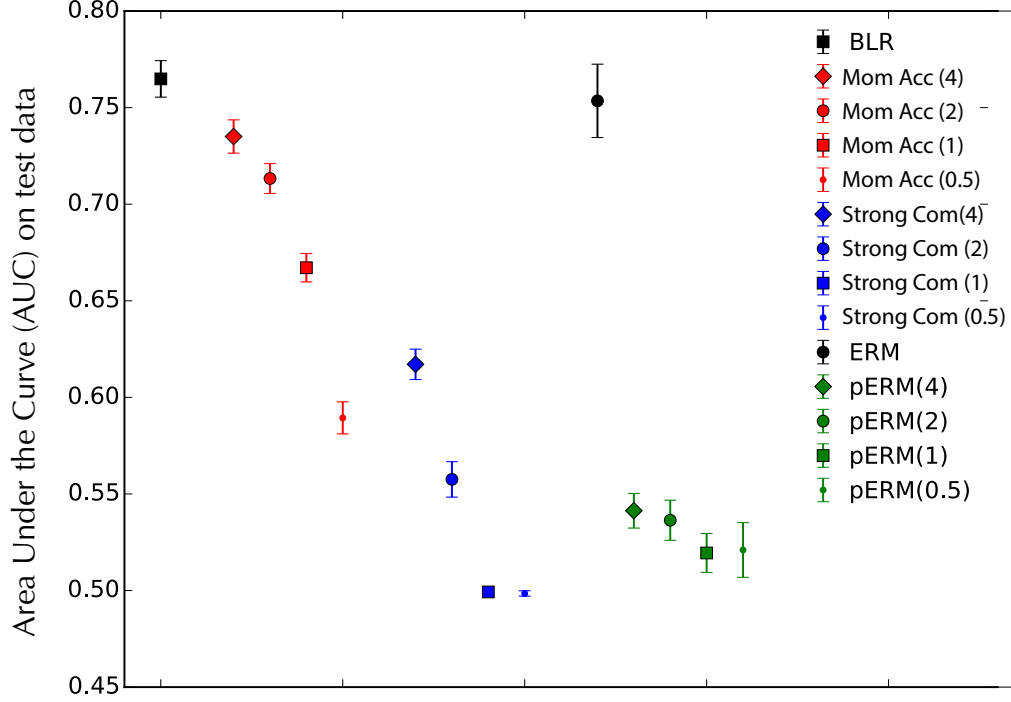


Figure 5: Stroke data. Comparison between our method and private/non-private ERM, for different $\epsilon_{tot} \in \{0.5, 1, 2, 4\}$. For the non-private methods, non-private BLR (black square marker) and ERM (black circle marker) achieved a similar AUC, which is higher than AUC obtained by any other private methods. Our method (red) under BLR with moments accountant with $\delta = 0.0001$ achieved the highest AUCs regardless of ϵ_{tot} among all the other private methods. The private version of ERM (objective perturbation, green) performed worse than BRL with strong composition as well as BRL with moments accountant. While directly comparing these to the private ERM is not totally fair since the private ERM (pERM) is ϵ -DP while others are (ϵ, δ) -DP, we show the difference between them in order to contrast the relative gain of our method compared to the existing method.


7. VIPS for sigmoid belief networks

As a last example model, we consider the Sigmoid Belief Network (SBN) model, which as first introduced in Neal (1992), for modeling N binary observations in terms of binary hidden variables and some parameters shown as Fig. 6. The complete-data likelihood for the n th observation and latent variables is given by

$$\begin{aligned} p(\mathcal{D}_n, \mathbf{l}_n | \mathbf{m}) &= p(\mathcal{D}_n | \mathbf{l}_n, \mathbf{m}) p(\mathbf{l}_n | \mathbf{m}), \\ &= \prod_{j=1}^J \sigma(\mathbf{w}_j^\top \mathbf{z}_n + c_j) \prod_{k=1}^K \sigma(b_k), \end{aligned} \quad (51)$$

$$= \prod_{j=1}^J \frac{[\exp(\mathbf{w}_j^\top \mathbf{z}_n + c_j)]^{y_{n,j}}}{1 + \exp(\mathbf{w}_j^\top \mathbf{z}_n + c_j)} \prod_{k=1}^K \frac{[\exp(b_k)]^{z_{n,k}}}{1 + \exp(b_k)}, \quad (52)$$

Figure 6: Schematic of the sigmoid belief network. A vector of binary observation $\mathbf{y} = [y_1, \dots, y_J]$ is a function of a vector of binary latent variables $\mathbf{z} = [z_1, \dots, z_K]$ and model parameters such that $p(y_j = 1 | \mathbf{z}, \boldsymbol{\theta}) = \sigma(\mathbf{w}_j^\top \mathbf{z} + c_j)$. The latent variables are also binary such that $p(z_k = 1 | \boldsymbol{\theta}) = \sigma(b_k)$, where $\boldsymbol{\theta} = \{\mathbf{w}, \mathbf{c}, \mathbf{b}\}$.

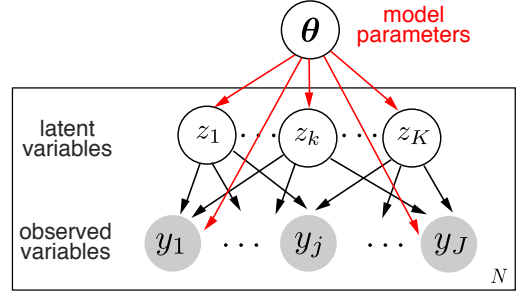

where we view the latent variables $\mathbf{l}_n = \mathbf{z}_n$ and model parameters $\mathbf{m} = \boldsymbol{\theta}$, and each datapoint $\mathcal{D}_n = \mathbf{y}_n$.

Thanks to the Pólya-Gamma data augmentation strategy, we can rewrite the complete-data likelihood from

$$p(\mathbf{z}_n, \mathbf{y}_n | \boldsymbol{\theta}) = \prod_{j=1}^J \frac{[\exp(\psi_{n,j})]^{y_{n,j}}}{1 + \exp(\psi_{n,j})} \prod_{k=1}^K \frac{[\exp(b_k)]^{z_{n,k}}}{1 + \exp(b_k)}, \quad (53)$$

where we denote $\psi_{n,j} = \mathbf{w}_j^\top \mathbf{z}_n + c_j$, to

$$p(\mathbf{y}_n, \mathbf{z}_n | \boldsymbol{\xi}_n^{(0)}, \boldsymbol{\xi}^{(1)}, \boldsymbol{\theta}) \propto \prod_{j=1}^J \exp((y_{n,j} - \frac{1}{2})\psi_{n,j}) \exp(-\frac{\xi_{n,j}^{(0)} \psi_{n,j}^2}{2}) \prod_{k=1}^K \exp((z_{n,k} - \frac{1}{2})b_k) \exp(-\frac{\xi_k^{(1)} b_k^2}{2})$$

where each element of vectors $\boldsymbol{\xi}_i^{(0)} \in \mathbb{R}^J$ and $\boldsymbol{\xi}^{(1)} \in \mathbb{R}^K$ is from $\text{PG}(1, 0)$.

Using the notations $\boldsymbol{\psi}_n \in \mathbb{R}^J$ where $\boldsymbol{\psi}_n = W\mathbf{z}_n + \mathbf{c}$, $W = [\mathbf{w}_1, \dots, \mathbf{w}_J]^\top \in \mathbb{R}^{J \times K}$, and $\mathbf{1}_J$ is a vector of J ones, we obtain

$$p(\mathbf{y}_n, \mathbf{z}_n | \boldsymbol{\xi}_n^{(0)}, \boldsymbol{\xi}^{(1)}, \boldsymbol{\theta}) \propto \exp \left[(\mathbf{y}_n - \frac{1}{2}\mathbf{1}_J)^\top \boldsymbol{\psi}_n - \frac{1}{2} \boldsymbol{\psi}_n^\top \text{diag}(\boldsymbol{\xi}_n^{(0)}) \boldsymbol{\psi}_n + (\mathbf{z}_n - \frac{1}{2}\mathbf{1}_K)^\top \mathbf{b} - \frac{1}{2} \mathbf{b}^\top \text{diag}(\boldsymbol{\xi}^{(1)}) \mathbf{b} \right].$$

The complete-data likelihood given the PG variables provides the exponential family form

$$p(\mathbf{y}_n, \mathbf{z}_n | \boldsymbol{\xi}_n^{(0)}, \boldsymbol{\xi}^{(1)}, \boldsymbol{\theta}) \quad (54)$$

$$\propto \exp \left[(\mathbf{y}_n - \frac{1}{2}\mathbf{1}_J)^\top (W\mathbf{z}_n + \mathbf{c}) - \frac{1}{2} (W\mathbf{z}_n + \mathbf{c})^\top \text{diag}(\boldsymbol{\xi}_n^{(0)}) (W\mathbf{z}_n + \mathbf{c}) + (\mathbf{z}_n - \frac{1}{2}\mathbf{1}_K)^\top \mathbf{b} - \frac{1}{2} \mathbf{b}^\top \text{diag}(\boldsymbol{\xi}^{(1)}) \mathbf{b} \right], \quad (55)$$

$$\propto \exp[\mathbf{n}(\boldsymbol{\theta})^\top \mathbf{s}(\mathbf{y}_n, \mathbf{z}_n, \boldsymbol{\xi}_n^{(0)}, \boldsymbol{\xi}^{(1)})], \quad (56)$$

where the natural parameters and sufficient statistics are given by

$$\mathbf{n}(\boldsymbol{\theta}) = \begin{bmatrix} \mathbf{b} \\ -\frac{1}{2} \text{vec}(\mathbf{b}\mathbf{b}^\top) \\ \mathbf{c} \\ -\frac{1}{2} \text{vec}(\mathbf{c}\mathbf{c}^\top) \\ -\frac{1}{2} \text{vec}(\text{diag}(\mathbf{c})W) \\ \text{vec}(W) \\ -\frac{1}{2} \text{vec}(\text{vec}(W^\top) \text{vec}(W^\top)^\top) \end{bmatrix}, \quad \mathbf{s}(\mathbf{y}_n, \mathbf{z}_n, \boldsymbol{\xi}_n^{(0)}, \boldsymbol{\xi}^{(1)}) = \begin{bmatrix} \mathbf{z}_n - \frac{1}{2}\mathbf{1}_K \\ \text{vec}(\text{diag}(\boldsymbol{\xi}^{(1)})) \\ \mathbf{y}_n - \frac{1}{2}\mathbf{1}_J \\ \text{vec}(\text{diag}(\boldsymbol{\xi}_n^{(0)})) \\ \text{vec}(\boldsymbol{\xi}_n^{(0)} \mathbf{z}_n^\top) \\ \text{vec}(\mathbf{z}_n (\mathbf{y}_n - \frac{1}{2}\mathbf{1}_J)^\top) \\ \text{vec}(\text{diag}(\boldsymbol{\xi}_n^{(0)}) \otimes (\mathbf{z}_n \mathbf{z}_n^\top)) \end{bmatrix}.$$

Algorithm 6 VIPS for sigmoid belief networks

Input: Data \mathcal{D} . Define $\rho_t = (\tau_0 + t)^{-\kappa}$, mini-batch size S , maximum iterations T , and σ

Output: Privatised expected natural parameters $\tilde{\mathbf{n}}$ and expected sufficient statistics $\tilde{\mathbf{s}}$

for $t = 1, \dots, T$ **do**

(1) E-step: Given expected natural parameters $\bar{\mathbf{n}}$, compute $q(\xi_n^{(0)})$ for $n = 1, \dots, S$.
 Given $\bar{\mathbf{n}}$, compute $q(\xi^{(1)})$ for $n = 1, \dots, S$.
 Given $\bar{\mathbf{n}}$, $q(\xi_n^{(0)})$ and $q(\xi^{(1)})$, compute $q(\mathbf{z}_n)$ for $n = 1, \dots, S$.
 Perturb $\bar{\mathbf{s}} = \frac{1}{S} \sum_{n=1}^S \langle \mathbf{s}(\mathcal{D}_n, \xi_n^{(0)}, \xi^{(1)}) \rangle_{q(\xi_n^{(0)})q(\xi^{(1)})q(\mathbf{z})}$ by Appendix B, and output $\tilde{\mathbf{s}}$.
 Update the moments function.

(2) M-step: Given $\tilde{\mathbf{s}}$, compute $q(\mathbf{m})$ by $\tilde{\boldsymbol{\nu}}^{(t)} = \boldsymbol{\nu} + N\tilde{\mathbf{s}}$. Set $\tilde{\boldsymbol{\nu}}^{(t)} \leftarrow (1 - \rho_t)\tilde{\boldsymbol{\nu}}^{(t-1)} + \rho_t\tilde{\boldsymbol{\nu}}^{(t)}$.
 Using $\tilde{\boldsymbol{\nu}}^{(t)}$, update variational posteriors for hyper-priors by Appendix C, and output $\tilde{\mathbf{n}} = \langle \mathbf{m} \rangle_{q(\mathbf{m})}$.

end for

Now the PG variables form a set of sufficient statistics, which is separated from the model parameters. Similar to logistic regression, in the E-step, we compute the posterior over ξ and \mathbf{z} , and output perturbed expected sufficient statistics. The closed-form update of the posteriors over the PG variables is simply

$$q(\xi_n^{(0)}) = \prod_{j=1}^J q(\xi_{n,j}^{(0)}) = \prod_{j=1}^J \text{PG}(1, \sqrt{\langle (\mathbf{w}_j^\top \mathbf{z}_n + c_j)^2 \rangle_{q(\boldsymbol{\theta})q(\mathbf{z}_n)}}), \quad (57)$$

$$q(\xi^{(1)}) = \prod_{k=1}^K q(\xi_k^{(1)}) = \prod_{k=1}^K \text{PG}(1, \sqrt{\langle b_k^2 \rangle_{q(\boldsymbol{\theta})}}). \quad (58)$$

The posterior over the latent variables is given by

$$q(\mathbf{z}) = \prod_{n=1}^N \prod_{k=1}^K q(z_{n,k}) = \text{Bern}(\sigma(d_{n,k})), \quad (59)$$

$$d_{n,k} = \langle b_k \rangle_{q(\boldsymbol{\theta})} + \langle \mathbf{w}_k^\top \mathbf{y}_n \rangle_{q(\boldsymbol{\theta})} - \frac{1}{2} \sum_{j=1}^J (\langle w_{j,k} \rangle_{q(\boldsymbol{\theta})} + \langle \xi_{n,j}^{(0)} \rangle_{q(\xi)} [2 \langle \psi_{n,j}^{\setminus k} w_{j,k} \rangle_{q(\boldsymbol{\theta})q(\mathbf{z})} + \langle w_{j,k}^2 \rangle_{q(\boldsymbol{\theta})}]),$$

$$\psi_{n,j}^{\setminus k} = \mathbf{w}_j^\top \mathbf{z}_n - w_{j,k} z_{n,k} + c_j. \quad (60)$$

Now, using $q(\mathbf{z})$ and $q(\xi)$, we compute the expected sufficient statistics,

$$\bar{\mathbf{s}}(\mathcal{D}) = \begin{bmatrix} \bar{\mathbf{s}}_1 = \frac{1}{N} \sum_{n=1}^N \mathbf{s}_1(\mathbf{y}_n) \\ \bar{\mathbf{s}}_2 = \frac{1}{N} \sum_{n=1}^N \mathbf{s}_2(\mathbf{y}_n) \\ \bar{\mathbf{s}}_3 = \frac{1}{N} \sum_{n=1}^N \mathbf{s}_3(\mathbf{y}_n) \\ \bar{\mathbf{s}}_4 = \frac{1}{N} \sum_{n=1}^N \mathbf{s}_4(\mathbf{y}_n) \\ \bar{\mathbf{s}}_5 = \frac{1}{N} \sum_{n=1}^N \mathbf{s}_5(\mathbf{y}_n) \\ \bar{\mathbf{s}}_6 = \frac{1}{N} \sum_{n=1}^N \mathbf{s}_6(\mathbf{y}_n) \\ \bar{\mathbf{s}}_7 = \frac{1}{N} \sum_{n=1}^N \mathbf{s}_7(\mathbf{y}_n) \end{bmatrix}, \quad \text{where} \quad \begin{bmatrix} \mathbf{s}_1(\mathbf{y}_n) \\ \mathbf{s}_2(\mathbf{y}_n) \\ \mathbf{s}_3(\mathbf{y}_n) \\ \mathbf{s}_4(\mathbf{y}_n) \\ \mathbf{s}_5(\mathbf{y}_n) \\ \mathbf{s}_6(\mathbf{y}_n) \\ \mathbf{s}_7(\mathbf{y}_n) \end{bmatrix} = \begin{bmatrix} \langle \mathbf{z}_n \rangle - \frac{1}{2} \mathbf{1}_K \\ \text{vec}(\text{diag}(\langle \xi^{(1)} \rangle)) \\ \mathbf{y}_n - \frac{1}{2} \mathbf{1}_J \\ \text{vec}(\text{diag}(\langle \xi^{(0)} \rangle)) \\ \text{vec}(\langle \xi^{(0)} \rangle \langle \mathbf{z}_n \rangle^\top) \\ \text{vec}(\langle \mathbf{z}_n \rangle (\mathbf{y}_n - \frac{1}{2} \mathbf{1}_J)^\top) \\ \text{vec}(\text{diag}(\langle \xi^{(0)} \rangle) \otimes (\langle \mathbf{z}_n \mathbf{z}_n^\top \rangle)) \end{bmatrix}.$$

Using the variational posterior distributions in the E-step, we perturb and output these sufficient statistics. See Appendix B for the sensitivities of each of these sufficient statistics.

Note that the fact that each of these sufficient statistics has a different sensitivity makes it difficult to directly use the composability theorem of the moments accountant method (Abadi et al., 2016). To resolve this, we modify the sufficient statistic vector into a new vector with a fixed sensitivity, and then apply the Gaussian mechanism. In this case, the log-moments are additive since the Gaussian noise added to the modified vector of sufficient statistics given each subsampled data is independent, and hence we are able to perform the usual moments accountant composition. Finally, we recover an estimate of the sufficient statistics from the perturbed modified vector.

In more detail, let us denote the sensitivities of each vector quantities by C_1, \dots, C_7 . Further, denote the moments accountant noise parameter by σ , and the subsampled data by \mathcal{D}_q with sampling rate q . We first scale down each sufficient statistic vector by its own sensitivity, so that the concatenated vector (denoted by \mathbf{s}' below)'s sensitivity becomes $\sqrt{7}$. Then, add the standard normal noise to the vectors with scaled standard deviation, $\sqrt{7}\sigma$. We then scale up each perturbed quantities by its own sensitivity, given as

$$\begin{bmatrix} \tilde{\mathbf{s}}_1(\mathcal{D}_q) \\ \tilde{\mathbf{s}}_2(\mathcal{D}_q) \\ \tilde{\mathbf{s}}_3(\mathcal{D}_q) \\ \tilde{\mathbf{s}}_4(\mathcal{D}_q) \\ \tilde{\mathbf{s}}_5(\mathcal{D}_q) \\ \tilde{\mathbf{s}}_6(\mathcal{D}_q) \\ \tilde{\mathbf{s}}_7(\mathcal{D}_q) \end{bmatrix} = \begin{bmatrix} C_1 \tilde{\mathbf{s}}'_1 \\ C_2 \tilde{\mathbf{s}}'_2 \\ C_3 \tilde{\mathbf{s}}'_3 \\ C_4 \tilde{\mathbf{s}}'_4 \\ C_5 \tilde{\mathbf{s}}'_5 \\ C_6 \tilde{\mathbf{s}}'_6 \\ C_7 \tilde{\mathbf{s}}'_7 \end{bmatrix} \quad \text{where } \tilde{\mathbf{s}}' = \mathbf{s}' + \sqrt{7}\sigma \mathcal{N}(0, I), \quad (61)$$

where the i th chunk of the vector \mathbf{s} is $\mathbf{s}'_i = \tilde{\mathbf{s}}_i/C_i$, resulting in privatized sufficient statistics.

While any conjugate priors are acceptable, following Gan et al. (2015), we put a Three Parameter Beta Normal (TPBN) prior for W

$$W_{j,k} \sim \mathcal{N}(0, \zeta_{j,k}), \zeta_{j,k} \sim \text{Gam}(\tfrac{1}{2}, \xi_{j,k}), \xi_{j,k} \sim \text{Gam}(\tfrac{1}{2}, \phi_k), \phi_k \sim \text{Gam}(0.5, \omega), \omega \sim \text{Gam}(0.5, 1)$$

to induce sparsity, and isotropic normal priors for \mathbf{b} and \mathbf{c} : $\mathbf{b} \sim \mathcal{N}(0, \nu_b I_K)$, $\mathbf{c} \sim \mathcal{N}(0, \nu_c I_J)$, assuming these hyperparameters are set such that the prior is broad. The M-step updates for the variational posteriors for the parameters as well as for the hyper-parameters are given in Appendix C. It is worth noting that these posterior updates for the hyper-parameters are one step away from the data, meaning that the posterior updates for the hyper-parameters are functions of variational posteriors that are already perturbed due to the perturbations in the expected natural parameters and expected sufficient statistics. Hence, we do not need any additional perturbation in the posteriors for the hyper-parameters.

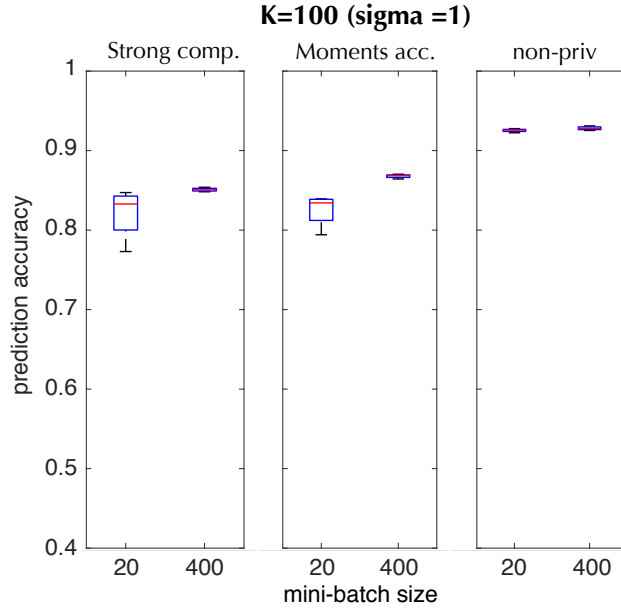


Figure 7: Prediction accuracy (binarised version of MNIST dataset). The non-private version (right most box) achieves highest prediction accuracy under the SBN model with $K = 100$. The private versions (left and middle boxes) with $\sigma = 1$ and $K = 100$ resulted in a total privacy loss $\epsilon_{tot} = 1.32$ when the mini-batch size is $S = 20$, and $\epsilon_{tot} = 2.31$ for $S = 400$. We ran these algorithms until they see 25% of the training data, resulting in different numbers of iterations for $S = 20$ and $S = 400$. The private version using strong composition (left) performs worse than that using moments accountant (right) regardless of the size of mini-batches, since the level of additive noise per iteration in strong composition is higher than that in moments accountant.

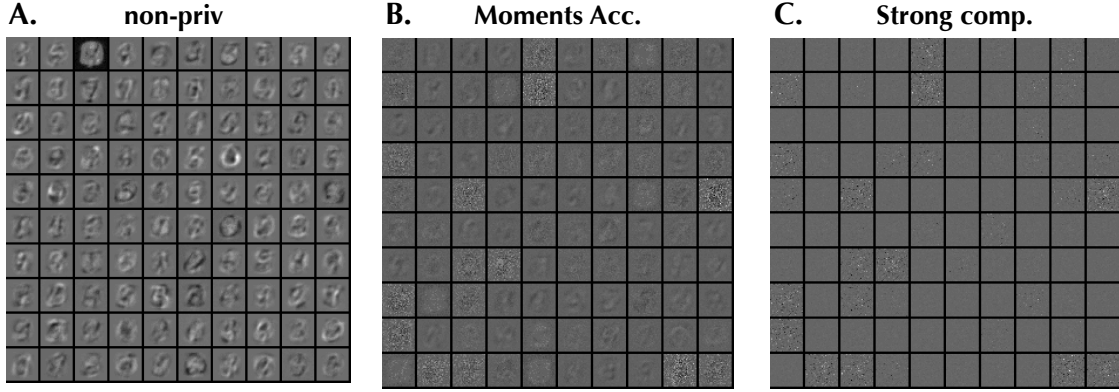


Figure 8: Estimated weight matrices (binarised version of MNIST dataset) for $K = 100$ and mini-batch size $S = 400$. **A**: The posterior mean of W under the non-private algorithm. Each image shows each reshaped column of W (reshaped as 28×28 , which is the same as the size of each image). We can easily identify the style of hand-written digits as well as the digits themselves in the training data. **B**: The posterior mean of W under our VIPS algorithm with moments accountant (with $\sigma = 1$, resulting in $\epsilon = 2.31$). Many of the columns are hard to identify, due to the noise addition step in our algorithm. However, in some columns, we can vaguely identify the style of hand-written digits and the digits themselves in the training data. **C**: The posterior mean of W under our VIPS algorithm with strong composition. Almost all the columns are hard to identify, due to the significant noise addition.

7.1 Experiments with MNIST data

We tested our VIPS algorithm for the SBN model on the MNIST digit dataset which contains 60,000 training images of ten handwritten digits (0 to 9), where each image consists of 28×28 pixels. For our experiment, we considered a one-hidden layer SBN with 100 hidden units $K = 100$.⁷ We varied the mini-batch size $S = \{20, 400\}$. For a fixed $\sigma = 1$, we obtained two different values of privacy loss due to different mini-batch sizes. We ran our code until it sees 25% of the data (15,000). We tested the non-private version of VIPS as well as the private versions with strong and moments accountant compositions, where each algorithm was run 4 times with different seed numbers.

As a performance measure, we calculated the pixel-wise prediction accuracy by first converting the pixels of reconstructed images into probabilities (between 0 and 1); then converting the probabilities into binary variables; and averaging the squared distances between the predicted binary variables and the test images. In each seed number, we selected 100 randomly selected test images from 10,000 test datapoints. Fig. 7 shows the performance of each method in terms of prediction accuracy. Fig. 8 shows the estimated weight matrices obtained by each method.

8. Discussion

We have developed a practical privacy-preserving VB algorithm which outputs accurate and privatized expected sufficient statistics and expected natural parameters. Our approach uses the moments accountant analysis combined with the privacy amplification effect due to subsampling of data, which significantly decrease the amount of additive noise for the same expected privacy guarantee compared to the standard analysis. Our methods show how to perform variational Bayes inference in private settings, not only for the conjugate exponential family models but also for non-conjugate models with binomial likelihoods using the Polyá Gamma data augmentation. We illustrated the effectiveness of our algorithm on several real-world datasets.

The private VB algorithms for the Latent Dirichlet Allocation (LDA), Bayesian Logistic Regression (BLR), and Sigmoid Belief Network (SBN) models we discussed are just a few examples of a much broader class of models to which our private VB framework applies. Our positive empirical results with VB indicate that these ideas are also likely to be beneficial for privatizing many other iterative machine learning algorithms. In future work, we plan to apply this general framework to other inference methods for larger and more complicated models such as deep neural networks. More broadly, our vision is that *practical* privacy preserving machine learning algorithms will have a transformative impact on the practice of data science in many real-world applications.

7. We chose this number since when K is larger than 100, the variational lower bound on the test data, shown in Figure 2 in (Gan et al., 2015), does not increase significantly.

References

- M. Abadi, A. Chu, I. Goodfellow, H. Brendan McMahan, I. Mironov, K. Talwar, and L. Zhang. Deep learning with differential privacy. In *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security*, pages 308–318. July 2016.
- Gilles Barthe, Gian Pietro Farina, Marco Gaboardi, Emilio Jesús Gallego Arias, Andy Gordon, Justin Hsu, and Pierre-Yves Strub. Differentially private Bayesian programming. In *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security*, pages 68–79. ACM, 2016.
- Raef Bassily, Adam D. Smith, and Abhradeep Thakurta. Private empirical risk minimization: Efficient algorithms and tight error bounds. In *55th IEEE Annual Symposium on Foundations of Computer Science, FOCS 2014, Philadelphia, PA, USA, October 18-21, 2014*, pages 464–473, 2014.
- M. J. Beal. *Variational Algorithms for Approximate Bayesian Inference*. PhD thesis, Gatsby Unit, University College London, 2003.
- David M. Blei, Andrew Y. Ng, and Michael I. Jordan. Latent Dirichlet allocation. *Journal of Machine Learning Research*, 3(Jan):993–1022, 2003.
- David M Blei, Alp Kucukelbir, and Jon D McAuliffe. Variational inference: A review for statisticians. *Journal of the American Statistical Association*, 112(518):859–877, 2017.
- Mark Bun and Thomas Steinke. Concentrated differential privacy: Simplifications, extensions, and lower bounds. In *Theory of Cryptography Conference*, pages 635–658. Springer, 2016.
- Kamalika Chaudhuri, Claire Monteleoni, and Anand D. Sarwate. Differentially private empirical risk minimization. *Journal of Machine Learning Research*, 12:1069–1109, July 2011. ISSN 1532-4435.
- Jon P. Daries, Justin Reich, Jim Waldo, Elise M. Young, Jonathan Whittinghill, Andrew Dean Ho, Daniel Thomas Seaton, and Isaac Chuang. Privacy, anonymity, and big data in the social sciences. *Communications of the ACM*, 57(9):56–63, 2014.
- A. P. Dempster, N. M. Laird, and D. B. Rubin. Maximum likelihood from incomplete data via the EM algorithm. *Journal of the Royal Statistical Society. Series B (Methodological)*, 39(1):1–38, 1977. ISSN 00359246.
- Christos Dimitrakakis, Blaine Nelson, Aikaterini Mitrokotsa, and Benjamin I.P. Rubinstein. Robust and private Bayesian inference. In *Algorithmic Learning Theory (ALT)*, pages 291–305. Springer, 2014.
- C. Dwork and G. N. Rothblum. Concentrated Differential Privacy. *ArXiv e-prints*, March 2016.

- Cynthia Dwork and Aaron Roth. The algorithmic foundations of differential privacy. *Found. Trends Theor. Comput. Sci.*, 9:211–407, August 2014. ISSN 1551-305X. doi: 10.1561/04000000042.
- Cynthia Dwork, Kunal Talwar, Abhradeep Thakurta, and Li Zhang. Analyze Gauss: optimal bounds for privacy-preserving principal component analysis. In *Symposium on Theory of Computing, STOC 2014, New York, NY, USA, May 31 - June 03, 2014*, pages 11–20. doi: 10.1145/2591796.2591883.
- Cynthia Dwork, Krishnaram Kenthapadi, Frank McSherry, Ilya Mironov, and Moni Naor. Our data, ourselves: Privacy via distributed noise generation. In *Annual International Conference on the Theory and Applications of Cryptographic Techniques*, pages 486–503. Springer, 2006a.
- Cynthia Dwork, Frank McSherry, Kobbi Nissim, and Adam Smith. Calibrating noise to sensitivity in private data analysis. In *Theory of Cryptography Conference*, pages 265–284. Springer, 2006b.
- Cynthia Dwork, Guy N Rothblum, and Salil Vadhan. Boosting and differential privacy. In *Foundations of Computer Science (FOCS), 2010 51st Annual IEEE Symposium on*, pages 51–60. IEEE, 2010.
- James R. Foulds, Joseph Geumlek, Max Welling, and Kamalika Chaudhuri. On the theory and practice of privacy-preserving Bayesian data analysis. In *Proceedings of the 32nd Conference on Uncertainty in Artificial Intelligence (UAI)*, 2016.
- Zhe Gan, Ricardo Henao, David E. Carlson, and Lawrence Carin. Learning deep sigmoid belief networks with data augmentation. In *Proceedings of the Eighteenth International Conference on Artificial Intelligence and Statistics (AISTATS)*, 2015.
- Matthew Hoffman, Francis R. Bach, and David M. Blei. Online learning for latent Dirichlet allocation. In J. D. Lafferty, C. K. I. Williams, J. Shawe-Taylor, R. S. Zemel, and A. Culotta, editors, *Advances in Neural Information Processing Systems 23*, pages 856–864. Curran Associates, Inc., 2010.
- Matthew D. Hoffman, David M. Blei, Chong Wang, and John Paisley. Stochastic variational inference. *Journal of Machine Learning Research*, 14(1):1303–1347, May 2013. ISSN 1532-4435.
- Dirk Husmeier, Richard Dybowski, and Stephen Roberts. *Probabilistic modeling in bioinformatics and medical informatics*. Springer Science & Business Media, 2006.
- J Jälkö, O. Dikmen, and A. Honkela. Differentially Private Variational Inference for Non-conjugate Models. In *Uncertainty in Artificial Intelligence 2017, Proceedings of the 33rd Conference (UAI)*, 2017.
- Michael I Jordan, Zoubin Ghahramani, Tommi S Jaakkola, and Lawrence K Saul. An introduction to variational methods for graphical models. *Machine learning*, 37(2):183–233, 1999.

- Peter Kairouz, Sewoong Oh, and Pramod Viswanath. The composition theorem for differential privacy. *IEEE Transactions on Information Theory*, 63(6):4037–4049, 2017.
- Daniel Kifer, Adam Smith, Abhradeep Thakurta, Shie Mannor, Nathan Srebro, and Robert C. Williamson. Private convex empirical risk minimization and high-dimensional regression. In *In COLT*, pages 94–103, 2012.
- Benjamin Letham, Cynthia Rudin, Tyler H. McCormick, and David Madigan. Interpretable classifiers using rules and Bayesian analysis: Building a better stroke prediction model. Department of Statistics Technical Report tr608, University of Washington, 2014.
- Frank McSherry and Kunal Talwar. Mechanism design via differential privacy. In *48th Annual IEEE Symposium on Foundations of Computer Science (FOCS 2007), October 20-23, 2007, Providence, RI, USA, Proceedings*, pages 94–103, 2007. doi: 10.1109/FOCS.2007.41.
- Radford M. Neal. Connectionist learning of belief networks. *Artif. Intell.*, 56(1):71–113, July 1992. ISSN 0004-3702. doi: 10.1016/0004-3702(92)90065-6.
- Radford M Neal and Geoffrey E Hinton. A view of the EM algorithm that justifies incremental, sparse, and other variants. In M. I. Jordan, editor, *Learning in graphical models*, pages 355–368. Kluwer Academic Publishers, 1998.
- Kobbi Nissim, Sofya Raskhodnikova, and Adam D. Smith. Smooth sensitivity and sampling in private data analysis. In *Proceedings of the 39th Annual ACM Symposium on Theory of Computing, San Diego, California, USA, June 11-13, 2007*, pages 75–84, 2007. doi: 10.1145/1250790.1250803.
- Mijung Park, James R. Foulds, Kamalika Chaudhuri, and Max Welling. DP-EM: Differentially private expectation maximization. In *Proceedings of the 20th International Conference on Artificial Intelligence and Statistics (AISTATS)*, 2017.
- C. Piech, J. Huang, Z. Chen, C. Do, A. Ng, and D. Koller. Tuned models of peer assessment in MOOCs. In *Proceedings of the 6th International Conference on Educational Data Mining*, pages 153–160, 2013.
- Nicholas G. Polson, James G. Scott, and Jesse Windle. Bayesian inference for logistic models using Polya-gamma latent variables. *Journal of the American Statistical Association*, 108(504):1339–1349, 2013. doi: 10.1080/01621459.2013.829001.
- Ryan M Rogers, Aaron Roth, Jonathan Ullman, and Salil Vadhan. Privacy odometers and filters: Pay-as-you-go composition. In *Advances in Neural Information Processing Systems*, pages 1921–1929, 2016.
- Anand D. Sarwate and Kamalika Chaudhuri. Signal processing and machine learning with differential privacy: Algorithms and challenges for continuous data. *IEEE Signal Process. Mag.*, 30(5):86–94, 2013. doi: 10.1109/MSP.2013.2259911.
- S. Song, K. Chaudhuri, and A. Sarwate. Stochastic gradient descent with differentially private updates. In *Proceedings of GlobalSIP*, 2013.

- M. J. Wainwright and M. I. Jordan. Graphical models, exponential families, and variational inference. *Found. Trends Mach. Learn.*, 1(1-2):1–305, January 2008. ISSN 1935-8237. doi: 10.1561/22000000001.
- Y.-X. Wang, S. E. Fienberg, and A. Smola. Privacy for Free: Posterior Sampling and Stochastic Gradient Monte Carlo. *Proceedings of The 32nd International Conference on Machine Learning (ICML)*, pages 2493–2502, 2015.
- Yu-Xiang Wang, Jing Lei, and Stephen E. Fienberg. Learning with differential privacy: Stability, learnability and the sufficiency and necessity of ERM principle. *Journal of Machine Learning Research*, 17(183):1–40, 2016.
- Max Welling and Yee Whye Teh. Bayesian learning via stochastic gradient Langevin dynamics. In *Proceedings of the 28th International Conference on Machine Learning (ICML)*, pages 681–688, 2011.
- Xi Wu, Arun Kumar, Kamalika Chaudhuri, Somesh Jha, and Jeffrey F. Naughton. Differentially private stochastic gradient descent for in-RDBMS analytics. *CoRR*, abs/1606.04722, 2016.
- Zuhe Zhang, Benjamin Rubinstein, and Christos Dimitrakakis. On the differential privacy of Bayesian inference. In *Proceedings of the Thirtieth AAAI Conference on Artificial Intelligence (AAAI)*, 2016.

Appendix A : Variational lower bound with auxiliary variables

The variational lower bound (per-datapoint for simplicity) given by

$$\begin{aligned}\mathcal{L}_n(q(\mathbf{m}), q(\mathbf{l}_n)) &= \int q(\mathbf{m})q(\mathbf{l}_n) \log \frac{p(\mathcal{D}_n|\mathbf{l}_n, \mathbf{m})p(\mathbf{m})p(\mathbf{l}_n)}{q(\mathbf{m})q(\mathbf{l}_n)} d\mathbf{l}_n d\mathbf{m}, \\ &= \int q(\mathbf{m})q(\mathbf{l}_n) \log p(\mathcal{D}_n|\mathbf{l}_n, \mathbf{m}) d\mathbf{l}_n d\mathbf{m} - \text{D}_{KL}(q(\mathbf{m})||p(\mathbf{m})) - \text{D}_{KL}(q(\mathbf{l}_n)||p(\mathbf{l}_n)),\end{aligned}\tag{62}$$

where the first term can be re-written using Eq. 26,

$$\begin{aligned}\int q(\mathbf{m})q(\mathbf{l}_n) \log p(\mathcal{D}_n|\mathbf{l}_n, \mathbf{m}) d\mathbf{l}_n d\mathbf{m} &= -b \log 2 + (y_n - \frac{b}{2}) \langle \mathbf{l}_n \rangle_{q(\mathbf{l}_n)}^\top \langle \mathbf{m} \rangle_{q(\mathbf{m})} \\ &\quad + \int q(\mathbf{m})q(\mathbf{l}_n) \log \int_0^\infty \exp(-\frac{1}{2}\xi_n \mathbf{l}_n^\top \mathbf{m} \mathbf{m}^\top \mathbf{l}_n) p(\xi_n) d\xi_n.\end{aligned}$$

We rewrite the third term using $q(\xi_n)$, the variational posterior distribution for ξ_n ,

$$\begin{aligned}&\int q(\mathbf{m})q(\mathbf{l}_n) \log \int_0^\infty \exp(-\frac{1}{2}\xi_n \mathbf{l}_n^\top \mathbf{m} \mathbf{m}^\top \mathbf{l}_n) p(\xi_n) d\xi_n \\ &= \int q(\mathbf{m})q(\mathbf{l}_n) \log \int_0^\infty q(\xi_n) \exp(-\frac{1}{2}\xi_n \mathbf{l}_n^\top \mathbf{m} \mathbf{m}^\top \mathbf{l}_n) \frac{p(\xi_n)}{q(\xi_n)} d\xi_n, \\ &\geq \int q(\mathbf{m})q(\mathbf{l}_n) \int_0^\infty q(\xi_n) \left[(-\frac{1}{2}\xi_n \mathbf{l}_n^\top \mathbf{m} \mathbf{m}^\top \mathbf{l}_n) + \log \frac{p(\xi_n)}{q(\xi_n)} \right] d\xi_n, \\ &= -\frac{1}{2} \langle \xi_n \rangle_{q(\xi_n)} \langle \mathbf{l}_n^\top \mathbf{m} \mathbf{m}^\top \mathbf{l}_n \rangle_{q(\mathbf{l}_n)q(\mathbf{m})} - \text{D}_{KL}(q(\xi_n)||p(\xi_n)),\end{aligned}\tag{63}$$

which gives us a lower lower bound to the log likelihood,

$$\begin{aligned}\mathcal{L}_n(q(\mathbf{m}), q(\mathbf{l}_n)) &\geq \mathcal{L}_n(q(\mathbf{m}), q(\mathbf{l}_n), q(\xi_n)) \\ &:= -b \log 2 + (y_n - \frac{b}{2}) \langle \mathbf{l}_n \rangle_{q(\mathbf{l}_n)}^\top \langle \mathbf{m} \rangle_{q(\mathbf{m})} - \frac{1}{2} \langle \xi_n \rangle_{q(\xi_n)} \langle \mathbf{l}_n^\top \mathbf{m} \mathbf{m}^\top \mathbf{l}_n \rangle_{q(\mathbf{l}_n)q(\mathbf{m})}, \\ &\quad - \text{D}_{KL}(q(\xi_n)||p(\xi_n)) - \text{D}_{KL}(q(\mathbf{m})||p(\mathbf{m})) - \text{D}_{KL}(q(\mathbf{l}_n)||p(\mathbf{l}_n)),\end{aligned}\tag{64}$$

which implies that

$$\begin{aligned}&\int q(\mathbf{m})q(\mathbf{l}_n)q(\xi_n) \log p(\mathcal{D}_n|\mathbf{l}_n, \xi_n, \mathbf{m}) \\ &= -b \log 2 + (y_n - \frac{b}{2}) \langle \mathbf{l}_n \rangle_{q(\mathbf{l}_n)}^\top \langle \mathbf{m} \rangle_{q(\mathbf{m})} - \frac{1}{2} \langle \xi_n \rangle_{q(\xi_n)} \langle \mathbf{l}_n^\top \mathbf{m} \mathbf{m}^\top \mathbf{l}_n \rangle_{q(\mathbf{l}_n)q(\mathbf{m})}.\end{aligned}\tag{65}$$

Appendix B : Perturbing expected sufficient statistics in SBNs

Using the variational posterior distributions in the E-step, we perturb and output each sufficient statistic as follows.

- For perturbing $\bar{\mathbf{s}}_1$, we perturb $A = \frac{1}{N} \sum_{n=1}^N \langle \mathbf{z}_n \rangle$ where the sensitivity is given by

$$\begin{aligned} \Delta A &= \max_{|\mathcal{D} \setminus \mathcal{D}'|=1} |A(\mathcal{D}) - A(\mathcal{D}')|_2, \\ &\leq \max_{\mathbf{y}_n, q(\mathbf{z}_n)} \frac{1}{N} \sqrt{\sum_{k=1}^K (\sigma(d_{n,k}))^2} \leq \frac{\sqrt{K}}{N}, \end{aligned} \quad (66)$$

due to Eq. 16 and the fact that \mathbf{z}_n is a vector of Bernoulli random variables (length K) and the mean of each element is $\sigma(d_{n,k})$ as given in Eq. 59.

- For perturbing $\tilde{\mathbf{s}}_2$, we perturb $B = \langle \boldsymbol{\xi}^{(1)} \rangle$, i.e. the part before we apply the diag and vec operations. The sensitivity of B is given by $\Delta B \leq \frac{\sqrt{K}}{4}$ as shown in Fig. 4.
- For perturbing $\bar{\mathbf{s}}_3$, we perturb $C = \frac{1}{N} \sum_{n=1}^N \mathbf{y}_n$, where the sensitivity is given by

$$\Delta C = \max_{|\mathcal{D} \setminus \mathcal{D}'|=1} |C(\mathcal{D}) - C(\mathcal{D}')|_2 = \max_{\mathbf{y}_n} \frac{1}{N} |\mathbf{y}_n|_2 \leq \frac{\sqrt{J}}{N}, \quad (67)$$

since \mathbf{y}_n is a binary vector of length J . Note that when performing the batch optimisation, we perturb $\bar{\mathbf{s}}_3$ only once, since this quantity remains the same across iterations. However, when performing the stochastic optimisation, we perturb $\bar{\mathbf{s}}_3$ in every iteration, since the new mini-batch of data is selected in every iteration.

- For perturbing $\tilde{\mathbf{s}}_4$, we perturb $D = \frac{1}{N} \sum_{n=1}^N \langle \boldsymbol{\xi}_n^{(0)} \rangle$, which is once again the part before taking diag and vec operations. Due to Eq. 16, the sensitivity is given by

$$\Delta D = \max_{|\mathcal{D} \setminus \mathcal{D}'|=1} |D(\mathcal{D}) - D(\mathcal{D}')|_2 \leq \frac{\sqrt{J}}{4N}. \quad (68)$$

- For $\tilde{\mathbf{s}}_5$, we perturb $E = \frac{1}{N} \sum_{n=1}^N \langle \boldsymbol{\xi}_n^{(0)} \rangle \langle \mathbf{z}_n \rangle^\top$. From Eq. 16, the sensitivity is given by

$$\begin{aligned} \Delta E &= \max_{|\mathcal{D} \setminus \mathcal{D}'|=1} |E(\mathcal{D}) - E(\mathcal{D}')|_2, \\ &\leq \max_{\mathbf{y}_n, q(\mathbf{z}_n), q(\boldsymbol{\xi}_n)} \frac{1}{N} \sqrt{\sum_{k=1}^K \sum_{j=1}^J (\langle \boldsymbol{\xi}_{n,j}^{(0)} \rangle \langle \mathbf{z}_{n,k} \rangle)^2} \leq \frac{\sqrt{JK}}{4N}. \end{aligned} \quad (69)$$

- For $\tilde{\mathbf{s}}_6$, we can use the noisy $\tilde{\mathbf{s}}_1$ for the second term, but perturb only the first term $F = \frac{1}{N} \sum_{n=1}^N \mathbf{y}_n \langle \mathbf{z}_n \rangle^\top$. Due to Eq. 16, the sensitivity is given by

$$\begin{aligned} \Delta F &= \max_{|\mathcal{D} \setminus \mathcal{D}'|=1} |F(\mathcal{D}) - F(\mathcal{D}')|_2, \\ &\leq \max_{\mathbf{y}_n, q(\mathbf{z}_n)} \frac{1}{N} \sqrt{\sum_{k=1}^K \sum_{j=1}^J (\mathbf{y}_{n,j} \langle \mathbf{z}_{n,k} \rangle)^2} \leq \frac{\sqrt{JK}}{N}. \end{aligned} \quad (70)$$

- For \bar{s}_7 , we define a matrix G , which is a collection of J matrices where each matrix is $G_j = \frac{1}{N} \sum_{n=1}^N \langle \xi_{n,j}^{(0)} \rangle \langle \mathbf{z}_n \mathbf{z}_n^\top \rangle$, where $G_j \in \mathbb{R}^{K \times K}$.

Using Eq. 16, the sensitivity of G_j is given by

$$\begin{aligned} \Delta G_j &= \max_{|\mathcal{D} \setminus \mathcal{D}'|=1} |G_j(\mathcal{D}) - G_j(\mathcal{D}')|_2, \\ &\leq \max_{\mathbf{y}_n} \frac{1}{N} \sqrt{\sum_{k=1}^K \sum_{k'=1}^K (\langle \xi_{n,j}^{(0)} \rangle \langle \mathbf{z}_{n,k} \mathbf{z}_{n,k'} \rangle)^2} \leq \frac{K}{4N}, \end{aligned} \quad (71)$$

which gives us the sensitivity of $\Delta G \leq \frac{\sqrt{JK}}{4N}$.

Appendix C: M-step updates in SBNs

The M-step updates are given below (taken from (Gan et al., 2015)):

- $q(W) = \prod_{j=1}^J q(\mathbf{w}_j)$, and $q(\mathbf{w}_j) = \mathcal{N}(\mu_j, \Sigma_j)$, where

$$\Sigma_j = \left[\sum_{n=1}^N \langle \xi_{n,j}^{(0)} \rangle_{q(\xi)} \langle \mathbf{z}_n \mathbf{z}_n^\top \rangle + \text{diag}(\langle \zeta_j^{-1} \rangle_{q(\zeta)}) \right]^{-1}$$

$$\mu_j = \Sigma_j \left[\sum_{n=1}^N (\mathbf{y}_{n,j} - \frac{1}{2} - \langle c_j \rangle_{q(\theta)} \langle \xi_{n,j}^{(0)} \rangle_{q(\xi)}) \langle \mathbf{z}_n \rangle_{q(\mathbf{z})} \right].$$

where we replace $\frac{1}{N} \sum_{n=1}^N \langle \xi_{n,j}^{(0)} \rangle_{q(\xi)} \langle \mathbf{z}_n \mathbf{z}_n^\top \rangle$, $\frac{1}{N} \sum_{n=1}^N \mathbf{y}_{n,j} \langle \mathbf{z}_n \rangle_{q(\mathbf{z})}$, $\frac{1}{N} \sum_{n=1}^N \langle \mathbf{z}_n \rangle_{q(\mathbf{z})}$, and $\frac{1}{N} \sum_{n=1}^N \langle \xi_{n,j}^{(0)} \rangle_{q(\xi)} \langle \mathbf{z}_n \rangle_{q(\mathbf{z})}$, with perturbed expected sufficient statistics.

- $q(\mathbf{b}) = \mathcal{N}(\mu_{\mathbf{b}}, \Sigma_{\mathbf{b}})$, where

$$\Sigma_{\mathbf{b}} = \left[\frac{1}{\nu_b} I + N \text{diag}(\langle \xi^{(1)} \rangle) \right]^{-1}, \quad (72)$$

$$\mu_{\mathbf{b}} = \Sigma_{\mathbf{b}} \left[\sum_{n=1}^N (\langle \mathbf{z}_n \rangle - \frac{1}{2} \mathbf{1}_K) \right], \quad (73)$$

where we replace $\langle \xi^{(1)} \rangle$ and $\frac{1}{N} \sum_{n=1}^N \langle \mathbf{z}_n \rangle_{q(\mathbf{z})}$ with perturbed expected sufficient statistics.

- $q(\mathbf{c}) = \mathcal{N}(\mu_{\mathbf{c}}, \Sigma_{\mathbf{c}})$, where

$$\Sigma_{\mathbf{c}} = \left[\frac{1}{\nu_c} I + \text{diag}(\sum_{n=1}^N \langle \xi_n^{(0)} \rangle) \right]^{-1}, \quad (74)$$

$$\mu_{\mathbf{c}} = \Sigma_{\mathbf{c}} \left[\sum_{n=1}^N (\mathbf{y}_n^\top - \frac{1}{2} \mathbf{1}_J^\top - \frac{1}{2} \text{diag}(\langle \xi_n^{(0)} \rangle \langle \mathbf{z}_n \rangle^\top \langle W \rangle^\top)) \right], \quad (75)$$

where we replace $\frac{1}{N} \sum_{n=1}^N \langle \xi_n^{(0)} \rangle$, $\frac{1}{N} \sum_{n=1}^N \mathbf{y}_n$, and $\frac{1}{N} \sum_{n=1}^N \langle \xi_n^{(0)} \rangle \langle \mathbf{z}_n \rangle^\top$ with perturbed expected sufficient statistics.

- TPBN shrinkage priors:

$$q(\zeta_{j,k}) = \mathcal{GIG}(0, 2\langle \xi_{j,k} \rangle_{q(\xi)}, \langle w_{j,k}^2 \rangle_{q(\theta)}), \quad q(\xi_{j,k}) = \text{Gam}(1, \langle \zeta_{j,k} \rangle_{q(\zeta)})$$

$$q(\phi_k) = \text{Gam}(\frac{J}{2} + \frac{1}{2}, \langle \omega \rangle_{q(\omega)} + \sum_{j=1}^J \langle \xi_{j,k} \rangle_{q(\xi)}), \quad q(\omega) = \text{Gam}(\frac{K}{2} + \frac{1}{2}, 1 + \sum_{k=1}^K \langle \phi_k \rangle_{q(\phi)}).$$

When updating these TPBN shrinkage priors, we first calculate $q(\zeta_{j,k})$ using a data-independent initial value for $2\langle \xi_{j,k} \rangle_{q(\xi)}$ and perturb $\langle w_{j,k}^2 \rangle_{q(\theta)}$ (since $q(c)$ is perturbed). Using this perturbed $q(\zeta_{j,k})$, we calculate $q(\xi_{j,k})$. Then, using $q(\xi_{j,k})$, we calculate $q(\phi_k)$ with some data-independent initial value for $\langle \omega \rangle_{q(\omega)}$. Then, finally, we update $q(\omega)$ using $q(\phi_k)$. In this way, these TPBN shrinkage priors are perturbed.

Appendix D: The EM algorithm and its relationship to VBEM

In contrast to VBEM, which computes an approximate posterior distribution, EM finds a point estimate of model parameters \mathbf{m} . A derivation of EM from a variational perspective, due to Neal and Hinton (1998), shows that VBEM generalizes EM (Beal, 2003). To derive EM from this perspective, we begin by identifying a lower bound $\mathcal{L}(q, \mathbf{m})$ on the log-likelihood using another Jensen’s inequality argument, which will serve as a proxy objective function. For any parameters \mathbf{m} and auxiliary distribution over the latent variables $q(\mathbf{l})$,

$$\begin{aligned} \log p(\mathcal{D}; \mathbf{m}) &= \log \left(\int d\mathbf{l} p(\mathbf{l}, \mathcal{D}; \mathbf{m}) \frac{q(\mathbf{l})}{q(\mathbf{l})} \right) = \log \left(\mathbb{E}_q \left[\frac{p(\mathbf{l}, \mathcal{D}; \mathbf{m})}{q(\mathbf{l})} \right] \right) \\ &\geq \mathbb{E}_q \left[\log p(\mathbf{l}, \mathcal{D}; \mathbf{m}) - \log q(\mathbf{l}) \right] = \mathbb{E}_q \left[\log p(\mathbf{l}, \mathcal{D}; \mathbf{m}) \right] + H(q) \triangleq \mathcal{L}(q, \mathbf{m}). \end{aligned} \quad (76)$$

Note that $\mathcal{L}(q, \mathbf{m})$ has a very similar definition to the ELBO from VB (Eq. 6). Indeed, we observe that for an instance of VBEM where $q(\mathbf{m})$ is restricted to being a Dirac delta function at \mathbf{m} , $q(\mathbf{m}) = \delta(\mathbf{m} - \mathbf{m}^*)$, and with no prior on \mathbf{m} , we have $\mathcal{L}(q(\mathbf{l}), \mathbf{m}) = \mathcal{L}(q(\mathbf{l}, \mathbf{m}))$ (Beal, 2003). The EM algorithm can be derived as a coordinate ascent algorithm which maximises $\mathcal{L}(q, \mathbf{m})$ by alternately optimizing q (the E-step) and \mathbf{m} (the M-step) (Neal and Hinton, 1998). At iteration i , with current parameters $\mathbf{m}^{(i-1)}$, the updates are:

$$\begin{aligned} q^{(i)} &= \arg \max_q \mathcal{L}(q, \mathbf{m}^{(i-1)}) = p(\mathbf{l}|\mathcal{D}; \mathbf{m}^{(i-1)}) & \text{(E-step)} \\ \mathbf{m}^{(i)} &= \arg \max_{\mathbf{m}} \mathcal{L}(q^{(i)}, \mathbf{m}) & \text{(M-step)}. \end{aligned} \quad (77)$$

In the above, $\arg \max_q \mathcal{L}(q, \mathbf{m}^{(i-1)}) = p(\mathbf{l}|\mathcal{D}; \mathbf{m}^{(i-1)})$ since this maximisation is equivalent to minimising $D_{KL}(q(\mathbf{l})\|p(\mathbf{l}|\mathcal{D}; \mathbf{m}^{(i-1)}))$. To see this, we rewrite $\mathcal{L}(q, \mathbf{m})$ as

$$\begin{aligned} \mathcal{L}(q, \mathbf{m}) &= \mathbb{E}_q \left[\log p(\mathbf{l}, \mathcal{D}; \mathbf{m}) \right] - \mathbb{E}_q [\log q(\mathbf{l})] \\ &= \log p(\mathcal{D}; \mathbf{m}) + \mathbb{E}_q \left[\log p(\mathbf{l}|\mathcal{D}, \mathbf{m}) \right] - \mathbb{E}_q [\log q(\mathbf{l})] \\ &= \log p(\mathcal{D}; \mathbf{m}) - D_{KL}(q(\mathbf{l})\|p(\mathbf{l}|\mathbf{m}, \mathcal{D})) . \end{aligned} \quad (78)$$

From a VBEM perspective, the M-step equivalently finds the Dirac delta $q(\mathbf{m})$ which maximises $\mathcal{L}(q(\mathbf{l}, \mathbf{m}))$. Although we have derived EM as optimizing the variational lower bound $\mathcal{L}(q, \mathbf{m})$ in each E- and M-step, it can also be shown that it monotonically increases the log-likelihood $\log p(\mathcal{D}; \mathbf{m})$ in each iteration. The E-step selects $q^{(i)} = p(\mathbf{l}|\mathcal{D}; \mathbf{m}^{(i-1)})$ which sets the KL-divergence in Eq. 78 to 0 at $\mathbf{m}^{(i)}$, at which point the bound is tight. This means that $\log p(\mathcal{D}; \mathbf{m}^{(i-1)})$ is achievable in the bound, so $\max_{\mathbf{m}} \mathcal{L}(q^{(i)}, \mathbf{m}) \geq \log p(\mathcal{D}; \mathbf{m}^{(i-1)})$. As $\mathcal{L}(q, \mathbf{m})$ lower bounds the log likelihood at \mathbf{m} , this in turn guarantees that the log-likelihood is non-decreasing over the previous iteration. We can thus also interpret the E-step as computing a lower bound on the log-likelihood, and the M-step as maximizing this lower bound, i.e. an instance of the Minorise Maximise (MM) algorithm. EM is sometimes written in terms of the *expected complete data log-likelihood* $Q(\mathbf{m}; \mathbf{m}^{(i-1)})$,

$$\begin{aligned} Q(\mathbf{m}; \mathbf{m}^{(i-1)}) &= \mathbb{E}_{p(\mathbf{l}|\mathcal{D}; \mathbf{m}^{(i-1)})} [\log p(\mathbf{l}, \mathcal{D}; \mathbf{m})] & \text{(E-step)} \\ \mathbf{m}^{(i)} &= \arg \max_{\mathbf{m}} Q(\mathbf{m}; \mathbf{m}^{(i-1)}) & \text{(M-step)}. \end{aligned} \quad (79)$$

This is equivalent to Eq. 77: $Q(\mathbf{m}; \mathbf{m}^{(i-1)}) + H(p(\mathbf{l}|\mathcal{D}; \mathbf{m}^{(i-1)})) = \mathcal{L}(p(\mathbf{l}|\mathcal{D}; \mathbf{m}^{(i-1)}), \mathbf{m})$.