

Inference-Based Quantum Sensing

C. Huerta Alderete,^{1,2,3,*} Max Hunter Gordon,^{4,5,*} Frédéric Sauvage,⁴ Akira Sone,⁶ Andrew T. Sornborger,^{1,3} Patrick J. Coles,^{4,3} and M. Cerezo^{1,3,†}

¹*Information Sciences, Los Alamos National Laboratory, Los Alamos, NM 87545, USA*

²*Materials Physics and Applications Division, Los Alamos National Laboratory, Los Alamos, NM 87545, USA.*

³*Quantum Science Center, Oak Ridge, TN 37931, USA*

⁴*Theoretical Division, Los Alamos National Laboratory, Los Alamos, NM 87545, USA*

⁵*Instituto de Física Teórica, UAM/CSIC, Universidad Autónoma de Madrid, Madrid 28049, Spain*

⁶*Aliro Technologies, Inc, Boston, MA 02135, USA*

In a standard Quantum Sensing (QS) task one aims at estimating an unknown parameter θ , encoded into an n -qubit probe state, via measurements of the system. The success of this task hinges on the ability to correlate changes in the parameter to changes in the system response $\mathcal{R}(\theta)$ (i.e., changes in the measurement outcomes). For simple cases the form of $\mathcal{R}(\theta)$ is known, but the same cannot be said for realistic scenarios, as no general closed-form expression exists. In this work we present an inference-based scheme for QS. We show that, for a general class of unitary families of encoding, $\mathcal{R}(\theta)$ can be fully characterized by only measuring the system response at $2n + 1$ parameters. In turn, this allows us to infer the value of an unknown parameter given the measured response, as well as to determine the sensitivity of the sensing scheme, which characterizes its overall performance. We show that inference error is, with high probability, smaller than δ , if one measures the system response with a number of shots that scales only as $\Omega(\log^3(n)/\delta^2)$. Furthermore, the framework presented can be broadly applied as it remains valid for arbitrary probe states and measurement schemes, and, even holds in the presence of quantum noise. We also discuss how to extend our results beyond unitary families. Finally, to showcase our method we implement it for a QS task on real quantum hardware, and in numerical simulations.

Introduction. Quantum Sensing (QS) is one of the most promising applications for quantum technologies [1]. In QS experiments one uses a quantum system as a probe to interact with an environment. Then, by measuring the system, one aims at learning some relevant property of the environment (usually some characteristic parameter) with a precision and sensitivity that are higher than those achievable by any classical system [2]. QS has applications in a wide range of fields such as quantum magnetometry [3–6], thermometry [7–10], dark matter detection [11], and gravitational wave detection [12, 13].

The key ingredients for a QS experiment are as follows. First, one prepares an n -qubit probe state ρ that is as sensitive as possible to an external parameter θ of interest. This ensures that upon encoding two parameters θ and θ' on the system, the respective states ρ_θ and $\rho_{\theta'}$ will be sufficiently distinguishable. Second, one obtains the system response $\mathcal{R}(\theta)$ to the external interaction by measuring some observable over ρ_θ . Third, if the functional form of $\mathcal{R}(\theta)$ is known and invertible, one can infer the value of θ from measurement outcomes, as well as estimate the sensitivity of the QS scheme.

In simple cases all these ingredients are well characterized. For instance, in an idealized magnetometry experiment it is known that the optimal probe state is the n -qubit Greenberg-Horne-Zeilinger (GHZ) state, while the optimal measurement is a parity measurement [14, 15].

In this case, $\mathcal{R}(\theta) = \cos(n\theta)$ which allows one to obtain the magnetic field as $\theta = \cos^{-1}(\mathcal{R}(\theta))/n$ (assuming $\theta \in (-\pi/n, \pi/n)$), and the state's sensitivity as $(\Delta\theta)^2 = 1/n^2$, which corresponds to the Heisenberg limit [2]. However, the situation becomes more involved in realistic scenarios where the system dynamics are not known, and hence where the explicit functional form of $\mathcal{R}(\theta)$ may not be accessible. For instance, when noise in the magnetometry setting is taken into account, the GHZ state is no longer optimal [16, 17]. In this case the true response $\mathcal{R}(\theta)$ will inevitably deviate from the idealized cosine formula, limiting the extent to which θ can be accurately estimated. While recent works have focused on maximizing the sensitivity of QS protocols in noisy situations, by means of variational approaches [17–23], methods to recover the true $\mathcal{R}(\theta)$ in-situ are still lacking.

In this work we introduce a data-driven inference method which allows us to efficiently characterize the exact functional form of $\mathcal{R}(\theta)$ for a general class of unitary families (i.e., when the parameter θ is encoded by a unitary evolution). We show that $\mathcal{R}(\theta)$ can be expressed as a trigonometric polynomial of degree n , such that it can be fully determined by only measuring the system response at a set of $2n + 1$ known parameters. We then discuss how the inferred function can be used to estimate the value of *any* unknown parameter, as well as the sensitivity of the scheme, two crucial aspects of QS. Moreover, we rigorously analyze the inference error. Finally, we show that our method can be extended to cases where the system response is no longer exactly a trigonometric polynomial, but can still be approximated by one. The potential applications of the inference scheme are demonstrated in

* The two first authors contributed equally.

† cerezo@lanl.gov

both numerical simulations as well as real implementations on a quantum computer.

Results. Throughout this work we consider a single-parameter QS setting employing an n -qubit probe state ρ to estimate a parameter θ . As shown in Fig. 1, ρ is prepared by sending a fiduciary state ρ_{in} through a state preparation channel \mathcal{E} such that $\mathcal{E}(\rho_{\text{in}}) = \rho$. We focus on the case of unitary families where the parameter encoding mechanism is of the form

$$\mathcal{S}_\theta(\rho) = e^{-i\theta H/2} \rho e^{i\theta H/2} = \rho_\theta. \quad (1)$$

Here, H is a Hermitian operator such that $H = \sum_j h_j$ with $h_j^2 = \mathbb{1}$, and $[h_j, h_{j'}] = 0, \forall j, j'$. As shown below, the Hamiltonian in a magnetometry task is precisely of this form. We allow for the possibility of sending ρ_θ through a second pre-measurement channel \mathcal{D} which outputs an m -qubit state $\mathcal{D}(\rho_\theta)$ (with $m \leq n$), over which we measure the expectation value of an observable O , with $\|O\|_\infty \leq 1$. The system response is thus defined as

$$\mathcal{R}(\theta) = \text{Tr}[\mathcal{D} \circ \mathcal{S}_\theta \circ \mathcal{E}(\rho_{\text{in}})O]. \quad (2)$$

This setting encompasses cases where \mathcal{E} or \mathcal{D} are noisy channels, as well as cases of imperfect parameter encoding where a θ -independent noise channel acts after \mathcal{S}_θ , as is further discussed in the Supplemental Material.

Leveraging tools from the quantum machine learning literature [24] we prove the following theorem.

Theorem 1. *Let $\mathcal{R}(\theta)$ be the response function in Eq. (2) for a unitary family as in Eq. (1). Then, for any \mathcal{E} , \mathcal{D} and measurement operator O , $\mathcal{R}(\theta)$ can be exactly expressed as a trigonometric polynomial of degree n . That is,*

$$\mathcal{R}(\theta) = \sum_{s=1}^n [a_s \cos(s\theta) + b_s \sin(s\theta)] + c, \quad (3)$$

with $\{a_s, b_s\}_{s=1}^n$ and c being real valued coefficients.

Notably, Theorem 1 determines the *exact* functional relation between the encoded parameter θ and the system response. Furthermore, the $2n+1$ coefficients $\{a_s, b_s\}_{s=1}^n$ and c , that are not known a priori, can be efficiently estimated by means of a trigonometric interpolation [25]. This is readily achieved by measuring the system responses at a set of predefined parameters $P = \{\theta_k\}_{k=1}^{2n+1}$ (see Fig. 1), as this leads to a system of $2n+1$ equations with $2n+1$ unknown variables. Hence, one needs to solve a linear system problem of the form $A \cdot \mathbf{x} = \mathbf{d}$. Here, $\mathbf{x} = (a_1, \dots, a_n, b_1, \dots, b_n, c)$ is the vector of unknown coefficients, $\mathbf{d} = (\mathcal{R}(\theta_1), \dots, \mathcal{R}(\theta_{2n+1}))$ is a vector of measured system responses across P and A is a $(2n+1) \times (2n+1)$ matrix with elements $A_{kj} = \cos(j\theta_k)$ for $j = 1, \dots, n$, $A_{kj} = \sin(j\theta_k)$ for $j = n+1, \dots, 2n$ and $A_{k(2n+1)} = 1$. Thus, solving $\mathbf{x} = A^{-1} \cdot \mathbf{d}$ allows us to fully characterize $\mathcal{R}(\theta)$. In the Supplemental Material we provide additional details on this linear system problem.

Here, it is important to make several remarks. First, we note that A can be singular (for instance if $\theta_k =$

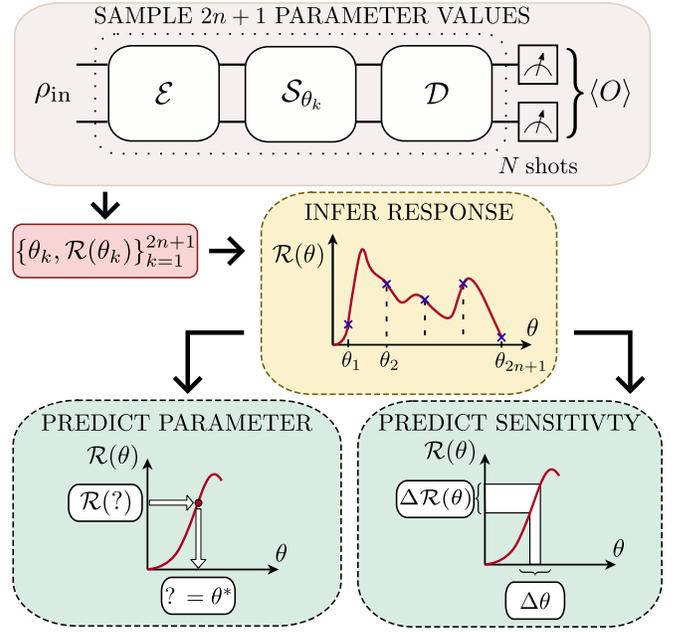


FIG. 1. **Inference-based QS scheme.** An input state ρ_{in} is sent through the following channels: state preparation \mathcal{E} , parameter encoding \mathcal{S}_θ , pre-measurement \mathcal{D} . We then measure the expectation value of O . By measuring the system response at $2n+1$ parameters, we can recover the exact form of $\mathcal{R}(\theta)$ in Eq. (3). From the functional form of $\mathcal{R}(\theta)$ we can infer the value of a parameter given the system response, and compute the sensitivity of the sensing scheme.

$\theta_{k'} + 2\pi$ for any two $\theta_k, \theta_{k'} \in P$), and hence care must be taken when determining the $2n+1$ parameters. As shown in the Supplemental Material, the optimal strategy is to uniformly sample the parameters as

$$\theta_k = \frac{2\pi(k-1)}{2n+1}, \quad \text{with } k = 1, \dots, 2n+1, \quad (4)$$

since this choice reduces the matrix inversion error. Second, in practice one cannot exactly evaluate the responses $\mathcal{R}(\theta_k)$, but rather can only estimate them up to some statistical uncertainty resulting from finite sampling. We define $\overline{\mathcal{R}}(\theta_k)$ as the N -shot estimate of $\mathcal{R}(\theta_k)$, and $\tilde{\mathcal{R}}(\theta)$ as the inferred response, a trigonometric polynomial of the form in Eq. (3), obtained by solving the linear system of equations with the estimates $\overline{\mathcal{R}}(\theta_k)$. The effect of the estimation errors on the accuracy of the inferred response can be rigorously quantified as follows.

Theorem 2. *Let $\mathcal{R}(\theta)$ be the exact response function, and let $\tilde{\mathcal{R}}(\theta)$ be its approximation obtained from the N -shot estimates $\overline{\mathcal{R}}(\theta_k)$ with θ_k given by Eq. (4). Defining the maximum estimation error $\varepsilon = \max_{\theta_k \in P} |\mathcal{R}(\theta_k) - \overline{\mathcal{R}}(\theta_k)|$, then we have that for all θ*

$$|\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)| \in \mathcal{O}(\varepsilon \log(n)). \quad (5)$$

Since the maximum estimation error ε is fundamentally related to the number of shots N , we can derive the following corollary.

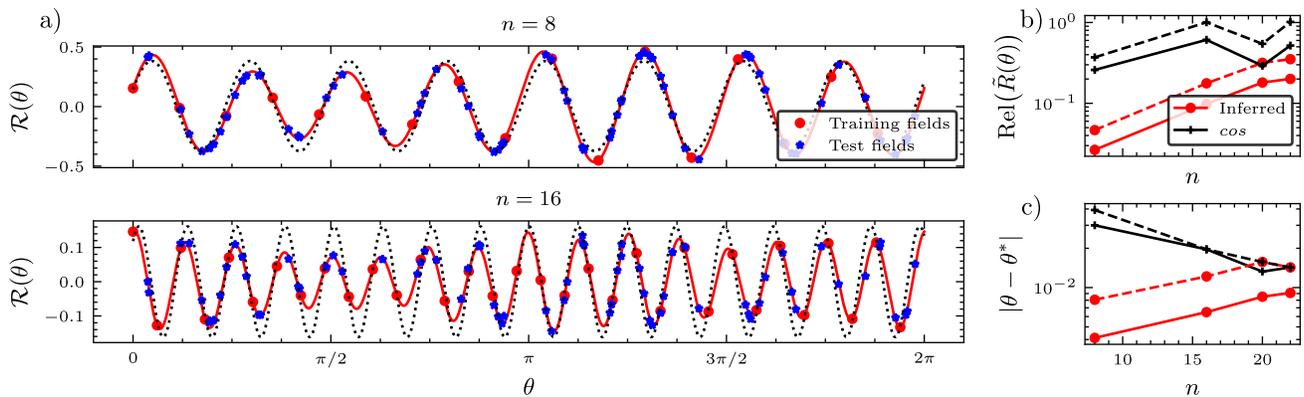


FIG. 2. **Magnetometry task on IBM hardware.** a) We show the inferred response $\tilde{\mathcal{R}}(\theta)$ for system sizes of $n = 8$ and 16 qubits. The fields used to train (red point) and test (blue star) the inference scheme, were estimated on the *IBM_Montreal* quantum computer using 3.2×10^4 shots per expectation value. We depict the inferred response $\tilde{\mathcal{R}}(\theta)$ (red solid curve) as well as the cosine fit $g(\theta)$ (black dotted curve). b) We show statistics of the relative response error versus n , that were obtained over 74 test fields and 7 experiment repetitions. The relative error is defined as the difference between the fit or inferred value and the measurement response, normalized by the average test expectation value. The red (black) points correspond to $\tilde{\mathcal{R}}(\theta)$ ($g(\theta)$), while solid (dashed) lines represent the median (upper quartile) error. c) We show the parameter prediction error versus n .

Corollary 1. *The number of shots N , necessary to ensure that with a (constant) high probability, and for all θ , the error $|\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)| \leq \delta$, for an inference error δ , is in $\Omega(\log^3(n)/\delta^2)$.*

Notably, it follows from Corollary 1 that, for fixed δ , a poly-logarithmic number of shots $N \in \Omega(\log^3(n))$ suffices to guarantee that $\tilde{\mathcal{R}}(\theta)$ will be a good approximation for the true response $\mathcal{R}(\theta)$. Once the inferred response is obtained, it can be further employed for tasks of parameter estimation and to characterize the sensitivity of a sensing apparatus – two aspects of central importance when devising a QS protocol (see Fig. 1).

When inferring the value of an unknown parameter θ' , we assume that one is given an estimate of the system response $\tilde{\mathcal{R}}(\theta')$, and the promise that θ' is sampled from some (potentially unknown) distribution over a known domain Θ . In such a case, one would estimate the unknown parameter as $\theta^* = \arg \min_{\theta \in \Theta} |\tilde{\mathcal{R}}(\theta) - \tilde{\mathcal{R}}(\theta')|$. In many cases of interest, such as high-precision estimation of small magnetic fields, Θ will be small enough such that $\tilde{\mathcal{R}}(\theta)$ is bijective, ensuring that the solution θ^* is unique. The resulting error in the estimate of the parameter θ' can be analyzed via the following corollary.

Corollary 2. *Let ϵ' be the estimation error in $\tilde{\mathcal{R}}(\theta')$ for some θ' in a known domain Θ where the system response is bijective. Let χ be the error introduced when estimating θ' via $\tilde{\mathcal{R}}(\theta)$ relative to the case when the exact response $\mathcal{R}(\theta)$ is used. The number of shots, N , necessary to ensure that with a (constant) high probability χ is no greater than δ' is $\Omega(\log^3(n)/(\delta' + \epsilon')^2)$.*

Corollary 2 certifies that $\tilde{\mathcal{R}}(\theta)$ can be used to infer an unknown parameter from a measured system response without incurring additional uncertainties as long

as enough shots are used. In fact, for fixed δ' and ϵ' , one only needs a poly-logarithmic number of shots.

Our inference-based method also allows for estimating the sensitivity of QS schemes. Knowing the functional form of the response enables one to directly compute the sensitivity using the error propagation formula $(\Delta\theta)^2 = (\Delta\mathcal{R}(\theta))^2/|\partial_\theta\mathcal{R}(\theta)|^2$ [26]. For the case of $O^2 = \mathbb{1}$ (i.e., measuring a Pauli operator), the sensitivity is

$$(\Delta\theta)^2 = \frac{1 - (\sum_{s=1}^n [a_s \cos(s\theta) + b_s \sin(s\theta)] + c)^2}{\sum_{s=1}^n s (-a_s \sin(s\theta) + b_s \cos(s\theta))}. \quad (6)$$

A similar expression will hold when using $\tilde{\mathcal{R}}(\theta)$ in place of $\mathcal{R}(\theta)$, i.e., for the inferred sensitivity $(\Delta\tilde{\theta})^2 = (\Delta\tilde{\mathcal{R}}(\theta))^2/|\partial_\theta\tilde{\mathcal{R}}(\theta)|^2$.

The previous results showcase the significance of Theorem 1, as knowing the exact form of the system response allows us to fully characterize QS protocols, in terms of parameter estimation and achieved sensitivity. One can further ask whether Eq. (3) can still be used in scenarios where the system response is no longer a trigonometric polynomial. Such a case will arise, for instance, if \mathcal{S}_θ is not of the form in Eq. (1). Still, we can leverage tools from trigonometric interpolation to accurately approximate the system response. Here, the following theorem holds for periodic responses and for parameters close enough to the θ_k values in P (regions of great interest for several QS tasks such as small magnetic field estimation).

Theorem 3. *Let $f(\theta)$ be a 2π -periodic function with $|f(\theta)| \leq 1 \forall \theta$, and let $\tilde{\mathcal{R}}(\theta)$ be its trigonometric polynomial approximation obtained from the N -shot estimates of $\tilde{f}(\theta_k)$, with θ_k given by Eq. (4). Defining the maximum estimation error $\epsilon' = \max_{\theta_k \in P} |f(\theta_k) - \tilde{f}(\theta_k)|$, and*

assuming that $|\theta - \theta_k| \in \mathcal{O}(1/\text{poly}(n))$, then

$$|f(\theta) - \tilde{\mathcal{R}}(\theta)| \in \mathcal{O} \left(\max \left\{ \frac{M}{\text{poly}(n)}, \varepsilon' \log(n) \right\} \right), \quad (7)$$

where M is the Lipschitz constant of $f(\theta)$.

Theorem 3 shows that if $M \in \mathcal{O}(n)$, which can occur for a wide range of parameter encoding schemes [27], then, we can derive a result similar to that in Corollary 1. Namely, using a poly-logarithmic number of shots to estimate the quantities $\bar{f}(\theta_k)$ leads to $\tilde{\mathcal{R}}(\theta)$ being a good approximation of $f(\theta)$.

Experimental results. We demonstrate the performance of the inference method for a magnetometry task performed on the *IBM_Montreal* quantum computer. This consists in preparing the GHZ state, encoding a magnetic field via Eq. (1) with $H = \sum_{j=1}^n Z_j/2$, and measuring the parity operator $O = \bigotimes_{j=1}^n X_j$. Here, Z_j and X_j are the Pauli z and x operators acting on the j -th qubit, respectively. Since one can efficiently measure O , we set \mathcal{D} to be the identity channel. We perform the QS task for systems of up to $n = 22$ qubits.

We first measure the system response at $2n+1$ training fields $\theta_k \in P$, sampled according to Eq. (4). These estimates are then used to infer the response $\tilde{\mathcal{R}}(\theta)$ of Eq. (3), as well as to fit a function $g(\theta) = \alpha \cos(\beta\theta + \gamma) + \zeta$. The latter corresponds to a naive approach where a cosine response is assumed, with correction coefficients α , β , γ and ζ , to account for the effects of noise. To evaluate the ability of these two functions to recover the true response of the system, we compare their predictions against the measured system response at a set of random test fields.

In Fig. 2(a) we display inference results for $n = 8$ and $n = 16$ qubits, indicating that our method (red solid curve) is clearly able to fit the training and test fields better than the cosine response (black dotted curve). More quantitatively, in Fig. 2(b), we show the scaling of the error as a function of the system size. One can see that for all problem sizes considered our method leads to smaller response prediction error. We note that for larger n the effect of noise becomes more prominent, as the hardware noise suppresses the measured expectation values [28–30]. Hence, in this regime both methods are equally limited by finite sampling noise which becomes of the same order as the magnitude of the response. Still, even for system sizes as large as $n = 22$ qubits, the inference method reduces the relative error by a factor larger than two when compared to that of the cosine fit. Finally, we also use $\tilde{\mathcal{R}}(\theta)$ and $g(\theta)$ for parameter estimation, i.e., to determine an unknown magnetic field encoded in the quantum state. As shown in Fig. 2(c), our inference method can outperform the cosine fit by up to one order of magnitude.

Numerical simulations. Assessment of the methodology based on experimental data is limited by lack of access to the true response with which to compare. Therefore, we complement the previous study with numerical results from a density matrix simulator that includes

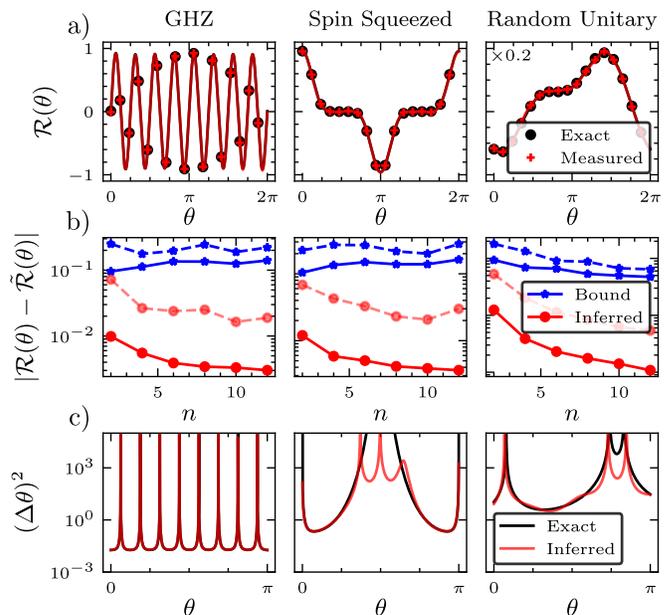


FIG. 3. Numerical results for QS tasks on a simulated noisy trapped ion device. a) We show the system response versus θ for $n = 8$ qubits in all three QS setups described in the main text. The exact response $\mathcal{R}(\theta)$ (black curve), and its value at the training fields $\mathcal{R}(\theta_k)$ (black points), were obtained with no finite sampling. In contrast, the response estimated at the training fields $\tilde{\mathcal{R}}(\theta_k)$ (red crosses), and the resulting inferred function $\tilde{\mathcal{R}}(\theta)$ (red curve), were obtained with a poly-logarithmic number of shots. b) We show the median (solid) and maximum (dashed) of the error $|\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)|$ (red) and the bound of Theorem 2 (blue) for 10^4 test fields uniformly sampled over $(0, 2\pi)$. The statistics were obtained over 30 repetitions of the experimental setups. c) Curves depict the inferred sensitivity versus θ . The exact (inferred) sensitivities are shown as a black (red) curves.

hardware noise, but where finite sampling can be omitted. We evaluate our inference method by emulating several magnetometry tasks as they would have been performed on a trapped-ion quantum computer (see [31, 32] for the noise model employed). To this end, we consider three different sensing setups. First, we study the same standard GHZ magnetometry setting as implemented on the IBM device. Second, we characterize the squeezing in a system where the probe state is a spin coherent state, $H = \sum_{j < k} X_j X_k / 2$ is the one-axis twisting Hamiltonian, and $O = Z_n$. Finally, we study a general scenario where the probe state is constructed by a random unitary composed of 4 layers of a hardware efficient ansatz with random parameters [33, 34], $H = \sum_{j=1}^{n-1} Z_j Z_{j+1}$ and $O = \frac{1}{n} \sum_{i=1}^n X_i$. In all cases \mathcal{D} is the identity channel. We present further details of these settings in the Supplemental Material, including the circuits employed.

As motivated by Corollary 1, $\tilde{\mathcal{R}}(\theta)$ is inferred with $N = \lceil 5 \times 10^2 \log(n)^2 \log(2 \times 10^2 (2n + 1)) \rceil$ shots per θ_k . Figure 3(a) shows that in all three QS settings considered the inferred response closely matches the exact one

(i.e, the red curve for $\tilde{\mathcal{R}}(\theta)$ and the black curve for $\mathcal{R}(\theta)$ are overlaid). In Fig. 3(b) we further show the scaling of the error $|\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)|$ with respect to the system size. This analysis reveals that our method always performs significantly better than the upper bound given by Theorem 2. Indeed, we can see that allocating a number of shots N that increases poly-logarithmically with n allows the error to decrease with increasing system size.

Finally, we use $\tilde{\mathcal{R}}(\theta)$ to estimate the sensitivity of the three experimental setups. As shown in Fig. 3(c), our method (red curves) recovers the behavior of the exact sensitivity (black curves). The sensitivity diverges in parameter regions where the experimental setup is insensitive to the field, or equivalently when the response function has a gradient which is zero. In the Supplemental Information we further analyze the scaling of the error in the estimated sensitivity, as well as the scaling of the error of inferring an unknown parameter given a system response.

Conclusions. We have introduced a inference-based scheme for QS which fully characterizes the response $\mathcal{R}(\theta)$ for a general class of unitary families by only measuring the system response at $2n + 1$ known parameters. This framework leverages techniques from variational quantum algorithms, quantum machine learning and polynomial interpolation [24, 35, 36] for quantum sensing, leading to new insights and methodology for the characterization, implementation and benchmarking of sensing protocols. This was complemented with rigorous error bounds, showing that a poly-logarithmic number of shots suffices to ensure good performance of the method.

Furthermore, we have explicitly shown two potential applications of this approach: accurate parameter estimation, and the ability to determine the sensitivity of a given sensing scheme. These applications were showcased in a proof-of-concept experiment on real quantum hardware, highlighting the applicability of our approach to explore the performance of sensing protocols in currently

available devices.

One of the main advantages of our inference method is that it can be readily combined with existing sensing protocols (even when the response is not a trigonometric polynomial, but can be approximated by one). For instance, further research could explore the use of the inferred response function in a variational setting, involving an optimization of the experimental setup to maximize the sensitivity and parameter prediction accuracy. This paves the way for a new approach in data-driven quantum machine learning for quantum metrology where the optimization procedure does not require knowledge of the classical or quantum Fisher information [17, 19–23, 37].

Acknowledgments

We thank Zoe Holmes, Michael Martin and Michael McKerns for helpful and insightful discussions. CHA and MC acknowledge support by NSEC Quantum Sensing at Los Alamos National Laboratory (LANL). MHG was supported by the U.S. Department of Energy (DOE), Office of Science, Office of Advanced Scientific Computing Research, under the Quantum Computing Application Teams (QCAT) program. AS was supported by the internal R&D from Aliro Technologies, Inc. ATS, PJC, and MC were initially supported by the LANL ASC Beyond Moore’s Law project. MC was supported by the LDRD program of LANL under project number 20210116DR. This work was also supported by the Quantum Science Center (QSC), a National Quantum Information Science Research Center of the U.S. Department of Energy (DOE). This research used quantum computing resources provided by the LANL Institutional Computing Program, which is supported by the U.S. DOE National Nuclear Security Administration under Contract No. 89233218CNA000001.

-
- [1] C. L. Degen, F. Reinhard, and P. Cappellaro, “Quantum sensing,” *Rev. Mod. Phys.* **89**, 035002 (2017).
 - [2] Vittorio Giovannetti, Seth Lloyd, and Lorenzo Maccone, “Quantum metrology,” *Physical review letters* **96**, 010401 (2006).
 - [3] Jacob M Taylor, Paola Cappellaro, Lilian Childress, Liang Jiang, Dmitry Budker, PR Hemmer, Amir Yacoby, Ronald Walsworth, and MD Lukin, “High-sensitivity diamond magnetometer with nanoscale resolution,” *nature physics* **4**, 810–816 (2008).
 - [4] Sourav Bhattacharjee, Utso Bhattacharya, Wolfgang Niedenzu, Victor Mukherjee, and Amit Dutta, “Quantum magnetometry using two-stroke thermal machines,” *New Journal of Physics* **22**, 013024 (2020).
 - [5] John F. Barry, Matthew J. Turner, Jennifer M. Schloss, David R. Glenn, Yuyu Song, Mikhail D. Lukin, Hongkun Park, and Ronald L. Walsworth, “Optical magnetic detection of single-neuron action potentials using quantum defects in diamond,” *Proceedings of the National Academy of Sciences* **113**, 14133–14138 (2016).
 - [6] Francesco Casola, Toeno Van Der Sar, and Amir Yacoby, “Probing condensed matter physics with magnetometry based on nitrogen-vacancy centres in diamond,” *Nature Reviews Materials* **3**, 1–13 (2018).
 - [7] Luis A Correa, Mohammad Mehboudi, Gerardo Adesso, and Anna Sanpera, “Individual quantum probes for optimal thermometry,” *Physical review letters* **114**, 220405 (2015).
 - [8] Antonella De Pasquale, Davide Rossini, Rosario Fazio, and Vittorio Giovannetti, “Local quantum thermal susceptibility,” *Nature communications* **7**, 1–8 (2016).
 - [9] Akira Sone, Quntao Zhuang, and Paola Cappellaro, “Quantifying precision loss in local quantum thermometry via diagonal discord,” *Physical Review A* **98**, 012115

- (2018).
- [10] Akira Sone, Quntao Zhuang, Changhao Li, Yi-Xiang Liu, and Paola Cappellaro, “Nonclassical correlations for quantum metrology in thermal equilibrium,” *Phys. Rev. A* **99**, 052318 (2019).
- [11] Surjeet Rajendran, Nicholas Zobrist, Alexander O Sushkov, Ronald Walsworth, and Mikhail Lukin, “A method for directional detection of dark matter using spectroscopy of crystal defects,” *Physical Review D* **96**, 035009 (2017).
- [12] L McCuller, C Whittle, D Ganapathy, K Komori, M Tse, A Fernandez-Galiana, L Barsotti, P Fritschel, M MacInnis, F Matichard, *et al.*, “Frequency-dependent squeezing for advanced LIGO,” *Physical review letters* **124**, 171102 (2020).
- [13] M e Tse, Haocun Yu, Nutsinee Kijbunchoo, A Fernandez-Galiana, P Dupej, L Barsotti, CD Blair, DD Brown, SE Dwyer, A Effler, *et al.*, “Quantum-enhanced advanced LIGO detectors in the era of gravitational-wave astronomy,” *Physical Review Letters* **123**, 231107 (2019).
- [14] Daniel M. Greenberger, Michael A. Horne, Abner Shimony, and Anton Zeilinger, “Bell’s theorem without inequalities,” *American Journal of Physics* **58**, 1131–1143 (1990).
- [15] D. Leibfried, M. D. Barrett, T. Schaetz, J. Britton, J. Chiaverini, W. M. Itano, J. D. Jost, C. Langer, and D. J. Wineland, “Toward Heisenberg-limited spectroscopy with multiparticle entangled states,” *Science* **304**, 1476–1478 (2004).
- [16] Susanna F Huelga, Chiara Macchiavello, Thomas Pellizzari, Artur K Ekert, Martin B Plenio, and J Ignacio Cirac, “Improvement of frequency standards with quantum entanglement,” *Physical Review Letters* **79**, 3865 (1997).
- [17] Bálint Koczor, Suguru Endo, Tyson Jones, Yuichiro Matsuzaki, and Simon C Benjamin, “Variational-state quantum metrology,” *New Journal of Physics* (2020), 10.1088/1367-2630/ab965e.
- [18] M. Cerezo, Andrew Arrasmith, Ryan Babbush, Simon C Benjamin, Suguru Endo, Keisuke Fujii, Jarrod R McClean, Kosuke Mitarai, Xiao Yuan, Lukasz Cincio, and Patrick J. Coles, “Variational quantum algorithms,” *Nature Reviews Physics* **3**, 625–644 (2021).
- [19] Jacob L Beckey, M Cerezo, Akira Sone, and Patrick J Coles, “Variational quantum algorithm for estimating the quantum Fisher information,” *Physical Review Research* **4**, 013083 (2022).
- [20] Akira Sone, M. Cerezo, Jacob L Beckey, and Patrick J Coles, “A generalized measure of quantum Fisher information,” *Physical Review A* **104**, 062602 (2021).
- [21] M. Cerezo, Akira Sone, Jacob L Beckey, and Patrick J Coles, “Sub-quantum Fisher information,” *Quantum Science and Technology* (2021), 10.1088/2058-9565/abfbef.
- [22] Raphael Kaubruegger, Denis V Vasilyev, Marius Schulte, Klemens Hammerer, and Peter Zoller, “Quantum variational optimization of ramsay interferometry and atomic clocks,” *Physical Review X* **11**, 041045 (2021).
- [23] Johannes Jakob Meyer, Johannes Borregaard, and Jens Eisert, “A variational toolbox for quantum multiparameter estimation,” *NPJ Quantum Information* **7**, 1–5 (2021).
- [24] Ken M Nakanishi, Keisuke Fujii, and Synge Todo, “Sequential minimal optimization for quantum-classical hybrid algorithms,” *Physical Review Research* **2**, 043158 (2020).
- [25] Antoni Zygmund, *Trigonometric series*, Vol. 1 (Cambridge university press, 2002).
- [26] Luca Pezzè, Augusto Smerzi, Markus K. Oberthaler, Roman Schmied, and Philipp Treutlein, “Quantum metrology with nonclassical states of atomic ensembles,” *Rev. Mod. Phys.* **90**, 035005 (2018).
- [27] Ryan Sweke, Frederik Wilde, Johannes Jakob Meyer, Maria Schuld, Paul K Fährmann, Barthélémy Meynard-Piganeau, and Jens Eisert, “Stochastic gradient descent for hybrid quantum-classical optimization,” *Quantum* **4**, 314 (2020).
- [28] Samson Wang, Enrico Fontana, Marco Cerezo, Kunal Sharma, Akira Sone, Lukasz Cincio, and Patrick J Coles, “Noise-induced barren plateaus in variational quantum algorithms,” *Nature Communications* **12**, 1–11 (2021).
- [29] Daniel Stilck França and Raul Garcia-Patron, “Limitations of optimization algorithms on noisy quantum devices,” *Nature Physics* **17**, 1221–1227 (2021).
- [30] Samson Wang, Piotr Czarnik, Andrew Arrasmith, M Cerezo, Lukasz Cincio, and Patrick J Coles, “Can error mitigation improve trainability of noisy variational quantum algorithms?” *arXiv preprint arXiv:2109.01051* (2021).
- [31] Lukasz Cincio, Yiğit Subaşı, Andrew T Sornborger, and Patrick J Coles, “Learning the quantum algorithm for state overlap,” *New Journal of Physics* **20**, 113022 (2018).
- [32] Colin J Trout, Muyuan Li, Mauricio Gutiérrez, Yukai Wu, Sheng-Tao Wang, Luming Duan, and Kenneth R Brown, “Simulating the performance of a distance-3 surface code in a linear ion trap,” *New Journal of Physics* **20**, 043038 (2018).
- [33] Abhinav Kandala, Antonio Mezzacapo, Kristan Temme, Maika Takita, Markus Brink, Jerry M. Chow, and Jay M. Gambetta, “Hardware-efficient variational quantum eigensolver for small molecules and quantum magnets,” *Nature* **549**, 242–246 (2017).
- [34] M Cerezo, Akira Sone, Tyler Volkoff, Lukasz Cincio, and Patrick J Coles, “Cost function dependent barren plateaus in shallow parametrized quantum circuits,” *Nature communications* **12**, 1–12 (2021).
- [35] Olivia Di Matteo, Josh Izaac, Tom Bromley, Anthony Hayes, Christina Lee, Maria Schuld, Antal Száva, Chase Roberts, and Nathan Killoran, “Quantum computing with differentiable quantum transforms,” *arXiv preprint arXiv:2202.13414* (2022).
- [36] David Wierichs, Josh Izaac, Cody Wang, and Cedric Yen-Yu Lin, “General parameter-shift rules for quantum gradients,” *Quantum* (2022).
- [37] Johannes Jakob Meyer, “Fisher Information in Noisy Intermediate-Scale Quantum Applications,” *Quantum* **5**, 539 (2021).
- [38] YP Hong and C-T Pan, “A lower bound for the smallest singular value,” *Linear Algebra and its Applications* **172**, 27–32 (1992).
- [39] Roger A. Horn and Charles R. Johnson, *Topics in Matrix Analysis* (Cambridge University Press, 1991).
- [40] Dunham Jackson, “On the accuracy of trigonometric interpolation,” *Transactions of the American Mathematical Society* **14**, 453–461 (1913).
- [41] Knut Petras, “Error estimates for trigonometric interpolation of periodic functions in lip 1,” *Series in Approximations and Decompositions* **6**, 459–466 (1995).

Supplemental Material for ‘‘Inference-Based Quantum Sensing’’

In this Supplemental Material, we provide additional details for the manuscript ‘‘*Inference-Based Quantum Sensing*’’. In Section A, we present a proof for Theorem 1. In Section B, we discuss the linear system problem that one needs to solve to determine the coefficients of the inferred system response. Therein we derive an optimal parameter sampling strategy that minimizes errors due to matrix inversion. We then present proofs of Theorem 2, Corollary 1, Corollary 2 and Theorem 3, in Sections C, D, E and F respectively. This is followed by numerical results further exploring the scaling of the errors arising in tasks of parameter estimation (see Section G) and when inferring the sensitivity (see Section H). Finally, in Section I, we provide examples of the circuits used for the experiments and numerical simulations performed.

A. Proof of Theorem 1

Here we present a proof for Theorem 1. This leverages the tools for optimizing quantum machine learning architectures presented in Ref. [24].

Theorem 1. *Let $\mathcal{R}(\theta)$ be the response function in Eq. (2) for a unitary family as in Eq. (1). Then, for any \mathcal{E} , \mathcal{D} and measurement operator O , $\mathcal{R}(\theta)$ can be exactly expressed as a trigonometric polynomial of degree n . That is,*

$$\mathcal{R}(\theta) = \sum_{s=1}^n [a_s \cos(s\theta) + b_s \sin(s\theta)] + c,$$

with $\{a_s, b_s\}_{s=1}^n$, and c being real valued coefficients.

Proof. We aim at deriving a closed-form expression for the true system response $\mathcal{R}(\theta)$ for a unitary family \mathcal{S}_θ . Recall that, for an operator h_j satisfying $h_j^2 = \mathbb{1}$, we have

$$e^{-i\theta h_j/2} = \cos\left(\frac{\theta}{2}\right) \mathbb{1}_j - i \sin\left(\frac{\theta}{2}\right) h_j. \quad (\text{A1})$$

Hence, the state obtained after encoding by the unitary channel defined in Eq. (1) can be rewritten as

$$\rho_\theta = \sum_{\mathbf{l}, \mathbf{l}'} c_{\mathbf{l}, \mathbf{l}'}(\theta) \left((-i)^{\|\mathbf{l}\|^2} (i)^{\|\mathbf{l}'\|^2} \mathbf{h}^{\mathbf{l}} \rho \mathbf{h}^{\mathbf{l}'} \right), \quad (\text{A2})$$

with

$$\begin{aligned} c_{\mathbf{l}, \mathbf{l}'}(\theta) &= \cos\left(\frac{\theta}{2}\right)^{2n - \|\mathbf{l}\|^2 - \|\mathbf{l}'\|^2} \sin\left(\frac{\theta}{2}\right)^{\|\mathbf{l}\|^2 + \|\mathbf{l}'\|^2} \\ &= \sum_{s=1}^n \bar{a}_{\mathbf{l}, \mathbf{l}', s} \cos(s\theta) + \sum_{s=1}^n \bar{b}_{\mathbf{l}, \mathbf{l}', s} \sin(s\theta) + \bar{c}, \end{aligned} \quad (\text{A3})$$

where, $\mathbf{l} = (l_1, l_2, \dots, l_n)$, with $l_j \in \{0, 1\}$, is a bitstring of length n , and where $\mathbf{h}^{\mathbf{l}}$ is a Hermitian operator defined as

$$\mathbf{h}^{\mathbf{l}} := h_1^{l_1} \otimes h_2^{l_2} \otimes \dots \otimes h_n^{l_n}. \quad (\text{A4})$$

Here, we have used the notation $h_j^0 = \mathbb{1}_j$ and recall that $\|\mathbf{l}\|, \|\mathbf{l}'\| \in \{0, 1, \dots, n\}$. It can be further verified that the coefficients $c_{\mathbf{l}, \mathbf{l}'}(\theta)$ are real-valued and symmetric with respect to swapping \mathbf{l} and \mathbf{l}' .

Finally, we can recast the system response $\mathcal{R}(\theta) = \text{Tr}[\mathcal{D} \circ \mathcal{S}_\theta \circ \mathcal{E}(\rho_{\text{in}})O]$ as the trigonometric polynomial

$$\mathcal{R}(\theta) = \sum_{s=1}^n [a_s \cos(s\theta) + b_s \sin(s\theta)] + c, \quad (\text{A5})$$

where we have defined the coefficients

$$\begin{aligned}
a_s &= \sum_{l,l'} \bar{a}_{l,l',s} d_{l,l'} , \\
b_s &= \sum_{l,l'} \bar{b}_{l,l',s} d_{l,l'} , \\
c &= \bar{c} \sum_{l,l'} d_{l,l'} . \\
d_{l,l'} &= \text{Tr} \left[\mathcal{D} \circ \mathcal{S}_\theta \left((-i)^{\|l\|^2} (i)^{\|l'\|^2} \left(\mathbf{h}^l \rho \mathbf{h}^{l'} \right) \right) O \right] .
\end{aligned} \tag{A6}$$

□

One of the striking implications of this theorem is that it holds even in the presence of quantum noise. If we assume that the quantum hardware employed is prone to noise, then such noise will affect the probe state preparation process resulting in a noisy channel $\tilde{\mathcal{E}}$ acting on ρ_{in} . The result is a noisy state $\tilde{\rho} = \tilde{\mathcal{E}}(\rho_{\text{in}})$. As such, we can see that the effect of a noisy state preparation channel is to replace ρ by $\tilde{\rho}$ in Eq. (A2), which does not ultimately change the functional form of the system's response Eq. (A5) (it only changes the value of the coefficients in Eq. (A6)). One can further assume that there is a θ -independent noise channel acting after the \mathcal{S}_θ as well as consider the case where the pre-measurement channel is noisy. Similarly to the previous case, this does not change the form of $\mathcal{R}(\theta)$ in Eq. (A5). Hence, we can see that the action of the noise channels can be ultimately absorbed into the coefficients of Eq. (A6), and thus, we can still use the tools from the main text to fully characterize the system response by measuring $2n + 1$.

B. Linear system problem

1. Matrix A

As outlined in the main text, $2n + 1$ evaluations of the response function, in Eq. (3), yield a system of $2n + 1$ equations with $2n + 1$ unknown variables. That is, we obtain a Linear System Problem (LSP) of the form $A \cdot \mathbf{x} = \mathbf{d}$, where, $\mathbf{x} = (a_1, \dots, a_n, b_1, \dots, b_n, c)$ is the vector of coefficients that characterize the physical process at hand, $\mathbf{d} = (\mathcal{R}(\theta_1), \mathcal{R}(\theta_2), \dots, \mathcal{R}(\theta_{2n+1}))$ is the vector of system responses for all the $\theta_k \in P$, and A is a $(2n + 1) \times (2n + 1)$ matrix defined as

$$A = \begin{pmatrix} \cos(\theta_1) & \dots & \cos(n\theta_1) & \sin(\theta_1) & \dots & \sin(n\theta_1) & 1 \\ \cos(\theta_2) & \dots & \cos(n\theta_2) & \sin(\theta_2) & \dots & \sin(n\theta_2) & 1 \\ \dots & \dots & \dots & \dots & \dots & \dots & \dots \\ \cos(\theta_{2n+1}) & \dots & \cos(n\theta_{2n+1}) & \sin(\theta_{2n+1}) & \dots & \sin(n\theta_{2n+1}) & 1 \end{pmatrix} .$$

The solution $\mathbf{x} = A^{-1} \cdot \mathbf{d}$ of the LSP provides a full characterization of $\mathcal{R}(\theta)$. In practice, the entries of the vector \mathbf{d} are noisy estimates with errors resulting from finite sampling. We denote by \mathbf{d}' the vector of estimated system responses and by $\boldsymbol{\delta}$ the vector of errors associated, such that

$$\mathbf{d}' = \mathbf{d} + \boldsymbol{\delta} . \tag{B1}$$

When solving the LSP, the error in the coefficients obtained is given by

$$\epsilon = \|\mathbf{x} - \mathbf{x}'\| = \|A^{-1} \cdot \boldsymbol{\delta}\| ,$$

which can be bounded as

$$\epsilon \leq \|A^{-1}\| \cdot \|\boldsymbol{\delta}\| . \tag{B2}$$

Using the 2-norm leads to $\|A^{-1}\|_2 = 1/\sigma_{\min}$, where σ_{\min} is the smallest singular value of A . Furthermore, we can bound the smallest singular value of an $M \times M$ square real-valued matrix [38], which for the matrix A yields

$$\sigma_{\min} \geq \left(\frac{M-1}{M} \right)^{(M-1)/2} |\det(A)| \cdot \frac{r_{\min}(A)}{\prod_{j=1}^{2n+1} r_j(A)} , \tag{B3}$$

where $r_j(A)$ is the 2-norm of the j th row of A , and $r_{\min}(A) = \min\{r_1(A), r_2(A), \dots, r_{2n+1}(A)\}$. Using the fact that

$$\left(\frac{M-1}{M}\right)^{(M-1)/2} \geq \frac{1}{\sqrt{e}}, \quad (\text{B4})$$

we find

$$\varepsilon \leq \frac{\sqrt{e}\|\delta\|}{r_{\min}(A)|\det(A)|} \prod_{j=1}^{2n+1} r_j(A). \quad (\text{B5})$$

For the error in Eq. (B5) to be minimized, one needs to pick the $2n+1$ field values such that $\det(A)$ is maximized. Using the fact that the matrix A can be related to a Vandermonde matrix [39] via element permutation,

$$|\det(A)| = \frac{1}{2^n} \prod_{i<j} |e^{i\theta_i} - e^{i\theta_j}|. \quad (\text{B6})$$

2. Optimal sampling strategy

In order to reduce the error induced when solving the LSP, one needs to maximize the determinant of A in Eq. (B6) by choosing the parameters $\theta_k \in P$ accordingly. Taking the logarithm of both sides in Eq. (B6), one can see that maximizing $|\det(A)|$ is equivalent to maximizing the quantity:

$$F = \sum_{i<j} \log(|z_i - z_j|), \quad (\text{B7})$$

where $z_i = e^{i\theta_i}$. Then, our optimization problem is equivalent to the task of placing $2N+1$ points over the unit circle such that they maximize the sum of the log of their distances. Since there are different ways to define a distance, we can replace F by a proxy quantity $\tilde{F} = \sum_{i<j} D_{i,j}$, where $D_{i,j}$ is taken to be a faithful distance between points over a circle. For convenience, let us pick the arc-length squared, i.e., $D_{i,j} = (\theta_i - \theta_j)^2 = \Delta\theta_{i,j}^2$ such that, we now need to maximize the function

$$\tilde{F} = \sum_{i<j} \Delta\theta_{i,j}^2, \quad (\text{B8})$$

subject to the condition

$$G = \sum_i \Delta\theta_{i,i+1} - 2\pi = 0. \quad (\text{B9})$$

This can be turned into the Lagrange multiplier problem

$$\mathcal{L} = F - \lambda G, \quad (\text{B10})$$

with partial derivatives

$$\frac{\partial \mathcal{L}}{\partial \Delta\theta_{i,j}} = 2\Delta\theta_{i,j} - \lambda \delta_{j,i+1}, \quad (\text{B11})$$

$$\frac{\partial \mathcal{L}}{\partial \lambda} = \sum_i \Delta\theta_{i,i+1} - 2\pi, \quad (\text{B12})$$

with $\delta_{j,i+1}$ representing Kronecker's delta function. The maximum will arise when the partial derivatives are zero, leading to

$$\Delta\theta_{i,i+1} = \frac{2\pi}{2n+1}, \quad (\text{B13})$$

resulting in values of θ_i evenly distributed between 0 and 2π .

C. Proof of Theorem 2

Theorem 2. Let $\mathcal{R}(\theta)$ be the exact response function, and let $\tilde{\mathcal{R}}(\theta)$ be its approximation obtained from the N -shot estimates $\bar{\mathcal{R}}(\theta_k)$ with θ_k given by Eq. (4). Defining the maximum estimation error $\varepsilon = \max_{\theta_k \in P} |\mathcal{R}(\theta_k) - \bar{\mathcal{R}}(\theta_k)|$, then we have that for all θ

$$|\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)| \in \mathcal{O}(\varepsilon \log(n)).$$

Before proving Theorem 2, we recall the following lemma that upper bounds trigonometric interpolation errors [40].

Lemma 1. Let $f(\theta)$ be a periodic function of θ with period 2π . Then, one can approximate $f(\theta)$ by a trigonometric function of order n

$$S_n(\theta) = \sum_{s=1}^n [a_s \cos(s\theta) + b_s \sin(s\theta)] + c$$

where $c = \frac{a_0}{2}$,

$$a_s = \frac{2}{2n+1} \sum_{k=1}^{2n+1} f(\theta_k) \cos(s\theta_k), \quad \text{and} \quad b_s = \frac{2}{2n+1} \sum_{k=1}^{2n+1} f(\theta_k) \sin(s\theta_k),$$

such that if $|f(\theta_k)| \leq f_{max} \forall \theta_k$ then,

$$|S_n(\theta)| \leq 5f_{max} \log(n).$$

A proof for Lemma 1 can be found in Ref. [40], and we note that the coefficients a_s, b_s defined above exactly match those recovered when solving the LSP previously formulated. We now provide a proof for Theorem 2.

Proof. Let $\mathcal{R}(\theta)$ be the true response function, and let $\tilde{\mathcal{R}}(\theta)$ be the inferred response obtained from the estimates $\bar{\mathcal{R}}(\theta_k)$ of the system response at $2n+1$ fields θ_k defined according to Eq. (4). Then, the difference between two trigonometric functions is another trigonometric function which is also 2π periodic, namely,

$$\begin{aligned} \mathcal{R}^*(\theta) &= \mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta) \\ &= \sum_{s=1}^n [a_s^* \cos(s\theta) + b_s^* \sin(s\theta)] + c^* \end{aligned} \quad (\text{C1})$$

with a_s^*, b_s^* , and c^* real-valued coefficients such that

$$a_s^* = \frac{2}{2n+1} \sum_{k=1}^{2n+1} (\mathcal{R}(\theta_k) - \bar{\mathcal{R}}(\theta_k)) \cos(s\theta_k), \quad \text{and} \quad b_s^* = \frac{2}{2n+1} \sum_{k=1}^{2n+1} (\mathcal{R}(\theta_k) - \bar{\mathcal{R}}(\theta_k)) \sin(s\theta_k).$$

Hence, defining $\varepsilon = \max_{\theta_k \in P} |\mathcal{R}(\theta_k) - \bar{\mathcal{R}}(\theta_k)|$, and using Lemma 1, shows that

$$|\mathcal{R}^*(\theta)| = |\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)| \leq 5\varepsilon \log(n). \quad (\text{C2})$$

The previous shows that for all θ , we have $|\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)| \in \mathcal{O}(\varepsilon \log(n))$. \square

D. Proof of Corollary 1

Corollary 1. The number of shots N , necessary to ensure that with a (constant) high probability, and for all θ , the error $|\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)| \leq \delta$, for an inference error δ , is in $\Omega(\log^3(n)/\delta^2)$.

Proof. Let $\zeta_k = |\mathcal{R}(\theta_k) - \bar{\mathcal{R}}(\theta_k)|$ be the estimation error in the system response for a parameter θ_k . We start this proof by bounding the probability of such error to be higher than a threshold ϵ . Recall that an estimate $\bar{\mathcal{R}}(\theta_k)$ is obtained as an average over N measurements of an observable O . We denote by X_k^i (with $i = 1, \dots, N$) the random variable associated with each measurement. Given that we consider observables O with norm $\|O\|_\infty \leq 1$, the outcomes of such a measurement take values in the range $[a_k^i, b_k^i]$ who's amplitude can always be bounded as $b_k^i - a_k^i \leq 2$.

Using this notation, $\overline{\mathcal{R}}(\theta_k)$ is defined as the average $\sum_{i=1}^N (X_k^i/N)$, which is an unbiased estimate of the response, i.e., $E[\overline{\mathcal{R}}(\theta_k)] = \mathcal{R}(\theta_k)$. It can be shown that:

$$\begin{aligned} \Pr(\zeta_k = |\mathcal{R}(\theta_k) - \overline{\mathcal{R}}(\theta_k)| \geq \epsilon) &\leq 2 \exp \left[- \frac{2\epsilon^2}{\sum_{i=1}^N [(b_k^i - a_k^i)/N]^2} \right] \\ &\leq 2 \exp[-N\epsilon^2/2], \end{aligned} \quad (\text{D1})$$

where we have made use of Hoeffding's inequality to derive the first inequality, and of the fact that $b_k^i - a_k^i \leq 2$ to obtain the second one.

As we are interested in the *maximum* estimation error ϵ appearing in Theorem 2, we now aim to bound the probability that *any* of the $2n + 1$ estimation errors ζ_k exceed ϵ . That is, we wish to bound $\Pr(\cup_{k=1}^{2n+1} E_k)$, where E_k is defined as the event when ζ_k is greater than ϵ . This is readily achieved by means of Boole's inequality which states that the probability of at least one event (over a set of events) to occur is no greater than the sum of the probabilities of each individual event in the set. Hence we have

$$\begin{aligned} \Pr(\cup_{k=1}^{2n+1} E_k) &\leq \sum_{k=1}^{2n+1} \Pr(E_k) \\ &\leq \sum_{k=1}^{2n+1} 2 \exp[-N\epsilon^2/2] \\ &= (4n + 2) \exp[-N\epsilon^2/2] \end{aligned} \quad (\text{D2})$$

where in the first inequality we used Boole's inequality, while in the second one we have used Eq. (D1).

Thus, to ensure that $\Pr(\cup_{k=1}^{2n+1} E_k) \leq a$ (for a some small positive a), we require a number of shots N , such that

$$N \geq \frac{2 \log[(4n + 2)/a]}{\epsilon^2}. \quad (\text{D3})$$

Finally, we can relate estimation errors to inference errors according to Theorem 2. In particular it follows from Eq. (C2) that $\Pr(|\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)| \geq 5\epsilon \log(n)) \leq a$ for N given in (D3). Accordingly, to ensure that $\Pr(|\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)| \geq \delta) \leq a$, with $\delta = 5\epsilon \log(n)$, we require that

$$N \geq \frac{50 \log^2(n) \log[(4n + 2)/a]}{\delta^2}. \quad (\text{D4})$$

Therefore, with a number of shots $N \in \Omega(\log^3(n)/\delta^2)$ we can ensure that $|\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)| < \delta$ with constant probability $1 - a$. \square

E. Proof of Corollary 2

Corollary 2. *Let ϵ' be the estimation error in $\overline{\mathcal{R}}(\theta')$ for some θ' in a known domain Θ where the system response is bijective. Let χ be the error introduced when estimating θ' via $\tilde{\mathcal{R}}(\theta)$ relative to the case when the exact response $\mathcal{R}(\theta)$ is used. The number of shots, N , necessary to ensure that with a (constant) high probability χ is no greater than δ' is $\Omega(\log^3(n)/(\delta' + \epsilon')^2)$.*

Proof. Let us here consider the problem of estimating an unknown parameter $\theta' \in \Theta$ given a measured system response $\overline{\mathcal{R}}(\theta')$ with estimation error ϵ' . Ideally, one would like to use the exact system response $\mathcal{R}(\theta)$ for such task. However, in practice, one does not have access to $\mathcal{R}(\theta)$ but only to the inferred response $\tilde{\mathcal{R}}(\theta)$, and we now aim at bounding the effect introduced by such approximation.

As sketched in Fig. 1, the error propagation formula allows us to relate the measured system response uncertainty $\Delta\mathcal{R}(\theta)$ to the uncertainty $\Delta\theta$ in the estimated parameter as $(\Delta\theta)^2 = (\Delta\mathcal{R}(\theta))^2 / |\partial_\theta \mathcal{R}(\theta)|^2$. From Theorem 2, we know that using $\tilde{\mathcal{R}}(\theta)$ for determining θ' introduces an error that is upper bounded by $5\epsilon \log(n)$ (where ϵ is the maximum estimation error over the $2n + 1$ parameters θ_k used to construct $\tilde{\mathcal{R}}(\theta)$). A simple geometric argument shows that the uncertainty in the error propagation formula now becomes $\Delta\mathcal{R}(\theta) \leq 5\epsilon \log(n) + \epsilon'$.

To ensure that the error introduced by the use of $\tilde{\mathcal{R}}(\theta)$ instead of $\mathcal{R}(\theta)$ does not dominate, we require that $5\epsilon \log(n) - \epsilon' \geq \delta$, with δ a positive value, should occur with low probability. In other words, we wish that $\epsilon \geq (\delta' + \epsilon')/5 \log(n)$ only occurs with a low probability. From the proof of Corollary 1, we know that

$$\Pr(\epsilon \geq \eta) \leq (4n + 2) \exp[-N\eta^2/2]. \quad (\text{E1})$$

Setting $\eta = (\delta' + \varepsilon')/5 \log(n)$ leads to

$$\Pr(\varepsilon \geq \eta) \leq (4n + 2) \exp \left[- \frac{N(\delta' + \varepsilon')^2}{50 \log^2(n)} \right] \quad (\text{E2})$$

Therefore to ensure that $\Pr(5\varepsilon \log(n) - \varepsilon' \geq \delta') \leq b$ we require the number of shots to satisfy

$$N \geq \frac{50 \log^2(n) \log[(4n + 2)/b]}{(\delta' + \varepsilon')^2}, \quad (\text{E3})$$

i.e., such that $N \in \Omega(\log^3(n)/(\delta' + \varepsilon')^2)$. □

F. Proof of Theorem 3

Theorem 3. *Let $f(\theta)$ be a 2π -periodic function with $|f(\theta)| \leq 1 \forall \theta$, and let $\tilde{\mathcal{R}}(\theta)$ be its trigonometric polynomial approximation obtained from the N -shot estimates of $\bar{f}(\theta_k)$ with θ_k given by Eq. (4). Defining the maximum estimation error $\varepsilon' = \max_{\theta_k \in P} |f(\theta_k) - \bar{f}(\theta_k)|$, then we have that if $|\theta - \theta_k| \in \mathcal{O}(1/\text{poly}(n))$, then*

$$|f(\theta) - \tilde{\mathcal{R}}(\theta)| \in \mathcal{O} \left(\max \left\{ \frac{M}{\text{poly}(n)}, \varepsilon' \log(n) \right\} \right), \quad (\text{F1})$$

where M is the Lipschitz constant of $f(\theta)$.

Before providing a proof for Theorem 3, we introduce the following lemma that bounds the error of using a trigonometric polynomial to approximate a periodic function [41].

Lemma 2. *Let $f(\theta)$ be a 2π -periodic function with Lipschitz-constant M and let S_n represent the trigonometric interpolation polynomial of order n used to approximate f via the values $f(\theta_k)$ at $2n + 1$ equidistant nodes, $\theta_k = \frac{2k\pi}{2n+1}$, $k = 0, 1, \dots, 2n$. The trigonometric approximation error is such that for all θ*

$$|f(\theta) - S_n(\theta)| \in \mathcal{O} \left(M \frac{\log(n)}{n} \left| \sin \left((n + 1/2) \theta \right) \right| \right).$$

A proof for Lemma 2 can be found on Ref. [41]. We now provide a proof for Theorem 3.

Proof. Let $f(\theta)$ be the response function of the system, and let $\mathcal{R}(\theta)$ be a trigonometric polynomial of order n used to estimate $f(\theta)$. It follows from Lemma 2 that when f is 2π -periodic with Lipschitz constant M , we have

$$|f(\theta) - \mathcal{R}(\theta)| \in \mathcal{O} \left(M \frac{\log(n)}{n} \left| \sin \left((n + 1/2) \theta \right) \right| \right). \quad (\text{F2})$$

Furthermore, when $|\theta - \theta_k| \leq \mathcal{O}(1/\text{poly}(n))$ for any $\theta_k = \frac{2\pi k}{2n+1}$, we can verify using the small angle approximation that

$$\left| \sin \left((n + 1/2) \theta \right) \right| \in \mathcal{O}(1/n).$$

Hence, Eq. (F2) can be rewritten as

$$|f(\theta) - \mathcal{R}(\theta)| \leq \mathcal{O} \left(\frac{M \log(n)}{n^2} \right). \quad (\text{F3})$$

So far, we have only considered the error of approximating $f(\theta)$ by a trigonometric polynomial $\mathcal{R}(\theta)$ obtained from the set of system responses $f(\theta_k)$, with $k = 0, \dots, 2n$. However, in practice we can only estimate such responses via measurements on a quantum device. Defining $\bar{f}(\theta_k)$ as the N -shot estimates of the system response, and defining $\tilde{\mathcal{R}}(\theta)$ as the trigonometric polynomial obtained from the measured values $\bar{f}(\theta_k)$, we now aim at bounding the error $|f(\theta) - \tilde{\mathcal{R}}(\theta)|$. To do so, one can use the following chain of inequalities

$$\begin{aligned} |f(\theta) - \tilde{\mathcal{R}}(\theta)| &= |f(\theta) - \mathcal{R}(\theta) + \mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)| \\ &\leq |f(\theta) - \mathcal{R}(\theta)| + |\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)| \\ &\leq 2 \max \left\{ |f(\theta) - \mathcal{R}(\theta)|, |\mathcal{R}(\theta) - \tilde{\mathcal{R}}(\theta)| \right\}. \end{aligned}$$

Defining the maximum estimation error $\varepsilon' = \max_{\theta_k \in P} |f(\theta_k) - \bar{f}(\theta_k)|$ and leveraging results from Theorem 2 and Lemma 2, and assuming that $|\theta - \theta_k| \in \mathcal{O}(1/\text{poly}(n))$, leads to

$$|f(\theta) - \tilde{\mathcal{R}}(\theta)| \in \mathcal{O} \left(\max \left\{ \frac{M}{\text{poly}(n)}, \varepsilon' \log(n) \right\} \right). \quad (\text{F4})$$

□

G. Inverting the inferred function

Once the inferred form $\tilde{\mathcal{R}}(\theta)$ of the response obtained, it can be used to estimate the value of a unknown field θ' in a given range. Given a measurement $\bar{\mathcal{R}}(\theta')$ of the response for this field, and provided that the response is bijective in the range considered, we define the estimated field value θ^* as follows:

$$\theta^* = \arg \min_{\theta} |\tilde{\mathcal{R}}(\theta) - \bar{\mathcal{R}}(\theta')|. \quad (\text{G1})$$

In Fig. 4, we report a study of the relative error in such predictions for a GHZ setting numerically simulated over system sizes of up to $n = 12$ qubits. The errors resulting from the use of the inferred response function (red curve) are compared to the errors resulting from the use of a cosine fit given by $g(\theta) = \alpha \cos(\beta\theta + \gamma) + \zeta$ (black curve). We find that the inferred function significantly outperforms the performance of the naive fit given by $g(\theta)$.

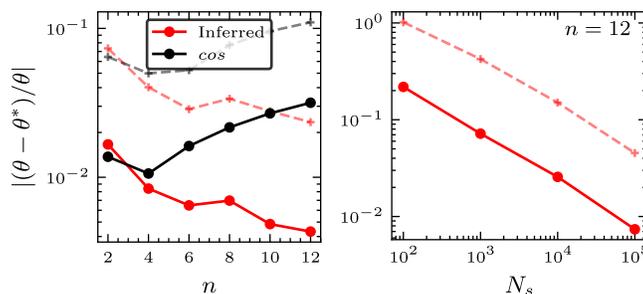


FIG. 4. **Scaling of the field prediction errors.** On the left hand side, we show the scaling of the median (solid) and maximal (dashed) relative errors in the θ^* values predicted by inverting either the inferred response function (red curve) or a cosine fit (black curve). These are obtained for a magnetometry setting with a probe GHZ state, over 30 repeats per system sizes $n \in [2, 12]$, and with 30 randomly selected θ' angles in the range $(-\pi/3n, \pi/3n)$ per repeat. The response functions were estimated using $N = \lceil 5 \times 10^3 \log(n)^2 \log(2 \times 10^2(2n + 1)) \rceil$ shots to evaluate each observable at every θ . On the right hand side we show the scaling of the errors as a function of the number of shots for a system size $n = 12$.

H. Error in the sensitivity

In Fig. 5, we report a study of the scaling of the errors resulting from the estimation of the sensitivity of two magnetometry setups: the GHZ state with a parity measurement, and the spin squeezed state with a single qubit Z -measurement. Errors are assessed across a range where no divergences in the sensitivities are observed. For the GHZ state and the spin squeezed state, this occurs at the ranges given by $\theta \in (-\pi/3n, \pi/3n)$, and $\theta \in (\pi/3n, \pi/n)$, respectively. No plot for the setup involving random unitary preparation (discussed in the main text) is shown here as the inherent randomness in the preparation of the probe state makes it difficult to systematically identify a region where the sensitivity is well-behaved over varied system sizes.

I. Circuits

In this section, we display the circuit constructions used in each sensing protocol presented in the experimental and numerical results as described in the main text. For illustrative purposes, we present the circuits for $n = 4$ qubits,

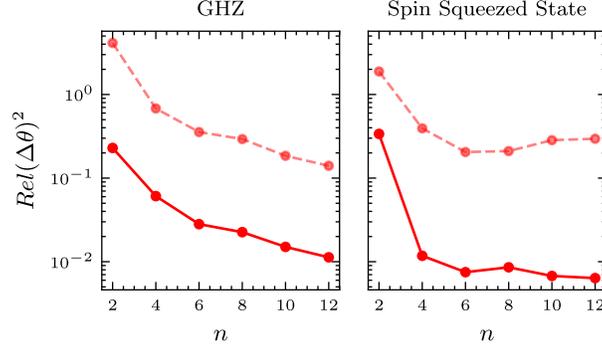


FIG. 5. **Scaling of the sensitivity prediction errors.** We show the scaling of the median (solid) and maximal (dashed) relative errors in the sensitivity estimates for the GHZ (left panel) and spin squeezed (right panel) experimental setups. The inferred response functions, used to predict the sensitivities, were estimated using $N = \lceil 5 \times 10^2 \log(n)^2 \log(2 \times 10^2(2n + 1)) \rceil$. The relative error is defined as the absolute error normalised by the range of sensitivity values.

which readily generalize to larger problem sizes. Vertical lines are used to separate the probe state preparation from the mechanism that encodes the parameter of interest.

In Fig. 6, we present two different circuit decompositions for the GHZ magnetometry problem. It is important to mention that even though they look different, both constructions are equivalent. The circuit shown in Fig. 6(a) favors the connectivity and native gates of the *IBM_Montreal* quantum computer, while the circuit shown in Fig. 6(b) is used for the ion-trap numerical simulations. In the latter, we assume that an ion-trap computer with full connectivity, enabling a GHZ state preparation in $\mathcal{O}(\log(n))$ depth. Once the GHZ is prepared, a global Z rotation with angle θ mimicking the effect of a magnetic field is applied to the probe state, and is followed by a parity measurement.

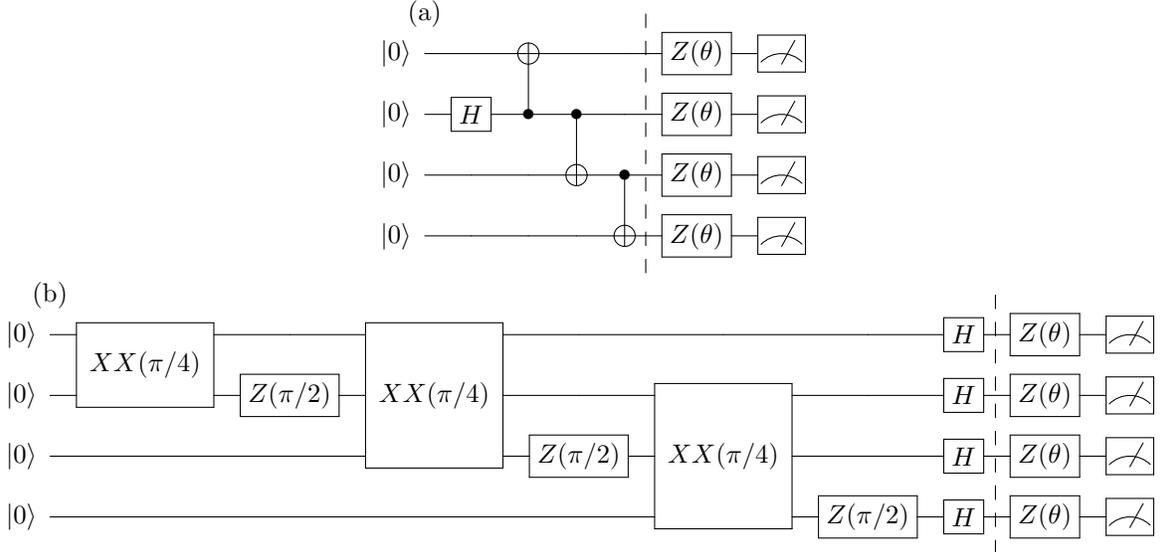


FIG. 6. Four-qubit circuit decomposition used for the GHZ magnetometry problem for (a) IBM and (b) ion-trap architectures.

For the spin squeezing setup, no step of state preparation is necessary as the coherent spin probe state $|0\rangle^{\otimes n}$ is the default initialization in current quantum computers. In Fig. 7, we show the gate decomposition corresponding to the one-axis twisting Hamiltonian mechanism used to characterize squeezing. In this particular setting we only need to measure one qubit, which is chosen to be the last one, but measurements on any other qubit would produce the same result.

Finally, in Fig. 8 we show the circuit decomposition for the preparation of a random probe state obtained by application of a random unitary composed of 4 layers of hardware efficient ansatz. The parameter values of $\{\alpha_j, \beta_i, \delta_i\}$ are randomly drawn. After encoding of the parameter θ , each qubit is measured individually.

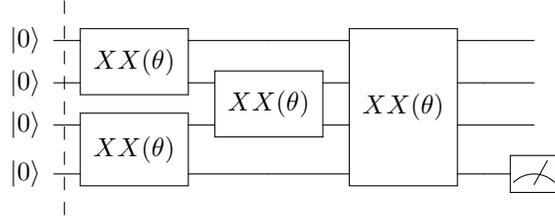


FIG. 7. Four-qubit circuit decomposition used for the spin squeezed state setup.

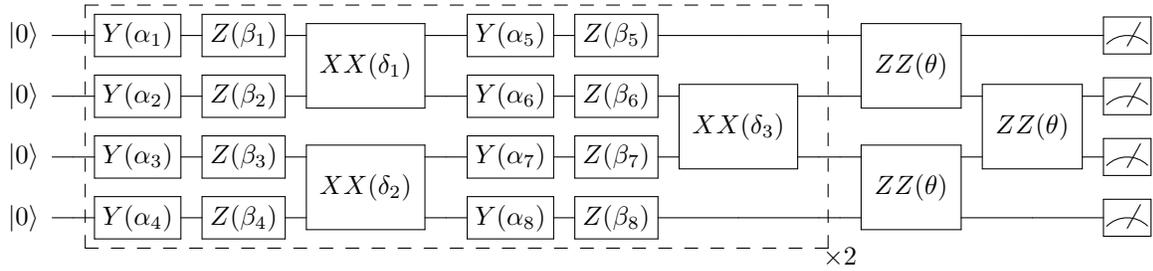


FIG. 8. Four-qubit circuit decomposition used for the Random Unitary.