

Software science view on quantum circuit algorithms

Yuri Gurevich and Andreas Blass

University of Michigan, Ann Arbor, Michigan, USA

Abstract

We show that, on the abstraction level of quantum circuit diagrams, quantum circuit algorithms belong to the species of interactive sequential algorithms that we studied in earlier work. This observation leads to a natural specification language for quantum circuit algorithms.

1 Introduction

We claim that, on the abstraction level of widely used quantum circuit diagrams, quantum circuit algorithms, *QC algorithms* in short, are interactive sequential algorithms, in fact a simple special case of those studied in [2]. But QC algorithms are approximate, parallel, and randomized. How can we claim that they are sequential? We will address these objections shortly. First we discuss what we mean by QC algorithms.

1.1 What are QC algorithms?

Recently, in [18], we defined syntax and semantics for quantum circuits with classical channels and for algorithms over such circuits. In the present introduction we recall some of those definitions. We also use some of the notions from [18] intuitively but we recall those definitions in §2 to make this paper more self-contained.

To simplify the presentation, we restrict attention to qubit-based circuits with wires. Wires are also known in the literature as timelines or registers. If a circuit has w input qubits (all input qubits, including ancillas, if any), we say that w is the *width* of the circuit; the state space for such a circuit is $(\mathbb{C}^2)^{\otimes w}$.

A nonempty set B of gates of a circuit C forms a *bout* if no B gate is a prerequisite for another B gate. Thus, the gates of a bout may be executed in parallel in a single step. A *schedule* for C is a sequence B_1, B_2, \dots, B_t of disjoint bouts such that every gate is in one of the bouts and all its prerequisites are in earlier bouts.

⁰Partially supported by the US Army Research Office under W911NF-20-1-0297

A *quantum circuit algorithm* A is given by a circuit C and a schedule B_1, B_2, \dots, B_t for C . The algorithm A works in t steps. In step 1, the B_1 gates fire; in step 2, the B_2 gates fire; and so on. It was shown in [18] that the input-output behavior of A depends only on C , not on the schedule.

1.2 Imprecision, parallelism, and randomness

We return to the objections, raised above, to our claim that QC algorithms are sequential algorithms interacting with the environment. In the course of the discussion, we address two common misconceptions about sequential algorithms.

Imprecision. Indeed, the inputs and outputs of a QC algorithm are in general approximate, and so are the operations of its gates. But the approximation aspect, so important in experimental physics, is completely ignored by the quantum circuit model which abstracts from the provenance of inputs and inaccuracy of gate operations. A QC algorithm with schedule B_1, B_2, \dots, B_t computes in t discrete steps where each step is a well-defined (at run time) transformation of the state space of the algorithm.

Parallelism. One common misconception is that a sequential algorithm cannot perform several distinct actions in parallel, within one step. In fact, it can. For example, a Turing machine may change the control state, write a symbol in the currently observed tape cell, and move the read/write head. But the parallelism of a sequential algorithm A is bounded by a fixed number n , independent of input, so that A can perform at most n actions in parallel. The parallelism of a QC algorithm over a quantum circuit is bounded by the width of the circuit.

In this paper, we consider only single-circuit algorithms. If we were to consider a (uniformly) parametrized family of QC algorithms, there would in general be no fixed bound on parallelism; bounds for individual circuits would depend on the parameters. There is an analogous situation with parametrized families of classical Boolean circuits.

One might also consider such a family to be a single algorithm. But we find the complexity-theoretical definition of families is unsatisfactory for programming/specification purposes [19, §1]. In this connection, we hope to find a sufficiently general (at least for practical purposes) definition of parametric programs and specifications that does not require an auxiliary classical algorithm constructing quantum circuits. We intend to address such a generalization of QC algorithms elsewhere.

Randomness. A QC algorithm with measurement gates relies on its environment for performing quantum measurements. In particular, the algorithm itself does not (and cannot) choose the random classical outcomes of measurements. This is done by nature. In that sense, nature is a part of the environment of a QC algorithm.

A second common misconception is that sequential algorithms do not interact with the environment, except possibly for accepting input and emitting output. In reality,

sequential algorithms, especially those written in high-level programming languages, depend on the environment, specifically the operating system, for various services, e.g., for providing (pseudo) random numbers.

This completes, for the time being, our discussion on the sense in which QC algorithms are sequential. We will return to the randomness issue in §6.

1.3 Related work

The most closely related body of work is that on abstract state machines, though we do not presume any familiarity with that body of work.

Below “abstract state machine” is abbreviated to “ASM.” The ASM thesis says that every algorithm, of any kind, is step-for-step simulated, at its natural level of abstraction, by an appropriate ASM [15]. In [16], the thesis was derived from first principles for sequential algorithms:

- sequential algorithms were axiomatized by means of three postulates,
- a *sequential ASM language* was defined (the algorithms programmed in this language are called *sequential ASMs*), and
- it was proved that, for every sequential algorithm A , one there is a sequential ASM that step-for-step simulates A .

Later the ASM thesis was derived from first principles for parallel algorithms in [1], and for interactive sequential algorithms in [2] and [3].

In article [11] Erich Grädel and Antje Nowack pioneered quantum ASM research: “We first show that, and how, a general model of quantum algorithms (based on the combination of a classical computer with quantum circuits) can be modeled by abstract state machines . . . we then formulate general postulates for quantum algorithms and show that every algorithm satisfying these postulates is simulated by an appropriate ASM.” Contrary to the previous cases, however, these theoretical results did not give rise to applications, primarily because the quantum ASM programs of [11] work with orthonormal bases of the quantum state spaces and thus are exponential in the number of qubits involved.

Here we show that QC algorithms form a simple subspecies of the so-called *ordinary interactive sequential algorithms* studied in [2]. We introduce a language for specifying arbitrary QC algorithms. We call this specification language the *ASM language for QC algorithms*, in short *QC-ASM*.

Now we turn attention to a much bigger body of work. There is a large and growing number of quantum programming languages and toolkits¹. A succinct survey of quantum languages is found in [26]. Of course, the present paper proposes a specification language, and specification languages are quite different from bona fide programming languages; specification languages are more theoretical and may not have efficient real-world implementations. Still these two kinds of languages are somewhat related, so it makes sense to discuss some programming languages here, though we

¹The first author was a member of Microsoft’s Quantum Architecture and Computing group when it started to develop Q#.

limit this discussion to those programming languages that seem most closely related to specification languages, namely Quipper (and its variants) and Qwire.

Peter Selinger and various coauthors have developed a quantum programming language, Quipper, and variants including Proto-Quipper-M and Proto-Quipper-Dyn [12, 13, 28, 29, 30]. Unlike our work in the present paper, Quipper and its variants are based on the viewpoint that quantum computations are subroutines, called when needed by a classical computer. Thus, for example, control operations are usually the responsibility of the classical computation; only in Proto-Quipper-Dyn [9] are quantum phenomena allowed to participate in control (via so-called dynamic lifting, similar to our classical channels).

Another consequence of the Quipper viewpoint is that the language is designed to operate smoothly with a classical “host” programming language. The host language chosen for this purpose is Haskell. Accordingly, Quipper is, like Haskell, a functional programming language, in contrast to the imperative nature of our specification language QC-ASM. Like many functional programming languages, Quipper is closely related to (and in some aspects inspired by) category-theoretic models [27]. A recent extension [8] incorporates dependent types.

There are also some lesser differences between Quipper and QC-ASM. One is that Quipper explicitly distinguishes ancillas from the meaningful qubits; it explicitly marks not only the introduction of each ancilla but also the end of the scope in which it is used. Another difference is that measurements in Quipper are merely projective measurements with respect to the computational basis.

The programming language Qwire, introduced in [25], is, like Quipper, an embedded language, i.e., it is to be used by a classical host to run quantum subroutines. But no particular host language is specified; Qwire is intended to operate with any of a wide spectrum of classical programming languages.

Qwire uses a combination of ordinary and linear type structures. Classical information is handled by traditional types, but quantum information has a type structure that is linear, in the sense of being based on Girard’s linear logic [10]. Linear type structure requires each qubit of quantum information to be used exactly once; it thereby enforces the no-cloning property of quantum physics. It also means that a qubit can be discarded only by measuring it, thereby turning it into classical information, and then discarding that classical bit.

Qwire, like our specification language QC-ASM, describes quantum computations in terms of wires carrying qubits. The gates in Qwire are unitary operations on a single wire and controlled-unitary operations on a pair of wires. Measurements are projective measurements of a single qubit in the computational basis. QC-ASM allows far more general gates and measurements, even non-projective measurements. It is known that the limited facilities of Qwire can be combined, also using ancillas, to simulate our more general measurements. Our greater generality makes it possible to work at a higher level of abstraction, which is important in specifications.

The paper [25] provides both operational and denotational semantics for Qwire. The denotational semantics works with mixed states rather than pure ones.

Finally we note that Quipper and Qwire include facilities to deal with uniform

circuit families rather than only single circuits. According to the standard complexity-theoretic definition, such a circuit family is constructed by a logspace bounded Turing machine. And indeed, Quipper and Qwire regard quantum circuits as being constructed by a classical sequential algorithm run by the classical host. Any such classical sequential algorithm can be programmed in the sequential ASM language which is a part of QC-ASM. But, as we mentioned in §1.2, we find the complexity-theoretic definition of uniform circuit families unsatisfactory.

1.4 What is in this paper?

After two preliminary sections, §2 and §3, we illustrate, in §4, our specification language QC-ASM and show how QC algorithms can be specified in that language. The abstraction level of QC-ASM is close to that of typical quantum circuit diagrams. This is illustrated in §5. The examples also show some advantages of QC-ASM specifications over diagram specifications as discussed in §5.1.

Sections up to and including §5 are intended to show the reader how to use our language for programming QC algorithms. The next two sections are more theoretical and put this paper in the framework of abstract state machine theory.

In §6, we show that QC algorithms form a simple subspecies of the interactive sequential algorithms introduced and studied in [2]. Interactive sequential algorithms are intra-step interactive. In other words, they are able to interact with the environment during a step. Traditional sequential algorithms also interact with the environment but only between steps, not during a step. In §7, we show that, by slightly lowering the level of abstraction, we can view QC algorithms as traditional sequential algorithms.

In §8, we give formal syntax and semantics for the QC-ASM language. In §9, we illustrate symbolic verification of a QC-ASM specification.

We use [24] as our main reference on quantum circuits and quantum circuit algorithms.

The talk [17] was a precursor of the present paper.

2 Quantum preliminaries

For the reader's convenience, we recall here some relevant information.

Proviso 1. By default, Hilbert spaces are finite dimensional, and quantum systems have finite dimensional state spaces.

2.1 Quantum circuits with classical channels

We recall some definitions from [18] in a form appropriate for our goals in this paper.

A quantum gate computes a unitary operator or a quantum measurement. For uniformity, we view a unitary U as a degenerate measurement with a single classical

output and a single linear operator U . Thus every quantum gate computes a quantum measurement.

A quantum gate G is endowed with two disjoint nonempty finite sets of the same cardinality, the set $\text{Entries}(G)$ of the *entries* of G and the set $\text{Exits}(G)$ of the *exits* of G . A quantum circuit comes with a one-to-one function Bind from the input nodes and gate exits to gate entries and output nodes. If $\text{Bind}(x) = y$, we say that x and y are *bound*.

A gate F is a *quantum source* for a gate G if an exit of F is bound to an entry of G , and F is a *classical source* for G if the classical output of the measurement computed by F is made available to G . F is a *direct prerequisite* of G if F is a quantum or classical source for G . The *prerequisite* relation \prec on the gates is the transitive closure of the direct prerequisite relation.

In this paper we require that a quantum gate G comes with a bijection from $\text{Entries}(G)$ to $\text{Exits}(G)$. Together with the Bind function, these bijections engender so-called wires, known also as timelines or registers, going from the inputs to outputs, drawn horizontally in pictures. See examples in §5. We think of wires as being numbered from the top down, starting with 1.

A gate G with a set $\text{CSrc}(G)$ of classical sources is assigned a finite nonempty set of *potential measurements* and a *selection function* σ_G that selects, at run time, the actual measurement $\sigma_G \langle x_F : F \in \text{CSrc}(G) \rangle$ executed by G ; here x_F is the classical output produced by gate F . If $\text{CSrc}(G)$ is empty, so that G has no classical sources, then there is only one measurement assigned to G .

2.2 Classical channels

If a gate G_1 is a classical source for a gate G_2 , we said in [18] that there is a classical channel from G_1 to G_2 . It was reasonable to think of a channel as going from a single gate to a single gate (though this was not mathematically required). In this sense, a gate may have more than one outgoing channel. That would be inefficient for programming purposes. Therefore we now prefer a one-to-many view of classical communication among gates. A gate G_1 displays its classical output, which is read by all the gates G_2 having G_1 as a classical source. Thus the mental picture of multiple outgoing channels of G_1 is replaced with that of a single display.

General discourse and examples of quantum circuits in the literature seem to treat classical channels as going from one gate to one gate, not as displays. They do not, however, explicitly prohibit displays. As a result, the notion of “channel” is a bit vague. We want the “display” version of the notion of channel, and we make this convention explicit as follows.

Proviso 2. Every gate G has a unique outgoing channel.

Thus, upon performing its measurement, G sends the classical outcome over its channel (i.e., displays the outcome). Every gate having G as a classical source is a recipient of that information. In addition there could be outside recipients of that information, especially if the classical outcome in question is an output of the circuit.

Notice that an outside recipient may be interested only in the existence of the classical outcome as a sign that the measurement has been performed successfully.

It is not assumed that the outgoing channel has material existence or that there are interested recipients. It may be a channel to nowhere. The purpose of the proviso is to simplify theory and programming. The channel, more exactly the associated variable, provides a standard place to record the classical outcome of the gate.

2.3 Measurements

A general quantum measurement of a quantum system Q is a finite indexed family $M = \langle A_i : i \in I \rangle$ of linear operators A_i on the state space of Q such that $\sum_i A_i^\dagger A_i$ is the identity operator $\mathbb{1}$. At each normalized quantum state ψ of Q , the classical outcome of M is a random variable taking values $i \in I$ with probabilities $p(i) = \langle \psi | A_i^\dagger A_i | \psi \rangle$ [24, §2.2.3].

If I is a single element, the requirement $\sum_i A_i^\dagger A_i = \mathbb{1}$ says that the unique A_i is unitary. If that unitary is the identity, we say that M is the identity measurement.

As mentioned earlier, we view a unitary U as a degenerate measurement with a unique classical output and a unique linear operator U . While the uniformity is natural mathematically and simplifies the exposition, a unitary is physically different from a “genuine” measurement because no randomness and no “collapse of the wave function” is involved. We will return to this point in §6.

3 Logic preliminaries

3.1 Traditional paradigm

Definition 3.1. A (*traditional many-sorted*) *vocabulary* is a finite collection of *sort symbols*, including symbol `Bool`, and *function symbols*, including symbols `true`, `false`, the standard propositional connectives, and the equality sign. Each function symbol f is assigned a nonnegative integer, the *arity* of f . Every function symbol f of arity r is assigned a *type* $S_1 \times \cdots \times S_r \rightarrow S_0$ where S_0, \dots, S_r are sort symbols. If f is nullary, i.e. if $r = 0$, we say that f is of type S_0 . \triangleleft

Remark 3.1. One may wonder what is the difference between sorts and types. Sorts are a special case of types. Sorts are given by the vocabulary; you don’t construct new sorts. Types, in contrast, can be constructed from sorts by operations like \times and \rightarrow used above. \triangleleft

Definition 3.2. A *structure* X of vocabulary V provides *denotations* for the V symbols. Each sort symbol S denotes a nonempty set. A function symbol f of type $S_1 \times \cdots \times S_r \rightarrow S_0$ denotes a function f from $S_1 \times \cdots \times S_r$ to S_0 , a *basic function* of X ; if $r = 0$ then the denotation is just an element of S_0 .

`Bool` consists of two distinct elements, (the denotations of) `true` and `false`, and the propositional connectives have their usual denotations. Also the equality sign works as usual on all elements regardless of their sorts. \triangleleft

Remark 3.2 (Names and denotations). Syntactic objects often denote semantical objects. For example, in Definition 3.2, the first occurrence of f is syntactic, and the second is semantic; similarly for the types S_0, S_1, \dots, S_r . Different conventions may be used for disambiguation, e.g. a basic function may be denoted f_X . We will use no disambiguation convention in this paper. It should be clear from the context whether a symbol means a syntactic or semantic object. \triangleleft

Define *expressions* (also known as *terms*) by induction. A nullary symbol of type S is an expression of type S , also called an *S -valued term*. If f is a function symbol of type $S_1 \times \dots \times S_r \rightarrow S$ and if each t_i is a term of type S_i , then $f(t_1, \dots, t_r)$ is a term of type S , an *S -valued term*.

3.2 Computational paradigm

The states of an abstract state machine are structures of a fixed vocabulary, but this requires enriching the notion of vocabulary.

Definition 3.3. An *ASM vocabulary* is a traditional vocabulary where the function symbols are split into three categories: *static*, *dynamic*, *external*. The symbols `true`, `false`, the propositional connectives, and the equality sign are all static. Nullary static symbols are *constants*, and nullary dynamic symbols are *programming variables*. \triangleleft

In the states of an abstract state machine, the denotations of the static symbols are given by initial states, those of the dynamic symbols may be changed by the algorithm, and those of the external symbols are controlled by the environment.

Below, by default, vocabularies are ASM vocabularies.

We presume that every vocabulary possesses the sort `integer` as well as the standard arithmetical operations, which are all static. In every structure, the sort `integer` and the arithmetical operations have their standard denotations.

4 An executable specification language for QC algorithm

In this and the following sections, we describe a simple language for programming QC algorithms on the level of common quantum circuit diagrams. In this section, the programming constructs of the language are introduced by showing how to use them in programming an arbitrary QC algorithm. A more formal description of the syntax and semantics of the language will be given in §8.

We call this language the *ASM language for QC algorithms*, in short *QC-ASM language*, because it is a special form of the language for programming sequential abstract state machines, in short *sequential ASMs* [16, §6]. How special is the “special form”? We address this question in §4.5.

In the ASM theory (and practice), states of an algorithm are rather comprehensive. Intuitively, at any point during the algorithm’s run, the state contains all the information (at the abstraction level of the algorithm) relevant to the future of the run except for the program of the algorithm and interventions of the environment. In the absence of environmental interventions (at the algorithm’s abstraction level), the current state and the program of the algorithm determine the future.

Such a comprehensive state of a QC algorithm determines its quantum state but not the other way round. The quantum state tells us nothing about which gates, if any, are about to fire, what classical information has been received by those gates, and so on. (Similarly, in the case of classical Turing machines, people often use the word “state” to mean just the control state, but the state in the ASM sense also includes the tape contents and the location of the read/write head.)

As in [16], comprehensive states of a QC algorithm are structures of a fixed many-sorted vocabulary which includes (among others) sorts `bool` and `integer` with the usual logical and arithmetical operations. But, in the case of a QC algorithm, the vocabulary also includes some quantum-specific sorts. One such sort is `qstate` (an allusion to “quantum state”), another is `measurement`.

4.1 Gates

We start with a useful notation. Consider what happens in run time when a gate performs a measurement M . The action of the gate is not determined just by the measurement M itself. The action also depends on what wires are involved, and the order of wires may be relevant as well. For example, the actions of performing *controlled-NOT* on wires 1,2, on wires 2,3, and on wires 3,2 are all distinct. A measurement M on wires $\bar{u} = (u_1, \dots, u_k)$ will be denoted $M(\bar{u})$.

Let G be a gate operating on wires \bar{u} . First suppose that G is assigned a single measurement M and thus performs a fixed measurement $M(\bar{u})$. Recall that, by Proviso 2, every gate has a unique outgoing channel. Hence, we can introduce a *channel variable* y to represent the content of the outgoing channel, the result of the measurement. The action of the gate is expressed by an *assignment rule*

$$y := M(\bar{u}). \tag{1}$$

Remark 4.1. There is something odd about assignment (1). On the right there is an expression of a measurement type but on the left an integer expression. We could have used something like $\text{CO}(M(\bar{u}))$ where CO alludes to “classical outcome.” For simplicity, we do not do that. ◁

If the channel variable y is not used later in the program, then we need not name it. Then, as syntactic sugar, the rule (1) may be rendered as

$$\text{output } M(\bar{u}). \tag{2}$$

If several `output` commands occur in the same program, they are presumed to refer to distinct variables y , so that they avoid write conflicts.

More generally, suppose that the gate G is assigned potential measurements M_1, \dots, M_p where $p \geq 1$. The actual measurement, performed by G , depends on the classical outcomes produced by the classical sources of G . Let \mathcal{F} be the set of these classical sources, and let \bar{x} be the indexed set $\langle x_F : F \in \mathcal{F} \rangle$ of the classical outcomes produced by the classical sources².

In §2.1 we mentioned a choice function σ_G that, given \bar{x} , determines the actual measurement $\sigma_G(\bar{x})$. While choice functions are convenient for the purposes of analysis, they are less convenient for programming purposes. Instead we use Boolean guards $\beta_1(\bar{x}), \dots, \beta_p(\bar{x})$ such that, if $\beta_q(\bar{x})$ holds and q is the smallest index³ for which $\beta_q(\bar{x})$ holds, then $M_q(\bar{u})$ is executed, and, if none of the guards holds, then $M_{p+1}(\bar{u})$ is executed. (Notice that the choice function has a finite domain and a finite range of possible values, and so the desired guards always exist.) Accordingly, instead of (1), we have a conditional assignment

$$\begin{aligned}
 &\text{if} && \beta_1(\bar{x}) & \text{then } y := M_1(\bar{u}) \\
 &\text{elseif} && \beta_2(\bar{x}) & \text{then } y := M_2(\bar{u}) \\
 &&& \vdots & \\
 &\text{elseif} && \beta_p(\bar{x}) & \text{then } y := M_p(\bar{u}) \\
 &\text{else} && & y := M_{p+1}(\bar{u}),
 \end{aligned} \tag{3}$$

where y is as in (1). Generalizing (2), if the variable y is not used later in the program, then, as syntactic sugar, the assignments $y := M_i(\bar{u})$ can be rendered as **output** $M_i(\bar{u})$ respectively.

In common examples in the literature, if a gate G is assigned $p + 1$ potential measurements, then $p = 1$ and M_2 is the identity measurement. In these common situations, (3) simplifies to

$$\text{if } \beta_1(\bar{x}) \text{ then } y := M_1(\bar{u}).$$

4.2 Bouts

If a bout B is the set $\{G_j : j \in J\}$ of gates G_j and if rule R_j programs G_j , then the *parallel composition rule*

$$\text{forall } j \text{ in } J: R_j \tag{4}$$

programs B . If ambiguity arises about where exactly the rule (5) ends, we may use braces around the rule:

$$\{\text{forall } j \text{ in } J: R_j\}.$$

In the common case where J consists of consecutive integers from a to b , we write $[a, b]$ as an alternative notation for J , so that (5) becomes

$$\text{forall } j \text{ in } [a, b]: R_j . \tag{5}$$

²If you fix a linear order on the gates, then the indexed set $\langle x_F : F \in \mathcal{F} \rangle$ could be replaced by an ordered tuple $(x_{F_1}, x_{F_2}, \dots)$ where $F_1 < F_2 < \dots$.

³Typically, the guards are disjoint, in which case “smallest index” amounts to “unique index.”

If $J = \{j_1, j_2, \dots, j_k\}$, then the parallel composition may also be rendered as

$$R_{j_1} \parallel R_{j_2} \parallel \dots \parallel R_{j_k}. \quad (6)$$

The order of the components in this parallel composition can be chosen arbitrarily. According to the semantics in [16, §6], all these choices behave the same.

4.3 Programs

Let A be a QC algorithm given by a circuit C and schedule B_1, \dots, B_t and suppose that the bouts B_s are programmed by rules R_s . A program for our algorithm may be written as a *sequential composition*

$$R_1; R_2; \dots; R_t \quad (7)$$

which has an alternative form

$$\text{for } j = 1 \text{ to } t: R(j) \quad (8)$$

where $R(j)$ is a rule such that $R(1)$ is equivalent to R_1 , $R(2)$ is equivalent to R_2 , etc. In applications where such $R(j)$ is natural, the alternative form is convenient; see §5.3 for example. But such $R(j)$ can always be constructed artificially:

$$\begin{array}{llll} \text{if} & j = 1 & \text{then} & R_1 \\ \text{elseif} & j = 2 & \text{then} & R_2 \\ & \vdots & & \\ \text{elseif} & j = t & \text{then} & R_t \\ \text{else} & & & \text{Skip} \end{array} \quad (9)$$

where the rule **Skip** does nothing (and the **else** clause is included only to comply with the syntax in §8).

As before, if ambiguity arises about where exactly the rule (14) ends, we may use braces around the rule:

$$\{\text{for } j = 1 \text{ to } n: R(j)\}.$$

The **for** construct is somewhat similar to the **forall** construct. In particular, in (5) and in (14), the variable j is bound. But notice that **for** operates sequentially, while **forall** operates in parallel. Also, the range of the variable j in **forall** can be any finite set, but in **for** it has to be a segment of integers, not necessarily starting at 1 as in the examples above.

Remark 4.2 (Normal form). The program is a sequential composition of parallel compositions of assignments or conditional assignments. Of course, we are not enforcing this normal form as a general requirement on QC-ASM programs. \triangleleft

4.4 Quantum input

Let QC algorithm A be as in §4.3. The program (7) of A says nothing about the initial state.

But a quantum circuit diagram for A usually describes the initial state. The set of wires of the circuit C is partitioned into subsets S_1, \dots, S_k of consecutive wires usually indicated by braces in the beginning of the diagram. For our purposes, we drop the consecutivity requirement, so that S_1, \dots, S_k can be an arbitrary partition of the set of wires. Each S_i is given by an ordered list L_i of the members of S_i . (In typical diagrams, that order is given by the top-to-bottom ordering of the wires.) The diagram indicates the initial state $|\psi_i\rangle$ on wires L_i , so that the intended initial quantum state of A is (up to isomorphism) the tensor product

$$|\psi_1\rangle \otimes \dots \otimes |\psi_k\rangle. \quad (10)$$

To match the diagrams, we introduce *quantum input declarations*. Recall the sort `qstate` mentioned in the beginning of this section. Expressions of sort `qstate` denote m -qubit states for various values of m . These could be standard states, like one-qubit quantum states $|0\rangle, |1\rangle$ or two-qubit Bell states. They could also be user-provided states.

The *basic quantum input declaration* has the form

$$|\psi\rangle \text{ on } L \quad (11)$$

where $|\psi\rangle$ is an m -qubit expression of type `qstate` and L is a list of m distinct wires.

If quantum input declarations D_1 and D_2 deal with disjoint sets of wires, then

$$D_1 \text{ and } D_2$$

is a quantum input declaration. Similarly, we can combine any number of input declarations as long as their sets of wires are pairwise disjoint. Suppose that sets S_i , lists L_i and quantum states $|\psi_i\rangle$ are as above. Then the initial state (10) is described by the quantum input declaration

$$|\psi_1\rangle \text{ on } L_1 \text{ and } |\psi_2\rangle \text{ on } L_2 \text{ and } \dots \text{ and } |\psi_k\rangle \text{ on } L_k. \quad (12)$$

Sometimes, the rule (12) or portions of it may be rendered more succinctly by means of the `forall` construct. For example, if every wire in a set J is initialized with the same one-qubit state $|\psi\rangle$, we may write

$$\text{forall } j \text{ in } J: \quad |\psi\rangle \text{ on } j. \quad (13)$$

We stipulate that the program P of an algorithm may be preceded by a quantum input declaration D :

$$D; P. \quad (14)$$

Remark 4.3 (Quantum input rules). Input declarations can be understood as input rules. Think of (11) as an instruction to input $|\psi\rangle$ on wires L . In (12), view `and` as another notation for (or replace it by the sign `||` of) parallel composition.

4.5 Some perspective

What are special features of the QC-ASM language from the perspective of the ASM theory and applications?

- The sort *measurement*. As far as we know, this sort does not appear in the ASM literature, with a possible exception of article [11] where the vocabulary is not explicit. But this is isn't surprising. It is common for an application area to have area-specific sorts.
- The invisible quantum state. While the classical outcome is recorded in (1) and (3), the quantum state is not mentioned in §4.1. The reason is not neglect but the level of abstraction which, as we mentioned above, is close to that of common circuit diagrams, e.g., those in §5. In classical algorithms, the actions of the operating system are typically below the algorithm's level of abstraction and so they are implicit. In the case of QC algorithms, nature works in the background, like an operating system. We revisit this issue in Remark 6.1 in §6.
- Sequential composition. There is no sequential composition construct in [16]; a program describes one generic step to be repeated over and over, possibly forever. With this semantics in mind, the program (7) can be replaced with a version of (9) where each of R_1, \dots, R_t increments j . For practical purposes though, explicit sequential composition is convenient, and it appears already in [15, §3.1.2]. It is used routinely in applications; see [7, 20] for example.
- Intra-step interaction with the environment. Consider the assignment $y := M(\bar{u})$ for example. The right side is a call to the environment to perform the measurement $M(\bar{u})$. Here M is an *external function call* in terms of ASM theory. While external functions are not mentioned in §6 of [16], they make a modest debut in §8.3 of that paper. In applications, intra-step interaction is common; see [7, 20] for example. Theoretically, intra-step interaction is formalized and analyzed in [2, 3].
- Calls to Nature. This feature is distinctive. In a sense, this is not surprising. With the exception of [11], the ASM literature is devoted to classical (rather than quantum) algorithms and algorithms are usually described on a level of abstraction higher than the physical implementation where nature is directly involved. We return to the issue in §6.

5 Examples

For a few well-known QC algorithms, we give quantum circuit diagrams and QC-ASM programs.

We adopt “frequently used quantum gates and circuit symbols” listed in [24, pages xxx–xxxi]; specifically, we use the symbols H, X, Z , *swap*, and *controlled-NOT*. We use the notion of controlled version cU of an operator U , as explained in [24, §4.3]. It is presumed that the first qubit is the controller. So, in $cU(v_0, v_1, \dots, v_k)$,

the qubit on wire v_0 is the controller. The one-qubit *standard measurement* SM produces 0 on qubit $|0\rangle$ and 1 on qubit $|1\rangle$ in the computational basis. It is the projective measurement $\langle i | \langle i | : i \in \{0, 1\}$.


The two-qubit *parity measurement* PM produces 0 on $|00\rangle = |0\rangle \otimes |0\rangle$ and on $|11\rangle$, and produces 1 on $|01\rangle$ and $|10\rangle$ in the computational basis. In more detail, PM is a projective measurement with classical outcomes 0,1 and the corresponding eigenspaces spanned by

$$\{|00\rangle, |11\rangle\} \text{ and } \{|01\rangle, |10\rangle\},$$

respectively.

According to our convention at the end of §8.1, $SM(u)$ is the measurement SM on the wire u , and $PM(u, v)$ is the measurement PM on wires u, v .

Example 5.1 (Controlled-NOT). The following diagram is a version of the circuit in [32] that we can verify and will do so in §9. It depicts a QC algorithm that computes the controlled-NOT operator on wires 1 (the controller) and 3 (the target). The computation uses one ancillary qubit, on wire 2, which is eventually discarded. Here (-1) is the one-qubit unitary operator $|\psi\rangle \mapsto -|\psi\rangle$.

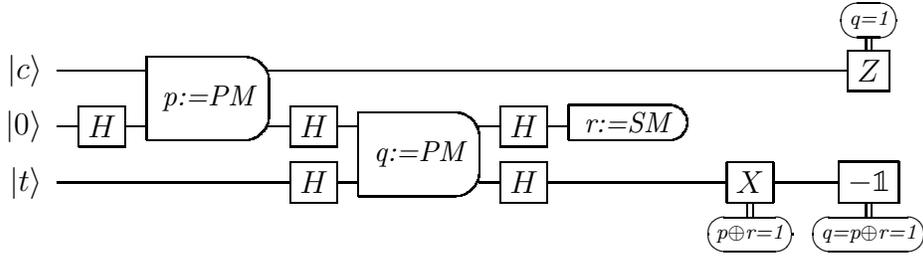

The corresponding QC-ASM program is

```

|c> on 1 and |0> on 2 and |t> on 3;
H(2); p := PM(1,2); H(2) || H(3); q := PM(2,3); H(2) || H(3);
r := SM(2); if p ⊕ r = 1 then X(3);
(if q = 1 then Z(1)) || (if (q = 1) ∧ (p ⊕ r = 1) then -1(3))

```

It is assumed that “||” binds more tightly than “;”.


Here is an alternative variant of this program that combines the two conditional gates on wire 3 into a single $(-1)^q X$ gate, appropriately conditioned.

```


|c> on 1 and |0> on 2 and |t> on 3;
H(2); p := PM(1,2); H(2) || H(3); q := PM(2,3); H(2) || H(3); r := SM(2);
(if q = 1 then Z(1)) || (if (p ⊕ r = 1) then (-1)qX(3))

```

A corresponding circuit would use an unorthodox gate $(-1)^q X$ as follows:

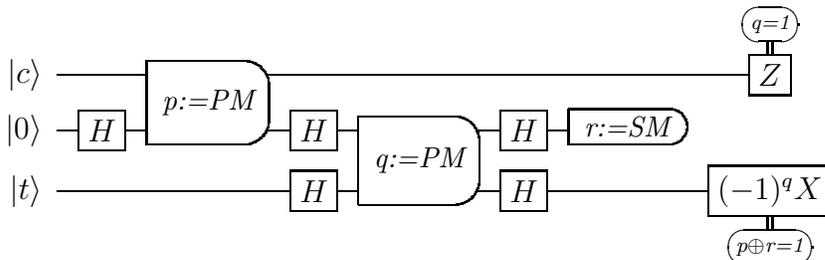

Example 5.2 (Teleportation). The following diagram is (a version of) the teleportation diagram in Figure 1.13 in [24].

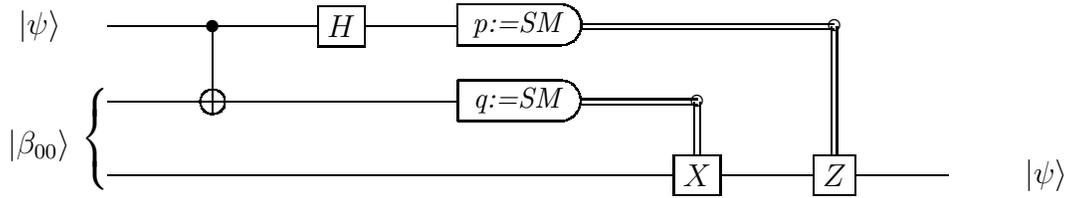


where $|\beta_{00}\rangle$ is a Bell state. The corresponding QC-ASM program is

```

|\psi\rangle on 1 and |\beta_{00}\rangle on 2,3;
controlled-NOT(1,2); H(1); p := SM(1) || q := SM(2);
if q = 1 then X(3); if p = 1 then Z(3)

```

Example 5.3 (Quantum Fourier transform). The QC algorithm in question computes a unitary operator known as the n -qubit quantum Fourier transform QFT_n . The algorithm is described in [24, §5.1]. The following diagram is Figure 5.1 in [24], except that we don't show the output state (because it isn't a part of the algorithm). The diagram depicts the essential part of the algorithm. As in [24, §5.1], “[n]ot shown are swap gates at the end of the circuit which reverse the order of qubits.”

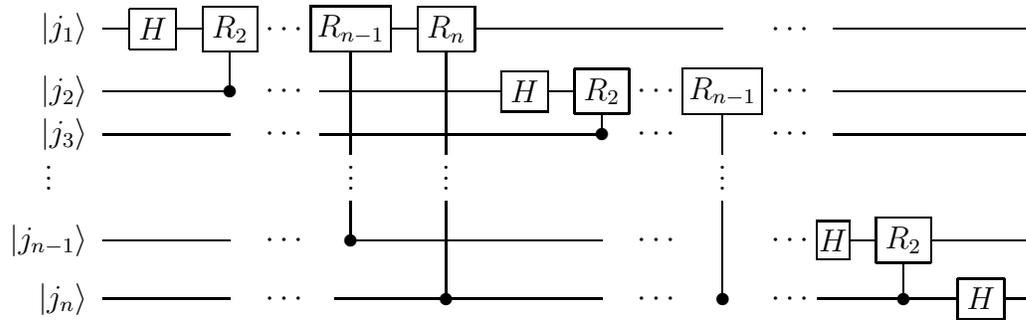

where $R_k = \begin{pmatrix} 1 & 0 \\ 0 & e^{2\pi i/2^k} \end{pmatrix}$ in the computational basis. The corresponding QC-ASM program is


```

forall i in [1,n]: |j_i\rangle on i;
{for i = 1 to n:
  H(i); for k = i + 1 to n: cR_{k-i+1}(k,i)};
forall i = 1 in [1, [n/2]]: swap(i, n - i)

```

Example 5.4 (Quantum phase estimation). The QC algorithm in question is described in [24, §5.2]. The following diagram is an obvious completion of the diagram in Figure 5.2 in [24]; in particular U is the same unitary operator as there. The

diagram depicts the algorithm.

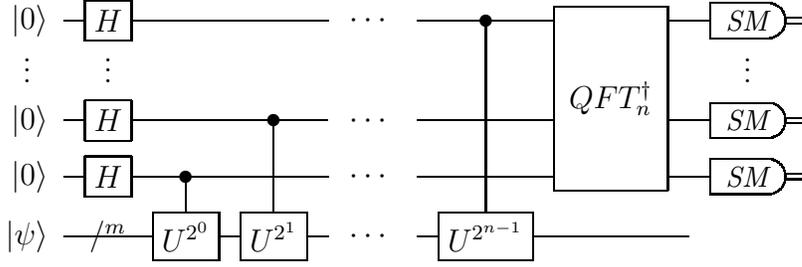


Here is the corresponding QC-ASM program:

```

{forall i in [1,n]: |0> on i} and |\psi> on n+1,...,n+m;
forall i in [1,n]: H(i);
for i=1 to n: cU^{2^{i-1}}(n-i+1,(n+1),..., (n+m));
QFT_n^\dagger(1,...,n);
forall i in [1,n]: output SM(i)

```

Example 5.5 (Grover's algorithm). Grover's search algorithm [14] is one of the most famous quantum algorithms. In [4], building on the exposition of Grover's algorithm in [22], we attempted to explain the algorithm to non-physicists. The following diagram is a variation on the diagram [31].

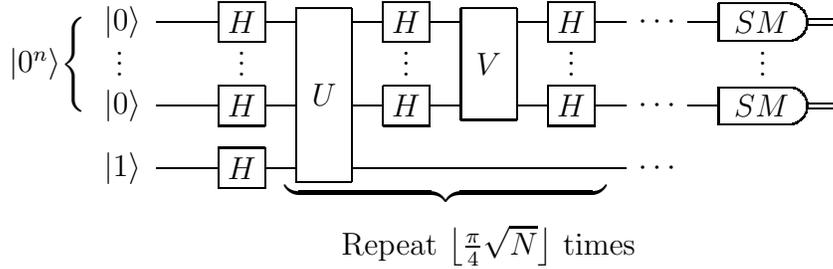

Here U is a quantum search oracle. For our purposes, it is not important what exactly U is; it is just a given unitary operator. V is the unitary $2|0^n\rangle\langle 0^n| - \mathbb{1}_n$. The corresponding QC-ASM program is as follows.

```

{forall i in 1...n: |0> on i} and |1> on n+1;
forall i in 1...(n+1): H(i);
{for k=1 to \lfloor \frac{\pi}{4} \sqrt{N} \rfloor:
  U(1,...,n+1); forall i in 1...n: H(i);
  V(1,...,n); forall i in 1...n: H(i);
};
forall i in 1...n: output SM(i)

```

5.1 Discussion

Our specifications are on the abstraction level of quantum circuit diagrams and closely resemble the diagrams. Nevertheless QC-ASM has some advantages visible already in

these small examples. There is no need to rely on intuition for the meaning of \dots and $\dot{.}$. There is no need for ad hoc notations like “Repeat \dots times.” In the Quantum Fourier Transform example, the parallel *swap* gates were omitted from the diagram because they are hard to draw neatly. In QC-ASM, there is no difficulty including these parallel swaps in the program.

In larger examples, the advantage of QC-ASM would be even more obvious.

6 QC algorithms as interactive algorithms

Article [16] axiomatized *sequential algorithms*, defined *sequential abstract state machines*, in short *sequential ASMs*, and proved that every sequential algorithm is step-for-step simulated by an appropriate sequential ASM. (Sequential ASMs are sequential algorithms of course.)

A sequential algorithm does not explicitly interact with the environment during a step. More exactly, it does not interact with the environment on its abstraction level, in the following sense. The environment may intervene implicitly: computing “given” functions, implementing the updates produced by the algorithm, etc. Such interventions are not treated as actual interaction and viewed as being below the abstraction level of the algorithms.

QC algorithms rely on the environment to perform measurements, and thus they involve explicit intra-step interaction with the environment.

Remark 6.1. Performing a measurement involves evaluating the classical outcome and applying the corresponding linear operator to update the quantum state. It is tempting to treat the classical outcome as a genuine choice of the environment and treat the update of the quantum state as an action of the algorithm (implemented by the environment). Such separation makes mathematical sense and is similar to common practice in classical computing. For example, the conditional assignment

```

if random = 0 then x := 7
else                x := 11,

```

where **random** is a bit chosen at random by the environment (operating system), could be performed entirely by the environment. But normally **random** would be chosen by the environment, and the update of x would be performed by the algorithm. However, the separation is thought to have little physical sense for QC algorithms. When nature evaluates the classical outcome, it simultaneously updates the quantum state. Also quantum circuit diagrams show no separation. Neither will we. \triangleleft

To account for intra-step interaction with the environment, we generalized in [2] the theory of sequential algorithms, developed in [16], to the theory of so called *ordinary interactive small-step algorithms*, in short *interactive algorithms*. An interactive algorithm

- proceeds in discrete steps,

- performs only a bounded amount of work in each step,
- uses only such information from the environment as can be regarded as answers to the queries issued by the algorithm, and
- never completes a step until all queries issued in that step have been answered.

In Part I of [2], we axiomatized interactive algorithms. In Part II, we defined interactive abstract state machines, in short *interactive ASMs*. In Part III, we proved that every interactive algorithm can be step-for-step simulated by an interactive ASM.

QC algorithms are interactive algorithms. Think of $M(\bar{u})$ in (1) as a function call to the environment. Of course the environment needs access to the appropriate quantum state $|\psi\rangle$. But, staying on the abstraction level of quantum circuit diagrams, we deal with the quantum state implicitly.

In terms of interactive algorithms, the measurement, a tuple of the relevant wires, and the relevant quantum state form a query. The answer comprises the classical outcome of $M(\bar{u})$ and the updated quantum state.

QC algorithms satisfy a constraint —namely, no query depends on any answer from the same step — that dramatically simplifies the theory developed in [2].

Remark 6.2 (Simplification). Readers who want to study [2] as background for the present paper would do well to keep this simplification in mind. To illustrate the simplification, we note that in the simplified version, we have the following.

- In the Interaction Postulate, the causality relation between answer functions and potential queries reduces to just the set of potential queries (caused by the empty answer function).
- The notion of context (Definition 5.5 in Part I) becomes nearly trivial. A context just assigns an answer to each potential query. ◁

In fact, a QC algorithm given by a program of §4 is an interactive abstract state machine [2, Part II]. In the terminology of that paper, in the assignment $y := M(\bar{u})$, M is a so-called *external* function symbol, and $M(\bar{u})$ is a *query* to the environment. The environment evaluates the query and returns the result to the algorithm. The case of conditional assignment (3) is similar; M_1, \dots, M_p, M_{p+1} are external function symbols there.

In the current situation, with QC algorithms, evaluating the query means performing the measurement, and the result returned to the algorithm is the classical outcome. In addition, the environment updates the quantum state. Since we agreed to treat the quantum state implicitly, the algorithm does not “see” the quantum state; the update of the quantum state is exclusively the business of the environment. This may seem delegating too much to the environment; in this connection, see Remark 6.1.

Still, the theory of interactive algorithms is more involved than that of sequential algorithms. By slightly lowering the level of abstraction of quantum circuit diagrams, we can turn intra-step interaction of QC algorithms with their environments into inter-step interaction, so that QC algorithms become sequential algorithms. Taking

this into account, we develop, in the next section, an alternative approach to QC algorithms, using only inter-step interaction, so that QC algorithms are sequential.

7 QC algorithms as sequential algorithms

The programming language of §4 is on the desired level of abstraction, that of quantum circuit diagrams. The purpose of the present section is not to change that language, but rather to show that a slight refinement of the language provides the proper semantics without intra-step interaction.

Assignment (1) is simulated by a two-step procedure of the algorithm in collaboration with the environment that, between the two steps of the algorithm, evaluates the measurement at the appropriate quantum state, updates the quantum state, and returns the classical outcome.

The algorithm starts by preparing the environmental intervention. In terms of interactive algorithms, it composes a query. The measurement M (the indexed set of operators) to be evaluated is assigned to a special variable mq (an allusion to “measurement in the query”), and the tuple \bar{u} of relevant wires is assigned to a special variable wq (an allusion to “wires in the query”). The environment would also need the state $|\psi\rangle$ of the quantum system. A special variable could be introduced for that purpose, but we chose to keep the quantum state implicit, as it is usually done on quantum circuit diagrams and as it is in §4.

Then the environment evaluates the measurement mq in the quantum state $|\psi\rangle$, updates the quantum state, and stores the classical outcome in a variable $o(\text{wq})$. (The purpose of the argument $\text{wq} = \bar{u}$ is to disambiguate the storage location. There could be several queries that the environment evaluates in parallel, even several uses of the same measurement on different wires.) Finally, the algorithm assigns the classical outcome to a fresh variable, called y in (1). Here is that procedure:

$$\begin{aligned} \text{mq} &:= M \quad || \quad \text{wq} := \bar{u}; \\ y &:= o(\bar{u}) \end{aligned}$$

where, in between the two steps, the environment performs the measurement $\text{mq}(\text{wq})$ at the quantum state, updating the state in the process, and returns the classical outcome as $o(\text{wq})$.

Similarly, conditional assignment (3) is simulated by a two-step procedure of the algorithm together with one step of the environment sandwiched between the two

steps of the algorithm:

```

    if  $\beta_1(\bar{x})$       then mq :=  $M_1$ 
    elseif  $\beta_2(\bar{x})$  then mq :=  $M_2$ 
    :
    elseif  $\beta_p(\bar{x})$  then mq :=  $M_p$ 
    else          mq :=  $M_{p+1}$ 
    ||   wq :=  $\bar{u}$ ;
    y :=  $o(\bar{u})$ 

```

Again, in between the two steps, the environment performs the measurement $\text{mq}(\text{wq})$ at the quantum state, updating the state in the process, and returns the classical outcome as $o(\text{wq})$. And again, the algorithm stores that outcome as y .

8 Syntax and semantics of QC-ASM rules

8.1 Expressions

We defined vocabularies and expressions in §3. To describe QC algorithms as abstract state machines, we need some additional assumptions and terminology about vocabularies and expressions.

We define *wire names* as expressions of type integer which have no programming variables and can be evaluated at compile time. (Example 5.3 uses wire names $1, 2, \dots, n$ where n is not a programming variable but a parameter whose value is fixed ahead of time in each QFT circuit.)

Channel variables form a subcategory of programming variables.

Sorts For each positive integer k , we have sorts *k-qubit unitary* and *k-qubit measurement*; we also have sort *qstate*. These sorts are *quantum sorts*; the other sorts are *classical*. We stipulate that channel variables must be of classical sorts.

As in §2.3, a k -qubit unitary U may be viewed as a degenerate k -qubit measurement M_U with a unique classical output and unique linear operator U ; this view allows us to simplify the exposition. Still, formally speaking, there is difference between a unitary U and the measurement M_U . This is similar to viewing an integer as a real number.

For brevity, we say that an expression e is *classical* if the values of e and all its subexpressions are of classical sorts.

8.2 Generalized circuits

Recall that a gate G is assigned a collection of potential measurements and that the selection function σ_G selects, at run time, the actual measurement depending on the values coming to G via the incoming classical channels.

For technical reasons, we need to generalize the notion of quantum circuit. To motivate the desired generalization, consider the possibility of breaking a quantum circuit C into an initial segment C_1 and the complementary final segment C_2 . Are those two segments genuine quantum circuits? More precisely, suppose that C_1 is a proper initial segment (initial in the sense that it is closed under prerequisites) of the quantum circuit C , and let C_2 be the complementary final segment. If an exit of a C_1 gate is bound to an entry of a C_2 gate, bind that gate exit to a fresh output node in C_1 , and bind a fresh input node to that gate entry in C_2 . As a result, C_1 is a quantum circuit in its own right, an initial subcircuit of C . If there are no classical channels from C_1 gates to C_2 gates, then C_2 is also a quantum circuit. Otherwise C_2 has incoming classical channels with sources outside C_2 ; it is in that sense that C_2 is a generalized quantum circuit.

If a C_1 gate F is a classical source of one or more C_2 gates, think of the value that F puts into its outgoing channel as the value of a special channel variable set by F .

Definition 8.1. Let Ω be a set of channel variables. (Intuitively, the values of Ω variables are set by entities outside of the circuit under consideration.) Ω -circuits are the generalization of quantum circuits where, for each gate G , the arguments of the selection functions σ_G are not only the values sent by the classical sources of G but also the values of Ω variables. ◁

Quantum circuits are Ω -circuits where $\Omega = \emptyset$.

8.3 Syntax of rules

Let Ω be a finite set of channel variables. We define the notion of *rule over Ω* , in short Ω -rule.

The definition is by induction. In the process of induction, we also define, for every Ω -rule R , the following.

- The *wire set* $W(R)$ of R . The intention is that $W(R)$ is the set of wires involved in the execution of R .
- The set $\text{Sub}(R)$ of *subrules* of R . We stipulate that R is a subrule of itself; the induction is used to define the *proper* (different from R) subrules.
- The set $\text{OV}(R)$ of *output variables* of R which are channel variables occurring on the left side of assignments (that is assignment targets) in R .

Definition 8.2. 1. *Quantum assignments.* If k, p are positive integers, e_1, \dots, e_{p+1} are expressions of type *k -qubit measurement*, \bar{u} is a tuple of wire names (u_1, \dots, u_k) with distinct values, β_1, \dots, β_p are boolean-valued expressions with no subexpressions of quantum sorts and whose only variables are channel variables in

Ω , and y is a fresh channel variable, then the conditional assignment

$$\begin{array}{ll}
\text{if} & \beta_1 \quad \text{then } y := e_1(\bar{u}) \\
\text{elseif} & \beta_2 \quad \text{then } y := e_2(\bar{u}) \\
& \vdots \\
\text{elseif} & \beta_p \quad \text{then } y := e_p(\bar{u}) \\
\text{else} & y := e_{p+1}(\bar{u})
\end{array} \tag{15}$$

is an Ω -rule, a *gate Ω -rule*, with wire set $\{u_1, \dots, u_k\}$, with no proper subrules, and with the single output variable y .

(On syntactic grounds, one may reasonably expect that assignments “ $y := e_q(\bar{u})$ ” are subrules of the gate Ω -rule. But, semantically, they are not; they describe gates other than the one described by the gate Ω -rule.)

We stipulate that a measurement expression may occur only within a gate rule, on the right side of an assignment.

2. *Classical assignments.* A (properly typed) assignment

$$f(e_1, \dots, e_r) := e_0,$$

where both sides of the assignment are classical and where $f(e_1, \dots, e_r)$ isn't a channel variable, is an Ω -rule. It has the empty sets of wires, of proper subrules, and of output variables. Such a rule is called a *classical assignment*.

3. *Classical conditionals.* If n is a positive integer, if R_1, \dots, R_{n+1} are Ω -rules involving only classical expressions, and if β_1, \dots, β_n are classical boolean-valued expressions, then the conditional

$$\begin{array}{ll}
\text{if} & \beta_1(\bar{x}) \quad \text{then } R_1 \\
\text{elseif} & \beta_2(\bar{x}) \quad \text{then } R_2 \\
& \vdots \\
\text{elseif} & \beta_n(\bar{x}) \quad \text{then } R_n, \\
\text{else} & R_{n+1}
\end{array}$$

is an Ω -rule. It has the empty sets of wires, the set $\text{Sub}(R_1) \cup \dots \cup \text{Sub}(R_{n+1})$ of proper subrules, and the empty set of output variables.

4. *Parallel compositions.* If Ω -rules $\langle R_j : j \in J \rangle$ have pairwise disjoint wire sets and if no output variable of any constituent R_j occurs in the other constituents, then

$$\text{forall } j \text{ in } J: R_j$$

is an Ω -rule with the wire set $\bigcup_j W(U_j)$, the set $\bigcup_j \text{Sub}(R_j)$ of proper subrules, and the set $\bigcup_j \text{OV}(R_j)$ of output variables.

5. *Sequential compositions.* Let R_1, R_2 be rules over sets Ω, Ω' of channel variables respectively such that their sets of output variables are disjoint. Suppose that $\Omega' = \Omega \cup \text{OV}(R_1)$. Then

$$R_1; R_2$$

is an Ω -rule with the wire set $W(R_1) \cup W(R_2)$, the set $\text{Sub}(R_1) \cup \text{Sub}(R_2)$ of proper subrules, and the set $\text{OV}(R_1) \cup \text{OV}(R_2)$ of output variables.

The sequential composition $R_1; R_2; \dots; R_n$ of many components is defined similarly.
 \triangleleft

When we discuss semantics below, it will be clear that the multi-component sequential composition is equivalent to the result of composing the same rules two at a time. Sequential composition is associative.

We say that an Ω -rule R is *classical* if all expressions in R are classical; otherwise R is *quantum*.

Below, by default, a rule is an Ω -rule where Ω is the empty set.

8.4 Semantics of rules

In §1.1, we defined a schedule for a quantum circuit C as a sequence of disjoint bouts such that every gate is in one of the bouts with the prerequisites in the earlier bouts. A schedule B_1, B_2, \dots, B_t is uniquely characterized by the partial order

$$F < G \iff \exists i, j (F \in B_i \wedge G \in B_j \wedge i < j)$$

that extends the prerequisite relation. The characterization motivates a generalization of the notion of schedule that we will arrive at later in this section.

Each quantum Ω -rule R determines an Ω -circuit $C(R)$ and a (strict) partial order $<_R$ for $C(R)$. $C(R)$ and $<_R$ are defined by the following induction where the set of gates of $C(R)$ will be denoted $\mathcal{G}(R)$.

- If R is a quantum assignment (15), then $C(R)$ comprises a single gate described by R . That gate acts on wires \bar{u} , its measurements are given by expressions e_q , and its selection function chooses the least q such that β_q is true; if no β_q is true, it chooses e_{p+1} . And $<_R$ is the empty partial order.
- Let R be the parallel composition of quantum Ω -rules $\langle R_j : j \in J \rangle$ and maybe some classical Ω -rules. Then $C(R)$ is the obvious “disjoint union” of the circuits $C(R_j)$. (Recall that the wire sets $W(R_j)$ are pairwise disjoint.) Further, $<_R$ is the parallel composition of partial orders $<_{R_j}$. In set theoretic terms (that is, viewing partial orders as sets of ordered pairs), $<_R$ is the disjoint union of the partial orders $<_{R_j}$.
- Suppose that R is a sequential composition $R_1; R_2$ over sets Ω, Ω' of channel variables respectively. If one of the two rules, R_j is classical, then $C(R)$ is the circuit of the other rule, $C(R_{3-j})$, and $<_R$ is $<_{R_{3-j}}$. Suppose that both rules are quantum. The Ω -circuit $C(R)$ is as follows.

$\mathcal{G}(R)$ is the disjoint union of $\mathcal{G}(R_1)$ and $\mathcal{G}(R_2)$. The Bind relation of $C(R)$ is the least binary relation which includes the disjoint Bind relations of $C(R_1)$ and $C(R_2)$ and which contains the pairs (a, b) such that, in $C(R_1)$, a is a gate exit bound to the output node on some wire u , while, in $C(R_2)$, the input node on wire u is bound to a gate entry b . The quantum source relation of $C(R)$ is determined by

the Bind relation. The classical source relation of $C(R)$ is the disjoint union of the classical source relation of $C(R_1)$, the classical source relation of $C(R_2)$, and the set of pairs $(F, G) \in \mathcal{G}(R_1) \times \mathcal{G}(R_2)$ such that the channel variable of F occurs in the gate subrule of R_2 that defines G .

Further, $<_R$ is the series composition of partial orders $<_{R_1}$ and $<_{R_2}$. In set theoretic terms, $<_R$ is the disjoint union of $<_{R_1}$, $<_{R_2}$, and $\mathcal{G}(R_1) \times \mathcal{G}(R_2)$. \triangleleft

Recall that *series-parallel* partial orders constitute the smallest class of partial orders that contains the one-element partial orders and is closed under parallel and series compositions [23, p.112]. The partial schedules $<_R$ that arise in the semantics of rules R are exactly the series-parallel partial orders.

Definition 8.3. • A *partial schedule* for an Ω -circuit C is any series-parallel partial order $<$ on the set of C gates that extends the prerequisite relation. A *partial Ω -algorithm* is given by an Ω -circuit C and a partial schedule $<$ for C .

- Semantically, each Ω -rule R means the partial Ω -algorithm $(C(R), <_R)$. \triangleleft

Every series-parallel partial order P with more than one element is a (nontrivial) parallel composition or series composition (but not both). Thus, each such P can be represented (up to isomorphism) by a *decomposition tree* [23, p. 113]. Moreover, each Ω -rule R determines a decomposition tree T_R for $<_R$, essentially given by the parse tree of R .

Furthermore, any series-parallel partial order has a unique *canonical decomposition*⁴ tree [23, p. 113]. Of course, the canonical decomposition tree for $<_R$ need not coincide with T_R , even though both trees represent the same partial order. One may want to call a rule R *canonical* if T_R is a canonical decomposition tree.

9 Verification

Normally a classical computation can be stopped at any point and its state can be examined. This is not the case with quantum computations. Hence a greater role for verification.

Consider a QC algorithm over a circuit with n input qubits and k measurements, each having at least two possible classical outcomes. In a sense, the verification of the intended input-output behavior of the algorithm is a mechanical task. It suffices to check that the algorithm works as intended on each of the 2^n basis input vectors which may involve $\geq 2^k$ distinct runs because of the k measurements. The obvious problem is that the number of runs is exponential in $n + k$.

One can try a symbolic verification where the basis vectors and the classical outcomes of the measurements are represented by parameters. It works at least sometimes. We illustrate that by verifying the program in Example 5.1 where $k = n = 3$ though there are just four initial basis vectors to consider because the auxiliary qubit on wire 2 is initially $|0\rangle$. We use the notation of Example 5.1.

⁴If P is a series composition, keep decomposing it (as a series composition) until none of the components is a series composition. Do similarly for parallel decompositions.

Theorem 9.1. *The program in Example 5.1 transforms any of the vectors $|c0t\rangle$ in the computational basis into $|cr(c \oplus t)\rangle$ for some r and thus, on wires 1 and 3, the program computes controlled-NOT.*

Proof.

- On the first step, we execute the rule $H(2)$ in quantum state $|c0t\rangle$ The new quantum state is

$$|c\rangle \frac{|0\rangle + |1\rangle}{\sqrt{2}} |t\rangle = \frac{1}{\sqrt{2}} |c\rangle (|0\rangle + |1\rangle) |t\rangle.$$

It will be convenient to rewrite the right side, possibly interchanging the two summands, so that the new state is

$$\frac{1}{\sqrt{2}} |c\rangle |c \oplus 0\rangle |t\rangle + \frac{1}{\sqrt{2}} |c\rangle |c \oplus 1\rangle |t\rangle.$$

- The second rule is $\{p := PM(1, 2)\}$. If $p = 0$ then the quantum state is projected into the eigenspace spanned by $\{|00\rangle, |11\rangle\}$ where $|c\rangle |c \oplus 0\rangle$ belongs, and if $p = 1$ then the quantum state is projected into the eigenspace spanned by $\{|01\rangle, |10\rangle\}$ where $|c\rangle |c \oplus 1\rangle$ belongs. The new state (after normalization) is

$$|c\rangle |c \oplus p\rangle |t\rangle.$$

- The next rule is $\{H(2) \| H(3)\}$ and the new state is

$$\begin{aligned} |c\rangle \cdot \frac{|0\rangle + (-1)^{c+p}|1\rangle}{\sqrt{2}} \cdot \frac{|0\rangle + (-1)^t|1\rangle|1\rangle}{\sqrt{2}} = \\ \frac{1}{2} |c\rangle (|00\rangle + (-1)^{c+p+t}|11\rangle) + \frac{1}{2} |c\rangle ((-1)^t|01\rangle + (-1)^{c+p}|10\rangle) \end{aligned}$$

- The next rule is $\{q := PM(2, 3)\}$. If $q = 0$ then the quantum state is projected into the eigenspace spanned by $\{|00\rangle, |11\rangle\}$ where the first summand belongs, and if $q = 1$ then the quantum state is projected into the eigenspace spanned by $\{|01\rangle, |10\rangle\}$ where the second summand belongs. Note that $qt = 0$ is 0 or t depending on whether q is 0 or 1. The new state (after normalization) is

$$\begin{aligned} \frac{1}{\sqrt{2}} |c\rangle \cdot [(-1)^{qt}|0\rangle|q\rangle + (-1)^{c+p+t+qt}|1\rangle|q \oplus 1\rangle] = \\ \frac{1}{\sqrt{2}} (-1)^{qt} |c\rangle |0\rangle |q\rangle + \frac{1}{\sqrt{2}} (-1)^{c+p+t+qt} |c\rangle |1\rangle |q \oplus 1\rangle \end{aligned}$$

- The next rule is $\{H(2) \| H(3)\}$ and the new quantum state is

$$\begin{aligned} \frac{1}{\sqrt{2}} (-1)^{qt} |c\rangle \cdot \frac{|0\rangle + |1\rangle}{\sqrt{2}} \cdot \frac{|0\rangle + (-1)^q|1\rangle}{\sqrt{2}} \\ + \frac{1}{\sqrt{2}} (-1)^{c+p+t+qt} |c\rangle \cdot \frac{|0\rangle - |1\rangle}{\sqrt{2}} \cdot \frac{|0\rangle - (-1)^q|1\rangle}{\sqrt{2}} \end{aligned}$$

- The next rule is $r := SM(2)$ and the new quantum state is

$$\begin{aligned} & \frac{1}{2}(-1)^{qt}|cr\rangle(|0\rangle + (-1)^q|1\rangle) + \frac{1}{2}(-1)^{c+p+t+qt+r}|cr\rangle(|0\rangle - (-1)^q|1\rangle) = \\ & \begin{cases} (-1)^{qt}|cr0\rangle & \text{if } c \oplus t \oplus p \oplus r = 0 \\ (-1)^{qt+q}|cr1\rangle & \text{if } c \oplus t \oplus p \oplus r = 1 \end{cases} = \\ & (-1)^{q(c+p+r)}|cr(c \oplus t \oplus p \oplus r)\rangle = \\ & \begin{cases} (-1)^{q(c+p+r)}|cr(c \oplus t)\rangle & \text{if } p \oplus r = 0 \\ (-1)^{q(c+p+r)}|cr(c \oplus t \oplus 1)\rangle & \text{if } p \oplus r = 1. \end{cases} \end{aligned}$$

- The next rule is $\{\text{if } p \oplus r = 1 \text{ then } X(3)\}$, and the new quantum state is

$$(-1)^{q(c+p+r)} \cdot |cr(c \oplus t)\rangle.$$

So we have the desired quantum state $|cr(c \oplus t)\rangle$ except for the undesired phase factor $(-1)^{q(c+p+r)}$. If $q = 0$, we are done. From now on, assume $q = 1$, so the unwanted factor is $(-1)^{c+p+r} = (-1)^c(-1)^{p+r}$.

- The final rule is $\{(\text{if } q = 1 \text{ then } Z(1)) \parallel (\text{if } q = p \oplus r = 1 \text{ then } (-\mathbb{1})(3))\}$. $Z(1)$ cancels $(-1)^c$ while $(-\mathbb{1})(3)$, guarded by $p \oplus r = 1$, cancels $(-1)^{p+r}$. The final quantum state is the desired $|cr(c \oplus t)\rangle$.

This completes the proof of Theorem 9.1. □

References

- [1] Andreas Blass and Yuri Gurevich, “Abstract state machines capture parallel algorithms,” *ACM Transactions on Computational Logic* 4:4 (2003) 578–651. “Correction and extension,” *ibid.* 9:3 (2008) article 19
- [2] Andreas Blass and Yuri Gurevich, “Ordinary interactive small-step algorithms,” *ACM Transactions on Computational Logic*, Part I: 7:2 (2006) 363–419, Part II: 8:3 (2007) article 15, and Part III: 8:3 (2007) article 16
- [3] Andreas Blass, Yuri Gurevich, Dean Rosenzweig and Benjamin Rossman, “Interactive small-step algorithms,” *Logical Methods in Computer Science* 3:4 (2007), Parts I and II: papers 3 and 4 respectively
- [4] Andreas Blass and Yuri Gurevich, “An invitation to quantum computing,” *Bulletin of the EATCS* 126 (2018)
- [5] Andreas Blass and Yuri Gurevich, “Circuit pedantry,” *Bulletin of the EATCS* 129 (2019), <https://arxiv.org/pdf/1910.06145.pdf>
- [6] Andreas Blass and Yuri Gurevich, “Circuits: An abstract viewpoint,” *Bulletin of the EATCS* 130 (2020), <https://arxiv.org/pdf/2006.09488.pdf>
- [7] Egon Börger and Robert Stärk, “Abstract state machines: A method for high-level system design and analysis,” Springer 2003

- [8] Peng Fu, Kohei Kishida, Neil J. Ross and Peter Selinger, “A tutorial introduction to quantum circuit programming in dependently typed Proto-Quipper,” in “Proceedings of the 12th International Conference on Reversible Computation,” *Springer Lecture Notes in Computer Science* 12227 (2020) 153–168
- [9] Peng Fu, Kohei Kishida, Neil J. Ross and Peter Selinger, “Proto-Quipper with dynamic lifting,” 2022, <https://arxiv.org/abs/2204.13041>
- [10] Jean-Yves Girard, “Linear Logic,” *Theoretical Computer Science* 50 (1987) 1–102
- [11] Erich Grädel and Antje Nowack, “Quantum computing and abstract state machines,” in “International Workshop on Abstract State Machines,” *Springer Lecture Notes in Computer Science* 2589 (2003) 309–323
- [12] Alexander S. Green, Peter LeFanu Lumsdaine, Neil J. Ross, Peter Selinger, and Benoît Valiron, “An introduction to quantum programming in Quipper,” in “RC 2013, Proceedings of the 5th International Conf. on Reversible Computation,” *Springer Lecture Notes in Computer Science* 7948 (2013) 110–124
- [13] Alexander S. Green, Peter LeFanu Lumsdaine, Neil J. Ross, Peter Selinger, and Benoît Valiron, “Quipper: A scalable quantum programming language,” in “PLDI 2013, Proceedings of the 34th annual ACM SIGPLAN conference on Programming Language Design and Implementation,” *ACM SIGPLAN Notices* 48:6 (2013) 333–342
- [14] Lov Grover, “A fast quantum mechanical algorithm for database search,” in “Proceedings of the 28th Annual ACM Symposium on the Theory of Computing,” ACM 1996
- [15] Yuri Gurevich, “Evolving algebra 1993: Lipari guide,” in “Specification and Validation Methods” (ed. E. Börger), Oxford University Press 1995 9–36, Reprinted at <https://arxiv.org/pdf/1808.06255.pdf>
- [16] Yuri Gurevich, “Sequential abstract state machines capture sequential algorithms,” *ACM Transactions on Computational Logic* 1:1 (2000) 77–111
- [17] Yuri Gurevich, “ASM specification of quantum algorithms,” Talk at Erich-Fest, a Symposium in honor of Erich Grädel’s 60th birthday, TU Berlin, 2018, <https://logic.las.tu-berlin.de/erichfest/index.html>
- [18] Yuri Gurevich and Andreas Blass, “Quantum circuits with classical channels and the principle of deferred measurements,” *Theoretical Computer Science* 920 (2022) 21–32
- [19] Yuri Gurevich and Andreas Blass, “Simple circuit simulations of classical and quantum Turing machines,” *Proceedings of the Royal Society A* 478:20210891 (2022), <https://doi.org/10.1098/rspa.2021.0891>
- [20] Yuri Gurevich, Benjamin Rossman and Wolfram Schulte, “Semantic essence of AsmL,” *Theoretical Computer Science* 343:3 (2005), 370–412

- [21] Emanuel Knill, “Conventions for quantum pseudocode,” Technical report LA-UR 96-2724, Los Alamos National Laboratory 1996, <https://www.osti.gov/servlets/purl/366453>
- [22] N. David Mermin, “Quantum computer science: An introduction,” Cambridge University Press 2007
- [23] Rolf H. Möhring, “Computationally tractable classes of ordered sets,” in Ivan Rival (ed.), “Algorithms and Order,” Kluwer Academic Publishers (now part of Springer) 1989 105–194
- [24] Michael A. Nielsen and Isaac L. Chuang, “Quantum computation and quantum information,” Cambridge University Press, 10th Anniversary Edition, 2010
- [25] Jennifer Paykin, Robert Rand, and Steve Zdanewic, “QWIRE: a core language for quantum circuits,” *POPL '17: Proceedings of the 44th SIGPLAN Symposium on Principles of Programming Languages* January 2017 846–858, <https://doi.org/10.1145/3009837.3009894>
- [26] Robert Rand, “Survey of Quantum Languages,” Section 4.4 in *Quantum programming languages*, eds. M. Mosca, M. Roetteler, and P. Selinger, Report from Dagstuhl Seminar 18381 2018 https://drops.dagstuhl.de/opus/volltexte/2019/10329/pdf/dagrep_v008_i009_p112_183
- [27] Francisco Rios and Peter Selinger, “A categorical model for a quantum circuit description language” extended abstract, in “QPL 2017, Proceedings of the 14th International Conference on Quantum Physics and Logic”, *Electronic Proceedings in Theoretical Computer Science* 266 (2018) 164–178
- [28] Peter Selinger, “Towards a quantum programming language,” *Mathematical Structures in Computer Science* 14:4 (2004) 527—586
- [29] Jonathan M. Smith, Neil J. Ross, Peter Selinger, and Benoît Valiron, “Quipper: Concrete resource estimation in quantum algorithms,” extended abstract, in *QAPL 2014, 12th International Workshop on Quantitative Aspects of Programming Languages*, Grenoble 2014
- [30] Benoît Valiron, Neil J. Ross, Peter Selinger, D. Scott Alexander, and Jonathan M. Smith, “Programming the quantum future,” *Communications of the ACM* 58:8 (2015) 52–61
- [31] Wikimedia Commons, “Grover’s algorithm circuit,” <https://commons.wikimedia.org/w/index.php?oldid=567866320>, accessed 31-July-2022
- [32] Oded Zilberberg, Bernd Braunecker, and Daniel Loss, “Controlled-NOT gate for multiparticle qubits and topological quantum computation based on parity measurements,” *Physical Review A* 77 (2008) 012327