Rank 3 Inhabitation of Intersection Types Revisited (Extended Version)*

Andrej Dudenhefner¹ and Jakob Rehof¹

Technical University of Dortmund, Dortmund, Germany {andrej.dudenhefner, jakob.rehof}@cs.tu-dortmund.de

Abstract

We revisit the undecidability result of rank 3 intersection type inhabitation (Urzyczyn 2009) in pursuit of two goals. First, we strengthen the previous result by showing that intersection type inhabitation is undecidable for types of rank 3 *and order 3*, i.e. it is not necessary to introduce new functional dependencies (new instructions) during proof search. Second, we pinpoint the principles necessary to simulate Turing machine computation *directly*, whereas previous constructions used a highly parallel and non-deterministic computation model. Since our construction is more concise than existing approaches taking no detours, we believe that it is valuable for a better understanding of the expressiveness of intersection type inhabitation.

1 Introduction

Intersection types capture deep semantic properties of λ -terms such as normalization and were subject to extensive study for decades [1]. Due to their expressive power, intersection type inhabitation (given a type, does there exist a term having the type?) is undecidable in standard intersection type systems [2].

Urzyczyn showed in 2009 [5] that restricted to rank 2 intersection type inhabitation is exponential space complete and is undecidable for rank 3 and up. Later, Salvati et al. discovered the equivalence of intersection type inhabitation and λ -definability [4], which further improved our understanding of the expressiveness of intersection types.

One can take several routes in order to show undecidability of intersection type inhabitation (abbreviated by IHP, resp. IHP3 for rank 3). In [1] the following reduction is performed: EQA \leq ETW \leq WTG \leq IHP, where EQA is the emptiness problem for queue automata, ETW is the emptiness problem for typewriter automata and WTG is the problem of determining whether one can win a tree game. A different route taken in [5] performs the following reduction: ELBA \leq SSTS1 \leq HETM \leq IHP3, where ELBA is the emptiness problem for linear bounded automata, SSTS1 is the problem of deciding whether there is a word that can be rewritten to 1s in a simple semi-Thue system and HETM is the halting problem for expanding tape machines. Alternatively, following the route of [4] via semantics, the following reduction can be performed: WSTS \leq LDF \leq IHP3, where WSTS is the word problem in semi-Thue systems and LDF is the λ -definability problem. Each of these routes introduces its own machinery that may distract from the initial question. As a result, it is challenging to even give examples of particularly hard inhabitation problem instances, or distinguish necessary properties on a finer scale than the rank restriction.

In this work (cf. Section 3), we reduce the halting problem for Turing machines to intersection type inhabitation directly. In particular, we show how arbitrary Turing machine

^{*}Based on: TYPES 2016, Types for Proofs and Programs – 22nd Meeting, Novi Sad, Serbia, 2016, pp. 29–30.

computations can be directly simulated using proof search. Additionally (Section 4), we outline the simplest construction (to date) to show undecidability of rank 3 inhabitation using simple semi-Thue systems. The main benefit of presented approaches is their corresponding accessibility and simplicity.

2 Preliminaries

We briefly assemble the necessary prerequisites in order to discuss inhabitation in the intersection type system. λ -terms (cf. Definition 1) are denoted by M, N, L and intersection types (cf. Definition 2) are denoted by σ, τ , while type atoms are denoted by a, b, c and drawn from the denumerable set \mathbb{A} . The intersection operator \cap binds stronger than \rightarrow and is assumed to be idempotent, commutative and associative. The rules of the considered intersection type system (also used in [5]) are given in Definition 3.

Definition 1 (λ -Terms). $M, N, L ::= x \mid (\lambda x.M) \mid (MN)$

Definition 2 (Intersection Types). $\sigma, \tau ::= a \mid \sigma \to \tau \mid \sigma \cap \tau$ where $a \in \mathbb{A}$

Definition 3 (Intersection Type System).

$$\begin{array}{c} \overline{\Gamma, x: \sigma \vdash x: \sigma} \quad (Ax) \\ \hline \Gamma, x: \sigma \vdash M: \tau \\ \overline{\Gamma \vdash \lambda x.M: \sigma \to \tau} \quad (\to I) \\ \hline \hline \Gamma \vdash M: \sigma \cap \tau \quad (\to I) \\ \hline \hline \Gamma \vdash M: \sigma \cap \tau \quad (\cap I) \\ \hline \hline \Gamma \vdash M: \sigma \cap \tau \quad (\cap E) \\ \hline \end{array}$$

After Leivant [3] we define the *rank* and the *order* of a type.

Definition 4 (Rank).

 $\operatorname{rank}(\tau) = 0 \text{ if } \tau \text{ is a simple type, i.e. containing no} \cap$ $\operatorname{rank}(\sigma \cap \tau) = \max\{1, \operatorname{rank}(\sigma), \operatorname{rank}(\tau)\}$ $\operatorname{rank}(\sigma \to \tau) = \max\{1 + \operatorname{rank}(\sigma), \operatorname{rank}(\tau)\}$

Definition 5 (Order).

$$\begin{aligned} & \operatorname{order}(a) = 0 \\ & \operatorname{order}(\sigma \cap \tau) = \max\{\operatorname{order}(\sigma), \operatorname{order}(\tau)\} \\ & \operatorname{order}(\sigma \to \tau) = \max\{1 + \operatorname{order}(\sigma), \operatorname{order}(\tau)\} \end{aligned}$$

Example 1. Let $\tau = \bigcap_{i=1}^{n} (((d_i \to c_i) \to b_i) \to a_i) \to a$. We have $\operatorname{rank}(\tau) = 2$ and $\operatorname{order}(\tau) = 4$. Note that types that are similar to τ are used in [5] to encode expanding tape machine switches.

Problem 1 (Intersection Type Inhabitation). Given a type τ , is there a λ -term M such that $\vdash M : \tau$?

3 Turing Machine Simulation

The undecidability proof in [5] reduces emptiness of linear bounded automata to a word existence problem in simple semi-Thue systemd to halting of expanding tape machines to inhabitation of an intersection type τ with rank(τ) = 3 and order(τ) = 4. In [5] order of 4 is necessary to hide and restore a word on the tape of the machine by introducing new instructions. In this section, we reduce the halting problem to inhabitation of an intersection type τ_{\star} with rank(τ_{\star}) = order(τ_{\star}) = 3. For this purpose, fix a Turing machine $T = (\Sigma, Q, q_0, q_f, \delta)$, where

- Σ is the finite, non-empty set of tape symbols
- Q is the finite, non-empty set of states
- $q_0 \in Q$ is the initial state
- $q_f \in Q$ is the final state
- $\delta: (Q \setminus \{q_f\}) \times \Sigma \to Q \times \Sigma \times \{+1, -1\}$ is the transition function

Let $\dot{\cup}$ denote disjoint union. We define the set of type atoms

$$\mathbb{A} = \Sigma \,\dot\cup\, \{l,r,\bullet\} \,\dot\cup\, \{\langle q,a\rangle \mid q \in Q, a \in \Sigma\} \,\dot\cup\, \{\circ,*,\#,\$\}$$

In the first part of our construction, we capture computation of T using the following types:

$$\sigma_{f} = \bigcap_{c \in \Sigma} \langle q_{f}, c \rangle \cap \bigcap_{c \in \Sigma} c$$

for each $t = ((q, c) \mapsto (q', c', +1)) \in \delta$
$$\sigma_{t} = \bigcap_{a \in \Sigma} (\bullet \to a \to a) \cap (l \to c' \to \langle q, c \rangle) \cap \bigcap_{a \in \Sigma} (r \to \langle q', a \rangle \to a)$$

for each $t = ((q, c) \mapsto (q', c', -1)) \in \delta$
$$\sigma_{t} = \bigcap_{a \in \Sigma} (\bullet \to a \to a) \cap (r \to c' \to \langle q, c \rangle) \cap \bigcap_{a \in \Sigma} (l \to \langle q', a \rangle \to a)$$

Intuitively, the defined types are used to achieve following goals

- $\langle q, a \rangle$ represents that T is at the position containing a in state q
- l, r (left, right) mark neighboring cells while other cells are marked by •
- σ_f recognizes whether an accepting state is reached
- σ_t transforms the state according to δ

Let us abbreviate $[i, j] := \{i, i + 1, ..., j\}.$

Lemma 1. Given $q \in Q$, $s = a_1 \dots a_n \in \Sigma^n$ and $p \in [1, n]$ we have (q, p, s) is accepting in T using at most n tape cells iff there exists a term e such that $\Gamma_p \vdash e : \langle q, a_p \rangle$ and $\Gamma_i \vdash e : a_i$ for $i \in [1, n] \setminus \{p\}$, where

- $\Gamma = \{x_f : \sigma_f\} \cup \{x_t : \sigma_t \mid t \in \delta\}$
- $\Gamma_1 = \Gamma \cup \{y_1 : l\} \cup \{y_j : \bullet \mid j \in [2, n-1]\}$
- $\Gamma_i = \Gamma \cup \{y_{i-1} : r, y_i : l\} \cup \{y_j : \bullet \mid j \in [1, n-1] \setminus \{i-1, i\}\}$ for $i \in [2, n-1]$
- $\Gamma_n = \Gamma \cup \{y_{n-1} : r\} \cup \{y_j : \bullet \mid j \in [1, n-2]\}$

Proof. By construction $(y_i : l) \in \Gamma_i$ and $(y_i : r) \in \Gamma_{i+1}$ for $i \in [1, n-1]$. Intuitively, this property is used to identify "neighboring" contexts.

" \Rightarrow ": Assume $(q, p, a_1 \dots a_n)$ is accepting in T using at most n tape cells. If $q = q_f$, then $\Gamma_i \vdash x_f : a_i$ for $i \in [1, n] \setminus \{p\}$ and $\Gamma_p \vdash x_f : \langle q, a_p \rangle$. To capture computation, we represent the transition $C \stackrel{t \in \delta}{\Rightarrow} C'$ with $C = (q, p, a_1 \dots a_p \dots a_n)$ and $C' = (q', p+1, a_1 \dots a_{p-1}, c', a_{p+1} \dots a_n)$ by the term $M_C^{C'} = x_t y_p$ with

$$\begin{split} &\Gamma_i \vdash M_C^{C'}: a_i \to a_i \text{ for } i \in [1,n] \setminus \{p,p+1\} \\ &\text{ and } \Gamma_p \vdash M_C^{C'}: c' \to \langle q,a_p \rangle \text{ and } \Gamma_{p+1} \vdash M_C^{C'}: \langle q',a_{p+1} \rangle \to a_{p+1} \end{split}$$

Similarly, we represent the transition $C \stackrel{t \in \delta}{\leadsto} C'$ with $C = (q, p, a_1 \dots a_p \dots a_n)$ and $C' = (q', p - 1, a_1 \dots a_{p-1}, c', a_{p+1} \dots a_n)$ by the term $M_C^{C'} = x_t y_{p-1}$ with

$$\begin{split} &\Gamma_i \vdash M_C^{C'}: a_i \to a_i \text{ for } i \in [1,n] \setminus \{p-1,p\} \\ &\text{ and } \Gamma_p \vdash M_C^{C'}: c' \to \langle q, a_p \rangle \text{ and } \Gamma_{p-1} \vdash M_C^{C'}: \langle q', a_{p-1} \rangle \to a_{p-1} \end{split}$$

Given a sequence of configurations $(q, p, s) = C_1 \rightsquigarrow \ldots \rightsquigarrow C_m = (q_f, p', s')$ for some $p' \leq n$ and $s' \in \Sigma^n$ let $M = M_{C_1}^{C_2}(M_{C_2}^{C_3}(\ldots(M_{C_{m-1}}^{C_m}x_f)\ldots)))$. By induction on m we have $\Gamma_i \vdash M : a_i$ for $i \in [1, n] \setminus \{p\}$ and $\Gamma_p \vdash M : \langle q, a_p \rangle$.

" \Leftarrow ": Assume $\Gamma_i \vdash M : a_i$ for $i \in [1, n] \setminus \{p\}$ and $\Gamma_p \vdash M : \langle q, a_p \rangle$ for some term M in beta normal form (cf. [2]). We show that (q, p, s) is accepting by induction on the structure of M. Due to $\Gamma_p \vdash M : \langle q, a_p \rangle$, we have three possible cases:

Case 1: $M = x_f$. Therefore, $q = q_f$ and (q, p, s) is accepting. **Case 2:** $M = x_t L N$ with $t = (q, a_p) \mapsto (q', c', +1)$. We have

$$\begin{split} &\Gamma_p \vdash M : \langle q, a_p \rangle \\ \Longrightarrow &\Gamma_p \vdash L : l \\ \Longrightarrow &L = y_p \text{ and } 1 \leq p < n \\ \Longrightarrow &\Gamma_{p+1} \vdash L : r \text{ and } \Gamma_i \vdash L : \bullet \text{ for } i \in [1, n] \setminus \{p, p+1\} \\ \Longrightarrow &\Gamma_i \vdash N : a_i \text{ for } i \in [1, n] \setminus \{p, p+1\} \\ &\text{ and } \Gamma_p \vdash N : c' \text{ and } \Gamma_{p+1} \vdash N : \langle q', a_{p+1} \rangle \end{split}$$

By the induction hypothesis $(q', p + 1, a_1 \dots a_{p-1}c'a_{p+1} \dots a_n)$ is accepting in T using at most n tape cells. Therefore, (q, p, s) is accepting in T using at most n tape cells.

Case 3: $M = x_t L N$ with $t = (q, a_p) \mapsto (q', c', -1)$. We have

$$\begin{split} &\Gamma_p \vdash M : \langle q, a_p \rangle \\ \Longrightarrow &\Gamma_p \vdash L : r \\ \Longrightarrow &L = y_{p-1} \text{ and } 1$$

By the induction hypothesis $(q', p - 1, a_1 \dots a_{p-1}c'a_{p+1} \dots a_n)$ is accepting in T using at most n tape cells. Therefore, (q, p, s) is accepting in T using at most n tape cells.

Rank 3 Inhabitation Revisited

In the second part of our construction we create the particular inhabitation problem to apply Lemma 1. The main idea is to use a technique similar to the encoding of expansion in expanding tape machines [5]. However, instead of introducing new functional dependencies (new machine instructions in the sense of [5]) it is sufficient to introduce type atoms that link neighboring judgements. We define the following types:

$$\begin{aligned} \sigma_* = &((\bullet \to \circ) \to \circ) \cap ((\bullet \to *) \to *) \cap ((l \to *) \to \#) \cap ((r \to \#) \cap (\bullet \to \$) \to \$) \\ \sigma_0 = &((\bullet \to \langle q_0, \lrcorner\rangle) \to \circ) \cap ((\bullet \to \lrcorner) \to *) \cap ((l \to \lrcorner) \to \#) \cap ((r \to \lrcorner) \to \$) \\ \tau_* = &\sigma_0 \to \sigma_* \to \sigma_f \to \sigma_{t_1} \to \ldots \to \sigma_{t_k} \to (l \to \circ) \cap (r \to \#) \cap (\bullet \to \$) \\ \text{where } \delta = \{t_1, \ldots, t_k\} \end{aligned}$$

Note that $\subseteq \Sigma$ is the space symbol. Again, let us develop an intuition for the defined types:


- \circ marks the first, \$ the last, # the second last and * all other cells during tape expansion
- σ_* is used for tape expansion at its end
- σ_0 initializes T to the state q_0 and the empty tape replacing $\circ, *, \#,$ marks

Observe that $\operatorname{rank}(\tau_{\star}) = \operatorname{order}(\tau_{\star}) = 3.$

Lemma 2. There exists a term M such that $\vdash M : \tau_{\star}$ iff there exists an $n \in \mathbb{N}$ and a term N such that $\Gamma_1 \vdash N : \langle q_0, \downarrow \rangle$ and $\Gamma_i \vdash N : \downarrow$ for $i \in [2, n]$ where

- $\Gamma = \{x_* : \sigma_*, x_0 : \sigma_0, x_f : \sigma_f\} \cup \{x_t : \sigma_t \mid t \in \delta\}$
- $\Gamma_1 = \Gamma \cup \{y_1 : l\} \cup \{y_j : \bullet \mid j \in [2, n-1]\}$
- $\Gamma_i = \Gamma \cup \{y_{i-1} : r, y_i : l\} \cup \{y_j : \bullet \mid j \in [1, n-1] \setminus \{i-1, i\}\}$ for $i \in [2, n-1]$
- $\Gamma_n = \Gamma \cup \{y_{n-1} : r\} \cup \{y_j : \bullet \mid j \in [1, n-2]\}$

Proof. To improve accessibility of the proof, we visualize necessary/sufficient steps (according to the inhabitation algorithm given in [5]) to prove $\vdash M : \tau_*$. A node σ states that σ is inhabited in the context described by the union of edge labels along the path from σ to the root. Additionally, at each level of the tree the shape of inhabitants (which have to be identical due to the nature of \cap) is ascribed on the left. The inhabitant is therefore the composition of the ascriptions.

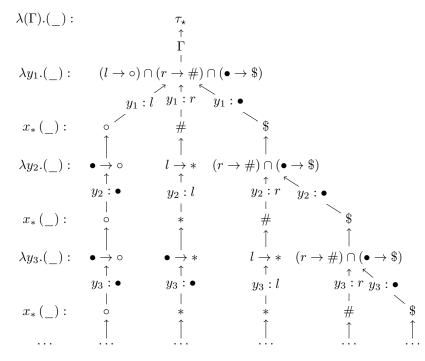

First, the variables in Γ and y_1 are abstracted. Next follows an arbitrary number of x_* applications in combination with an abstraction, that increments the current width of the tree. Intuitively, \circ is used to mark the first context; \$\$ is used to mark the last context; \$\$ is used to mark the last context; \$\$ is used to introduce consecutive $y_i : r$ and $y_{i+1} : l$.

Finally, an application of x_0 in combination with one abstraction of y_{n-1} , where n is the current width of the tree, produces exactly $\Gamma_1 \vdash N : \langle q_0, \downarrow \rangle$ and $\Gamma_i \vdash N : \bigcup$ for $i \in [2, n]$, that can be verified inductively reading the edge labels along the path to the root.

Using the presented tree, we sketch the proof as follows.

"⇒": If τ_{\star} is inhabited, then we can read the tree from the root to the leaves to get necessary conditions $\Gamma_1 \vdash N : \langle q_0, \downarrow \rangle$ and $\Gamma_i \vdash N : \downarrow$ for $i \in [2, n]$ for some term N.

" \Leftarrow ": If $\Gamma_1 \vdash N : \langle q_0, \downarrow \rangle$ and $\Gamma_i \vdash N : \lrcorner$ for $i \in [2, n]$, then we can read the tree from leaves to the root to get the sufficient condition, namely the inhabitant M, such that $\vdash M : \tau_{\star}$.

Theorem 1. Intersection type inhabitation (Problem 1) is undecidable in rank 3 and order 3.

Proof. Adding $x_* : \sigma_*$ and $x_0 : \sigma_0$ to all contexts does not invalidate Lemma 1 because σ_* and σ_0 work on the special atoms $\circ, *, \#$ and \$. Therefore, by Lemma 2 and Lemma 1 we have that τ_* is inhabited iff T accepts the empty word.

4 Simple Semi-Thue System Simulation

The undecidability result in Section 3 is of didactic interest because it shows how Turing machine computation can be simulated by proof search directly. If one is only interested in minimal requirements for undecidability, then it is helpful to consider simple semi-Thue systems.

Definition 6 (Simple Semi-Thue System). A semi-Thue system over an alphabet Σ , where each rule has the form $ab \Rightarrow cd$, for some $a, b, c, d \in \Sigma$, is called a simple semi-Thue system.

Problem 2. Given a simple semi-Thue system R, is there an $n \in \mathbb{N}$ such that $0^n \to_R 1^n$?

Lemma 3. Problem 2 is undecidable.

Proof. Reduction from the empty word halting problem for Turing machines. Turing machine computation requires at each step the modification of two neighboring cells. The unknown parameter n corresponds to the required tape length.

Given a simple semi-Thue system R over an alphabet Σ with $\bullet, *, \#, \$, l, r \notin \Sigma$ we (similarly to Section 3) construct the following types of rank and order at most 3:

$$\begin{split} \sigma_* &= ((\bullet \to *) \to *) \cap ((l \to *) \to \#) \cap ((r \to \#) \cap (\bullet \to \$) \to \$) \\ \sigma_0 &= ((\bullet \to 0) \to *) \cap ((l \to 0) \to \#) \cap ((r \to 0) \to \$) \\ \sigma_1 &= 1 \\ \sigma_{ab \Rightarrow cd} &= (l \to c \to a) \cap (r \to d \to b) \cap \bigcap_{e \in \Sigma} (\bullet \to e \to e) \text{ for each } ab \Rightarrow cd \in R \\ \tau_* &= \sigma_0 \to \sigma_* \to \sigma_1 \to \sigma_{t_1} \to \ldots \to \sigma_{t_k} \to (l \to *) \cap (r \to \#) \cap (\bullet \to \$) \\ \text{ where } R &= \{t_1, \ldots, t_k\} \end{split}$$

Lemma 4. The type τ_{\star} is inhabited iff there exists an $n \in \mathbb{N}$ such that $0^n \twoheadrightarrow_R 1^n$.

Proof. The argumentation is the same as in the proofs of Lemma 2 and Lemma 1. The type σ_* is used for initial expansion; σ_0 is used for initialization; σ_t for transition for $t \in R$; and σ_1 for termination.

References

- H. P. Barendregt, W. Dekkers, and R. Statman. Lambda Calculus with Types. Perspectives in Logic, Cambridge University Press, 2013.
- S. Ghilezan. Strong Normalization and Typability with Intersection Types. Notre Dame Journal of Formal Logic, 37(1):44-52, 1996. doi:10.1305/ndjfl/1040067315.
- D. Leivant. Polymorphic Type Inference. In POPL 1983, Proceedings of the 10th ACM Symposium on Principles of Programming Languages, pages 88–98, 1983. doi:10.1145/567067.567077.
- [4] S. Salvati, G. Manzonetto, M. Gehrke, and H. P. Barendregt. Urzyczyn and Loader are logically related. In *ICALP 2012, Proceedings of Automata, Languages, and Programming - 39th International Colloquium*, volume 7392 of *LNCS*, pages 364–376. Springer, 2012. doi:10.1007/978-3-642-31585-5_34.
- [5] P. Urzyczyn. Inhabitation of Low-Rank Intersection Types. In TLCA 2009, Proceedings of Typed Lambda Calculus and Applications, volume 5608 of LNCS, pages 356–370. Springer, 2009. doi:10.1007/978-3-642-02273-9_26.